
EvalML Documentation

Release 0.35.0

Alteryx, Inc.

Oct 15, 2021

CONTENTS

1	Install	3
2	Start	7
3	Tutorials	13
4	User Guide	43
5	API Reference	155
6	Release Notes	1359
	Python Module Index	1409
	Index	1413

EvalML is an AutoML library that builds, optimizes, and evaluates machine learning pipelines using domain-specific objective functions.

Combined with [Featuretools](#) and [Compose](#), EvalML can be used to create end-to-end supervised machine learning solutions.

INSTALL

EvalML is available for Python 3.7 and 3.8 with experimental support 3.9. It can be installed with pip or conda.

1.1 Time Series support with Facebook's Prophet

To support the `Prophet` time series estimator, be sure to install it as an extra requirement. Please note that this may take a few minutes. Prophet is currently only supported via pip installation in EvalML for Mac with CmdStan as a backend.

```
pip install evalml[prophet]
```

Another option for installing Prophet with CmdStan as a backend is to use `make installdeps-prophet`.

Note: In order to do this, you must have the EvalML repo cloned and you must be in the top level folder `<your_directory>/evalml/` to execute this command. This command will do the following: - Pip install `cmdstanpy==0.9.68` - Execute the `install_cmdstan.py` script found within your `site-packages/cmdstanpy` which builds `cmdstan` in your `site-packages`. - Install `Prophet==1.0.1` with the `CMDSTAN` and `STAN_BACKEND` environment variables set.

If the `site-packages` path is incorrect or you'd like to specify a different one, just run `make installdeps-prophet SITE_PACKAGES_DIR="<path_to_your_site_packages>"`.

If you'd like to have more fine-tuned control over the installation steps for Prophet, such as specifying the backend, follow these steps:

For `CmdStanPy` as a backend: 1. `pip install cmdstanpy==0.9.68` 2. `python <path_to_installed_cmdstanpy>/install_cmdstan.py --dir <path_to_build_cmdstan> -v <version_to_use>` 3. `CMDSTAN=<path_to_build_cmdstan>/cmdstan-<version_to_use> STAN_BACKEND=CMDSTANPY pip install prophet==1.0.1`

For `PyStan` as a backend (`PyStan` is used by default): 1. `pip install prophet==1.0.1`

1.2 Pip with all dependencies

To install evalml with pip, run the following command:

```
pip install evalml
```

1.3 Pip with core dependencies

EvalML includes several optional dependencies. The `xgboost` and `catboost` packages support pipelines built around those modeling libraries. The `plotly` and `ipywidgets` packages support plotting functionality in automl searches. These dependencies are recommended, and are included with EvalML by default but are not required in order to install and use EvalML.

EvalML's core dependencies are listed in `core-requirements.txt` in the source code, and optional requirements are listed in `requirements.txt`.

To install EvalML with only the core required dependencies, download the EvalML source from [pypi](#) to access the requirements files. Then run the following:

```
pip install evalml --no-dependencies
pip install -r core-requirements.txt
```

1.3.1 Add-ons

You can install add-ons individually or all at once by running:

```
pip install evalml[complete]
```

Time Series Support

Add time series support with Facebook's Prophet

```
pip install evalml[prophet]
```

Please note that this may take a few minutes. Prophet is currently only supported via pip installation in EvalML.

Update checker

Receive automatic notifications of new EvalML releases

```
pip install evalml[update_checker]
```

1.4 Conda with all dependencies

To install evalml with conda run the following command:

```
conda install -c conda-forge evalml
```

1.5 Conda with core dependencies

To install evalml with only core dependencies run the following command:

```
conda install -c conda-forge evalml-core
```


1.6 Windows

Additionally, if you are using `pip` to install EvalML, it is recommended you first install the following packages using `conda`: * `numba` (needed for `shap` and prediction explanations). Install with `conda install -c conda-forge numba` * `graphviz` if you're using EvalML's plotting utilities. Install with `conda install -c conda-forge python-graphviz`

The `XGBoost` library may not be `pip`-installable in some Windows environments. If you are encountering installation issues, please try installing XGBoost from [Github](#) before installing EvalML or install `evalml` with `conda`.

1.7 Mac

In order to run on Mac, `LightGBM` requires the `OpenMP` library to be installed, which can be done with `HomeBrew` by running

```
brew install libomp
```

Additionally, `graphviz` can be installed by running

```
brew install graphviz
```

1.8 Python 3.9 support

`Evalml` can still be installed with `pip` in python 3.9 but note that `sktime`, one of our dependencies, will not be installed because that library does not yet support python 3.9. This means the `PolynomialDetrending` component will not be usable in python 3.9. You can try to install `sktime` [from source](#) in python 3.9 to use the `PolynomialDetrending` component but be warned that we only test it in python 3.7 and 3.8.

START

In this guide, we'll show how you can use EvalML to automatically find the best pipeline for predicting whether or not a credit card transaction is fraudulent. Along the way, we'll highlight EvalML's built-in tools and features for understanding and interacting with the search process.

```
[1]: import evalml
      from evalml import AutoMLSearch
      from evalml.utils import infer_feature_types
```

First, we load in the features and outcomes we want to use to train our model.

```
[2]: X, y = evalml.demos.load_fraud(n_rows=250)
```

```

          Number of Features
Boolean                1
Categorical            6
Numeric               5

Number of training examples: 250
Targets
False    88.40%
True     11.60%
Name: fraud, dtype: object
```

First, we will clean the data. Since EvalML accepts a pandas input, it can run type inference on this data directly. Since we'd like to change the types inferred by EvalML, we can use the `infer_feature_types` utility method. Here's what we're going to do with the following dataset:

- Reformat the `expiration_date` column so it reflects a more familiar date format.
- Cast the `lat` and `lng` columns from float to str.
- Use `infer_feature_types` to specify what types certain columns should be. For example, to avoid having the `provider` column be inferred as natural language text, we have specified it as a categorical column instead.

The `infer_feature_types` utility method takes a pandas or numpy input and converts it to a pandas dataframe with a [Woodwork](#) accessor, providing us with flexibility to cast the data as necessary.

```
[3]: X.ww['expiration_date'] = X['expiration_date'].apply(lambda x: '20{}-01-{}'.format(x.
      ↪split("/") [1], x.split("/") [0]))
      X = infer_feature_types(X, feature_types= {'store_id': 'categorical',
          'expiration_date': 'datetime',
          'lat': 'categorical',
          'lng': 'categorical',
          'provider': 'categorical'})

      X.ww
```

```
[3]:
```

	Physical Type	Logical Type	Semantic Tag(s)
Column			
card_id	int64	Integer	['numeric']
store_id	int64	Integer	['numeric']
datetime	datetime64[ns]	Datetime	[]
amount	int64	Integer	['numeric']
currency	string	Unknown	[]
customer_present	bool	Boolean	[]
expiration_date	datetime64[ns]	Datetime	[]
provider	category	Categorical	['category']
lat	float64	Double	['numeric']
lng	float64	Double	['numeric']
region	category	Categorical	['category']
country	category	Categorical	['category']

In order to validate the results of the pipeline creation and optimization process, we will save some of our data as a holdout set.

```
[4]: X_train, X_holdout, y_train, y_holdout = evalml.preprocessing.split_data(X, y,
    ↪problem_type='binary', test_size=.2)
```

Note: To provide data to EvalML, it is recommended that you initialize a woodwork accessor so that you control how EvalML will treat each feature, such as as a numeric feature, a categorical feature, a text feature or other type of feature. Consult the [the Woodwork project](#) for help on how to do this. Here, `split_data()` returns dataframes with woodwork accessors.

EvalML has many options to configure the pipeline search. At the minimum, we need to define an objective function. For simplicity, we will use the F1 score in this example. However, the real power of EvalML is in using domain-specific *objective functions* or *building your own*.

Below EvalML utilizes Bayesian optimization (EvalML's default optimizer) to search and find the best pipeline defined by the given objective.

EvalML provides a number of parameters to control the search process. `max_batches` is one of the parameters which controls the stopping criterion for the AutoML search. It indicates the maximum number of rounds of AutoML to evaluate, where each round may train and score a variable number of pipelines. In this example, `max_batches` is set to 1.

**** Graphing methods, like AutoMLSearch, on Jupyter Notebook and Jupyter Lab require [ipywidgets](#) to be installed.**

**** If graphing on Jupyter Lab, [jupyterlab-plotly](#) required. To download this, make sure you have [npm](#) installed.**

```
[5]: automl = AutoMLSearch(X_train=X_train, y_train=y_train,
    problem_type='binary', objective='f1',
    max_batches=1, verbose=True)
```

```
Generating pipelines to search over...
Removing columns ['currency'] because they are of 'Unknown' type
8 pipelines ready for search.
```

When we call `search()`, the search for the best pipeline will begin. There is no need to wrangle with missing data or categorical variables as EvalML includes various preprocessing steps (like imputation, one-hot encoding, feature selection) to ensure you're getting the best results. As long as your data is in a single table, EvalML can handle it. If not, you can reduce your data to a single table by utilizing [Featuretools](#) and its Entity Sets.

You can find more information on pipeline components and how to integrate your own custom pipelines into EvalML [here](#).

```
[6]: automl.search()
```

```
*****
* Beginning pipeline search *
*****

Optimizing for F1.
Greater score is better.

Using SequentialEngine to train and score pipelines.
Searching up to 1 batches for a total of 9 pipelines.
Allowed model families: linear_model, linear_model, decision_tree, extra_trees,
↳random_forest, xgboost, lightgbm, catboost

FigureWidget({
  'data': [{'mode': 'lines+markers',
            'name': 'Best Score',
            'type'...

Evaluating Baseline Pipeline: Mode Baseline Binary Classification Pipeline
Mode Baseline Binary Classification Pipeline:
  Starting cross validation
  Finished cross validation - mean F1: 0.000

*****
* Evaluating Batch Number 1 *
*****

Elastic Net Classifier w/ Label Encoder + Drop Columns Transformer + Imputer +
↳DateTime Featurization Component + One Hot Encoder + Oversampler + Standard Scaler:
  Starting cross validation
  Finished cross validation - mean F1: 0.236
Decision Tree Classifier w/ Label Encoder + Drop Columns Transformer + Imputer +
↳DateTime Featurization Component + One Hot Encoder + Oversampler:
  Starting cross validation
  Finished cross validation - mean F1: 0.199
Random Forest Classifier w/ Label Encoder + Drop Columns Transformer + Imputer +
↳DateTime Featurization Component + One Hot Encoder + Oversampler:
  Starting cross validation
  Finished cross validation - mean F1: 0.403
LightGBM Classifier w/ Label Encoder + Drop Columns Transformer + Imputer + DateTime
↳Featurization Component + One Hot Encoder + Oversampler:
  Starting cross validation
  Finished cross validation - mean F1: 0.279
Logistic Regression Classifier w/ Label Encoder + Drop Columns Transformer + Imputer
↳+ DateTime Featurization Component + One Hot Encoder + Oversampler + Standard
↳Scaler:
  Starting cross validation
  Finished cross validation - mean F1: 0.197
XGBoost Classifier w/ Label Encoder + Drop Columns Transformer + Imputer + DateTime
↳Featurization Component + One Hot Encoder + Oversampler:
  Starting cross validation
  Finished cross validation - mean F1: 0.205
Extra Trees Classifier w/ Label Encoder + Drop Columns Transformer + Imputer +
↳DateTime Featurization Component + One Hot Encoder + Oversampler:
  Starting cross validation
  Finished cross validation - mean F1: 0.193
```

(continues on next page)

(continued from previous page)

```
CatBoost Classifier w/ Label Encoder + Drop Columns Transformer + Imputer + DateTime_
↳Featurization Component + Oversampler:
    Starting cross validation
    Finished cross validation - mean F1: 0.538

Search finished after 00:17
Best pipeline: CatBoost Classifier w/ Label Encoder + Drop Columns Transformer +
↳Imputer + DateTime Featurization Component + Oversampler
Best pipeline F1: 0.537892
```

If you would like to suppress stdout output, set `verbose=False`. This is also the default behavior for `AutoMLSearch` if `verbose` is not specified.

```
[7]: automl = AutoMLSearch(X_train=X_train, y_train=y_train,
                          problem_type='binary', objective='f1',
                          max_batches=1, verbose=False)

automl.search()
```

We also provide a standalone `search` method [./generated/evalml.automl.search.html](https://evalml.com/en/latest/generated/evalml.automl.search.html) which does all of the above in a single line, and returns the `AutoMLSearch` instance and data check results. If there were data check errors, AutoML will not be run and no `AutoMLSearch` instance will be returned.

After the search is finished we can view all of the pipelines searched, ranked by score. Internally, EvalML performs cross validation to score the pipelines. If it notices a high variance across cross validation folds, it will warn you. EvalML also provides additional [data checks](#) to analyze your data to assist you in producing the best performing pipeline.

```
[8]: automl.rankings
```

```
[8]:   id  pipeline_name  search_order  \
0   8  CatBoost Classifier w/ Label Encoder + Drop Co...      8
1   3  Random Forest Classifier w/ Label Encoder + Dr...      3
2   4  LightGBM Classifier w/ Label Encoder + Drop Co...      4
3   1  Elastic Net Classifier w/ Label Encoder + Drop...      1
4   6  XGBoost Classifier w/ Label Encoder + Drop Col...      6
5   2  Decision Tree Classifier w/ Label Encoder + Dr...      2
6   5  Logistic Regression Classifier w/ Label Encode...      5
7   7  Extra Trees Classifier w/ Label Encoder + Drop...      7
8   0  Mode Baseline Binary Classification Pipeline      0

   mean_cv_score  standard_deviation_cv_score  validation_score  \
0      0.537892          0.201574          0.769231
1      0.402694          0.040471          0.400000
2      0.278620          0.074925          0.222222
3      0.236111          0.122615          0.142857
4      0.204545          0.186031          0.000000
5      0.199216          0.075506          0.213333
6      0.197114          0.063306          0.142857
7      0.193023          0.167490          0.279070
8      0.000000          0.000000          0.000000

   percent_better_than_baseline  high_variance_cv  \
0                53.789174          False
1                40.269360          False
2                27.861953          False
3                23.611111          False
4                20.454545          False
```

(continues on next page)

(continued from previous page)

```

5          19.921569          False
6          19.711400          False
7          19.302326          False
8           0.000000          False

                                parameters
0  {'Drop Columns Transformer': {'columns': ['cur...
1  {'Drop Columns Transformer': {'columns': ['cur...
2  {'Drop Columns Transformer': {'columns': ['cur...
3  {'Drop Columns Transformer': {'columns': ['cur...
4  {'Drop Columns Transformer': {'columns': ['cur...
5  {'Drop Columns Transformer': {'columns': ['cur...
6  {'Drop Columns Transformer': {'columns': ['cur...
7  {'Drop Columns Transformer': {'columns': ['cur...
8      {'Baseline Classifier': {'strategy': 'mode'}}

```

If we are interested in see more details about the pipeline, we can view a summary description using the `id` from the rankings table:

```
[9]: automl.describe_pipeline(3)
```

```

*****
* Random Forest Classifier w/ Label Encoder + Drop Columns Transformer + Imputer +
↳ DateTime Featurization Component + One Hot Encoder + Oversampler *
*****

Problem Type: binary
Model Family: Random Forest

Pipeline Steps
=====
1. Label Encoder
2. Drop Columns Transformer
   * columns : ['currency']
3. Imputer
   * categorical_impute_strategy : most_frequent
   * numeric_impute_strategy : mean
   * categorical_fill_value : None
   * numeric_fill_value : None
4. DateTime Featurization Component
   * features_to_extract : ['year', 'month', 'day_of_week', 'hour']
   * encode_as_categories : False
   * date_index : None
5. One Hot Encoder
   * top_n : 10
   * features_to_encode : None
   * categories : None
   * drop : if_binary
   * handle_unknown : ignore
   * handle_missing : error
6. Oversampler
   * sampling_ratio : 0.25
   * k_neighbors_default : 5
   * n_jobs : -1
   * sampling_ratio_dict : None
   * k_neighbors : 5

```

(continues on next page)

(continued from previous page)

```

7. Random Forest Classifier
  * n_estimators : 100
  * max_depth : 6
  * n_jobs : -1

Training
=====
Training for binary problems.
Objective to optimize binary classification pipeline thresholds for: <evalml.
↳objectives.standard_metrics.F1 object at 0x7f112d587df0>
Total training time (including CV): 2.0 seconds

Cross Validation
-----

```

	F1	MCC Binary	Log Loss Binary	Gini	AUC	Precision	Balanced_
↳Accuracy Binary	Accuracy Binary	Accuracy Binary	# Training	# Validation			
0	0.400	0.476		0.277	0.593	0.797	1.000
↳	0.625	0.910	133	67			
1	0.364	0.365		0.340	0.318	0.659	0.667
↳	0.617	0.896	133	67			
2	0.444	0.513		0.253	0.724	0.862	1.000
↳	0.643	0.924	134	66			
mean	0.403	0.452		0.290	0.545	0.772	0.889
↳	0.628	0.910	-	-			
std	0.040	0.077		0.045	0.207	0.104	0.192
↳	0.013	0.014	-	-			
coef of var	0.101	0.170		0.156	0.380	0.134	0.217
↳	0.021	0.016	-	-			

We can also view the pipeline parameters directly:

```

[10]: pipeline = automl.get_pipeline(3)
      print(pipeline.parameters)

{'Drop Columns Transformer': {'columns': ['currency']}, 'Imputer': {'categorical_
↳impute_strategy': 'most_frequent', 'numeric_impute_strategy': 'mean', 'categorical_
↳fill_value': None, 'numeric_fill_value': None}, 'DateTime Featurization Component':
↳{'features_to_extract': ['year', 'month', 'day_of_week', 'hour'], 'encode_as_
↳categories': False, 'date_index': None}, 'One Hot Encoder': {'top_n': 10, 'features_
↳to_encode': None, 'categories': None, 'drop': 'if_binary', 'handle_unknown': 'ignore
↳', 'handle_missing': 'error'}, 'Oversampler': {'sampling_ratio': 0.25, 'k_neighbors_
↳default': 5, 'n_jobs': -1, 'sampling_ratio_dict': None, 'k_neighbors': 5}, 'Random_
↳Forest Classifier': {'n_estimators': 100, 'max_depth': 6, 'n_jobs': -1}}

```

We can now select the best pipeline and score it on our holdout data:

```

[11]: pipeline = automl.best_pipeline
      pipeline.score(X_holdout, y_holdout, ["f1"])

[11]: OrderedDict([('F1', 0.6666666666666666)])

```

We can also visualize the structure of the components contained by the pipeline:

```

[12]: pipeline.graph()

[12]:

```


TUTORIALS

Below are examples of how to apply EvalML to a variety of problems:

3.1 Building a Fraud Prediction Model with EvalML

In this demo, we will build an optimized fraud prediction model using EvalML. To optimize the pipeline, we will set up an objective function to minimize the percentage of total transaction value lost to fraud. At the end of this demo, we also show you how introducing the right objective during the training results in a much better than using a generic machine learning metric like AUC.

```
[1]: import evalml
      from evalml import AutoMLSearch
      from evalml.objectives import FraudCost
```

3.1.1 Configure “Cost of Fraud”

To optimize the pipelines toward the specific business needs of this model, we can set our own assumptions for the cost of fraud. These parameters are

- `retry_percentage` - what percentage of customers will retry a transaction if it is declined?
- `interchange_fee` - how much of each successful transaction do you collect?
- `fraud_payout_percentage` - the percentage of fraud will you be unable to collect
- `amount_col` - the column in the data the represents the transaction amount

Using these parameters, EvalML determines attempt to build a pipeline that will minimize the financial loss due to fraud.

```
[2]: fraud_objective = FraudCost(retry_percentage=.5,
                                interchange_fee=.02,
                                fraud_payout_percentage=.75,
                                amount_col='amount')
```

3.1.2 Search for best pipeline

In order to validate the results of the pipeline creation and optimization process, we will save some of our data as the holdout set.

```
[3]: X, y = evalml.demos.load_fraud(n_rows=5000)
```

```

                Number of Features
Boolean                      1
Categorical                   6
Numeric                      5

Number of training examples: 5000
Targets
False      86.20%
True       13.80%
Name: fraud, dtype: object
```

EvalML natively supports one-hot encoding. Here we keep 1 out of the 6 categorical columns to decrease computation time.

```
[4]: cols_to_drop = ['datetime', 'expiration_date', 'country', 'region', 'provider']
    for col in cols_to_drop:
        X.ww.pop(col)
```

```
X_train, X_holdout, y_train, y_holdout = evalml.preprocessing.split_data(X, y,
    problem_type='binary', test_size=0.2, random_seed=0)
```

```
X.ww
```

```
[4]:
```

Column	Physical Type	Logical Type	Semantic Tag(s)
card_id	int64	Integer	['numeric']
store_id	int64	Integer	['numeric']
amount	int64	Integer	['numeric']
currency	category	Categorical	['category']
customer_present	bool	Boolean	[]
lat	float64	Double	['numeric']
lng	float64	Double	['numeric']

Because the fraud labels are binary, we will use `AutoMLSearch(X_train=X_train, y_train=y_train, problem_type='binary')`. When we call `.search()`, the search for the best pipeline will begin.

```
[5]: automl = AutoMLSearch(X_train=X_train, y_train=y_train,
    problem_type='binary',
    objective=fraud_objective,
    additional_objectives=['auc', 'f1', 'precision'],
    allowed_model_families=["random_forest", "linear_model"],
    max_batches=1,
    optimize_thresholds=True,
    verbose=True)
```

```
automl.search()
```

```
Generating pipelines to search over...
3 pipelines ready for search.
```

```
*****
* Beginning pipeline search *
```

(continues on next page)

(continued from previous page)

```

*****

Optimizing for Fraud Cost.
Lower score is better.

Using SequentialEngine to train and score pipelines.
Searching up to 1 batches for a total of 4 pipelines.
Allowed model families: linear_model, linear_model, random_forest

FigureWidget({
  'data': [{'mode': 'lines+markers',
            'name': 'Best Score',
            'type'...

Evaluating Baseline Pipeline: Mode Baseline Binary Classification Pipeline
Mode Baseline Binary Classification Pipeline:
  Starting cross validation
  Finished cross validation - mean Fraud Cost: 0.790

*****
* Evaluating Batch Number 1 *
*****

Elastic Net Classifier w/ Label Encoder + Imputer + One Hot Encoder + Oversampler +
↳Standard Scaler:
  Starting cross validation
  Finished cross validation - mean Fraud Cost: 0.539
Random Forest Classifier w/ Label Encoder + Imputer + One Hot Encoder + Oversampler:
  Starting cross validation
  Finished cross validation - mean Fraud Cost: 0.289
Logistic Regression Classifier w/ Label Encoder + Imputer + One Hot Encoder +
↳Oversampler + Standard Scaler:
  Starting cross validation
  Finished cross validation - mean Fraud Cost: 0.539

Search finished after 00:12
Best pipeline: Random Forest Classifier w/ Label Encoder + Imputer + One Hot Encoder
↳+ Oversampler
Best pipeline Fraud Cost: 0.289305

```

View rankings and select pipelines

Once the fitting process is done, we can see all of the pipelines that were searched, ranked by their score on the fraud detection objective we defined.

```
[6]: automl.rankings
```

```

[6]:   id      pipeline_name  search_order  \
0    2  Random Forest Classifier w/ Label Encoder + Im...      2
1    1  Elastic Net Classifier w/ Label Encoder + Impu...      1
2    3  Logistic Regression Classifier w/ Label Encode...      3
3    0      Mode Baseline Binary Classification Pipeline      0

      mean_cv_score  standard_deviation_cv_score  validation_score  \
0          0.289305              0.434440          0.790953

```

(continues on next page)

(continued from previous page)

```

1      0.538598      0.435507      0.790953
2      0.538598      0.435507      0.790953
3      0.789648      0.001136      0.790953

    percent_better_than_baseline  high_variance_cv  \
0                50.034387                False
1                25.105090                False
2                25.105090                False
3                 0.000000                False

                                parameters
0  {'Imputer': {'categorical_impute_strategy': 'm...
1  {'Imputer': {'categorical_impute_strategy': 'm...
2  {'Imputer': {'categorical_impute_strategy': 'm...
3      {'Baseline Classifier': {'strategy': 'mode'}}

```

To select the best pipeline we can call `automl.best_pipeline`.

```
[7]: best_pipeline = automl.best_pipeline
```

Describe pipelines

We can get more details about any pipeline created during the search process, including how it performed on other objective functions, by calling the `describe_pipeline` method and passing the `id` of the pipeline of interest.

```
[8]: automl.describe_pipeline(automl.rankings.iloc[1]["id"])
```

```

*****
* Elastic Net Classifier w/ Label Encoder + Imputer + One Hot Encoder + Oversampler +
↳Standard Scaler *
*****

Problem Type: binary
Model Family: Linear

Pipeline Steps
=====
1. Label Encoder
2. Imputer
   * categorical_impute_strategy : most_frequent
   * numeric_impute_strategy : mean
   * categorical_fill_value : None
   * numeric_fill_value : None
3. One Hot Encoder
   * top_n : 10
   * features_to_encode : None
   * categories : None
   * drop : if_binary
   * handle_unknown : ignore
   * handle_missing : error
4. Oversampler
   * sampling_ratio : 0.25
   * k_neighbors_default : 5
   * n_jobs : -1

```

(continues on next page)

(continued from previous page)

```

    * sampling_ratio_dict : None
    * k_neighbors : 5
5. Standard Scaler
6. Elastic Net Classifier
    * penalty : elasticnet
    * C : 1.0
    * l1_ratio : 0.15
    * n_jobs : -1
    * multi_class : auto
    * solver : saga

Training
=====
Training for binary problems.
Objective to optimize binary classification pipeline thresholds for: <evalml.
->objectives.fraud_cost.FraudCost object at 0x7f0d0e0ab190>
Total training time (including CV): 1.9 seconds

Cross Validation
-----

```

	Fraud Cost	AUC	F1	Precision	# Training	# Validation
0	0.791	0.856	0.000	0.000	2,666	1,334
1	0.789	0.796	0.000	0.000	2,667	1,333
2	0.036	0.828	0.635	0.592	2,667	1,333
mean	0.539	0.827	0.212	0.197	-	-
std	0.436	0.030	0.366	0.342	-	-
coef of var	0.809	0.036	1.732	1.732	-	-

3.1.3 Evaluate on holdout data

Finally, since the best pipeline is already trained, we evaluate it on the holdout data.

Now, we can score the pipeline on the holdout data using both our fraud cost objective and the AUC (Area under the ROC Curve) objective.

```

[9]: best_pipeline.score(X_holdout, y_holdout, objectives=["auc", fraud_objective])
[9]: OrderedDict([('AUC', 0.8654628602172233),
                  ('Fraud Cost', 0.026054721586011263)])

```

3.1.4 Why optimize for a problem-specific objective?

To demonstrate the importance of optimizing for the right objective, let's search for another pipeline using AUC, a common machine learning metric. After that, we will score the holdout data using the fraud cost objective to see how the best pipelines compare.

```

[10]: automl_auc = AutoMLSearch(X_train=X_train, y_train=y_train,
                                problem_type='binary',
                                objective='auc',
                                additional_objectives=['f1', 'precision'],
                                max_batches=1,
                                allowed_model_families=["random_forest", "linear_model"],
                                optimize_thresholds=True,
                                verbose=True)

```

(continues on next page)

(continued from previous page)

```

automl_auc.search()

Generating pipelines to search over...
3 pipelines ready for search.

*****
* Beginning pipeline search *
*****

Optimizing for AUC.
Greater score is better.

Using SequentialEngine to train and score pipelines.
Searching up to 1 batches for a total of 4 pipelines.
Allowed model families: linear_model, linear_model, random_forest

FigureWidget({
  'data': [{'mode': 'lines+markers',
            'name': 'Best Score',
            'type': ...

Evaluating Baseline Pipeline: Mode Baseline Binary Classification Pipeline
Mode Baseline Binary Classification Pipeline:
  Starting cross validation
  Finished cross validation - mean AUC: 0.500

*****
* Evaluating Batch Number 1 *
*****

Elastic Net Classifier w/ Label Encoder + Imputer + One Hot Encoder + Oversampler + ↵
↵Standard Scaler:
  Starting cross validation
  Finished cross validation - mean AUC: 0.827
Random Forest Classifier w/ Label Encoder + Imputer + One Hot Encoder + Oversampler:
  Starting cross validation
  Finished cross validation - mean AUC: 0.847
Logistic Regression Classifier w/ Label Encoder + Imputer + One Hot Encoder + ↵
↵Oversampler + Standard Scaler:
  Starting cross validation
  Finished cross validation - mean AUC: 0.826

Search finished after 00:05
Best pipeline: Random Forest Classifier w/ Label Encoder + Imputer + One Hot Encoder ↵
↵+ Oversampler
Best pipeline AUC: 0.847400

```

Like before, we can look at the rankings of all of the pipelines searched and pick the best pipeline.

```

[11]: automl_auc.rankings

[11]:   id  pipeline_name  search_order  \
0   2  Random Forest Classifier w/ Label Encoder + Im...      2
1   1  Elastic Net Classifier w/ Label Encoder + Impu...      1
2   3  Logistic Regression Classifier w/ Label Encode...      3
3   0      Mode Baseline Binary Classification Pipeline      0

```

(continues on next page)

(continued from previous page)

	mean_cv_score	standard_deviation_cv_score	validation_score	\
0	0.847400	0.002923	0.845246	
1	0.826778	0.030029	0.856262	
2	0.826327	0.030496	0.856172	
3	0.500000	0.000000	0.500000	

	percent_better_than_baseline	high_variance_cv	\
0	34.740035	False	
1	32.677824	False	
2	32.632734	False	
3	0.000000	False	

	parameters
0	{'Imputer': {'categorical_impute_strategy': 'm...
1	{'Imputer': {'categorical_impute_strategy': 'm...
2	{'Imputer': {'categorical_impute_strategy': 'm...
3	{'Baseline Classifier': {'strategy': 'mode'}}

```
[12]: best_pipeline_auc = automl_auc.best_pipeline
```

```
[13]: # get the fraud score on holdout data
best_pipeline_auc.score(X_holdout, y_holdout, objectives=["auc", fraud_objective])
```

```
[13]: OrderedDict([('AUC', 0.8654628602172233),
                  ('Fraud Cost', 0.026054721586011263)])
```

```
[14]: # fraud score on fraud optimized again
best_pipeline.score(X_holdout, y_holdout, objectives=["auc", fraud_objective])
```

```
[14]: OrderedDict([('AUC', 0.8654628602172233),
                  ('Fraud Cost', 0.026054721586011263)])
```

When we optimize for AUC, we can see that the AUC score from this pipeline performs better compared to the AUC score from the pipeline optimized for fraud cost; however, the losses due to fraud are a much larger percentage of the total transaction amount when optimized for AUC and much smaller when optimized for fraud cost. As a result, we lose a noticeable percentage of the total transaction amount by not optimizing for fraud cost specifically.

Optimizing for AUC does not take into account the user-specified `retry_percentage`, `interchange_fee`, `fraud_payout_percentage` values, which could explain the decrease in fraud performance. Thus, the best pipelines may produce the highest AUC but may not actually reduce the amount loss due to your specific type fraud.

This example highlights how performance in the real world can diverge greatly from machine learning metrics.

3.2 Building a Lead Scoring Model with EvalML

In this demo, we will build an optimized lead scoring model using EvalML. To optimize the pipeline, we will set up an objective function to maximize the revenue generated with true positives while taking into account the cost of false positives. At the end of this demo, we also show you how introducing the right objective during the training is significantly better than using a generic machine learning metric like AUC.

```
[1]: import evalml
from evalml import AutoMLSearch
from evalml.objectives import LeadScoring
```

3.2.1 Configure LeadScoring

To optimize the pipelines toward the specific business needs of this model, you can set your own assumptions for how much value is gained through true positives and the cost associated with false positives. These parameters are

- `true_positive` - dollar amount to be gained with a successful lead
- `false_positive` - dollar amount to be lost with an unsuccessful lead

Using these parameters, EvalML builds a pipeline that will maximize the amount of revenue per lead generated.

```
[2]: lead_scoring_objective = LeadScoring(
      true_positives=100,
      false_positives=-5
    )
```

3.2.2 Dataset

We will be utilizing a dataset detailing a customer's job, country, state, zip, online action, the dollar amount of that action and whether they were a successful lead.

```
[3]: from urllib.request import urlopen
      import pandas as pd
      import woodwork as ww
      customers_data = urlopen('https://featurelabs-static.s3.amazonaws.com/lead_scoring_ml_
      ↪apps/customers.csv')
      interactions_data = urlopen('https://featurelabs-static.s3.amazonaws.com/lead_scoring_
      ↪ml_apps/interactions.csv')
      leads_data = urlopen('https://featurelabs-static.s3.amazonaws.com/lead_scoring_ml_
      ↪apps/previous_leads.csv')
      customers = pd.read_csv(customers_data)
      interactions = pd.read_csv(interactions_data)
      leads = pd.read_csv(leads_data)

      X = customers.merge(interactions, on='customer_id').merge(leads, on='customer_id')
      y = X['label']
      X = X.drop(['customer_id', 'date_registered', 'birthday', 'phone', 'email',
                  'owner', 'company', 'id', 'time_x',
                  'session', 'referrer', 'time_y', 'label', 'country'], axis=1)
      display(X.head())
```

	job	state	zip	action	amount
0	Engineer, mining	NY	60091.0	page_view	NaN
1	Psychologist, forensic	CA	NaN	purchase	135.23
2	Psychologist, forensic	CA	NaN	page_view	NaN
3	Air cabin crew	NaN	60091.0	download	NaN
4	Air cabin crew	NaN	60091.0	page_view	NaN

We will convert our data into Woodwork data structures. Doing so enables us to have more control over the types passed to and inferred by AutoML.

```
[4]: X.ww.init(semantic_tags={'job': 'category'}, logical_types={'job': 'Categorical'})
      y = ww.init_series(y)
      X.ww
```

```
[4]: Physical Type Logical Type Semantic Tag(s)
      Column
      job          category  Categorical      ['category']
```

(continues on next page)

(continued from previous page)

state	category	Categorical	['category']
zip	float64	Double	['numeric']
action	category	Categorical	['category']
amount	float64	Double	['numeric']

3.2.3 Search for the best pipeline

In order to validate the results of the pipeline creation and optimization process, we will save some of our data as a holdout set.

EvalML natively supports one-hot encoding and imputation so the above NaN and categorical values will be taken care of.

```
[5]: X_train, X_holdout, y_train, y_holdout = evalml.preprocessing.split_data(X, y,
    ↪problem_type='binary', test_size=0.2, random_seed=0)
```

```
X.ww
```

```
[5]:
```

	Physical Type	Logical Type	Semantic Tag(s)
Column			
job	category	Categorical	['category']
state	category	Categorical	['category']
zip	float64	Double	['numeric']
action	category	Categorical	['category']
amount	float64	Double	['numeric']

Because the lead scoring labels are binary, we will use set the problem type to “binary”. When we call `.search()`, the search for the best pipeline will begin.

```
[6]: automl = AutoMLSearch(X_train=X_train, y_train=y_train,
    problem_type='binary',
    objective=lead_scoring_objective,
    additional_objectives=['auc'],
    allowed_model_families=["catboost", "random_forest", "linear_
    ↪model"],
    max_batches=1,
    verbose=True)
```

```
automl.search()
```

```
Generating pipelines to search over...
```

```
4 pipelines ready for search.
```

```
*****
* Beginning pipeline search *
*****
```

```
Optimizing for Lead Scoring.
Greater score is better.
```

```
Using SequentialEngine to train and score pipelines.
Searching up to 1 batches for a total of 5 pipelines.
Allowed model families: linear_model, linear_model, random_forest, catboost
```

```
FigureWidget({
  'data': [{'mode': 'lines+markers',
            'name': 'Best Score',
            'type'...

Evaluating Baseline Pipeline: Mode Baseline Binary Classification Pipeline
Mode Baseline Binary Classification Pipeline:
  Starting cross validation
  Finished cross validation - mean Lead Scoring: 0.000

*****
* Evaluating Batch Number 1 *
*****

Elastic Net Classifier w/ Label Encoder + Imputer + One Hot Encoder + Oversampler +
↳Standard Scaler:
  Starting cross validation
  Finished cross validation - mean Lead Scoring: 0.028
Random Forest Classifier w/ Label Encoder + Imputer + One Hot Encoder + Oversampler:
  Starting cross validation
  Finished cross validation - mean Lead Scoring: 0.031
Logistic Regression Classifier w/ Label Encoder + Imputer + One Hot Encoder +
↳Oversampler + Standard Scaler:
  Starting cross validation
  Finished cross validation - mean Lead Scoring: 0.028
CatBoost Classifier w/ Label Encoder + Imputer + Oversampler:
  Starting cross validation
  Finished cross validation - mean Lead Scoring: 0.358

Search finished after 00:11
Best pipeline: CatBoost Classifier w/ Label Encoder + Imputer + Oversampler
Best pipeline Lead Scoring: 0.358194
```

View rankings and select pipeline

Once the fitting process is done, we can see all of the pipelines that were searched, ranked by their score on the lead scoring objective we defined.

```
[7]: automl.rankings
```

```
[7]:
```

	id	pipeline_name	search_order	\
0	4	CatBoost Classifier w/ Label Encoder + Imputer...	4	
1	2	Random Forest Classifier w/ Label Encoder + Im...	2	
2	1	Elastic Net Classifier w/ Label Encoder + Impu...	1	
3	3	Logistic Regression Classifier w/ Label Encode...	3	
4	0	Mode Baseline Binary Classification Pipeline	0	

	mean_cv_score	standard_deviation_cv_score	validation_score	\
0	0.358194	0.328811	-0.016129	
1	0.031193	0.041485	-0.016129	
2	0.027979	0.065303	-0.012903	
3	0.027979	0.065303	-0.012903	
4	0.000000	0.000000	0.000000	

	percent_better_than_baseline	high_variance_cv	\
0	inf	False	
1	inf	False	

(continues on next page)

(continued from previous page)

```

2             inf             False
3             inf             False
4             0.0             False

                                parameters
0 {'Imputer': {'categorical_impute_strategy': 'm...
1 {'Imputer': {'categorical_impute_strategy': 'm...
2 {'Imputer': {'categorical_impute_strategy': 'm...
3 {'Imputer': {'categorical_impute_strategy': 'm...
4 {'Baseline Classifier': {'strategy': 'mode'}}

```

To select the best pipeline we can call `automl.best_pipeline`.

```
[8]: best_pipeline = automl.best_pipeline
```

Describe pipeline

You can get more details about any pipeline, including how it performed on other objective functions by calling `.describe_pipeline()` and specifying the `id` of the pipeline.

```
[9]: automl.describe_pipeline(automl.rankings.iloc[0]["id"])
```

```

*****
* CatBoost Classifier w/ Label Encoder + Imputer + Oversampler *
*****

Problem Type: binary
Model Family: CatBoost

Pipeline Steps
=====
1. Label Encoder
2. Imputer
   * categorical_impute_strategy : most_frequent
   * numeric_impute_strategy : mean
   * categorical_fill_value : None
   * numeric_fill_value : None
3. Oversampler
   * sampling_ratio : 0.25
   * k_neighbors_default : 5
   * n_jobs : -1
   * sampling_ratio_dict : None
   * categorical_features : [0, 1, 3]
   * k_neighbors : 5
4. CatBoost Classifier
   * n_estimators : 10
   * eta : 0.03
   * max_depth : 6
   * bootstrap_type : None
   * silent : True
   * allow_writing_files : False
   * n_jobs : -1

Training

```

(continues on next page)

(continued from previous page)

```

=====
Training for binary problems.
Objective to optimize binary classification pipeline thresholds for: <evalml.
↳objectives.lead_scoring.LeadScoring object at 0x7fa2b7a22580>
Total training time (including CV): 1.2 seconds

Cross Validation
-----

```

	Lead Scoring	AUC	# Training	# Validation
0	-0.016	0.869	3,099	1,550
1	0.490	0.887	3,099	1,550
2	0.600	0.889	3,100	1,549
mean	0.358	0.882	-	-
std	0.329	0.011	-	-
coef of var	0.918	0.012	-	-

3.2.4 Evaluate on hold out

Finally, since the best pipeline was trained on all of the training data, we evaluate it on the holdout dataset.

```

[10]: best_pipeline_score = best_pipeline.score(X_holdout, y_holdout, objectives=["auc",
↳lead_scoring_objective])
best_pipeline_score

[10]: OrderedDict([('AUC', 0.8585599879117558),
('Lead Scoring', 0.8469475494411006)])

```

3.2.5 Why optimize for a problem-specific objective?

To demonstrate the importance of optimizing for the right objective, let's search for another pipeline using AUC, a common machine learning metric. After that, we will score the holdout data using the lead scoring objective to see how the best pipelines compare.

```

[11]: automl_auc = evalml.AutoMLSearch(X_train=X_train, y_train=y_train,
problem_type='binary',
objective='auc',
additional_objectives=[lead_scoring_objective],
allowed_model_families=["catboost", "random_forest",
↳"linear_model"],
max_batches=1,
verbose=True)

automl_auc.search()

Generating pipelines to search over...
4 pipelines ready for search.

*****
* Beginning pipeline search *
*****

Optimizing for AUC.
Greater score is better.

```

(continues on next page)

(continued from previous page)

```

Using SequentialEngine to train and score pipelines.
Searching up to 1 batches for a total of 5 pipelines.
Allowed model families: linear_model, linear_model, random_forest, catboost

FigureWidget({
  'data': [{'mode': 'lines+markers',
            'name': 'Best Score',
            'type'...

Evaluating Baseline Pipeline: Mode Baseline Binary Classification Pipeline
Mode Baseline Binary Classification Pipeline:
  Starting cross validation
  Finished cross validation - mean AUC: 0.500

*****
* Evaluating Batch Number 1 *
*****

Elastic Net Classifier w/ Label Encoder + Imputer + One Hot Encoder + Oversampler +
↳Standard Scaler:
  Starting cross validation
  Finished cross validation - mean AUC: 0.672
Random Forest Classifier w/ Label Encoder + Imputer + One Hot Encoder + Oversampler:
  Starting cross validation
  Finished cross validation - mean AUC: 0.662
Logistic Regression Classifier w/ Label Encoder + Imputer + One Hot Encoder +
↳Oversampler + Standard Scaler:
  Starting cross validation
  Finished cross validation - mean AUC: 0.672
CatBoost Classifier w/ Label Encoder + Imputer + Oversampler:
  Starting cross validation
  Finished cross validation - mean AUC: 0.882

Search finished after 00:07
Best pipeline: CatBoost Classifier w/ Label Encoder + Imputer + Oversampler
Best pipeline AUC: 0.881709

```

```
[12]: automl_auc.rankings
```

```

[12]:   id                pipeline_name  search_order  \
0    4  CatBoost Classifier w/ Label Encoder + Imputer...      4
1    1  Elastic Net Classifier w/ Label Encoder + Impu...      1
2    3  Logistic Regression Classifier w/ Label Encode...      3
3    2  Random Forest Classifier w/ Label Encoder + Im...      2
4    0      Mode Baseline Binary Classification Pipeline      0

   mean_cv_score  standard_deviation_cv_score  validation_score  \
0      0.881709          0.010861          0.869201
1      0.671885          0.050182          0.727798
2      0.671517          0.048732          0.725816
3      0.662322          0.050673          0.718588
4      0.500000          0.000000          0.500000

   percent_better_than_baseline  high_variance_cv  \
0                38.170947          False
1                17.188511          False
2                17.151664          False

```

(continues on next page)

(continued from previous page)

```

3             16.232241             False
4             0.000000             False

                                parameters
0  {'Imputer': {'categorical_impute_strategy': 'm...
1  {'Imputer': {'categorical_impute_strategy': 'm...
2  {'Imputer': {'categorical_impute_strategy': 'm...
3  {'Imputer': {'categorical_impute_strategy': 'm...
4      {'Baseline Classifier': {'strategy': 'mode'}}

```

Like before, we can look at the rankings and pick the best pipeline.

```

[13]: best_pipeline_auc = automl_auc.best_pipeline

[14]: # get the auc and lead scoring score on holdout data
best_pipeline_auc_score = best_pipeline_auc.score(X_holdout, y_holdout, objectives=[
    ↪ "auc", lead_scoring_objective])
best_pipeline_auc_score

[14]: OrderedDict([('AUC', 0.8585599879117558),
                  ('Lead Scoring', 0.08168529664660361)])

[15]: assert best_pipeline_score['Lead Scoring'] > best_pipeline_auc_score['Lead Scoring']
assert best_pipeline_auc_score['Lead Scoring'] >= 0

```

When we optimize for AUC, we can see that the AUC score from this pipeline is similar to the AUC score from the pipeline optimized for lead scoring. However, the revenue per lead is much smaller per lead when optimized for AUC and was much larger when optimized for lead scoring. As a result, we would have a huge gain on the amount of revenue if we optimized for lead scoring.

This happens because optimizing for AUC does not take into account the user-specified `true_positive` (dollar amount to be gained with a successful lead) and `false_positive` (dollar amount to be lost with an unsuccessful lead) values. Thus, the best pipelines may produce the highest AUC but may not actually generate the most revenue through lead scoring.

This example highlights how performance in the real world can diverge greatly from machine learning metrics.

3.3 Using the Cost-Benefit Matrix Objective

The Cost-Benefit Matrix (`CostBenefitMatrix`) objective is an objective that assigns costs to each of the quadrants of a confusion matrix to quantify the cost of being correct or incorrect.

3.3.1 Confusion Matrix

[Confusion matrices](#) are tables that summarize the number of correct and incorrectly-classified predictions, broken down by each class. They allow us to quickly understand the performance of a classification model and where the model gets “confused” when it is making predictions. For the binary classification problem, there are four possible combinations of prediction and actual target values possible:

- true positives (correct positive assignments)
- true negatives (correct negative assignments)
- false positives (incorrect positive assignments)

- false negatives (incorrect negative assignments)

An example of how to calculate a confusion matrix can be found [here](#).

3.3.2 Cost-Benefit Matrix

Although the confusion matrix is an incredibly useful visual for understanding our model, each prediction that is correctly or incorrectly classified is treated equally. For example, for detecting breast cancer, the confusion matrix does not take into consideration that it could be much more costly to incorrectly classify a malignant tumor as benign than it is to incorrectly classify a benign tumor as malignant. This is where the cost-benefit matrix shines: it uses the cost of each of the four possible outcomes to weigh each outcome differently. By scoring using the cost-benefit matrix, we can measure the score of the model by a concrete unit that is more closely related to the goal of the model. In the below example, we will show how the cost-benefit matrix objective can be used, and how it can give us better real-world impact when compared to using other standard machine learning objectives.

3.3.3 Customer Churn Example

Data

In this example, we will be using a customer churn data set taken from [Kaggle](#).

This dataset includes records of over 7000 customers, and includes customer account information, demographic information, services they signed up for, and whether or not the customer “churned” or left within the last month.

The target we want to predict is whether the customer churned (“Yes”) or did not churn (“No”). In the dataset, approximately 73.5% of customers did not churn, and 26.5% did. We will refer to the customers who churned as the “positive” class and the customers who did not churn as the “negative” class.

```
[1]: from evalml.demos.churn import load_churn
      from evalml.preprocessing import split_data

X, y = load_churn()
X.ww.set_types({'PaymentMethod': 'Categorical', 'Contract': 'Categorical'}) # Update_
↳data types Woodwork did not correctly infer
X_train, X_holdout, y_train, y_holdout = split_data(X, y, problem_type='binary', test_
↳size=0.3, random_seed=0)
```

```

          Number of Features
Categorical              16
Numeric                  3

Number of training examples: 7043
Targets
No      73.46%
Yes     26.54%
Name: Churn, dtype: object
```

In this example, let’s say that correctly identifying customers who will churn (true positive case) will give us a net profit of \$400, because it allows us to intervene, incentivize the customer to stay, and sign a new contract. Incorrectly classifying customers who were not going to churn as customers who will churn (false positive case) will cost \$100 to represent the marketing and effort used to try to retain the user. Not identifying customers who will churn (false negative case) will cost us \$200 to represent the lost in revenue from losing a customer. Finally, correctly identifying customers who will not churn (true negative case) will not cost us anything (\$0), as nothing needs to be done for that customer.

We can represent these values in our `CostBenefitMatrix` objective, where a negative value represents a cost and a positive value represents a profit—note that this means that the greater the score, the more profit we will make.

```
[2]: from evalml.objectives import CostBenefitMatrix
cost_benefit_matrix = CostBenefitMatrix(true_positive=400,
                                         true_negative=0,
                                         false_positive=-100,
                                         false_negative=-200)
```

AutoML Search with Log Loss

First, let us run AutoML search to train pipelines using the default objective for binary classification (log loss).

```
[3]: from evalml import AutoMLSearch
automl = AutoMLSearch(X_train=X_train, y_train=y_train, problem_type='binary',
                      objective='log loss binary',
                      max_iterations=5, verbose=True)
automl.search()

ll_pipeline = automl.best_pipeline
ll_pipeline.score(X_holdout, y_holdout, ['log loss binary'])

Generating pipelines to search over...
Removing columns ['TotalCharges'] because they are of 'Unknown' type
8 pipelines ready for search.

*****
* Beginning pipeline search *
*****

Optimizing for Log Loss Binary.
Lower score is better.

Using SequentialEngine to train and score pipelines.
Searching up to 5 pipelines.
Allowed model families: linear_model, linear_model, decision_tree, extra_trees,
↳ random_forest, xgboost, lightgbm, catboost

FigureWidget({
  'data': [{'mode': 'lines+markers',
            'name': 'Best Score',
            'type': ...

Evaluating Baseline Pipeline: Mode Baseline Binary Classification Pipeline
Mode Baseline Binary Classification Pipeline:
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 9.164

*****
* Evaluating Batch Number 1 *
*****

Elastic Net Classifier w/ Label Encoder + Drop Columns Transformer + Imputer + One_
↳ Hot Encoder + Standard Scaler:
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 0.423
Decision Tree Classifier w/ Label Encoder + Drop Columns Transformer + Imputer + One_
↳ Hot Encoder:
```

(continues on next page)

(continued from previous page)

```

    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.685
Random Forest Classifier w/ Label Encoder + Drop Columns Transformer + Imputer + One_
↳Hot Encoder:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.426
LightGBM Classifier w/ Label Encoder + Drop Columns Transformer + Imputer + One Hot_
↳Encoder:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.471

Search finished after 00:10
Best pipeline: Elastic Net Classifier w/ Label Encoder + Drop Columns Transformer +_
↳Imputer + One Hot Encoder + Standard Scaler
Best pipeline Log Loss Binary: 0.422746
[3]: OrderedDict([('Log Loss Binary', 0.41990933380906487)])

```

When we train our pipelines using log loss as our primary objective, we try to find pipelines that minimize log loss. However, our ultimate goal in training models is to find a model that gives us the most profit, so let's score our pipeline on the cost benefit matrix (using the costs outlined above) to determine the profit we would earn from the predictions made by this model:

```

[4]: ll_pipeline_score = ll_pipeline.score(X_holdout, y_holdout, [cost_benefit_matrix])
print (ll_pipeline_score)

OrderedDict([('Cost Benefit Matrix', 54.47231424514908)])

[5]: # Calculate total profit across all customers using pipeline optimized for Log Loss
total_profit_ll = ll_pipeline_score['Cost Benefit Matrix'] * len(X)
print (total_profit_ll)

383648.50922858494

```

AutoML Search with Cost-Benefit Matrix

Let's try rerunning our AutoML search, but this time using the cost-benefit matrix as our primary objective to optimize.

```

[6]: automl = AutoMLSearch(X_train=X_train, y_train=y_train, problem_type='binary',_
↳objective=cost_benefit_matrix,
max_iterations=5, verbose=True)

automl.search()

cbm_pipeline = automl.best_pipeline

Generating pipelines to search over...
Removing columns ['TotalCharges'] because they are of 'Unknown' type
8 pipelines ready for search.

*****
* Beginning pipeline search *
*****

Optimizing for Cost Benefit Matrix.
Greater score is better.

```

(continues on next page)

(continued from previous page)

```

Using SequentialEngine to train and score pipelines.
Searching up to 5 pipelines.
Allowed model families: linear_model, linear_model, decision_tree, extra_trees,
↳random_forest, xgboost, lightgbm, catboost

FigureWidget({
  'data': [{'mode': 'lines+markers',
            'name': 'Best Score',
            'type'...

Evaluating Baseline Pipeline: Mode Baseline Binary Classification Pipeline
Mode Baseline Binary Classification Pipeline:
  Starting cross validation
  Finished cross validation - mean Cost Benefit Matrix: -53.063

*****
* Evaluating Batch Number 1 *
*****

Elastic Net Classifier w/ Label Encoder + Drop Columns Transformer + Imputer + One_
↳Hot Encoder + Standard Scaler:
  Starting cross validation
  Finished cross validation - mean Cost Benefit Matrix: 59.554
Decision Tree Classifier w/ Label Encoder + Drop Columns Transformer + Imputer + One_
↳Hot Encoder:
  Starting cross validation
  Finished cross validation - mean Cost Benefit Matrix: 51.745
Random Forest Classifier w/ Label Encoder + Drop Columns Transformer + Imputer + One_
↳Hot Encoder:
  Starting cross validation
  Finished cross validation - mean Cost Benefit Matrix: 59.413
LightGBM Classifier w/ Label Encoder + Drop Columns Transformer + Imputer + One Hot_
↳Encoder:
  Starting cross validation
  Finished cross validation - mean Cost Benefit Matrix: 50.692

Search finished after 00:14
Best pipeline: Elastic Net Classifier w/ Label Encoder + Drop Columns Transformer +_
↳Imputer + One Hot Encoder + Standard Scaler
Best pipeline Cost Benefit Matrix: 59.554148

```

Now, if we calculate the cost-benefit matrix score on our best pipeline, we see that with this pipeline optimized for our cost-benefit matrix objective, we are able to generate more profit per customer. Across our 7043 customers, we generate much more profit using this best pipeline! Custom objectives like `CostBenefitMatrix` are just one example of how using EvalML can help find pipelines that can perform better on real-world problems, rather than on arbitrary standard statistical metrics.

```

[7]: cbm_pipeline_score = cbm_pipeline.score(X_holdout, y_holdout, [cost_benefit_matrix])
print (cbm_pipeline_score)

OrderedDict([('Cost Benefit Matrix', 62.23379081874113)])

[8]: # Calculate total profit across all customers using pipeline optimized for_
↳CostBenefitMatrix
total_profit_cbm = cbm_pipeline_score['Cost Benefit Matrix'] * len(X)
print (total_profit_cbm)

```

```
438312.5887363938
```

```
[9]: # Calculate difference in profit made using both pipelines
profit_diff = total_profit_cbm - total_profit_ll
print (profit_diff)
```

```
54664.07950780884
```

Finally, we can graph the confusion matrices for both pipelines to better understand why the pipeline trained using the cost-benefit matrix is able to correctly classify more samples than the pipeline trained with log loss: we were able to correctly predict more cases where the customer would have churned (true positive), allowing us to intervene and prevent those customers from leaving.

```
[10]: from evalml.model_understanding.graphs import graph_confusion_matrix

# pipeline trained with log loss
y_pred = ll_pipeline.predict(X_holdout)
graph_confusion_matrix(y_holdout, y_pred)
```

Data type cannot be displayed: application/vnd.plotly.v1+json, text/html

```
[11]: # pipeline trained with cost-benefit matrix
y_pred = cbm_pipeline.predict(X_holdout)
graph_confusion_matrix(y_holdout, y_pred)
```

Data type cannot be displayed: application/vnd.plotly.v1+json, text/html

3.4 Using Text Data with EvalML

In this demo, we will show you how to use EvalML to build models which use text data.

```
[1]: import evalml
from evalml import AutoMLSearch
```

3.4.1 Dataset

We will be utilizing a dataset of SMS text messages, some of which are categorized as spam, and others which are not (“ham”). This dataset is originally from [Kaggle](#), but modified to produce a slightly more even distribution of spam to ham.

```
[2]: from urllib.request import urlopen
import pandas as pd

input_data = urlopen('https://featurelabs-static.s3.amazonaws.com/spam_text_messages_
↳modified.csv')
data = pd.read_csv(input_data)[:750]

X = data.drop(['Category'], axis=1)
```

(continues on next page)

(continued from previous page)

```
y = data['Category']

display(X.head())
```

	Message
0	Free entry in 2 a wkly comp to win FA Cup fina...
1	FreeMsg Hey there darling it's been 3 week's n...
2	WINNER!! As a valued network customer you have...
3	Had your mobile 11 months or more? U R entitle...
4	SIX chances to win CASH! From 100 to 20,000 po...

The ham vs spam distribution of the data is 3:1, so any machine learning model must get above 75% accuracy in order to perform better than a trivial baseline model which simply classifies everything as ham.

```
[3]: y.value_counts(normalize=True)
```

```
[3]: spam    0.593333
ham      0.406667
Name: Category, dtype: float64
```

In order to properly utilize Woodwork's 'Natural Language' typing, we need to pass this argument in during initialization. Otherwise, this will be treated as an 'Unknown' type and dropped in the search.

```
[4]: X.ww.init(logical_types={"Message": "NaturalLanguage"})
```

3.4.2 Search for best pipeline

In order to validate the results of the pipeline creation and optimization process, we will save some of our data as a holdout set.

```
[5]: X_train, X_holdout, y_train, y_holdout = evalml.preprocessing.split_data(X, y,
↳problem_type='binary', test_size=0.2, random_seed=0)
```

EvalML uses Woodwork to automatically detect which columns are text columns, so you can run search normally, as you would if there was no text data. We can print out the logical type of the Message column and assert that it is indeed inferred as a natural language column.

```
[6]: X_train.ww
```

	Physical Type	Logical Type	Semantic Tag(s)
Column			
Message	string	NaturalLanguage	[]

Because the spam/ham labels are binary, we will use `AutoMLSearch(X_train=X_train, y_train=y_train, problem_type='binary')`. When we call `.search()`, the search for the best pipeline will begin.

```
[7]: automl = AutoMLSearch(X_train=X_train, y_train=y_train,
                           problem_type='binary',
                           max_batches=1,
                           optimize_thresholds=True,
                           verbose=True)

automl.search()
```

```
Generating pipelines to search over...
8 pipelines ready for search.
```

```
*****
* Beginning pipeline search *
*****
```

```
Optimizing for Log Loss Binary.
Lower score is better.
```

```
Using SequentialEngine to train and score pipelines.
Searching up to 1 batches for a total of 9 pipelines.
Allowed model families: linear_model, linear_model, decision_tree, extra_trees,
↳random_forest, xgboost, lightgbm, catboost
```

```
FigureWidget({
  'data': [{'mode': 'lines+markers',
            'name': 'Best Score',
            'type'...}]
```

```
Evaluating Baseline Pipeline: Mode Baseline Binary Classification Pipeline
Mode Baseline Binary Classification Pipeline:
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 14.046
```

```
*****
* Evaluating Batch Number 1 *
*****
```

```
Elastic Net Classifier w/ Label Encoder + Text Featurization Component + Imputer +
↳Standard Scaler:
```

```
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 0.350
```

```
Decision Tree Classifier w/ Label Encoder + Text Featurization Component + Imputer:
```

```
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 3.386
  High coefficient of variation (cv >= 0.5) within cross validation scores.
  Decision Tree Classifier w/ Label Encoder + Text Featurization Component +
↳Imputer may not perform as estimated on unseen data.
```

```
Random Forest Classifier w/ Label Encoder + Text Featurization Component + Imputer:
```

```
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 0.221
```

```
LightGBM Classifier w/ Label Encoder + Text Featurization Component + Imputer:
```

```
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 0.292
```

```
Logistic Regression Classifier w/ Label Encoder + Text Featurization Component +
↳Imputer + Standard Scaler:
```

```
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 0.350
```

```
XGBoost Classifier w/ Label Encoder + Text Featurization Component + Imputer:
```

```
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 0.266
```

```
Extra Trees Classifier w/ Label Encoder + Text Featurization Component + Imputer:
```

```
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 0.292
```

```
CatBoost Classifier w/ Label Encoder + Text Featurization Component + Imputer:
```

```
  Starting cross validation
```

(continues on next page)

(continued from previous page)

```

Finished cross validation - mean Log Loss Binary: 0.589

Search finished after 00:30
Best pipeline: Random Forest Classifier w/ Label Encoder + Text Featurization_
↳Component + Imputer
Best pipeline Log Loss Binary: 0.221422

```

View rankings and select pipeline

Once the fitting process is done, we can see all of the pipelines that were searched.

```

[8]: automl.rankings

[8]:   id                pipeline_name  search_order  \
0    3  Random Forest Classifier w/ Label Encoder + Te...    3
1    6  XGBoost Classifier w/ Label Encoder + Text Fea...    6
2    4  LightGBM Classifier w/ Label Encoder + Text Fe...    4
3    7  Extra Trees Classifier w/ Label Encoder + Text...    7
4    5  Logistic Regression Classifier w/ Label Encode...    5
5    1  Elastic Net Classifier w/ Label Encoder + Text...    1
6    8  CatBoost Classifier w/ Label Encoder + Text Fe...    8
7    2  Decision Tree Classifier w/ Label Encoder + Te...    2
8    0      Mode Baseline Binary Classification Pipeline    0

   mean_cv_score  standard_deviation_cv_score  validation_score  \
0         0.221422             0.040958             0.221587
1         0.266164             0.106501             0.242896
2         0.291768             0.114862             0.291521
3         0.292373             0.029893             0.325764
4         0.350340             0.074833             0.349271
5         0.350471             0.074886             0.349437
6         0.588944             0.004016             0.592259
7         3.385551             0.672118             3.708759
8        14.045769             0.099705            13.988204

   percent_better_than_baseline  high_variance_cv  \
0                98.423568             False
1                98.105025             False
2                97.922737             False
3                97.918427             False
4                97.505728             False
5                97.504795             False
6                95.806967             False
7                75.896294              True
8                 0.000000             False

                                parameters
0  {'Imputer': {'categorical_impute_strategy': 'm...
1  {'Imputer': {'categorical_impute_strategy': 'm...
2  {'Imputer': {'categorical_impute_strategy': 'm...
3  {'Imputer': {'categorical_impute_strategy': 'm...
4  {'Imputer': {'categorical_impute_strategy': 'm...
5  {'Imputer': {'categorical_impute_strategy': 'm...
6  {'Imputer': {'categorical_impute_strategy': 'm...
7  {'Imputer': {'categorical_impute_strategy': 'm...
8      {'Baseline Classifier': {'strategy': 'mode'}}

```

To select the best pipeline we can call `automl.best_pipeline`.

```
[9]: best_pipeline = automl.best_pipeline
```

Describe pipeline

You can get more details about any pipeline, including how it performed on other objective functions.

```
[10]: automl.describe_pipeline(automl.rankings.iloc[0]["id"])

*****
* Random Forest Classifier w/ Label Encoder + Text Featurization Component + Imputer *
*****

Problem Type: binary
Model Family: Random Forest

Pipeline Steps
=====
1. Label Encoder
2. Text Featurization Component
3. Imputer
    * categorical_impute_strategy : most_frequent
    * numeric_impute_strategy : mean
    * categorical_fill_value : None
    * numeric_fill_value : None
4. Random Forest Classifier
    * n_estimators : 100
    * max_depth : 6
    * n_jobs : -1

Training
=====
Training for binary problems.
Total training time (including CV): 3.7 seconds

Cross Validation
-----
              Log Loss Binary  MCC Binary  Gini  AUC  Precision  F1  Balanced_
→Accuracy Binary  Accuracy Binary # Training # Validation
0              0.222      0.817 0.950 0.975      0.862 0.893
→ 0.913              0.910      400      200
1              0.180      0.875 0.970 0.985      0.937 0.925
→ 0.936              0.940      400      200
2              0.262      0.783 0.925 0.963      0.918 0.865
→ 0.883              0.895      400      200
mean           0.221      0.825 0.948 0.974      0.906 0.894
→ 0.910              0.915      -        -
std            0.041      0.047 0.023 0.011      0.039 0.030
→ 0.026              0.023      -        -
coef of var     0.185      0.057 0.024 0.012      0.043 0.034
→ 0.029              0.025      -        -
```

```
[11]: best_pipeline.graph()
```

[11]:

Notice above that there is a `Text Featurization Component` as the first step in the pipeline. `AutoMLSearch` uses the `woodwork` accessor to recognize that `'Message'` is a text column, and converts this text into numerical values that can be handled by the estimator.

3.4.3 Evaluate on holdout

Now, we can score the pipeline on the holdout data using the core objectives for binary classification problems.

```
[12]: scores = best_pipeline.score(X_holdout, y_holdout, objectives=evalml.objectives.get_
      ↪core_objectives('binary'))
      print(f'Accuracy Binary: {scores["Accuracy Binary"]}')

Accuracy Binary: 0.96
```

As you can see, this model performs relatively well on this dataset, even on unseen data.

3.4.4 What does the Text Featurization Component do?

Machine learning models cannot handle non-numeric data. Any text must be broken down into numeric features that provide useful information about that text. The `Text Featurization` component first normalizes your text by removing any punctuation and other non-alphanumeric characters and converting any capital letters to lowercase. From there, it passes the text into `featuretools`' `nlp_primitives` `dfs` search, resulting in several informative features that replace the original column in your dataset: `Diversity Score`, `Mean Characters per Word`, `Polarity Score`, and `LSA` (`Latent Semantic Analysis`).

Diversity Score is the ratio of unique words to total words.

Mean Characters per Word is the average number of letters in each word.

Polarity Score is a prediction of how “polarized” the text is, on a scale from -1 (extremely negative) to 1 (extremely positive).

Latent Semantic Analysis is an abstract representation of how important each word is with respect to the entire text, reduced down into two values per text. While the other text features are each a single column, this feature adds two columns to your data, `LSA(column_name) [0]` and `LSA(column_name) [1]`.

Let's see what this looks like with our spam/ham example.

```
[13]: best_pipeline.input_feature_names

[13]: {'Label Encoder': ['Message'],
      'Text Featurization Component': ['Message'],
      'Imputer': ['DIVERSITY_SCORE(Message)',
                  'MEAN_CHARACTERS_PER_WORD(Message)',
                  'POLARITY_SCORE(Message)',
                  'LSA(Message) [0]',
                  'LSA(Message) [1]'],
      'Random Forest Classifier': ['DIVERSITY_SCORE(Message)',
                                   'MEAN_CHARACTERS_PER_WORD(Message)',
                                   'POLARITY_SCORE(Message)',
                                   'LSA(Message) [0]',
                                   'LSA(Message) [1]']}
```

Here, the `Text Featurization` component takes in a single “`Message`” column, but then the next component in the pipeline, the `Imputer`, receives five columns of input. These five columns are the result of featurizing the text-type “`Message`” column. Most importantly, these featurized columns are what ends up passed in to the estimator.

If the dataset had any non-text columns, those would be left alone by this process. If the dataset had more than one text column, each would be broken into these five feature columns independently.

The features, more directly

Rather than just checking the new column names, let's examine the output of this component directly. We can see this by running the component on its own.

```
[14]: text_featurizer = evalml.pipelines.components.TextFeaturizer()
      X_featurized = text_featurizer.fit_transform(X_train)
```

Now we can compare the input data to the output from the text featurizer:

```
[15]: X_train.head()
```

```
[15]:      Message
296  Sunshine Hols. To claim ur med holiday send a ...
652      Yup ü not comin :-(
526  Hello hun how ru? Its here by the way. Im good...
571  I tagged MY friends that you seemed to count a...
472      What happened to our yo date?
```

```
[16]: X_featurized.head()
```

```
[16]:      DIVERSITY_SCORE (Message)  MEAN_CHARACTERS_PER_WORD (Message)  \
296                        1.0                        4.344828
652                        1.0                        3.000000
526                        1.0                        3.363636
571                        0.8                        4.083333
472                        1.0                        3.833333

      POLARITY_SCORE (Message)  LSA (Message) [0]  LSA (Message) [1]
296                        0.003      0.150556      -0.072443
652                        0.000      0.017340      -0.005411
526                        0.162      0.169954      0.022670
571                        0.681      0.144713      0.036799
472                        0.000      0.109373      -0.042754
```

These numeric values now represent important information about the original text that the estimator at the end of the pipeline can successfully use to make predictions.

3.4.5 Why encode text this way?

To demonstrate the importance of text-specific modeling, let's train a model with the same dataset, without letting AutoMLSearch detect the text column. We can change this by explicitly setting the data type of the 'Message' column in Woodwork to Categorical using the utility method `infer_feature_types`.

```
[17]: from evalml.utils import infer_feature_types
      X = infer_feature_types(X, {'Message': 'Categorical'})
      X_train, X_holdout, y_train, y_holdout = evalml.preprocessing.split_data(X, y,
      ↪problem_type='binary', test_size=0.2, random_seed=0)
```

```
[18]: automl_no_text = AutoMLSearch(X_train=X_train, y_train=y_train,
      problem_type='binary',
      max_batches=1,
```

(continues on next page)

(continued from previous page)

```

optimize_thresholds=True,
verbose=True)

automl_no_text.search()

Generating pipelines to search over...
8 pipelines ready for search.

*****
* Beginning pipeline search *
*****

Optimizing for Log Loss Binary.
Lower score is better.

Using SequentialEngine to train and score pipelines.
Searching up to 1 batches for a total of 9 pipelines.
Allowed model families: linear_model, linear_model, decision_tree, extra_trees,
↳random_forest, xgboost, lightgbm, catboost

FigureWidget({
  'data': [{'mode': 'lines+markers',
            'name': 'Best Score',
            'type'...

Evaluating Baseline Pipeline: Mode Baseline Binary Classification Pipeline
Mode Baseline Binary Classification Pipeline:
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 14.046

*****
* Evaluating Batch Number 1 *
*****

Elastic Net Classifier w/ Label Encoder + Text Featurization Component + Imputer +
↳Standard Scaler:
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 0.350
Decision Tree Classifier w/ Label Encoder + Text Featurization Component + Imputer:
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 3.386
  High coefficient of variation (cv >= 0.5) within cross validation scores.
  Decision Tree Classifier w/ Label Encoder + Text Featurization Component +
↳Imputer may not perform as estimated on unseen data.
Random Forest Classifier w/ Label Encoder + Text Featurization Component + Imputer:
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 0.221
LightGBM Classifier w/ Label Encoder + Text Featurization Component + Imputer:
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 0.292
Logistic Regression Classifier w/ Label Encoder + Text Featurization Component +
↳Imputer + Standard Scaler:
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 0.350
XGBoost Classifier w/ Label Encoder + Text Featurization Component + Imputer:
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 0.266

```

(continues on next page)

(continued from previous page)

```

Extra Trees Classifier w/ Label Encoder + Text Featurization Component + Imputer:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.292
CatBoost Classifier w/ Label Encoder + Text Featurization Component + Imputer:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.589

Search finished after 00:27
Best pipeline: Random Forest Classifier w/ Label Encoder + Text Featurization_
↳Component + Imputer
Best pipeline Log Loss Binary: 0.221422

```

Like before, we can look at the rankings and pick the best pipeline.

```
[19]: automl_no_text.rankings
```

```

[19]:   id      pipeline_name  search_order  \
0    3  Random Forest Classifier w/ Label Encoder + Te...      3
1    6  XGBoost Classifier w/ Label Encoder + Text Fea...      6
2    4  LightGBM Classifier w/ Label Encoder + Text Fe...      4
3    7  Extra Trees Classifier w/ Label Encoder + Text...      7
4    5  Logistic Regression Classifier w/ Label Encode...      5
5    1  Elastic Net Classifier w/ Label Encoder + Text...      1
6    8  CatBoost Classifier w/ Label Encoder + Text Fe...      8
7    2  Decision Tree Classifier w/ Label Encoder + Te...      2
8    0      Mode Baseline Binary Classification Pipeline      0

   mean_cv_score  standard_deviation_cv_score  validation_score  \
0         0.221422             0.040958             0.221587
1         0.266164             0.106501             0.242896
2         0.291768             0.114862             0.291521
3         0.292373             0.029893             0.325764
4         0.350340             0.074833             0.349271
5         0.350471             0.074886             0.349437
6         0.588944             0.004016             0.592259
7         3.385551             0.672118             3.708759
8        14.045769             0.099705            13.988204

   percent_better_than_baseline  high_variance_cv  \
0                98.423568             False
1                98.105025             False
2                97.922737             False
3                97.918427             False
4                97.505728             False
5                97.504795             False
6                95.806967             False
7                75.896294              True
8                 0.000000             False

                                parameters
0  {'Imputer': {'categorical_impute_strategy': 'm...
1  {'Imputer': {'categorical_impute_strategy': 'm...
2  {'Imputer': {'categorical_impute_strategy': 'm...
3  {'Imputer': {'categorical_impute_strategy': 'm...
4  {'Imputer': {'categorical_impute_strategy': 'm...
5  {'Imputer': {'categorical_impute_strategy': 'm...
6  {'Imputer': {'categorical_impute_strategy': 'm...

```

(continues on next page)

(continued from previous page)

```

7  {'Imputer': {'categorical_impute_strategy': 'm...
8      {'Baseline Classifier': {'strategy': 'mode'}}}

```

```
[20]: best_pipeline_no_text = automl_no_text.best_pipeline
```

Here, changing the data type of the text column removed the Text Featurization Component from the pipeline.

```
[21]: best_pipeline_no_text.graph()
```

```
[21]:
```

```
[22]: automl_no_text.describe_pipeline(automl_no_text.rankings.iloc[0]["id"])
```

```

*****
* Random Forest Classifier w/ Label Encoder + Text Featurization Component + Imputer *
*****

```

```

Problem Type: binary
Model Family: Random Forest

```

```
Pipeline Steps
```

```
=====
```

```

1. Label Encoder
2. Text Featurization Component
3. Imputer
    * categorical_impute_strategy : most_frequent
    * numeric_impute_strategy : mean
    * categorical_fill_value : None
    * numeric_fill_value : None
4. Random Forest Classifier
    * n_estimators : 100
    * max_depth : 6
    * n_jobs : -1

```

```
Training
```

```
=====
```

```

Training for binary problems.
Total training time (including CV): 3.6 seconds

```

```
Cross Validation
```

```
-----
```

	Log Loss Binary	Accuracy Binary	MCC Binary	Gini	AUC	Precision	F1	Balanced_
	Accuracy Binary	Accuracy Binary	# Training	# Validation				
0	0.222	0.817	0.950	0.975	0.862	0.893		
→ 0.913	0.910	400	200					
1	0.180	0.875	0.970	0.985	0.937	0.925		
→ 0.936	0.940	400	200					
2	0.262	0.783	0.925	0.963	0.918	0.865		
→ 0.883	0.895	400	200					
mean	0.221	0.825	0.948	0.974	0.906	0.894		
→ 0.910	0.915	-	-					
std	0.041	0.047	0.023	0.011	0.039	0.030		
→ 0.026	0.023	-	-					
coef of var	0.185	0.057	0.024	0.012	0.043	0.034		
→ 0.029	0.025	-	-					

```
[23]: # get standard performance metrics on holdout data
scores = best_pipeline_no_text.score(X_holdout, y_holdout, objectives=evalml.
↳objectives.get_core_objectives('binary'))
print(f'Accuracy Binary: {scores["Accuracy Binary"]}')

```

```
Accuracy Binary: 0.96

```

Without the Text Featurization Component, the 'Message' column was treated as a categorical column, and therefore the conversion of this text to numerical features happened in the One Hot Encoder. The best pipeline encoded the top 10 most frequent “categories” of these texts, meaning 10 text messages were one-hot encoded and all the others were dropped. Clearly, this removed almost all of the information from the dataset, as we can see the `best_pipeline_no_text` performs very similarly to randomly guessing “ham” in every case.

These guides include in-depth descriptions and explanations of EvalML's features.

4.1 Automated Machine Learning (AutoML) Search

4.1.1 Background

Machine Learning

Machine learning (ML) is the process of constructing a mathematical model of a system based on a sample dataset collected from that system.

One of the main goals of training an ML model is to teach the model to separate the signal present in the data from the noise inherent in system and in the data collection process. If this is done effectively, the model can then be used to make accurate predictions about the system when presented with new, similar data. Additionally, introspecting on an ML model can reveal key information about the system being modeled, such as which inputs and transformations of the inputs are most useful to the ML model for learning the signal in the data, and are therefore the most predictive.

There are a **variety** of ML problem types. Supervised learning describes the case where the collected data contains an output value to be modeled and a set of inputs with which to train the model. EvalML focuses on training supervised learning models.

EvalML supports three common supervised ML problem types. The first is regression, where the target value to model is a continuous numeric value. Next are binary and multiclass classification, where the target value to model consists of two or more discrete values or categories. The choice of which supervised ML problem type is most appropriate depends on domain expertise and on how the model will be evaluated and used.

EvalML is currently building support for supervised time series problems: time series regression, time series binary classification, and time series multiclass classification. While we've added some features to tackle these kinds of problems, our functionality is still being actively developed so please be mindful of that before using it.

AutoML and Search

AutoML is the process of automating the construction, training and evaluation of ML models. Given a data and some configuration, AutoML searches for the most effective and accurate ML model or models to fit the dataset. During the search, AutoML will explore different combinations of model type, model parameters and model architecture.

An effective AutoML solution offers several advantages over constructing and tuning ML models by hand. AutoML can assist with many of the difficult aspects of ML, such as avoiding overfitting and underfitting, imbalanced data, detecting data leakage and other potential issues with the problem setup, and automatically applying best-practice data cleaning, feature engineering, feature selection and various modeling techniques. AutoML can also leverage

search algorithms to optimally sweep the hyperparameter search space, resulting in model performance which would be difficult to achieve by manual training.

4.1.2 AutoML in EvalML

EvalML supports all of the above and more.

In its simplest usage, the AutoML search interface requires only the input data, the target data and a `problem_type` specifying what kind of supervised ML problem to model.

** Graphing methods, like verbose `AutoMLSearch`, on Jupyter Notebook and Jupyter Lab require `ipywidgets` to be installed.

** If graphing on Jupyter Lab, `jupyterlab-plotly` required. To download this, make sure you have `npm` installed.

```
[1]: import evalml
      from evalml.utils import infer_feature_types
      X, y = evalml.demos.load_fraud(n_rows=250)
```

```

              Number of Features
Boolean                      1
Categorical                   6
Numeric                       5

Number of training examples: 250
Targets
False      88.40%
True       11.60%
Name: fraud, dtype: object
```

To provide data to EvalML, it is recommended that you initialize a `Woodwork` accessor on your data. This allows you to easily control how EvalML will treat each of your features before training a model.

EvalML also accepts `pandas` input, and will run type inference on top of the input `pandas` data. If you'd like to change the types inferred by EvalML, you can use the `infer_feature_types` utility method, which takes `pandas` or `numpy` input and converts it to a `Woodwork` data structure. The `feature_types` parameter can be used to specify what types specific columns should be.

Feature types such as `Natural Language` must be specified in this way, otherwise `Woodwork` will infer it as `Unknown` type and drop it during the `AutoMLSearch`.

In the example below, we reformat a couple features to make them easily consumable by the model, and then specify that the provider, which would have otherwise been inferred as a column with natural language, is a categorical column.

```
[2]: X.ww['expiration_date'] = X['expiration_date'].apply(lambda x: '20{}-01-{}'.format(x.
    ↪split("/") [1], x.split("/") [0]))
      X = infer_feature_types(X, feature_types= {'store_id': 'categorical',
                                                'expiration_date': 'datetime',
                                                'lat': 'categorical',
                                                'lng': 'categorical',
                                                'provider': 'categorical'})
```

In order to validate the results of the pipeline creation and optimization process, we will save some of our data as a holdout set.

```
[3]: X_train, X_holdout, y_train, y_holdout = evalml.preprocessing.split_data(X, y,
    ↪problem_type='binary', test_size=.2)
```


Data Checks

Before calling `AutoMLSearch.search`, we should run some sanity checks on our data to ensure that the input data being passed will not run into some common issues before running a potentially time-consuming search. EvalML has various data checks that makes this easy. Each data check will return a collection of warnings and errors if it detects potential issues with the input data. This allows users to inspect their data to avoid confusing errors that may arise during the search process. You can learn about each of the data checks available through our [data checks guide](#)

Here, we will run the `DefaultDataChecks` class, which contains a series of data checks that are generally useful.

```
[4]: from evalml.data_checks import DefaultDataChecks

data_checks = DefaultDataChecks("binary", "log loss binary")
data_checks.validate(X_train, y_train)

[4]: {'warnings': [], 'errors': [], 'actions': []}
```

Since there were no warnings or errors returned, we can safely continue with the search process.

```
[5]: automl = evalml.automl.AutoMLSearch(X_train=X_train, y_train=y_train, problem_type=
↳ 'binary', verbose=True)
automl.search()

Using default limit of max_batches=1.

Generating pipelines to search over...
Removing columns ['currency'] because they are of 'Unknown' type
8 pipelines ready for search.

*****
* Beginning pipeline search *
*****

Optimizing for Log Loss Binary.
Lower score is better.

Using SequentialEngine to train and score pipelines.
Searching up to 1 batches for a total of 9 pipelines.
Allowed model families: linear_model, linear_model, decision_tree, extra_trees,
↳ random_forest, xgboost, lightgbm, catboost

FigureWidget({
  'data': [{'mode': 'lines+markers',
            'name': 'Best Score',
            'type': ...

Evaluating Baseline Pipeline: Mode Baseline Binary Classification Pipeline
Mode Baseline Binary Classification Pipeline:
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 3.970

*****
* Evaluating Batch Number 1 *
*****

Elastic Net Classifier w/ Label Encoder + Drop Columns Transformer + Imputer +
↳ DateTime Featurization Component + One Hot Encoder + Oversampler + Standard Scaler:
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 0.627
```

(continues on next page)

(continued from previous page)

```

Decision Tree Classifier w/ Label Encoder + Drop Columns Transformer + Imputer +
↳DateTime Featurization Component + One Hot Encoder + Oversampler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 5.404
    High coefficient of variation (cv >= 0.5) within cross validation scores.
    Decision Tree Classifier w/ Label Encoder + Drop Columns Transformer +
↳Imputer + DateTime Featurization Component + One Hot Encoder + Oversampler may not
↳perform as estimated on unseen data.
Random Forest Classifier w/ Label Encoder + Drop Columns Transformer + Imputer +
↳DateTime Featurization Component + One Hot Encoder + Oversampler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.290
LightGBM Classifier w/ Label Encoder + Drop Columns Transformer + Imputer + DateTime
↳Featurization Component + One Hot Encoder + Oversampler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.321
Logistic Regression Classifier w/ Label Encoder + Drop Columns Transformer + Imputer
↳+ DateTime Featurization Component + One Hot Encoder + Oversampler + Standard
↳Scaler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.652
XGBoost Classifier w/ Label Encoder + Drop Columns Transformer + Imputer + DateTime
↳Featurization Component + One Hot Encoder + Oversampler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.274
Extra Trees Classifier w/ Label Encoder + Drop Columns Transformer + Imputer +
↳DateTime Featurization Component + One Hot Encoder + Oversampler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.339
CatBoost Classifier w/ Label Encoder + Drop Columns Transformer + Imputer + DateTime
↳Featurization Component + Oversampler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.627

Search finished after 00:17
Best pipeline: XGBoost Classifier w/ Label Encoder + Drop Columns Transformer +
↳Imputer + DateTime Featurization Component + One Hot Encoder + Oversampler
Best pipeline Log Loss Binary: 0.273766

```

With the `verbose` argument set to `True`, the AutoML search will log its progress, reporting each pipeline and parameter set evaluated during the search.

There are a number of mechanisms to control the AutoML search time. One way is to set the `max_batches` parameter which controls the maximum number of rounds of AutoML to evaluate, where each round may train and score a variable number of pipelines. Another way is to set the `max_iterations` parameter which controls the maximum number of candidate models to be evaluated during AutoML. By default, AutoML will search for a single batch. The first pipeline to be evaluated will always be a baseline model representing a trivial solution.

The AutoML interface supports a variety of other parameters. For a comprehensive list, please [refer to the API reference](#).

We also provide [a standalone search method](#) which does all of the above in a single line, and returns the `AutoMLSearch` instance and data check results. If there were data check errors, AutoML will not be run and no `AutoMLSearch` instance will be returned.

Detecting Problem Type

EvalML includes a simple method, `detect_problem_type`, to help determine the problem type given the target data.

This function can return the predicted problem type as a `ProblemType` enum, choosing from `ProblemType.BINARY`, `ProblemType.MULTICLASS`, and `ProblemType.REGRESSION`. If the target data is invalid (for instance when there is only 1 unique label), the function will throw an error instead.

```
[6]: import pandas as pd
      from evalml.problem_types import detect_problem_type

      y_binary = pd.Series([0, 1, 1, 0, 1, 1])
      detect_problem_type(y_binary)

[6]: <ProblemTypes.BINARY: 'binary'>
```

Objective parameter

`AutoMLSearch` takes in an objective parameter to determine which objective to optimize for. By default, this parameter is set to `auto`, which allows `AutoML` to choose `LogLossBinary` for binary classification problems, `LogLossMulticlass` for multiclass classification problems, and `R2` for regression problems.

It should be noted that the objective parameter is only used in ranking and helping choose the pipelines to iterate over, but is not used to optimize each individual pipeline during fit-time.

To get the default objective for each problem type, you can use the `get_default_primary_search_objective` function.

```
[7]: from evalml automl import get_default_primary_search_objective

      binary_objective = get_default_primary_search_objective("binary")
      multiclass_objective = get_default_primary_search_objective("multiclass")
      regression_objective = get_default_primary_search_objective("regression")

      print(binary_objective.name)
      print(multiclass_objective.name)
      print(regression_objective.name)

      Log Loss Binary
      Log Loss Multiclass
      R2
```

Using custom pipelines

EvalML's `AutoML` algorithm generates a set of pipelines to search with. To provide a custom set instead, set `allowed_component_graphs` to a dictionary of custom component graphs. `AutoMLSearch` will use these to generate `Pipeline` instances. Note: this will prevent `AutoML` from generating other pipelines to search over.

```
[8]: from evalml.pipelines import MulticlassClassificationPipeline

      automl_custom = evalml.automl.AutoMLSearch(
          X_train=X_train,
          y_train=y_train,
          problem_type='multiclass',
```

(continues on next page)

(continued from previous page)

```

    verbose=True,
    allowed_component_graphs={"My_pipeline": ['Simple Imputer', 'Random Forest_
↪Classifier'],
                                "My_other_pipeline": ['One Hot Encoder', 'Random Forest_
↪Classifier']})

```

Using default limit of max_batches=1.

2 pipelines ready for search.

```

/home/docs/checkouts/readthedocs.org/user_builds/feature-labs-inc-evalml/envs/v0.35.0/
↪lib/python3.8/site-packages/evalml/automl/automl_algorithm/iterative_algorithm.py:
↪475: ParameterNotUsedWarning:

```

```

Parameters for components {'Oversampler'} will not be used to instantiate the_
↪pipeline since they don't appear in the pipeline

```

Stopping the search early

To stop the search early, hit `Ctrl-C`. This will bring up a prompt asking for confirmation. Responding with `y` will immediately stop the search. Responding with `n` will continue the search.

Callback functions

`AutoMLSearch` supports several callback functions, which can be specified as parameters when initializing an `AutoMLSearch` object. They are:

- `start_iteration_callback`
- `add_result_callback`
- `error_callback`

Start Iteration Callback

Users can set `start_iteration_callback` to set what function is called before each pipeline training iteration. This callback function must take three positional parameters: the pipeline class, the pipeline parameters, and the `AutoMLSearch` object.

```

[9]: ## start_iteration_callback example function
def start_iteration_callback_example(pipeline_class, pipeline_params, automl_obj):
    print ("Training pipeline with the following parameters:", pipeline_params)

```

Add Result Callback

Users can set `add_result_callback` to set what function is called after each pipeline training iteration. This callback function must take three positional parameters: a dictionary containing the training results for the new pipeline, an `untrained_pipeline` containing the parameters used during training, and the `AutoMLSearch` object.

```
[10]: ## add_result_callback example function
def add_result_callback_example(pipeline_results_dict, untrained_pipeline, automl_
    obj):
    print ("Results for trained pipeline with the following parameters:", pipeline_
    results_dict)
```

Error Callback

Users can set the `error_callback` to set what function called when `search()` errors and raises an `Exception`. This callback function takes three positional parameters: the `Exception` raised, the `traceback`, and the `AutoMLSearch` object. This callback function must also accept `kwargs`, so `AutoMLSearch` is able to pass along other parameters used by default.

`Evalml` defines several error callback functions, which can be found under `evalml.automl.callbacks`. They are:

- `silent_error_callback`
- `raise_error_callback`
- `log_and_save_error_callback`
- `raise_and_save_error_callback`
- `log_error_callback` (default used when `error_callback` is `None`)

```
[11]: # error_callback example; this is implemented in the evalml library
def raise_error_callback(exception, traceback, automl, **kwargs):
    """Raises the exception thrown by the AutoMLSearch object. Also logs the_
    exception as an error."""
    logger.error(f'AutoMLSearch raised a fatal exception: {str(exception)}')
    logger.error("\n".join(traceback))
    raise exception
```

4.1.3 View Rankings

A summary of all the pipelines built can be returned as a `pandas DataFrame` which is sorted by score. The `score` column contains the average score across all cross-validation folds while the `validation_score` column is computed from the first cross-validation fold.

```
[12]: automl.rankings
```

```
[12]:   id  pipeline_name  search_order  \
0   6  XGBoost Classifier w/ Label Encoder + Drop Col...      6
1   3  Random Forest Classifier w/ Label Encoder + Dr...      3
2   4  LightGBM Classifier w/ Label Encoder + Drop Co...      4
3   7  Extra Trees Classifier w/ Label Encoder + Drop...      7
4   8  CatBoost Classifier w/ Label Encoder + Drop Co...      8
5   1  Elastic Net Classifier w/ Label Encoder + Drop...      1
6   5  Logistic Regression Classifier w/ Label Encode...      5
```

(continues on next page)

(continued from previous page)

7	0	Mode Baseline Binary Classification Pipeline			0
8	2	Decision Tree Classifier w/ Label Encoder + Dr...			2
	mean_cv_score	standard_deviation_cv_score	validation_score	\	
0	0.273766	0.164425	0.206398		
1	0.289832	0.045093	0.276903		
2	0.320864	0.147577	0.226765		
3	0.338676	0.030914	0.314494		
4	0.626968	0.005110	0.632822		
5	0.627427	0.108176	0.508699		
6	0.651602	0.117410	0.522408		
7	3.970423	0.266060	4.124033		
8	5.403917	2.627562	2.632694		
	percent_better_than_baseline	high_variance_cv	\		
0	93.104871	False			
1	92.700224	False			
2	91.918642	False			
3	91.470030	False			
4	84.209030	False			
5	84.197481	False			
6	83.588598	False			
7	0.000000	False			
8	-36.104299	True			
	parameters				
0	{ 'Drop Columns Transformer': { 'columns': ['cur...				
1	{ 'Drop Columns Transformer': { 'columns': ['cur...				
2	{ 'Drop Columns Transformer': { 'columns': ['cur...				
3	{ 'Drop Columns Transformer': { 'columns': ['cur...				
4	{ 'Drop Columns Transformer': { 'columns': ['cur...				
5	{ 'Drop Columns Transformer': { 'columns': ['cur...				
6	{ 'Drop Columns Transformer': { 'columns': ['cur...				
7	{ 'Baseline Classifier': { 'strategy': 'mode'}}				
8	{ 'Drop Columns Transformer': { 'columns': ['cur...				

4.1.4 Describe Pipeline

Each pipeline is given an `id`. We can get more information about any particular pipeline using that `id`. Here, we will get more information about the pipeline with `id = 1`.

```
[13]: automl.describe_pipeline(1)
```

```
*****
* Elastic Net Classifier w/ Label Encoder + Drop Columns Transformer + Imputer +
↳ DateTime Featurization Component + One Hot Encoder + Oversampler + Standard Scaler *
*****

Problem Type: binary
Model Family: Linear

Pipeline Steps
=====
1. Label Encoder
```

(continues on next page)

(continued from previous page)

```

2. Drop Columns Transformer
    * columns : ['currency']
3. Imputer
    * categorical_impute_strategy : most_frequent
    * numeric_impute_strategy : mean
    * categorical_fill_value : None
    * numeric_fill_value : None
4. DateTime Featurization Component
    * features_to_extract : ['year', 'month', 'day_of_week', 'hour']
    * encode_as_categories : False
    * date_index : None
5. One Hot Encoder
    * top_n : 10
    * features_to_encode : None
    * categories : None
    * drop : if_binary
    * handle_unknown : ignore
    * handle_missing : error
6. Oversampler
    * sampling_ratio : 0.25
    * k_neighbors_default : 5
    * n_jobs : -1
    * sampling_ratio_dict : None
    * k_neighbors : 5
7. Standard Scaler
8. Elastic Net Classifier
    * penalty : elasticnet
    * C : 1.0
    * l1_ratio : 0.15
    * n_jobs : -1
    * multi_class : auto
    * solver : saga

```

Training

```
=====
```

Training for binary problems.

Total training time (including CV): 2.0 seconds

Cross Validation

```

-----
          Log Loss Binary  MCC Binary  Gini  AUC  Precision  F1  Balanced_
↳Accuracy Binary  Accuracy Binary # Training # Validation
0
↳ 0.520          0.509          0.046 0.174 0.587          0.167 0.143
1
↳ 0.645          0.821          133      67
0.653          0.290 0.131 0.566          0.375 0.375
↳ 0.851          133      67
2
↳ 0.541          0.720          0.062 0.080 0.540          0.143 0.190
↳ 0.742          134      66
mean          0.627          0.133 0.128 0.564          0.228 0.236
↳ 0.569          0.805          -      -
std          0.108          0.137 0.047 0.023          0.128 0.123
↳ 0.067          0.056          -      -
coef of var          0.172          1.031 0.366 0.042          0.560 0.519
↳ 0.118          0.070          -      -

```

4.1.5 Get Pipeline

We can get the object of any pipeline via their id as well:

```
[14]: pipeline = automl.get_pipeline(1)
print(pipeline.name)
print(pipeline.parameters)

Elastic Net Classifier w/ Label Encoder + Drop Columns Transformer + Imputer +
↳ DateTime Featurization Component + One Hot Encoder + Oversampler + Standard Scaler
{'Drop Columns Transformer': {'columns': ['currency']}, 'Imputer': {'categorical_
↳ impute_strategy': 'most_frequent', 'numeric_impute_strategy': 'mean', 'categorical_
↳ fill_value': None, 'numeric_fill_value': None}, 'DateTime Featurization Component':
↳ {'features_to_extract': ['year', 'month', 'day_of_week', 'hour'], 'encode_as_
↳ categories': False, 'date_index': None}, 'One Hot Encoder': {'top_n': 10, 'features_
↳ to_encode': None, 'categories': None, 'drop': 'if_binary', 'handle_unknown': 'ignore
↳ ', 'handle_missing': 'error'}, 'Oversampler': {'sampling_ratio': 0.25, 'k_neighbors_
↳ default': 5, 'n_jobs': -1, 'sampling_ratio_dict': None, 'k_neighbors': 5}, 'Elastic_
↳ Net Classifier': {'penalty': 'elasticnet', 'C': 1.0, 'l1_ratio': 0.15, 'n_jobs': -1,
↳ 'multi_class': 'auto', 'solver': 'saga'}}
```

Get best pipeline

If you specifically want to get the best pipeline, there is a convenient accessor for that. The pipeline returned is already fitted on the input X, y data that we passed to AutoMLSearch. To turn off this default behavior, set `train_best_pipeline=False` when initializing AutoMLSearch.

```
[15]: best_pipeline = automl.best_pipeline
print(best_pipeline.name)
print(best_pipeline.parameters)
best_pipeline.predict(X_train)

XGBoost Classifier w/ Label Encoder + Drop Columns Transformer + Imputer + DateTime_
↳ Featurization Component + One Hot Encoder + Oversampler
{'Drop Columns Transformer': {'columns': ['currency']}, 'Imputer': {'categorical_
↳ impute_strategy': 'most_frequent', 'numeric_impute_strategy': 'mean', 'categorical_
↳ fill_value': None, 'numeric_fill_value': None}, 'DateTime Featurization Component':
↳ {'features_to_extract': ['year', 'month', 'day_of_week', 'hour'], 'encode_as_
↳ categories': False, 'date_index': None}, 'One Hot Encoder': {'top_n': 10, 'features_
↳ to_encode': None, 'categories': None, 'drop': 'if_binary', 'handle_unknown': 'ignore
↳ ', 'handle_missing': 'error'}, 'Oversampler': {'sampling_ratio': 0.25, 'k_neighbors_
↳ default': 5, 'n_jobs': -1, 'sampling_ratio_dict': None, 'k_neighbors': 5}, 'XGBoost_
↳ Classifier': {'eta': 0.1, 'max_depth': 6, 'min_child_weight': 1, 'n_estimators':
↳ 100, 'n_jobs': -1, 'eval_metric': 'logloss'}}
```

```
[15]: 0      False
      1      False
      2      False
      3      False
      4      False
      ...
      195    False
      196    False
      197    False
      198    False
      199    False
      Name: fraud, Length: 200, dtype: bool
```


4.1.6 Training and Scoring Multiple Pipelines using AutoMLSearch

AutoMLSearch will automatically fit the best pipeline on the entire training data. It also provides an easy API for training and scoring other pipelines.

If you'd like to train one or more pipelines on the entire training data, you can use the `train_pipelines` method

Similarly, if you'd like to score one or more pipelines on a particular dataset, you can use the `train_pipelines` method

```
[16]: trained_pipelines = automl.train_pipelines([automl.get_pipeline(i) for i in [0, 1, 2]])
trained_pipelines

[16]: {'Mode Baseline Binary Classification Pipeline': pipeline =
↳ BinaryClassificationPipeline(component_graph={'Label Encoder': ['Label Encoder', 'X', 'y'], 'Baseline Classifier': ['Baseline Classifier', 'Label Encoder.x', 'Label Encoder.y']}, parameters={'Baseline Classifier':{'strategy': 'mode'}}), custom_name='Mode Baseline Binary Classification Pipeline', random_seed=0),
↳ Elastic Net Classifier w/ Label Encoder + Drop Columns Transformer + Imputer +
↳ DateTime Featurization Component + One Hot Encoder + Oversampler + Standard Scaler':
↳ pipeline = BinaryClassificationPipeline(component_graph={'Label Encoder': ['Label Encoder', 'X', 'y'], 'Drop Columns Transformer': ['Drop Columns Transformer', 'X', 'Label Encoder.y'], 'Imputer': ['Imputer', 'Drop Columns Transformer.x', 'Label Encoder.y'], 'DateTime Featurization Component': ['DateTime Featurization Component', 'Imputer.x', 'Label Encoder.y'], 'One Hot Encoder': ['One Hot Encoder', 'DateTime Featurization Component.x', 'Label Encoder.y'], 'Oversampler': ['Oversampler', 'One Hot Encoder.x', 'Label Encoder.y'], 'Standard Scaler': ['Standard Scaler', 'Oversampler.x', 'Oversampler.y'], 'Elastic Net Classifier': ['Elastic Net Classifier', 'Standard Scaler.x', 'Oversampler.y']}, parameters={'Drop Columns Transformer':{'columns': ['currency']}, 'Imputer':{'categorical_impute_strategy': 'most_frequent', 'numeric_impute_strategy': 'mean', 'categorical_fill_value': None, 'numeric_fill_value': None}, 'DateTime Featurization Component':{'features_to_extract': ['year', 'month', 'day_of_week', 'hour'], 'encode_as_categories': False, 'date_index': None}, 'One Hot Encoder':{'top_n': 10, 'features_to_encode': None, 'categories': None, 'drop': 'if_binary', 'handle_unknown': 'ignore', 'handle_missing': 'error'}, 'Oversampler':{'sampling_ratio': 0.25, 'k_neighbors_default': 5, 'n_jobs': -1, 'sampling_ratio_dict': None, 'k_neighbors': 5}, 'Elastic Net Classifier':{'penalty': 'elasticnet', 'C': 1.0, 'l1_ratio': 0.15, 'n_jobs': -1, 'multi_class': 'auto', 'solver': 'saga'}}), random_seed=0),
↳ Decision Tree Classifier w/ Label Encoder + Drop Columns Transformer + Imputer +
↳ DateTime Featurization Component + One Hot Encoder + Oversampler': pipeline =
↳ BinaryClassificationPipeline(component_graph={'Label Encoder': ['Label Encoder', 'X', 'y'], 'Drop Columns Transformer': ['Drop Columns Transformer', 'X', 'Label Encoder.y'], 'Imputer': ['Imputer', 'Drop Columns Transformer.x', 'Label Encoder.y'], 'DateTime Featurization Component': ['DateTime Featurization Component', 'Imputer.x', 'Label Encoder.y'], 'One Hot Encoder': ['One Hot Encoder', 'DateTime Featurization Component.x', 'Label Encoder.y'], 'Oversampler': ['Oversampler', 'One Hot Encoder.x', 'Label Encoder.y'], 'Decision Tree Classifier': ['Decision Tree Classifier', 'Oversampler.x', 'Oversampler.y']}, parameters={'Drop Columns Transformer':{'columns': ['currency']}, 'Imputer':{'categorical_impute_strategy': 'most_frequent', 'numeric_impute_strategy': 'mean', 'categorical_fill_value': None, 'numeric_fill_value': None}, 'DateTime Featurization Component':{'features_to_extract': ['year', 'month', 'day_of_week', 'hour'], 'encode_as_categories': False, 'date_index': None}, 'One Hot Encoder':{'top_n': 10, 'features_to_encode': None, 'categories': None, 'drop': 'if_binary', 'handle_unknown': 'ignore', 'handle_missing': 'error'}, 'Oversampler':{'sampling_ratio': 0.25, 'k_neighbors_default': 5, 'n_jobs': -1, 'sampling_ratio_dict': None, 'k_neighbors': 5}, 'Decision Tree Classifier':{'criterion': 'gini', 'max_features': 'auto', 'max_depth': 6, 'min_samples_split': 2, 'min_weight_fraction_leaf': 0.0}}), random_seed=0)}
```

(continues on next page)

(continued from previous page)

```
[17]: pipeline_holdout_scores = automl.score_pipelines([trained_pipelines[name] for name in
↳ trained_pipelines.keys()],
                                                    X_holdout,
                                                    y_holdout,
                                                    ['Accuracy Binary', 'F1', 'AUC'])

pipeline_holdout_scores

[17]: {'Mode Baseline Binary Classification Pipeline': OrderedDict([('Accuracy Binary',
0.88),
('F1', 0.0),
('AUC', 0.5)]),
'Elastic Net Classifier w/ Label Encoder + Drop Columns Transformer + Imputer +
↳ DateTime Featurization Component + One Hot Encoder + Oversampler + Standard Scaler':
↳ OrderedDict([('Accuracy Binary',
0.44),
('F1', 0.17647058823529413),
('AUC', 0.49242424242424243)]),
'Decision Tree Classifier w/ Label Encoder + Drop Columns Transformer + Imputer +
↳ DateTime Featurization Component + One Hot Encoder + Oversampler': OrderedDict([(
↳ 'Accuracy Binary',
0.42),
('F1', 0.17142857142857143),
('AUC', 0.48295454545454547)])}]
```

4.1.7 Saving AutoMLSearch and pipelines from AutoMLSearch

There are two ways to save results from AutoMLSearch.

- You can save the AutoMLSearch object itself, calling `.save(<filepath>)` to do so. This will allow you to save the AutoMLSearch state and reload all pipelines from this.
- If you want to save a pipeline from AutoMLSearch for future use, pipeline classes themselves have a `.save(<filepath>)` method.

```
[18]: # saving the entire automl search
automl.save("automl.cloudpickle")
automl2 = evalml.automl.AutoMLSearch.load("automl.cloudpickle")
# saving the best pipeline using .save()
best_pipeline.save("pipeline.cloudpickle")
best_pipeline_copy = evalml.pipelines.PipelineBase.load("pipeline.cloudpickle")
```

4.1.8 Limiting the AutoML Search Space

The AutoML search algorithm first trains each component in the pipeline with their default values. After the first iteration, it then tweaks the parameters of these components using the pre-defined hyperparameter ranges that these components have. To limit the search over certain hyperparameter ranges, you can specify a `custom_hyperparameters` argument with your AutoMLSearch parameters. These parameters will limit the hyperparameter search space.

Hyperparameter ranges can be found through the [API reference](#) for each component. Parameter arguments must be specified as dictionaries, but the associated values can be single values or `skopt.space` Real, Integer, Categorical values.

If however you'd like to specify certain values for the initial batch of the AutoML search algorithm, you can use the `pipeline_parameters` argument. This will set the initial batch's component parameters to the values passed by this argument.

```
[19]: from evalml import AutoMLSearch
from evalml.demos import load_fraud
from skopt.space import Categorical
from evalml.model_family import ModelFamily
import woodwork as ww

X, y = load_fraud(n_rows=1000)

# example of setting parameter to just one value
custom_hyperparameters = {'Imputer': {
    'numeric_impute_strategy': 'mean'
}}

# limit the numeric impute strategy to include only `median` and `most_frequent`
# `mean` is the default value for this argument, but it doesn't need to be included,
# in the specified hyperparameter range for this to work
custom_hyperparameters = {'Imputer': {
    'numeric_impute_strategy': Categorical(['median', 'most_frequent'])
}}
# set the initial batch numeric impute strategy strategy to 'median'
pipeline_parameters = {'Imputer': {
    'numeric_impute_strategy': 'median'
}}

# using this custom hyperparameter means that our Imputer components in these
# pipelines will only search through
# 'median' and 'most_frequent' strategies for 'numeric_impute_strategy', and the
# initial batch parameter will be
# set to 'median'
automl_constrained = AutoMLSearch(X_train=X, y_train=y, problem_type='binary',
                                  pipeline_parameters=pipeline_parameters,
                                  custom_hyperparameters=custom_hyperparameters,
                                  verbose=True)
```

	Number of Features
Boolean	1
Categorical	6
Numeric	5

Number of training examples: 1000
Targets
False 85.90%
True 14.10%
Name: fraud, dtype: object
Using default limit of max_batches=1.

Generating pipelines to search over...
8 pipelines ready for search.

4.1.9 Imbalanced Data

The AutoML search algorithm now has functionality to handle imbalanced data during classification! AutoMLSearch now provides two additional parameters, `sampler_method` and `sampler_balanced_ratio`, that allow you to let AutoMLSearch know whether to sample imbalanced data, and how to do so. `sampler_method` takes in either `Undersampler`, `Oversampler`, `auto`, or `None` as the sampler to use, and `sampler_balanced_ratio` specifies the minority/majority ratio that you want to sample to. Details on the `Undersampler` and `Oversampler` components can be found in the [documentation](#).

This can be used for imbalanced datasets, like the fraud dataset, which has a ‘minority:majority’ ratio of < 0.2 .

```
[20]: automl_auto = AutoMLSearch(X_train=X, y_train=y, problem_type='binary')
      automl_auto.allowed_pipelines[-1]

[20]: pipeline = BinaryClassificationPipeline(component_graph={'Label Encoder': ['Label_
↳Encoder', 'X', 'y'], 'Imputer': ['Imputer', 'X', 'Label Encoder.y'], 'DateTime_
↳Featurization Component': ['DateTime Featurization Component', 'Imputer.x', 'Label_
↳Encoder.y'], 'Oversampler': ['Oversampler', 'DateTime Featurization Component.x',
↳'Label Encoder.y']}, parameters={'Imputer':{'categorical_impute_strategy': 'most_
↳frequent', 'numeric_impute_strategy': 'mean', 'categorical_fill_value': None,
↳'numeric_fill_value': None}, 'DateTime Featurization Component':{'features_to_
↳extract': ['year', 'month', 'day_of_week', 'hour'], 'encode_as_categories': False,
↳'date_index': None}, 'Oversampler':{'sampling_ratio': 0.25, 'k_neighbors_default':
↳5, 'n_jobs': -1, 'sampling_ratio_dict': None}, 'CatBoost Classifier':{'n_estimators
↳': 10, 'eta': 0.03, 'max_depth': 6, 'bootstrap_type': None, 'silent': True, 'allow_
↳writing_files': False, 'n_jobs': -1}}, random_seed=0)
```

The `Oversampler` is chosen as the default sampling component here, since the `sampler_balanced_ratio = 0.25`. If you specified a lower ratio, for instance `sampler_balanced_ratio = 0.1`, then there would be no sampling component added here. This is because if a ratio of 0.1 would be considered balanced, then a ratio of 0.2 would also be balanced.

The `Oversampler` uses SMOTE under the hood, and automatically selects whether to use SMOTE, SMOTEN, or SMOTENC based on the data it receives.

```
[21]: automl_auto_ratio = AutoMLSearch(X_train=X, y_train=y, problem_type='binary', sampler_
↳balanced_ratio=0.1)
      automl_auto_ratio.allowed_pipelines[-1]

[21]: pipeline = BinaryClassificationPipeline(component_graph={'Label Encoder': ['Label_
↳Encoder', 'X', 'y'], 'Imputer': ['Imputer', 'X', 'Label Encoder.y'], 'DateTime_
↳Featurization Component': ['DateTime Featurization Component', 'Imputer.x', 'Label_
↳Encoder.y'], 'CatBoost Classifier': ['CatBoost Classifier', 'DateTime Featurization_
↳Component.x', 'Label Encoder.y']}, parameters={'Imputer':{'categorical_impute_
↳strategy': 'most_frequent', 'numeric_impute_strategy': 'mean', 'categorical_fill_
↳value': None, 'numeric_fill_value': None}, 'DateTime Featurization Component':{'
↳features_to_extract': ['year', 'month', 'day_of_week', 'hour'], 'encode_as_
↳categories': False, 'date_index': None}, 'CatBoost Classifier':{'n_estimators': 10,
↳'eta': 0.03, 'max_depth': 6, 'bootstrap_type': None, 'silent': True, 'allow_writing_
↳files': False, 'n_jobs': -1}}, random_seed=0)
```

Additionally, you can add more fine-grained sampling ratios by passing in a `sampling_ratio_dict` in pipeline parameters. For this dictionary, AutoMLSearch expects the keys to be int values from 0 to $n-1$ for the classes, and the values would be the `sampler_balanced_ratio` associated with each target. This dictionary would override the AutoML argument `sampler_balanced_ratio`. Below, you can see the scenario for `Oversampler` component on this dataset. Note that the logic for `Undersamplers` is included in the commented section.

```
[22]: # In this case, the majority class is the negative class
# for the oversampler, we don't want to oversample this class, so class 0 (majority)
# will have a ratio of 1 to itself
# for the minority class 1, we want to oversample it to have a minority/majority
# ratio of 0.5, which means we want minority to have 1/2 the samples as the majority
sampler_ratio_dict = {0: 1, 1: 0.5}
pipeline_parameters = {"Oversampler": {"sampler_balanced_ratio": sampler_ratio_dict}}
automl_auto_ratio_dict = AutoMLSearch(X_train=X, y_train=y, problem_type='binary',
# pipeline_parameters=pipeline_parameters)
automl_auto_ratio_dict.allowed_pipelines[-1]

# Undersampler case
# we don't want to undersample this class, so class 1 (minority) will have a ratio of
# 1 to itself
# for the majority class 0, we want to undersample it to have a minority/majority
# ratio of 0.5, which means we want majority to have 2x the samples as the minority
# sampler_ratio_dict = {0: 0.5, 1: 1}
# pipeline_parameters = {"Oversampler": {"sampler_balanced_ratio": sampler_ratio_dict}}
# }
# automl_auto_ratio_dict = AutoMLSearch(X_train=X, y_train=y, problem_type='binary',
# pipeline_parameters=pipeline_parameters)

[22]: pipeline = BinaryClassificationPipeline(component_graph={'Label Encoder': ['Label
# Encoder', 'X', 'y'], 'Imputer': ['Imputer', 'X', 'Label Encoder.y'], 'DateTime
# Featurization Component': ['DateTime Featurization Component', 'Imputer.x', 'Label
# Encoder.y'], 'Oversampler': ['Oversampler', 'DateTime Featurization Component.x',
# 'Label Encoder.y'], 'CatBoost Classifier': ['CatBoost Classifier', 'Oversampler.x',
# 'Oversampler.y']}, parameters={'Imputer':{'categorical_impute_strategy': 'most_
# frequent', 'numeric_impute_strategy': 'mean', 'categorical_fill_value': None,
# 'numeric_fill_value': None}, 'DateTime Featurization Component':{'features_to_
# extract': ['year', 'month', 'day_of_week', 'hour'], 'encode_as_categories': False,
# 'date_index': None}, 'Oversampler':{'sampling_ratio': 0.25, 'k_neighbors_default':
# 5, 'n_jobs': -1, 'sampling_ratio_dict': None, 'sampler_balanced_ratio': {0: 1, 1: 0.
# 5}}, 'CatBoost Classifier':{'n_estimators': 10, 'eta': 0.03, 'max_depth': 6,
# 'bootstrap_type': None, 'silent': True, 'allow_writing_files': False, 'n_jobs': -1}}
# , random_seed=0)
```

4.1.10 Adding ensemble methods to AutoML

Stacking

Stacking is an ensemble machine learning algorithm that involves training a model to best combine the predictions of several base learning algorithms. First, each base learning algorithm is trained using the given data. Then, the combining algorithm or meta-learner is trained on the predictions made by those base learning algorithms to make a final prediction.

AutoML enables stacking using the `ensembling` flag during initialization; this is set to `False` by default. The stacking ensemble pipeline runs in its own batch after a whole cycle of training has occurred (each allowed pipeline trains for one batch). Note that this means **a large number of iterations may need to run before the stacking ensemble runs**. It is also important to note that **only the first CV fold is calculated for stacking ensembles** because the model internally uses CV folds.

```
[23]: X, y = evalml.demos.load_breast_cancer()
```

(continues on next page)

(continued from previous page)

```

automl_with_ensembling = AutoMLSearch(X_train=X, y_train=y,
                                     problem_type="binary",
                                     allowed_model_families=[ModelFamily.LINEAR_
↳MODEL],
                                     max_batches=4,
                                     ensembling=True,
                                     verbose=True)

automl_with_ensembling.search()

```

```

      Number of Features
Numeric                30

Number of training examples: 569
Targets
benign                62.74%
malignant             37.26%
Name: target, dtype: object
Generating pipelines to search over...
Ensembling will run every 3 batches.
2 pipelines ready for search.

```

```

*****
* Beginning pipeline search *
*****

```

```

Optimizing for Log Loss Binary.
Lower score is better.

```

```

Using SequentialEngine to train and score pipelines.
Searching up to 4 batches for a total of 14 pipelines.
Allowed model families: linear_model, linear_model

```

```

FigureWidget({
  'data': [{ 'mode': 'lines+markers',
             'name': 'Best Score',
             'type'...

```

```

Evaluating Baseline Pipeline: Mode Baseline Binary Classification Pipeline
Mode Baseline Binary Classification Pipeline:
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 12.868

```

```

*****
* Evaluating Batch Number 1 *
*****

```

```

Elastic Net Classifier w/ Label Encoder + Imputer + Standard Scaler:
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 0.077
Logistic Regression Classifier w/ Label Encoder + Imputer + Standard Scaler:
  Starting cross validation
  Finished cross validation - mean Log Loss Binary: 0.077

```

```

*****
* Evaluating Batch Number 2 *
*****

```

(continues on next page)

(continued from previous page)

```

Logistic Regression Classifier w/ Label Encoder + Imputer + Standard Scaler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.097
Logistic Regression Classifier w/ Label Encoder + Imputer + Standard Scaler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.085
Logistic Regression Classifier w/ Label Encoder + Imputer + Standard Scaler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.097
Logistic Regression Classifier w/ Label Encoder + Imputer + Standard Scaler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.091
Logistic Regression Classifier w/ Label Encoder + Imputer + Standard Scaler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.080

*****
* Evaluating Batch Number 3 *
*****

Elastic Net Classifier w/ Label Encoder + Imputer + Standard Scaler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.075
Elastic Net Classifier w/ Label Encoder + Imputer + Standard Scaler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.075
Elastic Net Classifier w/ Label Encoder + Imputer + Standard Scaler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.079
Elastic Net Classifier w/ Label Encoder + Imputer + Standard Scaler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.076
Elastic Net Classifier w/ Label Encoder + Imputer + Standard Scaler:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.075

*****
* Evaluating Batch Number 4 *
*****

Stacked Ensemble Classification Pipeline:
    Starting cross validation
    Finished cross validation - mean Log Loss Binary: 0.103

Search finished after 00:20
Best pipeline: Elastic Net Classifier w/ Label Encoder + Imputer + Standard Scaler
Best pipeline Log Loss Binary: 0.075387

```

We can view more information about the stacking ensemble pipeline (which was the best performing pipeline) by calling `.describe()`.

```
[24]: automl_with_ensembling.best_pipeline.describe()
```

```

*****
* Elastic Net Classifier w/ Label Encoder + Imputer + Standard Scaler *
*****

```

(continues on next page)

(continued from previous page)

```

Problem Type: binary
Model Family: Linear
Number of features: 30

Pipeline Steps
=====
1. Label Encoder
2. Imputer
    * categorical_impute_strategy : most_frequent
    * numeric_impute_strategy : median
    * categorical_fill_value : None
    * numeric_fill_value : None
3. Standard Scaler
4. Elastic Net Classifier
    * penalty : elasticnet
    * C : 8.123565600467177
    * l1_ratio : 0.47997717237505744
    * n_jobs : -1
    * multi_class : auto
    * solver : saga

```

4.1.11 Access raw results

The `AutoMLSearch` class records detailed results information under the `results` field, including information about the cross-validation scoring and parameters.

```

[25]: automl.results
[25]: {'pipeline_results': {0: {'id': 0,
    'pipeline_name': 'Mode Baseline Binary Classification Pipeline',
    'pipeline_class': evalml.pipelines.binary_classification_pipeline.
    ↳ BinaryClassificationPipeline,
    'pipeline_summary': 'Baseline Classifier w/ Label Encoder',
    'parameters': {'Baseline Classifier': {'strategy': 'mode'}},
    'mean_cv_score': 3.970423187263591,
    'standard_deviation_cv_score': 0.26606000431837074,
    'high_variance_cv': False,
    'training_time': 0.9660406112670898,
    'cv_data': [{'all_objective_scores': OrderedDict([('Log Loss Binary',
        4.124033002377396),
        ('MCC Binary', 0.0),
        ('Gini', 0.0),
        ('AUC', 0.5),
        ('Precision', 0.0),
        ('F1', 0.0),
        ('Balanced Accuracy Binary', 0.5),
        ('Accuracy Binary', 0.8805970149253731),
        ('# Training', 133),
        ('# Validation', 67)]),
    'mean_cv_score': 4.124033002377396,
    'binary_classification_threshold': 9.16384630183206e-53},
    {'all_objective_scores': OrderedDict([('Log Loss Binary',
        4.124033002377395),
        ('MCC Binary', 0.0),

```

(continues on next page)

(continued from previous page)

```

        ('Gini', 0.0),
        ('AUC', 0.5),
        ('Precision', 0.0),
        ('F1', 0.0),
        ('Balanced Accuracy Binary', 0.5),
        ('Accuracy Binary', 0.8805970149253731),
        ('# Training', 133),
        ('# Validation', 67)]),
    'mean_cv_score': 4.124033002377395,
    'binary_classification_threshold': 9.16384630183206e-53},
{'all_objective_scores': OrderedDict([('Log Loss Binary',
    3.6632035570359824),
    ('MCC Binary', 0.0),
    ('Gini', 0.0),
    ('AUC', 0.5),
    ('Precision', 0.0),
    ('F1', 0.0),
    ('Balanced Accuracy Binary', 0.5),
    ('Accuracy Binary', 0.8939393939393939),
    ('# Training', 134),
    ('# Validation', 66)]),
    'mean_cv_score': 3.6632035570359824,
    'binary_classification_threshold': 9.16384630183206e-53}],
'percent_better_than_baseline_all_objectives': {'Log Loss Binary': 0,
'MCC Binary': 0,
'Gini': 0,
'AUC': 0,
'Precision': 0,
'F1': 0,
'Balanced Accuracy Binary': 0,
'Accuracy Binary': 0},
'percent_better_than_baseline': 0,
'validation_score': 4.124033002377396},
1: {'id': 1,
    'pipeline_name': 'Elastic Net Classifier w/ Label Encoder + Drop Columns_
↳Transformer + Imputer + DateTime Featurization Component + One Hot Encoder +_
↳Oversampler + Standard Scaler',
    'pipeline_class': evalml.pipelines.binary_classification_pipeline.
↳BinaryClassificationPipeline,
    'pipeline_summary': 'Elastic Net Classifier w/ Label Encoder + Drop Columns_
↳Transformer + Imputer + DateTime Featurization Component + One Hot Encoder +_
↳Oversampler + Standard Scaler',
    'parameters': {'Drop Columns Transformer': {'columns': ['currency']},
    'Imputer': {'categorical_impute_strategy': 'most_frequent',
    'numeric_impute_strategy': 'mean',
    'categorical_fill_value': None,
    'numeric_fill_value': None},
    'DateTime Featurization Component': {'features_to_extract': ['year',
    'month',
    'day_of_week',
    'hour']},
    'encode_as_categories': False,
    'date_index': None},
    'One Hot Encoder': {'top_n': 10,
    'features_to_encode': None,
    'categories': None,
    'drop': 'if_binary',

```

(continues on next page)

(continued from previous page)

```

    'handle_unknown': 'ignore',
    'handle_missing': 'error'},
'Oversampler': {'sampling_ratio': 0.25,
    'k_neighbors_default': 5,
    'n_jobs': -1,
    'sampling_ratio_dict': None,
    'k_neighbors': 5},
'Elastic Net Classifier': {'penalty': 'elasticnet',
    'C': 1.0,
    'l1_ratio': 0.15,
    'n_jobs': -1,
    'multi_class': 'auto',
    'solver': 'saga'}},
'mean_cv_score': 0.6274268949098596,
'standard_deviation_cv_score': 0.10817615334446118,
'high_variance_cv': False,
'training_time': 1.980362892150879,
'cv_data': [{'all_objective_scores': OrderedDict([('Log Loss Binary',
    0.5086986589950817),
    ('MCC Binary', 0.045713245813732276),
    ('Gini', 0.17372881355932202),
    ('AUC', 0.586864406779661),
    ('Precision', 0.16666666666666666),
    ('F1', 0.14285714285714288),
    ('Balanced Accuracy Binary', 0.5201271186440678),
    ('Accuracy Binary', 0.8208955223880597),
    ('# Training', 133),
    ('# Validation', 67)]),
    'mean_cv_score': 0.5086986589950817,
    'binary_classification_threshold': 0.3735112604474508},
{'all_objective_scores': OrderedDict([('Log Loss Binary',
    0.6531787435325545),
    ('MCC Binary', 0.2902542372881356),
    ('Gini', 0.13135593220338992),
    ('AUC', 0.565677966101695),
    ('Precision', 0.375),
    ('F1', 0.375),
    ('Balanced Accuracy Binary', 0.6451271186440678),
    ('Accuracy Binary', 0.8507462686567164),
    ('# Training', 133),
    ('# Validation', 67)]),
    'mean_cv_score': 0.6531787435325545,
    'binary_classification_threshold': 0.23238767434564783},
{'all_objective_scores': OrderedDict([('Log Loss Binary',
    0.7204032822019426),
    ('MCC Binary', 0.0620066404299915),
    ('Gini', 0.07990314769975781),
    ('AUC', 0.5399515738498789),
    ('Precision', 0.14285714285714285),
    ('F1', 0.19047619047619047),
    ('Balanced Accuracy Binary', 0.5411622276029056),
    ('Accuracy Binary', 0.7424242424242424),
    ('# Training', 134),
    ('# Validation', 66)]),
    'mean_cv_score': 0.7204032822019426,
    'binary_classification_threshold': 0.45539243933617346}],
'percent_better_than_baseline_all_objectives': {'Log Loss Binary': 84.
↪19748058789973,
```

(continues on next page)

(continued from previous page)

```

'MCC Binary': inf,
'Gini': inf,
'AUC': 6.416464891041162,
'Precision': 22.817460317460316,
'F1': 23.611111111111114,
'Balanced Accuracy Binary': 6.880548829701372,
'Accuracy Binary': -8.035579677370707},
'percent_better_than_baseline': 84.19748058789973,
'validation_score': 0.5086986589950817},
2: {'id': 2,
'pipeline_name': 'Decision Tree Classifier w/ Label Encoder + Drop Columns_
↳Transformer + Imputer + DateTime Featurization Component + One Hot Encoder +_
↳Oversampler',
'pipeline_class': evalml.pipelines.binary_classification_pipeline.
↳BinaryClassificationPipeline,
'pipeline_summary': 'Decision Tree Classifier w/ Label Encoder + Drop Columns_
↳Transformer + Imputer + DateTime Featurization Component + One Hot Encoder +_
↳Oversampler',
'parameters': {'Drop Columns Transformer': {'columns': ['currency']},
'Imputer': {'categorical_impute_strategy': 'most_frequent',
'numeric_impute_strategy': 'mean',
'categorical_fill_value': None,
'numeric_fill_value': None},
'Datetime Featurization Component': {'features_to_extract': ['year',
'month',
'day_of_week',
'hour'],
'encode_as_categories': False,
'date_index': None},
'One Hot Encoder': {'top_n': 10,
'features_to_encode': None,
'categories': None,
'drop': 'if_binary',
'handle_unknown': 'ignore',
'handle_missing': 'error'},
'Oversampler': {'sampling_ratio': 0.25,
'k_neighbors_default': 5,
'n_jobs': -1,
'sampling_ratio_dict': None,
'k_neighbors': 5},
'Decision Tree Classifier': {'criterion': 'gini',
'max_features': 'auto',
'max_depth': 6,
'min_samples_split': 2,
'min_weight_fraction_leaf': 0.0}},
'mean_cv_score': 5.4039166268422525,
'standard_deviation_cv_score': 2.627561787321521,
'high_variance_cv': True,
'training_time': 1.6488087177276611,
'cv_data': [{'all_objective_scores': OrderedDict([('Log Loss Binary',
2.632694044787486),
('MCC Binary', 0.0),
('Gini', 0.22669491525423724),
('AUC', 0.6133474576271186),
('Precision', 0.11940298507462686),
('F1', 0.21333333333333335),
('Balanced Accuracy Binary', 0.5),

```

(continues on next page)

(continued from previous page)

```

        ('Accuracy Binary', 0.11940298507462686),
        ('# Training', 133),
        ('# Validation', 67)]),
    'mean_cv_score': 2.632694044787486,
    'binary_classification_threshold': -1.4827414887138564e-52},
    {'all_objective_scores': OrderedDict([('Log Loss Binary',
        5.719796644733923),
        ('MCC Binary', 0.17518582316850065),
        ('Gini', 0.12711864406779672),
        ('AUC', 0.5635593220338984),
        ('Precision', 0.2857142857142857),
        ('F1', 0.26666666666666666),
        ('Balanced Accuracy Binary', 0.5826271186440678),
        ('Accuracy Binary', 0.835820895522388),
        ('# Training', 133),
        ('# Validation', 67)]),
    'mean_cv_score': 5.719796644733923,
    'binary_classification_threshold': 0.9999999885588493},
    {'all_objective_scores': OrderedDict([('Log Loss Binary',
        7.859259191005347),
        ('MCC Binary', -0.008317464424851172),
        ('Gini', -0.09685230024213076),
        ('AUC', 0.4515738498789346),
        ('Precision', 0.1),
        ('F1', 0.11764705882352941),
        ('Balanced Accuracy Binary', 0.4951573849878934),
        ('Accuracy Binary', 0.7727272727272727),
        ('# Training', 134),
        ('# Validation', 66)]),
    'mean_cv_score': 7.859259191005347,
    'binary_classification_threshold': 0.9999999885588493}],
    'percent_better_than_baseline_all_objectives': {'Log Loss Binary': -36.
    ↪104298508457546,
    'MCC Binary': inf,
    'Gini': inf,
    'AUC': 4.2826876513317185,
    'Precision': 16.83724235963042,
    'F1': 19.92156862745098,
    'Balanced Accuracy Binary': 2.592816787732044,
    'Accuracy Binary': -30.906075682195077},
    'percent_better_than_baseline': -36.104298508457546,
    'validation_score': 2.632694044787486},
    3: {'id': 3,
    'pipeline_name': 'Random Forest Classifier w/ Label Encoder + Drop Columns_
    ↪Transformer + Imputer + DateTime Featurization Component + One Hot Encoder +_
    ↪Oversampler',
    'pipeline_class': evalml.pipelines.binary_classification_pipeline.
    ↪BinaryClassificationPipeline,
    'pipeline_summary': 'Random Forest Classifier w/ Label Encoder + Drop Columns_
    ↪Transformer + Imputer + DateTime Featurization Component + One Hot Encoder +_
    ↪Oversampler',
    'parameters': {'Drop Columns Transformer': {'columns': ['currency']},
    'Imputer': {'categorical_impute_strategy': 'most_frequent',
    'numeric_impute_strategy': 'mean',
    'categorical_fill_value': None,
    'numeric_fill_value': None},
    'DateTime Featurization Component': {'features_to_extract': ['year',

```

(continues on next page)

(continued from previous page)

```

    'month',
    'day_of_week',
    'hour'],
    'encode_as_categories': False,
    'date_index': None},
    'One Hot Encoder': {'top_n': 10,
    'features_to_encode': None,
    'categories': None,
    'drop': 'if_binary',
    'handle_unknown': 'ignore',
    'handle_missing': 'error'},
    'Oversampler': {'sampling_ratio': 0.25,
    'k_neighbors_default': 5,
    'n_jobs': -1,
    'sampling_ratio_dict': None,
    'k_neighbors': 5},
    'Random Forest Classifier': {'n_estimators': 100,
    'max_depth': 6,
    'n_jobs': -1}},
    'mean_cv_score': 0.2898320159158559,
    'standard_deviation_cv_score': 0.04509254687158935,
    'high_variance_cv': False,
    'training_time': 2.0257036685943604,
    'cv_data': [{'all_objective_scores': OrderedDict([('Log Loss Binary',
    0.27690265474464915),
    ('MCC Binary', 0.47636443708895493),
    ('Gini', 0.5932203389830508),
    ('AUC', 0.7966101694915254),
    ('Precision', 1.0),
    ('F1', 0.4),
    ('Balanced Accuracy Binary', 0.625),
    ('Accuracy Binary', 0.9104477611940298),
    ('# Training', 133),
    ('# Validation', 67)]),
    'mean_cv_score': 0.27690265474464915,
    'binary_classification_threshold': 0.5255549360104743},
    {'all_objective_scores': OrderedDict([('Log Loss Binary',
    0.33997691511520767),
    ('MCC Binary', 0.36540212737375455),
    ('Gini', 0.31779661016949157),
    ('AUC', 0.6588983050847458),
    ('Precision', 0.6666666666666666),
    ('F1', 0.36363636363636365),
    ('Balanced Accuracy Binary', 0.6165254237288136),
    ('Accuracy Binary', 0.8955223880597015),
    ('# Training', 133),
    ('# Validation', 67)]),
    'mean_cv_score': 0.33997691511520767,
    'binary_classification_threshold': 0.4861948486476305},
    {'all_objective_scores': OrderedDict([('Log Loss Binary',
    0.2526164778877109),
    ('MCC Binary', 0.5132181379714255),
    ('Gini', 0.7239709443099271),
    ('AUC', 0.8619854721549636),
    ('Precision', 1.0),
    ('F1', 0.44444444444444445),
    ('Balanced Accuracy Binary', 0.6428571428571428),

```

(continues on next page)

(continued from previous page)

```

        ('Accuracy Binary', 0.9242424242424242),
        ('# Training', 134),
        ('# Validation', 66)]),
    'mean_cv_score': 0.2526164778877109,
    'binary_classification_threshold': 0.5400954892324498]],
    'percent_better_than_baseline_all_objectives': {'Log Loss Binary': 92.
↪70022357199642,
    'MCC Binary': inf,
    'Gini': inf,
    'AUC': 27.249798224374487,
    'Precision': 88.88888888888889,
    'F1': 40.26936026936027,
    'Balanced Accuracy Binary': 12.812752219531875,
    'Accuracy Binary': 2.5026383235338567},
    'percent_better_than_baseline': 92.70022357199642,
    'validation_score': 0.27690265474464915},
4: {'id': 4,
    'pipeline_name': 'LightGBM Classifier w/ Label Encoder + Drop Columns Transformer_
↪+ Imputer + DateTime Featurization Component + One Hot Encoder + Oversampler',
    'pipeline_class': evalml.pipelines.binary_classification_pipeline.
↪BinaryClassificationPipeline,
    'pipeline_summary': 'LightGBM Classifier w/ Label Encoder + Drop Columns_
↪Transformer + Imputer + DateTime Featurization Component + One Hot Encoder +_
↪Oversampler',
    'parameters': {'Drop Columns Transformer': {'columns': ['currency']},
    'Imputer': {'categorical_impute_strategy': 'most_frequent',
    'numeric_impute_strategy': 'mean',
    'categorical_fill_value': None,
    'numeric_fill_value': None},
    'DateTime Featurization Component': {'features_to_extract': ['year',
    'month',
    'day_of_week',
    'hour'],
    'encode_as_categories': False,
    'date_index': None},
    'One Hot Encoder': {'top_n': 10,
    'features_to_encode': None,
    'categories': None,
    'drop': 'if_binary',
    'handle_unknown': 'ignore',
    'handle_missing': 'error'},
    'Oversampler': {'sampling_ratio': 0.25,
    'k_neighbors_default': 5,
    'n_jobs': -1,
    'sampling_ratio_dict': None,
    'k_neighbors': 5},
    'LightGBM Classifier': {'boosting_type': 'gbdt',
    'learning_rate': 0.1,
    'n_estimators': 100,
    'max_depth': 0,
    'num_leaves': 31,
    'min_child_samples': 20,
    'n_jobs': -1,
    'bagging_freq': 0,
    'bagging_fraction': 0.9}},
    'mean_cv_score': 0.3208641239535214,
    'standard_deviation_cv_score': 0.14757715366385865,

```

(continues on next page)

(continued from previous page)

```

'high_variance_cv': False,
'training_time': 1.5993905067443848,
'cv_data': [{'all_objective_scores': OrderedDict([('Log Loss Binary',
0.22676504669023242),
('MCC Binary', 0.3342789617107607),
('Gini', 0.771186440677966),
('AUC', 0.885593220338983),
('Precision', 1.0),
('F1', 0.2222222222222222),
('Balanced Accuracy Binary', 0.5625),
('Accuracy Binary', 0.8955223880597015),
('# Training', 133),
('# Validation', 67))]},
'mean_cv_score': 0.22676504669023242,
'binary_classification_threshold': 0.8315193475327842},
{'all_objective_scores': OrderedDict([('Log Loss Binary',
0.49095040111140575),
('MCC Binary', 0.36540212737375455),
('Gini', 0.4576271186440677),
('AUC', 0.7288135593220338),
('Precision', 0.6666666666666666),
('F1', 0.36363636363636365),
('Balanced Accuracy Binary', 0.6165254237288136),
('Accuracy Binary', 0.8955223880597015),
('# Training', 133),
('# Validation', 67))]},
'mean_cv_score': 0.49095040111140575,
'binary_classification_threshold': 0.812705509811428},
{'all_objective_scores': OrderedDict([('Log Loss Binary',
0.24487692405892594),
('MCC Binary', 0.3600976668493281),
('Gini', 0.7627118644067796),
('AUC', 0.8813559322033898),
('Precision', 1.0),
('F1', 0.25),
('Balanced Accuracy Binary', 0.5714285714285714),
('Accuracy Binary', 0.9090909090909091),
('# Training', 134),
('# Validation', 66))]},
'mean_cv_score': 0.24487692405892594,
'binary_classification_threshold': 0.9574727501533578}],
'percent_better_than_baseline_all_objectives': {'Log Loss Binary': 91.
↪9186416958576,
'MCC Binary': inf,
'Gini': inf,
'AUC': 33.19209039548022,
'Precision': 88.88888888888889,
'F1': 27.86195286195286,
'Balanced Accuracy Binary': 8.348466505246165,
'Accuracy Binary': 1.5000753806724054},
'percent_better_than_baseline': 91.9186416958576,
'validation_score': 0.22676504669023242},
5: {'id': 5,
'pipeline_name': 'Logistic Regression Classifier w/ Label Encoder + Drop Columns_
↪Transformer + Imputer + DateTime Featurization Component + One Hot Encoder +_
↪Oversampler + Standard Scaler',
'pipeline_class': evalml.pipelines.binary_classification_pipeline.
↪BinaryClassificationPipeline,

```

(continues on next page)

(continued from previous page)

```

'pipeline_summary': 'Logistic Regression Classifier w/ Label Encoder + Drop
↳Columns Transformer + Imputer + DateTime Featurization Component + One Hot Encoder
↳+ Oversampler + Standard Scaler',
'parameters': {'Drop Columns Transformer': {'columns': ['currency']},
'Imputer': {'categorical_impute_strategy': 'most_frequent',
'numeric_impute_strategy': 'mean',
'categorical_fill_value': None,
'numeric_fill_value': None},
'Datetime Featurization Component': {'features_to_extract': ['year',
'month',
'day_of_week',
'hour'],
'encode_as_categories': False,
'date_index': None},
'One Hot Encoder': {'top_n': 10,
'features_to_encode': None,
'categories': None,
'drop': 'if_binary',
'handle_unknown': 'ignore',
'handle_missing': 'error'},
'Oversampler': {'sampling_ratio': 0.25,
'k_neighbors_default': 5,
'n_jobs': -1,
'sampling_ratio_dict': None,
'k_neighbors': 5},
'Logistic Regression Classifier': {'penalty': 'l2',
'C': 1.0,
'n_jobs': -1,
'multi_class': 'auto',
'solver': 'lbfgs'}},
'mean_cv_score': 0.6516020967013594,
'standard_deviation_cv_score': 0.11741047129130076,
'high_variance_cv': False,
'training_time': 3.2802741527557373,
'cv_data': [{'all_objective_scores': OrderedDict([('Log Loss Binary',
0.5224083958088352),
('MCC Binary', 0.045713245813732276),
('Gini', 0.15254237288135597),
('AUC', 0.576271186440678),
('Precision', 0.16666666666666666),
('F1', 0.14285714285714288),
('Balanced Accuracy Binary', 0.5201271186440678),
('Accuracy Binary', 0.8208955223880597),
('# Training', 133),
('# Validation', 67)]),
'mean_cv_score': 0.5224083958088352,
'binary_classification_threshold': 0.36567760969764035},
{'all_objective_scores': OrderedDict([('Log Loss Binary',
0.6806045725061826),
('MCC Binary', 0.17518582316850065),
('Gini', 0.15677966101694918),
('AUC', 0.5783898305084746),
('Precision', 0.2857142857142857),
('F1', 0.26666666666666666),
('Balanced Accuracy Binary', 0.5826271186440678),
('Accuracy Binary', 0.835820895522388),
('# Training', 133),

```

(continues on next page)

(continued from previous page)

```

        ('# Validation', 67)]),
    'mean_cv_score': 0.6806045725061826,
    'binary_classification_threshold': 0.21868425771854014},
    {'all_objective_scores': OrderedDict([('Log Loss Binary',
        0.7517933217890604),
        ('MCC Binary', 0.04803502496528411),
        ('Gini', 0.07021791767554486),
        ('AUC', 0.5351089588377724),
        ('Precision', 0.13333333333333333),
        ('F1', 0.18181818181818182),
        ('Balanced Accuracy Binary', 0.5326876513317191),
        ('Accuracy Binary', 0.7272727272727273),
        ('# Training', 134),
        ('# Validation', 66)]),
    'mean_cv_score': 0.7517933217890604,
    'binary_classification_threshold': 0.44118090538932764}},
    'percent_better_than_baseline_all_objectives': {'Log Loss Binary': 83.
↪58859834408628,
    'MCC Binary': inf,
    'Gini': inf,
    'AUC': 6.325665859564166,
    'Precision': 19.523809523809522,
    'F1': 19.71139971139971,
    'Balanced Accuracy Binary': 4.514729620661829,
    'Accuracy Binary': -9.038142620232147},
    'percent_better_than_baseline': 83.58859834408628,
    'validation_score': 0.5224083958088352},
6: {'id': 6,
    'pipeline_name': 'XGBoost Classifier w/ Label Encoder + Drop Columns Transformer +
↪Imputer + DateTime Featurization Component + One Hot Encoder + Oversampler',
    'pipeline_class': evalml.pipelines.binary_classification_pipeline.
↪BinaryClassificationPipeline,
    'pipeline_summary': 'XGBoost Classifier w/ Label Encoder + Drop Columns
↪Transformer + Imputer + DateTime Featurization Component + One Hot Encoder +
↪Oversampler',
    'parameters': {'Drop Columns Transformer': {'columns': ['currency']},
    'Imputer': {'categorical_impute_strategy': 'most_frequent',
    'numeric_impute_strategy': 'mean',
    'categorical_fill_value': None,
    'numeric_fill_value': None},
    'DateTime Featurization Component': {'features_to_extract': ['year',
    'month',
    'day_of_week',
    'hour'],
    'encode_as_categories': False,
    'date_index': None},
    'One Hot Encoder': {'top_n': 10,
    'features_to_encode': None,
    'categories': None,
    'drop': 'if_binary',
    'handle_unknown': 'ignore',
    'handle_missing': 'error'},
    'Oversampler': {'sampling_ratio': 0.25,
    'k_neighbors_default': 5,
    'n_jobs': -1,
    'sampling_ratio_dict': None,
    'k_neighbors': 5},

```

(continues on next page)

(continued from previous page)

```

'XGBoost Classifier': {'eta': 0.1,
  'max_depth': 6,
  'min_child_weight': 1,
  'n_estimators': 100,
  'n_jobs': -1,
  'eval_metric': 'logloss'}},
'mean_cv_score': 0.27376580269962625,
'standard_deviation_cv_score': 0.16442482847286716,
'high_variance_cv': False,
'training_time': 1.8235678672790527,
'cv_data': [{'all_objective_scores': OrderedDict([('Log Loss Binary',
  0.20639750014922215),
  ('MCC Binary', 0.0),
  ('Gini', 0.7118644067796611),
  ('AUC', 0.8559322033898306),
  ('Precision', 0.0),
  ('F1', 0.0),
  ('Balanced Accuracy Binary', 0.5),
  ('Accuracy Binary', 0.8805970149253731),
  ('# Training', 133),
  ('# Validation', 67)]),
'mean_cv_score': 0.20639750014922215,
'binary_classification_threshold': 0.9446923046727642},
{'all_objective_scores': OrderedDict([('Log Loss Binary',
  0.46117587266435733),
  ('MCC Binary', 0.36540212737375455),
  ('Gini', 0.40042372881355925),
  ('AUC', 0.7002118644067796),
  ('Precision', 0.6666666666666666),
  ('F1', 0.36363636363636365),
  ('Balanced Accuracy Binary', 0.6165254237288136),
  ('Accuracy Binary', 0.8955223880597015),
  ('# Training', 133),
  ('# Validation', 67)]),
'mean_cv_score': 0.46117587266435733,
'binary_classification_threshold': 0.8627784224489395},
{'all_objective_scores': OrderedDict([('Log Loss Binary',
  0.15372403528529918),
  ('MCC Binary', 0.3600976668493281),
  ('Gini', 0.8111380145278451),
  ('AUC', 0.9055690072639225),
  ('Precision', 1.0),
  ('F1', 0.25),
  ('Balanced Accuracy Binary', 0.5714285714285714),
  ('Accuracy Binary', 0.9090909090909091),
  ('# Training', 134),
  ('# Validation', 66)]),
'mean_cv_score': 0.15372403528529918,
'binary_classification_threshold': 0.9306861087519589}],
'percent_better_than_baseline_all_objectives': {'Log Loss Binary': 93.
↪10487094731317,
'MCC Binary': inf,
'Gini': inf,
'AUC': 32.05710250201776,
'Precision': 55.55555555555555,
'F1': 20.454545454545457,
'Balanced Accuracy Binary': 6.265133171912829,

```

(continues on next page)

(continued from previous page)

```

    'Accuracy Binary': 1.0025629428614624},
    'percent_better_than_baseline': 93.10487094731317,
    'validation_score': 0.20639750014922215},
  7: {'id': 7,
     'pipeline_name': 'Extra Trees Classifier w/ Label Encoder + Drop Columns_
↳Transformer + Imputer + DateTime Featurization Component + One Hot Encoder +_
↳Oversampler',
     'pipeline_class': evalml.pipelines.binary_classification_pipeline.
↳BinaryClassificationPipeline,
     'pipeline_summary': 'Extra Trees Classifier w/ Label Encoder + Drop Columns_
↳Transformer + Imputer + DateTime Featurization Component + One Hot Encoder +_
↳Oversampler',
     'parameters': {'Drop Columns Transformer': {'columns': ['currency']},
                    'Imputer': {'categorical_impute_strategy': 'most_frequent',
                                'numeric_impute_strategy': 'mean',
                                'categorical_fill_value': None,
                                'numeric_fill_value': None},
                    'DateTime Featurization Component': {'features_to_extract': ['year',
                                        'month',
                                        'day_of_week',
                                        'hour'],
                                                         'encode_as_categories': False,
                                                         'date_index': None},
                    'One Hot Encoder': {'top_n': 10,
                                         'features_to_encode': None,
                                         'categories': None,
                                         'drop': 'if_binary',
                                         'handle_unknown': 'ignore',
                                         'handle_missing': 'error'},
                    'Oversampler': {'sampling_ratio': 0.25,
                                    'k_neighbors_default': 5,
                                    'n_jobs': -1,
                                    'sampling_ratio_dict': None,
                                    'k_neighbors': 5},
                    'Extra Trees Classifier': {'n_estimators': 100,
                                                'max_features': 'auto',
                                                'max_depth': 6,
                                                'min_samples_split': 2,
                                                'min_weight_fraction_leaf': 0.0,
                                                'n_jobs': -1}},
     'mean_cv_score': 0.3386759195464455,
     'standard_deviation_cv_score': 0.030914031011629657,
     'high_variance_cv': False,
     'training_time': 1.9046282768249512,
     'cv_data': [{'all_objective_scores': OrderedDict([('Log Loss Binary',
                                                         0.3144942839064824),
                                                         ('MCC Binary', 0.16779531085172097),
                                                         ('Gini', 0.4872881355932204),
                                                         ('AUC', 0.7436440677966102),
                                                         ('Precision', 0.17142857142857143),
                                                         ('F1', 0.2790697674418604),
                                                         ('Balanced Accuracy Binary', 0.6292372881355932),
                                                         ('Accuracy Binary', 0.5373134328358209),
                                                         ('# Training', 133),
                                                         ('# Validation', 67)])},
                  'mean_cv_score': 0.3144942839064824,
                  'binary_classification_threshold': 0.09086573203500445},

```

(continues on next page)

(continued from previous page)

```

{'all_objective_scores': OrderedDict([('Log Loss Binary',
                                     0.3735068711989279),
                                     ('MCC Binary', -0.0645917880798583),
                                     ('Gini', 0.19491525423728828),
                                     ('AUC', 0.5974576271186441),
                                     ('Precision', 0.0),
                                     ('F1', 0.0),
                                     ('Balanced Accuracy Binary', 0.4830508474576271),
                                     ('Accuracy Binary', 0.8507462686567164),
                                     ('# Training', 133),
                                     ('# Validation', 67)]),
 'mean_cv_score': 0.3735068711989279,
 'binary_classification_threshold': 0.2616991380282906},
{'all_objective_scores': OrderedDict([('Log Loss Binary',
                                     0.3280266035339262),
                                     ('MCC Binary', 0.2005853178066611),
                                     ('Gini', 0.35593220338983045),
                                     ('AUC', 0.6779661016949152),
                                     ('Precision', 0.23076923076923078),
                                     ('F1', 0.3),
                                     ('Balanced Accuracy Binary', 0.6295399515738499),
                                     ('Accuracy Binary', 0.7878787878787878),
                                     ('# Training', 134),
                                     ('# Validation', 66)]),
 'mean_cv_score': 0.3280266035339262,
 'binary_classification_threshold': 0.22061716793337022}},
'percent_better_than_baseline_all_objectives': {'Log Loss Binary': 91.
→47002967762083,
 'MCC Binary': inf,
 'Gini': inf,
 'AUC': 17.302259887005654,
 'Precision': 13.406593406593407,
 'F1': 19.302325581395344,
 'Balanced Accuracy Binary': 8.06093623890235,
 'Accuracy Binary': -15.973164480627155},
'percent_better_than_baseline': 91.47002967762083,
'validation_score': 0.3144942839064824},
8: {'id': 8,
 'pipeline_name': 'CatBoost Classifier w/ Label Encoder + Drop Columns Transformer_
→+ Imputer + DateTime Featurization Component + Oversampler',
 'pipeline_class': evalml.pipelines.binary_classification_pipeline.
→BinaryClassificationPipeline,
 'pipeline_summary': 'CatBoost Classifier w/ Label Encoder + Drop Columns_
→Transformer + Imputer + DateTime Featurization Component + Oversampler',
 'parameters': {'Drop Columns Transformer': {'columns': ['currency']},
 'Imputer': {'categorical_impute_strategy': 'most_frequent',
 'numeric_impute_strategy': 'mean',
 'categorical_fill_value': None,
 'numeric_fill_value': None},
 'DateTime Featurization Component': {'features_to_extract': ['year',
 'month',
 'day_of_week',
 'hour'],
 'encode_as_categories': False,
 'date_index': None},
 'Oversampler': {'sampling_ratio': 0.25,
 'k_neighbors_default': 5,

```

(continues on next page)

(continued from previous page)

```

'n_jobs': -1,
'sampling_ratio_dict': None,
'categorical_features': [3, 4, 7, 8],
'k_neighbors': 5},
'CatBoost Classifier': {'n_estimators': 10,
'eta': 0.03,
'max_depth': 6,
'bootstrap_type': None,
'silent': True,
'allow_writing_files': False,
'n_jobs': -1}},
'mean_cv_score': 0.6269683475365982,
'standard_deviation_cv_score': 0.005110376657691124,
'high_variance_cv': False,
'training_time': 1.1069116592407227,
'cv_data': [{'all_objective_scores': OrderedDict([('Log Loss Binary',
0.6328217109569406),
('MCC Binary', 0.7712055916006633),
('Gini', 0.7669491525423728),
('AUC', 0.8834745762711864),
('Precision', 1.0),
('F1', 0.7692307692307693),
('Balanced Accuracy Binary', 0.8125),
('Accuracy Binary', 0.9552238805970149),
('# Training', 133),
('# Validation', 67)]),
'mean_cv_score': 0.6328217109569406,
'binary_classification_threshold': 0.49572877036722973},
{'all_objective_scores': OrderedDict([('Log Loss Binary',
0.6246893942305619),
('MCC Binary', 0.47636443708895493),
('Gini', 0.31779661016949157),
('AUC', 0.6588983050847458),
('Precision', 1.0),
('F1', 0.4),
('Balanced Accuracy Binary', 0.625),
('Accuracy Binary', 0.9104477611940298),
('# Training', 133),
('# Validation', 67)]),
'mean_cv_score': 0.6246893942305619,
'binary_classification_threshold': 0.5136041807822178},
{'all_objective_scores': OrderedDict([('Log Loss Binary',
0.6233939374222923),
('MCC Binary', 0.5132181379714255),
('Gini', 0.937046004842615),
('AUC', 0.9685230024213075),
('Precision', 1.0),
('F1', 0.4444444444444445),
('Balanced Accuracy Binary', 0.6428571428571428),
('Accuracy Binary', 0.9242424242424242),
('# Training', 134),
('# Validation', 66)]),
'mean_cv_score': 0.6233939374222923,
'binary_classification_threshold': 0.4978114819159809}},
'percent_better_than_baseline_all_objectives': {'Log Loss Binary': 84.
→20902966847964,
'MCC Binary': inf,

```

(continues on next page)

(continued from previous page)

```
'Gini': inf,
'AUC': 33.69652945924132,
'Precision': 100.0,
'F1': 53.789173789173795,
'Balanced Accuracy Binary': 19.345238095238095,
'Accuracy Binary': 4.492688074777629},
'percent_better_than_baseline': 84.20902966847964,
'validation_score': 0.6328217109569406}},
'search_order': [0, 1, 2, 3, 4, 5, 6, 7, 8])
```

4.1.12 Parallel AutoML

By default, all pipelines in an AutoML batch are evaluated in series. Pipelines can be evaluated in parallel to improve performance during AutoML search. This is accomplished by a futures style submission and evaluation of pipelines in a batch. As of this writing, the pipelines use a threaded model for concurrent evaluation. This is similar to the currently implemented `n_jobs` parameter in the estimators, which uses increased numbers of threads to train and evaluate estimators.

Quick Start

To quickly use some parallelism to enhance the pipeline searching, a string can be passed through to `AutoMLSearch` during initialization to setup the parallel engine and client within the `AutoMLSearch` object. The current options are “`cf_threaded`”, “`cf_process`”, “`dask_threaded`” and “`dask_process`” and indicate the futures backend to use and whether to use threaded- or process-level parallelism.

```
[26]: automl_cf_threaded = AutoMLSearch(X_train=X, y_train=y,
                                     problem_type="binary",
                                     allowed_model_families=[ModelFamily.LINEAR_MODEL],
                                     engine="cf_threaded")
automl_cf_threaded.search(show_iteration_plot = False)
automl_cf_threaded.close_engine()
```

Parallelism with Concurrent Futures

The `EngineBase` class is robust and extensible enough to support futures-like implementations from a variety of libraries. The `CFEngine` extends the `EngineBase` to use the native Python `concurrent.futures` library. The `CFEngine` supports both thread- and process-level parallelism. The type of parallelism can be chosen using either the `ThreadPoolExecutor` or the `ProcessPoolExecutor`. If either executor is passed a `max_workers` parameter, it will set the number of processes and threads spawned. If not, the default number of processes will be equal to the number of processors available and the number of threads set to five times the number of processors available.

Here, the `CFEngine` is invoked with default parameters, which is threaded parallelism using all available threads.

```
[27]: from concurrent.futures import ThreadPoolExecutor

from evalml.automl.engine.cf_engine import CFEngine, CFClient

cf_engine = CFEngine(CFClient(ThreadPoolExecutor(max_workers=4)))
automl_cf_threaded = AutoMLSearch(X_train=X, y_train=y,
                                problem_type="binary",
                                allowed_model_families=[ModelFamily.LINEAR_MODEL],
```

(continues on next page)

(continued from previous page)

```

engine=cf_engine)
automl_cf_threaded.search(show_iteration_plot = False)
automl_cf_threaded.close_engine()

```

Note: the cell demonstrating process-level parallelism is a markdown due to incompatibility with our ReadTheDocs build. It can be run successfully locally.

```

from concurrent.futures import ProcessPoolExecutor

# Repeat the process but using process-level parallelism\
cf_engine = CFEngine(CFClient(ProcessPoolExecutor(max_workers=2)))
automl_cf_process = AutoMLSearch(X_train=X, y_train=y,
                                problem_type="binary",
                                engine="cf_process")
automl_cf_process.search(show_iteration_plot = False)
automl_cf_process.close_engine()

```

Parallelism with Dask

Thread or process level parallelism can be explicitly invoked for the DaskEngine (as well as the CFEngine). The processes can be set to True and the number of processes set using `n_workers`. If processes is set to False, then the resulting parallelism will be threaded and `n_workers` will represent the threads used. Examples of both follow.

```

[28]: from dask.distributed import LocalCluster

from evalml.automl.engine import DaskEngine

dask_engine_p2 = DaskEngine(cluster=LocalCluster(processes=True, n_workers = 2))
automl_dask_p2 = AutoMLSearch(X_train=X, y_train=y,
                              problem_type="binary",
                              allowed_model_families=[ModelFamily.LINEAR_MODEL],
                              engine=dask_engine_p2)
automl_dask_p2.search(show_iteration_plot = False)

# Explicitly shutdown the automl object's LocalCluster
automl_dask_p2.close_engine()

```

Loky-backed parallel loops cannot be called in a multiprocessing, setting n_jobs=1
 Loky-backed parallel loops cannot be called in a multiprocessing, setting n_jobs=1
 Loky-backed parallel loops cannot be called in a multiprocessing, setting n_jobs=1
 Loky-backed parallel loops cannot be called in a multiprocessing, setting n_jobs=1

```

[29]: dask_engine_t4 = DaskEngine(cluster=LocalCluster(processes=False, n_workers = 4))

automl_dask_t4 = AutoMLSearch(X_train=X, y_train=y,
                              problem_type="binary",
                              allowed_model_families=[ModelFamily.LINEAR_MODEL],
                              engine=dask_engine_t4)
automl_dask_t4.search(show_iteration_plot = False)
automl_dask_t4.close_engine()

```

As we can see, a significant performance gain can result from simply using something other than the default SequentialEngine, ranging from a 100% speed up with multiple processes to 500% speedup with multiple threads!

```
[30]: print("Sequential search duration: %s" % str(automl.search_duration))
      print("Concurrent futures (threaded) search duration: %s" % str(automl_cf_threaded.
      ↪search_duration))
      print("Dask (two processes) search duration: %s" % str(automl_dask_p2.search_
      ↪duration))
      print("Dask (four threads)search duration: %s" % str(automl_dask_t4.search_duration))
```

```
Sequential search duration: 17.316110134124756
Concurrent futures (threaded) search duration: 4.351461172103882
Dask (two processes) search duration: 9.68747591972351
Dask (four threads)search duration: 5.067521810531616
```

4.2 Pipelines

EvalML pipelines represent a sequence of operations to be applied to data, where each operation is either a data transformation or an ML modeling algorithm.

A pipeline holds a combination of one or more components, which will be applied to new input data in sequence.

Each component and pipeline supports a set of parameters which configure its behavior. The AutoML search process seeks to find the combination of pipeline structure and pipeline parameters which perform the best on the data.

4.2.1 Defining a Pipeline Instance

Pipeline instances can be instantiated using any of the following classes:

- RegressionPipeline
- BinaryClassificationPipeline
- MulticlassClassificationPipeline
- TimeSeriesRegressionPipeline
- TimeSeriesBinaryClassificationPipeline
- TimeSeriesMulticlassClassificationPipeline

The class you want to use will depend on your problem type. The only required parameter input for instantiating a pipeline instance is `component_graph`, which can be a `ComponentGraph` instance, a list, or a dictionary containing a sequence of components to be fit and evaluated.

A `component_graph` list is the default representation, which represents a linear order of transforming components with an estimator as the final component. A `component_graph` dictionary is used to represent a non-linear graph of components, where the key is a unique name for each component and the value is a list with the component's class as the first element and any parents of the component as the following element(s). For these two `component_graph` formats, each component can be provided as a reference to the component class for custom components, and as either a string name or as a reference to the component class for components defined in EvalML.

If you choose to provide a `ComponentGraph` instance and want to set custom parameters for your pipeline, set it through the pipeline initialization rather than `ComponentGraph.instantiate()`.

```
[1]: from evalml.pipelines import MulticlassClassificationPipeline, ComponentGraph

      component_graph_as_list = ['Imputer', 'Random Forest Classifier']
      MulticlassClassificationPipeline(component_graph=component_graph_as_list)
```



```
[1]: pipeline = MulticlassClassificationPipeline(component_graph={'Imputer': ['Imputer', 'X', 'y'], 'Random Forest Classifier': ['Random Forest Classifier', 'Imputer.x', 'y']}, parameters={'Imputer':{'categorical_impute_strategy': 'most_frequent', 'numeric_impute_strategy': 'mean', 'categorical_fill_value': None, 'numeric_fill_value': None}, 'Random Forest Classifier':{'n_estimators': 100, 'max_depth': 6, 'n_jobs': -1}}, random_seed=0)
```

```
[2]: component_graph_as_dict = {
    'Imputer': ['Imputer', 'X', 'y'],
    'Encoder': ['One Hot Encoder', 'Imputer.x', 'y'],
    'Random Forest Clf': ['Random Forest Classifier', 'Encoder.x', 'y'],
    'Elastic Net Clf': ['Elastic Net Classifier', 'Encoder.x', 'y'],
    'Final Estimator': ['Logistic Regression Classifier', 'Random Forest Clf.x', 'Elastic Net Clf.x', 'y']
}
```

```
MulticlassClassificationPipeline(component_graph=component_graph_as_dict)
```

```
[2]: pipeline = MulticlassClassificationPipeline(component_graph={'Imputer': ['Imputer', 'X', 'y'], 'Encoder': ['One Hot Encoder', 'Imputer.x', 'y'], 'Random Forest Clf': ['Random Forest Classifier', 'Encoder.x', 'y'], 'Elastic Net Clf': ['Elastic Net Classifier', 'Encoder.x', 'y'], 'Final Estimator': ['Logistic Regression Classifier', 'Random Forest Clf.x', 'Elastic Net Clf.x', 'y']}, parameters={'Imputer':{'categorical_impute_strategy': 'most_frequent', 'numeric_impute_strategy': 'mean', 'categorical_fill_value': None, 'numeric_fill_value': None}, 'Encoder':{'top_n': 10, 'features_to_encode': None, 'categories': None, 'drop': 'if_binary', 'handle_unknown': 'ignore', 'handle_missing': 'error'}, 'Random Forest Clf':{'n_estimators': 100, 'max_depth': 6, 'n_jobs': -1}, 'Elastic Net Clf':{'penalty': 'elasticnet', 'C': 1.0, 'l1_ratio': 0.15, 'n_jobs': -1, 'multi_class': 'auto', 'solver': 'saga'}, 'Final Estimator':{'penalty': 'l2', 'C': 1.0, 'n_jobs': -1, 'multi_class': 'auto', 'solver': 'lbfgs'}}, random_seed=0)
```

```
[3]: cg = ComponentGraph(component_graph_as_dict)

# set parameters in the pipeline rather than through cg.instantiate()
MulticlassClassificationPipeline(component_graph=cg, parameters={})
```

```
[3]: pipeline = MulticlassClassificationPipeline(component_graph={'Imputer': ['Imputer', 'X', 'y'], 'Encoder': ['One Hot Encoder', 'Imputer.x', 'y'], 'Random Forest Clf': ['Random Forest Classifier', 'Encoder.x', 'y'], 'Elastic Net Clf': ['Elastic Net Classifier', 'Encoder.x', 'y'], 'Final Estimator': ['Logistic Regression Classifier', 'Random Forest Clf.x', 'Elastic Net Clf.x', 'y']}, parameters={'Imputer':{'categorical_impute_strategy': 'most_frequent', 'numeric_impute_strategy': 'mean', 'categorical_fill_value': None, 'numeric_fill_value': None}, 'Encoder':{'top_n': 10, 'features_to_encode': None, 'categories': None, 'drop': 'if_binary', 'handle_unknown': 'ignore', 'handle_missing': 'error'}, 'Random Forest Clf':{'n_estimators': 100, 'max_depth': 6, 'n_jobs': -1}, 'Elastic Net Clf':{'penalty': 'elasticnet', 'C': 1.0, 'l1_ratio': 0.15, 'n_jobs': -1, 'multi_class': 'auto', 'solver': 'saga'}, 'Final Estimator':{'penalty': 'l2', 'C': 1.0, 'n_jobs': -1, 'multi_class': 'auto', 'solver': 'lbfgs'}}, random_seed=0)
```

If you're using your own *custom components* you can refer to them like so:

```
[4]: from evalml.pipelines.components import Transformer

class NewTransformer(Transformer):
    name = 'New Transformer'
    hyperparameter_ranges = {
```

(continues on next page)

(continued from previous page)

```

    "parameter_1": ['a', 'b', 'c']
}

def __init__(self, parameter_1=1, random_seed=0):
    parameters = {"parameter_1": parameter_1}
    super().__init__(parameters=parameters,
                     random_seed=random_seed)

def transform(self, X, y=None):
    # Your code here!
    return X

```

```
MulticlassClassificationPipeline([NewTransformer, 'Random Forest Classifier'])
```

```
[4]: pipeline = MulticlassClassificationPipeline(component_graph={'New Transformer':
↳ [NewTransformer, 'X', 'y'], 'Random Forest Classifier': ['Random Forest Classifier',
↳ 'New Transformer.x', 'y']}, parameters={'New Transformer':{'parameter_1': 1},
↳ 'Random Forest Classifier':{'n_estimators': 100, 'max_depth': 6, 'n_jobs': -1}},
↳ random_seed=0)
```

4.2.2 Pipeline Usage

All pipelines define the following methods:

- `fit` fits each component on the provided training data, in order.
- `predict` computes the predictions of the component graph on the provided data.
- `score` computes the value of *an objective* on the provided data.

```
[5]: from evalml.demos import load_wine
X, y = load_wine()

pipeline = MulticlassClassificationPipeline(component_graph = {
    "Label Encoder": ["Label Encoder", "X", "y"],
    "Imputer": ["Imputer", "X", "Label Encoder.y"],
    "Random Forest Classifier": [
        "Random Forest Classifier",
        "Imputer.x",
        "Label Encoder.y",
    ],
})
pipeline.fit(X, y)
print(pipeline.predict(X))
print(pipeline.score(X, y, objectives=['log loss multiclass']))
```

```

      Number of Features
Numeric                13

```

```
Number of training examples: 178
```

```
Targets
```

```
class_1    39.89%
```

```
class_0    33.15%
```

```
class_2    26.97%
```

```
Name: target, dtype: object
```

```
0      class_0
```

```
1      class_0
```

(continues on next page)

(continued from previous page)

```

2      class_0
3      class_0
4      class_0
...
173     class_2
174     class_2
175     class_2
176     class_2
177     class_2
Length: 178, dtype: category
Categories (3, object): ['class_0', 'class_1', 'class_2']
OrderedDict([('Log Loss Multiclass', 0.04132737017536148)])

```

4.2.3 Custom Name

By default, a pipeline's name is created using the component graph that makes up the pipeline. E.g. A pipeline with an imputer, one-hot encoder, and logistic regression classifier will have the name 'Logistic Regression Classifier w/ Imputer + One Hot Encoder'.

If you'd like to override the pipeline's name attribute, you can set the `custom_name` parameter when initializing a pipeline, like so:

```

[6]: component_graph = ['Imputer', 'One Hot Encoder', 'Logistic Regression Classifier']
     pipeline = MulticlassClassificationPipeline(component_graph)
     print("Pipeline with default name:", pipeline.name)

     pipeline_with_name = MulticlassClassificationPipeline(component_graph, custom_name=
     ↪ "My cool custom pipeline")
     print("Pipeline with custom name:", pipeline_with_name.name)

Pipeline with default name: Logistic Regression Classifier w/ Imputer + One Hot_
↪ Encoder
Pipeline with custom name: My cool custom pipeline

```

4.2.4 Pipeline Parameters

You can also pass in custom parameters by using the `parameters` parameter, which will then be used when instantiating each component in `component_graph`. The parameters dictionary needs to be in the format of a two-layered dictionary where the key-value pairs are the component name and corresponding component parameters dictionary. The component parameters dictionary consists of (parameter name, parameter values) key-value pairs.

An example will be shown below. The API reference for component parameters can also be found [\[here\]](#) (`../api_reference.rst#components`).

```

[7]: parameters = {
     'Imputer': {
         "categorical_impute_strategy": "most_frequent",
         "numeric_impute_strategy": "median"
     },
     'Logistic Regression Classifier': {
         'penalty': 'l2',
         'C': 1.0,
     }
}

```

(continues on next page)

(continued from previous page)

```

    }
    component_graph = ['Imputer', 'One Hot Encoder', 'Standard Scaler', 'Logistic_
↳Regression Classifier']
    MulticlassClassificationPipeline(component_graph=component_graph,
↳parameters=parameters)

```

```

[7]: pipeline = MulticlassClassificationPipeline(component_graph={'Imputer': ['Imputer', 'X
↳', 'y'], 'One Hot Encoder': ['One Hot Encoder', 'Imputer.x', 'y'], 'Standard Scaler
↳': ['Standard Scaler', 'One Hot Encoder.x', 'y'], 'Logistic Regression Classifier':
↳['Logistic Regression Classifier', 'Standard Scaler.x', 'y']}, parameters={'Imputer
↳': {'categorical_impute_strategy': 'most_frequent', 'numeric_impute_strategy':
↳'median', 'categorical_fill_value': None, 'numeric_fill_value': None}, 'One Hot_
↳Encoder': {'top_n': 10, 'features_to_encode': None, 'categories': None, 'drop': 'if_
↳binary', 'handle_unknown': 'ignore', 'handle_missing': 'error'}, 'Logistic_
↳Regression Classifier': {'penalty': 'l2', 'C': 1.0, 'n_jobs': -1, 'multi_class':
↳'auto', 'solver': 'lbfgs'}}}, random_seed=0)

```

4.2.5 Pipeline Description

You can call `.graph()` to see each component and its parameters. Each component takes in data and feeds it to the next.

```

[8]: component_graph = ['Imputer', 'One Hot Encoder', 'Standard Scaler', 'Logistic_
↳Regression Classifier']
    pipeline = MulticlassClassificationPipeline(component_graph=component_graph,
↳parameters=parameters)
    pipeline.graph()

```

[8]:

```

[9]: component_graph_as_dict = {
    'Imputer': ['Imputer', 'X', 'y'],
    'Encoder': ['One Hot Encoder', 'Imputer.x', 'y'],
    'Random Forest Clf': ['Random Forest Classifier', 'Encoder.x', 'y'],
    'Elastic Net Clf': ['Elastic Net Classifier', 'Encoder.x', 'y'],
    'Final Estimator': ['Logistic Regression Classifier', 'Random Forest Clf.x',
↳'Elastic Net Clf.x', 'y']
}

nonlinear_pipeline = MulticlassClassificationPipeline(component_graph=component_graph_
↳as_dict)
nonlinear_pipeline.graph()

```

[9]:

You can see a textual representation of the pipeline by calling `.describe()`:

```

[10]: pipeline.describe()

*****
* Logistic Regression Classifier w/ Imputer + One Hot Encoder + Standard Scaler *
*****

Problem Type: multiclass
Model Family: Linear

Pipeline Steps

```

(continues on next page)

(continued from previous page)

```

=====
1. Imputer
  * categorical_impute_strategy : most_frequent
  * numeric_impute_strategy : median
  * categorical_fill_value : None
  * numeric_fill_value : None
2. One Hot Encoder
  * top_n : 10
  * features_to_encode : None
  * categories : None
  * drop : if_binary
  * handle_unknown : ignore
  * handle_missing : error
3. Standard Scaler
4. Logistic Regression Classifier
  * penalty : l2
  * C : 1.0
  * n_jobs : -1
  * multi_class : auto
  * solver : lbfgs

```

```
[11]: nonlinear_pipeline.describe()
```

```

*****
* Logistic Regression Classifier w/ Imputer + One Hot Encoder + Random Forest_
↳Classifier + Elastic Net Classifier *
*****

Problem Type: multiclass
Model Family: Linear

Pipeline Steps
=====
1. Imputer
  * categorical_impute_strategy : most_frequent
  * numeric_impute_strategy : mean
  * categorical_fill_value : None
  * numeric_fill_value : None
2. One Hot Encoder
  * top_n : 10
  * features_to_encode : None
  * categories : None
  * drop : if_binary
  * handle_unknown : ignore
  * handle_missing : error
3. Random Forest Classifier
  * n_estimators : 100
  * max_depth : 6
  * n_jobs : -1
4. Elastic Net Classifier
  * penalty : elasticnet
  * C : 1.0
  * l1_ratio : 0.15
  * n_jobs : -1
  * multi_class : auto
  * solver : saga

```

(continues on next page)

(continued from previous page)

```
5. Logistic Regression Classifier
  * penalty : l2
  * C : 1.0
  * n_jobs : -1
  * multi_class : auto
  * solver : lbfgs
```

4.2.6 Component Graph

You can use `pipeline.get_component(name)` and provide the component name to access any component (API reference [here](#)):

```
[12]: pipeline.get_component('Imputer')
[12]: Imputer(categorical_impute_strategy='most_frequent', numeric_impute_strategy='median',
  ↳ categorical_fill_value=None, numeric_fill_value=None)

[13]: nonlinear_pipeline.get_component('Elastic Net Clf')
[13]: ElasticNetClassifier(penalty='elasticnet', C=1.0, l1_ratio=0.15, n_jobs=-1, multi_
  ↳ class='auto', solver='saga')
```

Alternatively, you can index directly into the pipeline to get a component

```
[14]: first_component = pipeline[0]
      print(first_component.name)

      Imputer

[15]: nonlinear_pipeline['Final Estimator']
[15]: LogisticRegressionClassifier(penalty='l2', C=1.0, n_jobs=-1, multi_class='auto',
  ↳ solver='lbfgs')
```

4.2.7 Pipeline Estimator

EvalML enforces that the last component of a linear pipeline is an estimator. You can access this estimator directly by using `pipeline.estimator`.

```
[16]: pipeline.estimator
[16]: LogisticRegressionClassifier(penalty='l2', C=1.0, n_jobs=-1, multi_class='auto',
  ↳ solver='lbfgs')
```

4.2.8 Input Feature Names

After a pipeline is fitted, you can access a pipeline's `input_feature_names` attribute to obtain a dictionary containing a list of feature names passed to each component of the pipeline. This could be especially useful for debugging where a feature might have been dropped or detecting unexpected behavior.

```
[17]: pipeline = MulticlassClassificationPipeline(['Imputer', 'Random Forest Classifier'])
      pipeline.fit(X, y)
      pipeline.input_feature_names

[17]: {'Imputer': ['alcohol',
                  'malic_acid',
                  'ash',
                  'alcalinity_of_ash',
                  'magnesium',
                  'total_phenols',
                  'flavanoids',
                  'nonflavanoid_phenols',
                  'proanthocyanins',
                  'color_intensity',
                  'hue',
                  'od280/od315_of_diluted_wines',
                  'proline'],
      'Random Forest Classifier': ['alcohol',
                                   'malic_acid',
                                   'ash',
                                   'alcalinity_of_ash',
                                   'magnesium',
                                   'total_phenols',
                                   'flavanoids',
                                   'nonflavanoid_phenols',
                                   'proanthocyanins',
                                   'color_intensity',
                                   'hue',
                                   'od280/od315_of_diluted_wines',
                                   'proline']}
```

4.2.9 Saving and Loading Pipelines

You can save and load trained or untrained pipeline instances using the Python `pickle` format, like so:

```
[18]: import pickle

      pipeline_to_pickle = MulticlassClassificationPipeline(['Imputer', 'Random Forest_
      ↪Classifier'])

      with open("pipeline.pkl", 'wb') as f:
          pickle.dump(pipeline_to_pickle, f)

      pickled_pipeline = None
      with open('pipeline.pkl', 'rb') as f:
          pickled_pipeline = pickle.load(f)

      assert pickled_pipeline == pipeline_to_pickle
      pickled_pipeline.fit(X, y)
```

```
[18]: pipeline = MulticlassClassificationPipeline(component_graph={'Imputer': ['Imputer', 'X
→', 'y'], 'Random Forest Classifier': ['Random Forest Classifier', 'Imputer.x', 'y']})
→, parameters={'Imputer':{'categorical_impute_strategy': 'most_frequent', 'numeric_
→impute_strategy': 'mean', 'categorical_fill_value': None, 'numeric_fill_value':
→None}, 'Random Forest Classifier':{'n_estimators': 100, 'max_depth': 6, 'n_jobs': -
→1}}, random_seed=0)
```

4.2.10 Generate Code

Once you have instantiated a pipeline, you can generate string Python code to recreate this pipeline, which can then be saved and run elsewhere with EvalML. `generate_pipeline_code` requires a pipeline instance as the input. It can also handle custom components, but it won't return the code required to define the component. Note that any external libraries used in creating the pipeline instance will also need to be imported to execute the returned code.

Code generation is not yet supported for nonlinear pipelines.

```
[19]: from evalml.pipelines.utils import generate_pipeline_code
from evalml.pipelines import MulticlassClassificationPipeline
import pandas as pd
from evalml.utils import infer_feature_types
from skopt.space import Integer

class MyDropNullColumns(Transformer):
    """Transformer to drop features whose percentage of NaN values exceeds a
    →specified threshold"""
    name = "My Drop Null Columns Transformer"
    hyperparameter_ranges = {}

    def __init__(self, pct_null_threshold=1.0, random_seed=0, **kwargs):
        """Initializes an transformer to drop features whose percentage of NaN values
        →exceeds a specified threshold.

        Args:
            pct_null_threshold(float): The percentage of NaN values in an input
            →feature to drop.
                Must be a value between [0, 1] inclusive. If equal to 0.0, will drop
            →columns with any null values.
                If equal to 1.0, will drop columns with all null values. Defaults to
            →0.95.
        """
        if pct_null_threshold < 0 or pct_null_threshold > 1:
            raise ValueError("pct_null_threshold must be a float between 0 and 1,
            →inclusive.")
        parameters = {"pct_null_threshold": pct_null_threshold}
        parameters.update(kwargs)

        self._cols_to_drop = None
        super().__init__(parameters=parameters,
                         component_obj=None,
                         random_seed=random_seed)

    def fit(self, X, y=None):
        pct_null_threshold = self.parameters["pct_null_threshold"]
        X = infer_feature_types(X)
        percent_null = X.isnull().mean()
        if pct_null_threshold == 0.0:
```

(continues on next page)

(continued from previous page)

```

        null_cols = percent_null[percent_null > 0]
    else:
        null_cols = percent_null[percent_null >= pct_null_threshold]
    self._cols_to_drop = list(null_cols.index)
    return self

    def transform(self, X, y=None):
        """Transforms data X by dropping columns that exceed the threshold of null_
        values.
        Args:
            X (pd.DataFrame): Data to transform
            y (pd.Series, optional): Targets
        Returns:
            pd.DataFrame: Transformed X
        """

        X = infer_feature_types(X)
        return X.drop(columns=self._cols_to_drop)

pipeline_instance = MulticlassClassificationPipeline(['Imputer', MyDropNullColumns,
                                                    'DateTime Featurization',
                                                    'Text Featurization Component',
                                                    'One Hot Encoder', 'Random
                                                    Forest Classifier'],
                                                    custom_name="Pipeline with
                                                    Custom Component",
                                                    random_seed=20)

code = generate_pipeline_code(pipeline_instance)
print(code)

# This string can then be pasted into a separate window and run, although since the
# pipeline has custom component `MyDropNullColumns`,
# the code for that component must also be included
from evalml.demos import load_fraud
X, y = load_fraud(1000)
exec(code)
pipeline.fit(X, y)

from evalml.pipelines.multiclass_classification_pipeline import
MulticlassClassificationPipeline
pipeline = MulticlassClassificationPipeline(component_graph={'Imputer': ['Imputer', 'X',
'y'], 'My Drop Null Columns Transformer': [MyDropNullColumns, 'Imputer.x', 'y'],
'DateTime Featurization Component': ['DateTime Featurization Component', 'My Drop
Null Columns Transformer.x', 'y'], 'Text Featurization Component': ['Text
Featurization Component', 'DateTime Featurization Component.x', 'y'], 'One Hot
Encoder': ['One Hot Encoder', 'Text Featurization Component.x', 'y'], 'Random
Forest Classifier': ['Random Forest Classifier', 'One Hot Encoder.x', 'y']},
parameters={'Imputer':{'categorical_impute_strategy': 'most_frequent', 'numeric_
impute_strategy': 'mean', 'categorical_fill_value': None, 'numeric_fill_value':
None}, 'My Drop Null Columns Transformer':{'pct_null_threshold': 1.0}, 'DateTime
Featurization Component':{'features_to_extract': ['year', 'month', 'day_of_week',
'hour'], 'encode_as_categories': False, 'date_index': None}, 'One Hot Encoder':{'
top_n': 10, 'features_to_encode': None, 'categories': None, 'drop': 'if_binary',
'handle_unknown': 'ignore', 'handle_missing': 'error'}, 'Random Forest Classifier':{'
n_estimators': 100, 'max_depth': 6, 'n_jobs': -1}}, custom_name='Pipeline with
Custom Component', random_seed=20)

```

(continues on next page)

(continued from previous page)

```

                Number of Features
Boolean                      1
Categorical                   6
Numeric                       5

Number of training examples: 1000
Targets
False      85.90%
True       14.10%
Name: fraud, dtype: object

```

```

[19]: pipeline = MulticlassClassificationPipeline(component_graph={'Imputer': ['Imputer', 'X
↳ ', 'y'], 'My Drop Null Columns Transformer': [MyDropNullColumns, 'Imputer.x', 'y'],
↳ 'DateTime Featurization Component': ['DateTime Featurization Component', 'My Drop_
↳ Null Columns Transformer.x', 'y'], 'Text Featurization Component': ['Text_
↳ Featurization Component', 'DateTime Featurization Component.x', 'y'], 'One Hot_
↳ Encoder': ['One Hot Encoder', 'Text Featurization Component.x', 'y'], 'Random_
↳ Forest Classifier': ['Random Forest Classifier', 'One Hot Encoder.x', 'y']},
↳ parameters={'Imputer':{'categorical_impute_strategy': 'most_frequent', 'numeric_
↳ impute_strategy': 'mean', 'categorical_fill_value': None, 'numeric_fill_value':_
↳ None}, 'My Drop Null Columns Transformer':{'pct_null_threshold': 1.0}, 'DateTime_
↳ Featurization Component':{'features_to_extract': ['year', 'month', 'day_of_week',
↳ 'hour'], 'encode_as_categories': False, 'date_index': None}, 'One Hot Encoder':{'
↳ top_n': 10, 'features_to_encode': None, 'categories': None, 'drop': 'if_binary',
↳ 'handle_unknown': 'ignore', 'handle_missing': 'error'}, 'Random Forest Classifier':{'
↳ n_estimators': 100, 'max_depth': 6, 'n_jobs': -1}}, custom_name='Pipeline with_
↳ Custom Component', random_seed=20)

```

4.3 Component Graphs

EvalML component graphs represent and describe the flow of data in a collection of related components. A component graph is comprised of nodes representing components, and edges between pairs of nodes representing where the inputs and outputs of each component should go. It is the backbone of the features offered by the EvalML *pipeline*, but is also a powerful data structure on its own. EvalML currently supports component graphs as linear and [directed acyclic graphs \(DAG\)](#).

4.3.1 Defining a Component Graph

Component graphs can be defined by specifying the dictionary of components and edges that describe the graph.

In this dictionary, each key is a reference name for a component. Each corresponding value is a list, where the first element is the component itself, and the remaining elements are the input edges that should be connected to that component. The component as listed in the value can either be the component object itself or its string name.

This structure is very similar to that of [Dask computation graphs](#).

For example, in the code example below, we have a simple component graph made up of two components: an Imputer and a Random Forest Classifier. The names used to reference these two components are given by the keys, “My Imputer” and “RF Classifier” respectively. Each value in the dictionary is a list where the first element is the component corresponding to the component name, and the remaining elements are the inputs, e.g. “My Imputer” represents an Imputer component which has inputs “X” (the original features matrix) and “y” (the original target).

Feature edges are specified as “X” or “{component_name}.x”. For example, {“My Component”: [MyComponent, “Imputer.x”, ...]} indicates that we should use the feature output of the Imputer as as

part of the feature input for MyComponent. Similarly, target edges are specified as "y" or "{component_name}.y". {"My Component": [MyComponent, "Target Imputer.y", ...]} indicates that we should use the target output of the Target Imputer as a target input for MyComponent.

Each component can have a number of feature inputs, but can only have one target input. All input edges must be explicitly defined.

Using a real example, we define a simple component graph consisting of three nodes: an Imputer (“My Imputer”), an One-Hot Encoder (“OHE”), and a Random Forest Classifier (“RF Classifier”).

- “My Imputer” takes the original X as a features input, and the original y as the target input
- “OHE” also takes the original X as a features input, and the original y as the target input
- “RF Classifier” takes the concatted feature outputs from “My Imputer” and “OHE” as a features input, and the original y as the target input.

```
[1]: from evalml.pipelines import ComponentGraph

component_dict = {
    'My Imputer': ['Imputer', 'X', 'y'],
    'OHE': ['One Hot Encoder', 'X', 'y'],
    'RF Classifier': ['Random Forest Classifier', 'My Imputer.x', 'OHE.x', 'y'] #_
    ↪takes in multiple feature inputs
}
cg_simple = ComponentGraph(component_dict)
```

All component graphs must end with one final or terminus node. This can either be a transformer or an estimator. Below, the component graph is invalid because has two terminus nodes: the “RF Classifier” and the “EN Classifier”.

```
[2]: # Can't instantiate a component graph with more than one terminus node (here: RF_
    ↪Classifier, EN Classifier)
component_dict = {
    'My Imputer': ['Imputer', 'X', 'y'],
    'RF Classifier': ['Random Forest Classifier', 'My Imputer.x', 'y'],
    'EN Classifier': ['Elastic Net Classifier', 'My Imputer.x', 'y']
}
```

Once we have defined a component graph, we can instantiate the graph with specific parameter values for each component using `.instantiate(parameters)`. All components in a component graph must be instantiated before fitting, transforming, or predicting.

Below, we instantiate our graph and set the value of our Imputer’s `numeric_impute_strategy` to “most_frequent”.

```
[3]: cg_simple.instantiate({'My Imputer': {'numeric_impute_strategy': 'most_frequent'}})

[3]: {'My Imputer': ['Imputer', 'X', 'y'], 'OHE': ['One Hot Encoder', 'X', 'y'], 'RF_
    ↪Classifier': ['Random Forest Classifier', 'My Imputer.x', 'OHE.x', 'y']}
```

4.3.2 Components in the Component Graph

You can use `.get_component(name)` and provide the unique component name to access any component in the component graph. Below, we can grab our Imputer component and confirm that `numeric_impute_strategy` has indeed been set to “most_frequent”.

```
[4]: cg_simple.get_component('My Imputer')
[4]: Imputer(categorical_impute_strategy='most_frequent', numeric_impute_strategy='most_
↪frequent', categorical_fill_value=None, numeric_fill_value=None)
```

You can also `.get_inputs(name)` and provide the unique component name to retrieve all inputs for that component.

Below, we can grab our ‘RF Classifier’ component and confirm that we use “My Imputer.x” as our features input and “y” as target input.

```
[5]: cg_simple.get_inputs('RF Classifier')
[5]: ['My Imputer.x', 'OHE.x', 'y']
```

4.3.3 Component Graph Computation Order

Upon initialization, each component graph will generate a topological order. We can access this generated order by calling the `.compute_order` attribute. This attribute is used to determine the order that components should be evaluated during calls to `fit` and `transform`.

```
[6]: cg_simple.compute_order
[6]: ['OHE', 'My Imputer', 'RF Classifier']
```

4.3.4 Visualizing Component Graphs

We can get more information about an instantiated component graph by calling `.describe()`. This method will pretty-print each of the components in the graph and its parameters.

```
[7]: # Using a more involved component graph with more complex edges
component_dict = {
    "Imputer": ["Imputer", "X", "y"],
    "Target Imputer": ["Target Imputer", "X", "y"],
    "OneHot_RandomForest": ["One Hot Encoder", "Imputer.x", "Target Imputer.y"],
    "OneHot_ElasticNet": ["One Hot Encoder", "Imputer.x", "y"],
    "Random Forest": ["Random Forest Classifier", "OneHot_RandomForest.x", "y"],
    "Elastic Net": ["Elastic Net Classifier", "OneHot_ElasticNet.x", "Target_
↪Imputer.y"],
    "Logistic Regression": [
        "Logistic Regression Classifier",
        "Random Forest.x",
        "Elastic Net.x",
        "y",
    ],
}
cg_with_estimators = ComponentGraph(component_dict)
cg_with_estimators.instantiate({})
cg_with_estimators.describe()
```

```

1. Imputer
  * categorical_impute_strategy : most_frequent
  * numeric_impute_strategy : mean
  * categorical_fill_value : None
  * numeric_fill_value : None
2. Target Imputer
  * impute_strategy : most_frequent
  * fill_value : None
3. One Hot Encoder
  * top_n : 10
  * features_to_encode : None
  * categories : None
  * drop : if_binary
  * handle_unknown : ignore
  * handle_missing : error
4. One Hot Encoder
  * top_n : 10
  * features_to_encode : None
  * categories : None
  * drop : if_binary
  * handle_unknown : ignore
  * handle_missing : error
5. Random Forest Classifier
  * n_estimators : 100
  * max_depth : 6
  * n_jobs : -1
6. Elastic Net Classifier
  * penalty : elasticnet
  * C : 1.0
  * l1_ratio : 0.15
  * n_jobs : -1
  * multi_class : auto
  * solver : saga
7. Logistic Regression Classifier
  * penalty : l2
  * C : 1.0
  * n_jobs : -1
  * multi_class : auto
  * solver : lbfgs

```

We can also visualize a component graph by calling `.graph()`.

```
[8]: cg_with_estimators.graph()
```

```
[8]:
```

4.3.5 Component graph methods

Similar to the pipeline structure, we can call `fit`, `transform` or `predict`.

We can also call `fit_features` which will fit all but the final component and `compute_final_component_features` which will transform all but the final component. These two methods may be useful in cases where you want to understand what transformed features are being passed into the last component.

```
[9]: from evalml.demos import load_breast_cancer
```

(continues on next page)

(continued from previous page)

```

X, y = load_breast_cancer()
component_dict = {
    'My Imputer': ['Imputer', 'X', 'y'],
    'OHE': ['One Hot Encoder', 'My Imputer.x', 'y']
}
cg_with_final_transformer = ComponentGraph(component_dict)
cg_with_final_transformer.instantiate({})
cg_with_final_transformer.fit(X, y)

# We can call `transform` for ComponentGraphs with a final transformer
cg_with_final_transformer.transform(X, y)

```

```

      Number of Features
Numeric                30

```

```
Number of training examples: 569
```

```
Targets
```

```
benign          62.74%
```

```
malignant      37.26%
```

```
Name: target, dtype: object
```

```
[9]:
```

	mean radius	mean texture	mean perimeter	mean area	mean smoothness	\
0	17.99	10.38	122.80	1001.0	0.11840	
1	20.57	17.77	132.90	1326.0	0.08474	
2	19.69	21.25	130.00	1203.0	0.10960	
3	11.42	20.38	77.58	386.1	0.14250	
4	20.29	14.34	135.10	1297.0	0.10030	
..	
564	21.56	22.39	142.00	1479.0	0.11100	
565	20.13	28.25	131.20	1261.0	0.09780	
566	16.60	28.08	108.30	858.1	0.08455	
567	20.60	29.33	140.10	1265.0	0.11780	
568	7.76	24.54	47.92	181.0	0.05263	

	mean compactness	mean concavity	mean concave points	mean symmetry	\
0	0.27760	0.30010	0.14710	0.2419	
1	0.07864	0.08690	0.07017	0.1812	
2	0.15990	0.19740	0.12790	0.2069	
3	0.28390	0.24140	0.10520	0.2597	
4	0.13280	0.19800	0.10430	0.1809	
..	
564	0.11590	0.24390	0.13890	0.1726	
565	0.10340	0.14400	0.09791	0.1752	
566	0.10230	0.09251	0.05302	0.1590	
567	0.27700	0.35140	0.15200	0.2397	
568	0.04362	0.00000	0.00000	0.1587	

	mean fractal dimension	...	worst radius	worst texture	\
0	0.07871	...	25.380	17.33	
1	0.05667	...	24.990	23.41	
2	0.05999	...	23.570	25.53	
3	0.09744	...	14.910	26.50	
4	0.05883	...	22.540	16.67	
..	
564	0.05623	...	25.450	26.40	
565	0.05533	...	23.690	38.25	
566	0.05648	...	18.980	34.12	
567	0.07016	...	25.740	39.42	

(continues on next page)

(continued from previous page)

```

568          0.05884 ...          9.456          30.37

      worst perimeter worst area worst smoothness worst compactness \
0          184.60      2019.0          0.16220          0.66560
1          158.80      1956.0          0.12380          0.18660
2          152.50      1709.0          0.14440          0.42450
3           98.87       567.7          0.20980          0.86630
4          152.20      1575.0          0.13740          0.20500
..          ...          ...          ...          ...
564         166.10      2027.0          0.14100          0.21130
565         155.00      1731.0          0.11660          0.19220
566         126.70      1124.0          0.11390          0.30940
567         184.60      1821.0          0.16500          0.86810
568          59.16       268.6          0.08996          0.06444

      worst concavity worst concave points worst symmetry \
0          0.7119          0.2654          0.4601
1          0.2416          0.1860          0.2750
2          0.4504          0.2430          0.3613
3          0.6869          0.2575          0.6638
4          0.4000          0.1625          0.2364
..          ...          ...          ...
564         0.4107          0.2216          0.2060
565         0.3215          0.1628          0.2572
566         0.3403          0.1418          0.2218
567         0.9387          0.2650          0.4087
568         0.0000          0.0000          0.2871

      worst fractal dimension
0          0.11890
1          0.08902
2          0.08758
3          0.17300
4          0.07678
..          ...
564         0.07115
565         0.06637
566         0.07820
567         0.12400
568         0.07039

```

[569 rows x 30 columns]

```
[10]: cg_with_estimators.fit(X, y)
```

```

# We can call `predict` for ComponentGraphs with a final transformer
cg_with_estimators.predict(X)

```

```

[10]: 0      malignant
      1      malignant
      2      malignant
      3      malignant
      4      malignant
      ...
      564    malignant
      565    malignant
      566    malignant

```

(continues on next page)

(continued from previous page)

```

567     malignant
568         benign
Length: 569, dtype: category
Categories (2, object): ['benign', 'malignant']

```

4.4 Components

Components are the lowest level of building blocks in EvalML. Each component represents a fundamental operation to be applied to data.

All components accept parameters as keyword arguments to their `__init__` methods. These parameters can be used to configure behavior.

Each component class definition must include a human-readable `name` for the component. Additionally, each component class may expose parameters for AutoML search by defining a `hyperparameter_ranges` attribute containing the parameters in question.

EvalML splits components into two categories: **transformers** and **estimators**.

4.4.1 Transformers

Transformers subclass the `Transformer` class, and define a `fit` method to learn information from training data and a `transform` method to apply a learned transformation to new data.

For example, an *imputer* is configured with the desired impute strategy to follow, for instance the mean value. The imputers `fit` method would learn the mean from the training data, and the `transform` method would fill the learned mean value in for any missing values in new data.

All transformers can execute `fit` and `transform` separately or in one step by calling `fit_transform`. Defining a custom `fit_transform` method can facilitate useful performance optimizations in some cases.

```

[1]: import numpy as np
import pandas as pd
from evalml.pipelines.components import SimpleImputer

```

```

X = pd.DataFrame([[1, 2, 3], [1, np.nan, 3]])
display(X)

```

```

   0    1    2
0  1  2.0  3
1  1  NaN  3

```

```

[2]: import woodwork as ww
imp = SimpleImputer(impute_strategy="mean")

```

```

X.ww.init()
X = imp.fit_transform(X)
display(X)

```

```

   0    1    2
0  1  2.0  3
1  1  2.0  3

```

Below is a list of all transformers included with EvalML:


```
[3]: from evalml.pipelines.components.utils import all_components, Estimator, Transformer
     for component in all_components():
         if issubclass(component, Transformer):
             print(f"Transformer: {component.name}")
```

```
Transformer: Drop Rows Transformer
Transformer: URL Featurizer
Transformer: Email Featurizer
Transformer: Log Transformer
Transformer: Polynomial Detrender
Transformer: DFS Transformer
Transformer: Delayed Feature Transformer
Transformer: Text Featurization Component
Transformer: LSA Transformer
Transformer: Drop Null Columns Transformer
Transformer: DateTime Featurization Component
Transformer: PCA Transformer
Transformer: Linear Discriminant Analysis Transformer
Transformer: Select Columns By Type Transformer
Transformer: Select Columns Transformer
Transformer: Drop Columns Transformer
Transformer: Oversampler
Transformer: Undersampler
Transformer: Standard Scaler
Transformer: Target Imputer
Transformer: Imputer
Transformer: Per Column Imputer
Transformer: Simple Imputer
Transformer: RF Regressor Select From Model
Transformer: RF Classifier Select From Model
Transformer: Label Encoder
Transformer: Target Encoder
Transformer: One Hot Encoder
```

4.4.2 Estimators

Each estimator wraps an ML algorithm. Estimators subclass the `Estimator` class, and define a `fit` method to learn information from training data and a `predict` method for generating predictions from new data. Classification estimators should also define a `predict_proba` method for generating predicted probabilities.

Estimator classes each define a `model_family` attribute indicating what type of model is used.

Here's an example of using the *LogisticRegressionClassifier* estimator to fit and predict on a simple dataset:

```
[4]: from evalml.pipelines.components import LogisticRegressionClassifier

     clf = LogisticRegressionClassifier()

     X = X
     y = [1, 0]

     clf.fit(X, y)
     clf.predict(X)
```

```
[4]: 0      0
     1      0
     dtype: int64
```

Below is a list of all estimators included with EvalML:

```
[5]: from evalml.pipelines.components.utils import all_components, Estimator, Transformer
    for component in all_components():
        if issubclass(component, Estimator):
            print(f"Estimator: {component.name}")

Estimator: Stacked Ensemble Regressor
Estimator: Stacked Ensemble Classifier
Estimator: ARIMA Regressor
Estimator: SVM Regressor
Estimator: Time Series Baseline Estimator
Estimator: Decision Tree Regressor
Estimator: Baseline Regressor
Estimator: Extra Trees Regressor
Estimator: XGBoost Regressor
Estimator: CatBoost Regressor
Estimator: Random Forest Regressor
Estimator: LightGBM Regressor
Estimator: Linear Regressor
Estimator: Elastic Net Regressor
Estimator: SVM Classifier
Estimator: KNN Classifier
Estimator: Decision Tree Classifier
Estimator: LightGBM Classifier
Estimator: Baseline Classifier
Estimator: Extra Trees Classifier
Estimator: Elastic Net Classifier
Estimator: CatBoost Classifier
Estimator: XGBoost Classifier
Estimator: Random Forest Classifier
Estimator: Logistic Regression Classifier
```

4.4.3 Defining Custom Components

EvalML allows you to easily create your own custom components by following the steps below.

Custom Transformers

Your transformer must inherit from the correct subclass. In this case *Transformer* for components that transform data. Next we will use EvalML's *DropNullColumns* as an example.

```
[6]: from evalml.pipelines.components import Transformer
    from evalml.utils import (
        infer_feature_types,
    )

    class DropNullColumns(Transformer):
        """Transformer to drop features whose percentage of NaN values exceeds a
        ↪specified threshold"""
        name = "Drop Null Columns Transformer"
        hyperparameter_ranges = {}

        def __init__(self, pct_null_threshold=1.0, random_seed=0, **kwargs):
            """Initializes a transformer to drop features whose percentage of NaN values
            ↪exceeds a specified threshold.
```

(continues on next page)

(continued from previous page)

```

    Args:
        pct_null_threshold(float): The percentage of NaN values in an input
        ↪ feature to drop.
            Must be a value between [0, 1] inclusive. If equal to 0.0, will drop
        ↪ columns with any null values.
            If equal to 1.0, will drop columns with all null values. Defaults to
        ↪ 0.95.
        """
        if pct_null_threshold < 0 or pct_null_threshold > 1:
            raise ValueError("pct_null_threshold must be a float between 0 and 1,
        ↪ inclusive.")
        parameters = {"pct_null_threshold": pct_null_threshold}
        parameters.update(kwargs)

        self._cols_to_drop = None
        super().__init__(parameters=parameters,
                         component_obj=None,
                         random_seed=random_seed)

    def fit(self, X, y=None):
        """Fits DropNullColumns component to data

    Args:
        X (pd.DataFrame): The input training data of shape [n_samples, n_features]
        y (pd.Series, optional): The target training data of length [n_samples]

    Returns:
        self
        """
        pct_null_threshold = self.parameters["pct_null_threshold"]
        X_t = infer_feature_types(X)
        percent_null = X_t.isnull().mean()
        if pct_null_threshold == 0.0:
            null_cols = percent_null[percent_null > 0]
        else:
            null_cols = percent_null[percent_null >= pct_null_threshold]
        self._cols_to_drop = list(null_cols.index)
        return self

    def transform(self, X, y=None):
        """Transforms data X by dropping columns that exceed the threshold of null
        ↪ values.

    Args:
        X (pd.DataFrame): Data to transform
        y (pd.Series, optional): Ignored.

    Returns:
        pd.DataFrame: Transformed X
        """
        X_t = infer_feature_types(X)
        return X_t.drop(self._cols_to_drop)

```

Required fields

- `name`: A human-readable name.
- `modifies_features`: A boolean that specifies whether this component modifies (subsets or transforms) the features variable during `transform`.
- `modifies_target`: A boolean that specifies whether this component modifies (subsets or transforms) the target variable during `transform`.

Required methods

Likewise, there are select methods you need to override as `Transformer` is an abstract base class:

- `__init__()`: The `__init__()` method of your transformer will need to call `super().__init__()` and pass three parameters in: a `parameters` dictionary holding the parameters to the component, the `component_obj`, and the `random_seed` value. You can see that `component_obj` is set to `None` above and we will discuss `component_obj` in depth later on.
- `fit()`: The `fit()` method is responsible for fitting your component on training data. It should return the component object.
- `transform()`: After fitting a component, the `transform()` method will take in new data and transform accordingly. It should return a pandas dataframe with woodwork initialized. Note: a component must call `fit()` before `transform()`.

You can also call or override `fit_transform()` that combines `fit()` and `transform()` into one method.

Custom Estimators

Your estimator must inherit from the correct subclass. In this case *Estimator* for components that predict new target values. Next we will use EvalML's *BaselineRegressor* as an example.

```
[7]: import numpy as np
import pandas as pd

from evalml.model_family import ModelFamily
from evalml.pipelines.components.estimators import Estimator
from evalml.problem_types import ProblemTypes

class BaselineRegressor(Estimator):
    """Regressor that predicts using the specified strategy.

    This is useful as a simple baseline regressor to compare with other regressors.
    """
    name = "Baseline Regressor"
    hyperparameter_ranges = {}
    model_family = ModelFamily.BASELINE
    supported_problem_types = [ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_
↪REGRESSION]

    def __init__(self, strategy="mean", random_seed=0, **kwargs):
        """Baseline regressor that uses a simple strategy to make predictions.

        Args:
```

(continues on next page)

(continued from previous page)

```

        strategy (str): Method used to predict. Valid options are "mean", "median
→ ". Defaults to "mean".
        random_seed (int): Seed for the random number generator. Defaults to 0.

    """
    if strategy not in ["mean", "median"]:
        raise ValueError("'strategy' parameter must equal either 'mean' or 'median
→ ")
    parameters = {"strategy": strategy}
    parameters.update(kwargs)

    self._prediction_value = None
    self._num_features = None
    super().__init__(parameters=parameters,
                     component_obj=None,
                     random_seed=random_seed)

    def fit(self, X, y=None):
        if y is None:
            raise ValueError("Cannot fit Baseline regressor if y is None")
        X = infer_feature_types(X)
        y = infer_feature_types(y)

        if self.parameters["strategy"] == "mean":
            self._prediction_value = y.mean()
        elif self.parameters["strategy"] == "median":
            self._prediction_value = y.median()
        self._num_features = X.shape[1]
        return self

    def predict(self, X):
        X = infer_feature_types(X)
        predictions = pd.Series([self._prediction_value] * len(X))
        return infer_feature_types(predictions)

    @property
    def feature_importance(self):
        """Returns importance associated with each feature. Since baseline regressors
→ do not use input features to calculate predictions, returns an array of zeroes.

        Returns:
            np.ndarray (float): An array of zeroes

    """
    return np.zeros(self._num_features)

```

Required fields

- `name`: A human-readable name.
- `model_family` - EvalML *model_family* that this component belongs to
- `supported_problem_types` - list of EvalML *problem_types* that this component supports
- `modifies_features`: A boolean that specifies whether the return value from `predict` or `predict_proba` should be used as features.
- `modifies_target`: A boolean that specifies whether the return value from `predict` or `predict_proba` should be used as the target variable.

Model families and problem types include:

```
[8]: from evalml.model_family import ModelFamily
     from evalml.problem_types import ProblemTypes

     print("Model Families:\n", [m.value for m in ModelFamily])
     print("Problem Types:\n", [p.value for p in ProblemTypes])

Model Families:
['k_neighbors', 'random_forest', 'svm', 'xgboost', 'lightgbm', 'linear_model',
→ 'catboost', 'extra_trees', 'ensemble', 'decision_tree', 'arima', 'baseline',
→ 'prophet', 'none']
Problem Types:
['binary', 'multiclass', 'regression', 'time series regression', 'time series binary
→ ', 'time series multiclass']
```

Required methods

- `__init__()` - the `__init__()` method of your estimator will need to call `super().__init__()` and pass three parameters in: a `parameters` dictionary holding the parameters to the component, the `component_obj`, and the `random_seed` value.
- `fit()` - the `fit()` method is responsible for fitting your component on training data.
- `predict()` - after fitting a component, the `predict()` method will take in new data and predict new target values. Note: a component must call `fit()` before `predict()`.
- `feature_importance` - `feature_importance` is a [Python property](#) that returns a list of importances associated with each feature.

If your estimator handles classification problems it also requires an additional method:

- `predict_proba()` - this method predicts probability estimates for classification labels

Components Wrapping Third-Party Objects

The `component_obj` parameter is used for wrapping third-party objects and using them in component implementation. If you're using a `component_obj` you will need to define `__init__()` and pass in the relevant object that has also implemented the required methods mentioned above. However, if the `component_obj` does not follow EvalML component conventions, you may need to override methods as needed. Below is an example of EvalML's *LinearRegressor*.

```
[9]: from sklearn.linear_model import LinearRegression as SKLinearRegression

from evalml.model_family import ModelFamily
from evalml.pipelines.components.estimators import Estimator
from evalml.problem_types import ProblemTypes

class LinearRegressor(Estimator):
    """Linear Regressor."""
    name = "Linear Regressor"
    model_family = ModelFamily.LINEAR_MODEL
    supported_problem_types = [ProblemTypes.REGRESSION]

    def __init__(self, fit_intercept=True, normalize=False, n_jobs=-1, random_seed=0,
↳ **kwargs):
        parameters = {
            'fit_intercept': fit_intercept,
            'normalize': normalize,
            'n_jobs': n_jobs
        }
        parameters.update(kwargs)
        linear_regressor = SKLinearRegression(**parameters)
        super().__init__(parameters=parameters,
                          component_obj=linear_regressor,
                          random_seed=random_seed)

    @property
    def feature_importance(self):
        return self._component_obj.coef_
```

Hyperparameter Ranges for AutoML

`hyperparameter_ranges` is a dictionary mapping the parameter name (str) to an allowed range (SkOpt Space) for that parameter. Both lists and `skopt.space.Categorical` values are accepted for categorical spaces.

AutoML will perform a search over the allowed ranges for each parameter to select models which produce optimal performance within those ranges. AutoML gets the allowed ranges for each component from the component's `hyperparameter_ranges` class attribute. Any component parameter you add an entry for in `hyperparameter_ranges` will be included in the AutoML search. If parameters are omitted, AutoML will use the default value in all pipelines.

4.4.4 Generate Component Code

Once you have a component defined in EvalML, you can generate string Python code to recreate this component, which can then be saved and run elsewhere with EvalML. `generate_component_code` requires a component instance as the input. This method works for custom components as well, although it won't return the code required to define the custom component.

```
[10]: from evalml.pipelines.components import LogisticRegressionClassifier
from evalml.pipelines.components.utils import generate_component_code

lr = LogisticRegressionClassifier(C=5)
code = generate_component_code(lr)
print(code)
```

```
from evalml.pipelines.components.estimators.classifiers.logistic_regression_
↳classifier import LogisticRegressionClassifier

logisticRegressionClassifier = LogisticRegressionClassifier(**{'penalty': 'l2', 'C':
↳5, 'n_jobs': -1, 'multi_class': 'auto', 'solver': 'lbfgs'})
```

```
[11]: # this string can then be copy and pasted into a separate window and executed as
↳python code
exec(code)
```

```
[12]: # We can also do this for custom components
from evalml.pipelines.components.utils import generate_component_code

myDropNull = DropNullColumns()
print(generate_component_code(myDropNull))

dropNullColumnsTransformer = DropNullColumns(**{'pct_null_threshold': 1.0})
```

Expectations for Custom Classification Components

EvalML expects the following from custom classification component implementations:

- Classification targets will range from 0 to n-1 and are integers.
- For classification estimators, the order of `predict_proba`'s columns must match the order of the target, and the column names must be integers ranging from 0 to n-1

4.5 Objectives

4.5.1 Overview

One of the key choices to make when training an ML model is what metric to choose by which to measure the efficacy of the model at learning the signal. Such metrics are useful for comparing how well the trained models generalize to new similar data.

This choice of metric is a key component of AutoML because it defines the cost function the AutoML search will seek to optimize. In EvalML, these metrics are called **objectives**. AutoML will seek to minimize (or maximize) the objective score as it explores more pipelines and parameters and will use the feedback from scoring pipelines to tune the available hyperparameters and continue the search. Therefore, it is critical to have an objective function that represents how the model will be applied in the intended domain of use.

EvalML supports a variety of objectives from traditional supervised ML including [mean squared error](#) for regression problems and [cross entropy](#) or [area under the ROC curve](#) for classification problems. EvalML also allows the user to define a custom objective using their domain expertise, so that AutoML can search for models which provide the most value for the user's problem.

4.5.2 Core Objectives

Use the `get_core_objectives` method to get a list of which objectives are included with EvalML for each problem type:

```
[1]: from evalml.objectives import get_core_objectives
      from evalml.problem_types import ProblemTypes

      for objective in get_core_objectives(ProblemTypes.BINARY):
          print(objective.name)
```

```
MCC Binary
Log Loss Binary
Gini
AUC
Precision
F1
Balanced Accuracy Binary
Accuracy Binary
```

EvalML defines a base objective class for each problem type: `RegressionObjective`, `BinaryClassificationObjective` and `MulticlassClassificationObjective`. All EvalML objectives are a subclass of one of these.

Binary Classification Objectives and Thresholds

All binary classification objectives have a `threshold` property. Some binary classification objectives like log loss and AUC are unaffected by the choice of binary classification threshold, because they score based on predicted probabilities or examine a range of threshold values. These metrics are defined with `score_needs_proba` set to `False`. For all other binary classification objectives, we can compute the optimal binary classification threshold from the predicted probabilities and the target.

```
[2]: from evalml.pipelines import BinaryClassificationPipeline
      from evalml.demos import load_fraud
      from evalml.objectives import F1

      X, y = load_fraud(n_rows=100)
      X.ww.init(logical_types={"provider": "Categorical", "region": "Categorical",
                              "currency": "Categorical", "expiration_date": "Categorical"})

      objective = F1()
      pipeline = BinaryClassificationPipeline(component_graph=['Simple Imputer', 'DateTime_
      ↪Featurization Component', 'One Hot Encoder', 'Random Forest Classifier'])
      pipeline.fit(X, y)
      print(pipeline.threshold)
      print(pipeline.score(X, y, objectives=[objective]))

      y_pred_proba = pipeline.predict_proba(X)[True]
      pipeline.threshold = objective.optimize_threshold(y_pred_proba, y)
      print(pipeline.threshold)
      print(pipeline.score(X, y, objectives=[objective]))
```

```
                Number of Features
Boolean                1
Categorical             6
Numeric                5
```

```
Number of training examples: 100
```

(continues on next page)

(continued from previous page)

```

Targets
False      91.00%
True       9.00%
Name: fraud, dtype: object
None
OrderedDict([('F1', 1.0)])
0.5202757772593112
OrderedDict([('F1', 1.0)])

```

4.5.3 Custom Objectives

Often times, the objective function is very specific to the use-case or business problem. To get the right objective to optimize requires thinking through the decisions or actions that will be taken using the model and assigning a cost/benefit to doing that correctly or incorrectly based on known outcomes in the training data.

Once you have determined the objective for your business, you can provide that to EvalML to optimize by defining a custom objective function.

Defining a Custom Objective Function

To create a custom objective class, we must define several elements:

- `name`: The printable name of this objective.
- `objective_function`: This function takes the predictions, true labels, and an optional reference to the inputs, and returns a score of how well the model performed.
- `greater_is_better`: True if a higher `objective_function` value represents a better solution, and otherwise False.
- `score_needs_proba`: Only for classification objectives. True if the objective is intended to function with predicted probabilities as opposed to predicted values (example: cross entropy for classifiers).
- `decision_function`: Only for binary classification objectives. This function takes predicted probabilities that were output from the model and a binary classification threshold, and returns predicted values.
- `perfect_score`: The score achieved by a perfect model on this objective.
- `expected_range`: The expected range of values we want this objective to output, which doesn't necessarily have to be equal to the possible range of values. For example, our expected R2 range is from `[-1, 1]`, although the actual range is `(-inf, 1]`.

Example: Fraud Detection

To give a concrete example, let's look at how the *fraud detection* objective function is built.

```

[3]: from evalml.objectives.binary_classification_objective import _
      ↪ BinaryClassificationObjective
      import pandas as pd

      class FraudCost(BinaryClassificationObjective):
          """Score the percentage of money lost of the total transaction amount process due_
          ↪ to fraud"""
          name = "Fraud Cost"

```

(continues on next page)

(continued from previous page)

```

greater_is_better = False
score_needs_proba = False
perfect_score = 0.0

def __init__(self, retry_percentage=.5, interchange_fee=.02,
              fraud_payout_percentage=1.0, amount_col='amount'):
    """Create instance of FraudCost

    Args:
        retry_percentage (float): What percentage of customers that will retry a
        ↳ transaction if it
            is declined. Between 0 and 1. Defaults to .5

        interchange_fee (float): How much of each successful transaction you can
        ↳ collect.
            Between 0 and 1. Defaults to .02

        fraud_payout_percentage (float): Percentage of fraud you will not be able
        ↳ to collect.
            Between 0 and 1. Defaults to 1.0

        amount_col (str): Name of column in data that contains the amount.
        ↳ Defaults to "amount"
    """
    self.retry_percentage = retry_percentage
    self.interchange_fee = interchange_fee
    self.fraud_payout_percentage = fraud_payout_percentage
    self.amount_col = amount_col

def decision_function(self, ypred_proba, threshold=0.0, X=None):
    """Determine if a transaction is fraud given predicted probabilities,
    ↳ threshold, and dataframe with transaction amount

    Args:
        ypred_proba (pd.Series): Predicted probabilities
        X (pd.DataFrame): Dataframe containing transaction amount
        threshold (float): Dollar threshold to determine if transaction is
        ↳ fraud

    Returns:
        pd.Series: Series of predicted fraud labels using X and threshold
    """
    if not isinstance(X, pd.DataFrame):
        X = pd.DataFrame(X)

    if not isinstance(ypred_proba, pd.Series):
        ypred_proba = pd.Series(ypred_proba)

    transformed_probs = (ypred_proba.values * X[self.amount_col])
    return transformed_probs > threshold

def objective_function(self, y_true, y_predicted, X):
    """Calculate amount lost to fraud per transaction given predictions, true
    ↳ values, and dataframe with transaction amount

    Args:
        y_predicted (pd.Series): predicted fraud labels

```

(continues on next page)

(continued from previous page)

```

        y_true (pd.Series): true fraud labels
        X (pd.DataFrame): dataframe with transaction amounts

    Returns:
        float: amount lost to fraud per transaction
    """
    if not isinstance(X, pd.DataFrame):
        X = pd.DataFrame(X)

    if not isinstance(y_predicted, pd.Series):
        y_predicted = pd.Series(y_predicted)

    if not isinstance(y_true, pd.Series):
        y_true = pd.Series(y_true)

    # extract transaction using the amount columns in users data
    try:
        transaction_amount = X[self.amount_col]
    except KeyError:
        raise ValueError("`{}` is not a valid column in X.".format(self.amount_
→col))

    # amount paid if transaction is fraud
    fraud_cost = transaction_amount * self.fraud_payout_percentage

    # money made from interchange fees on transaction
    interchange_cost = transaction_amount * (1 - self.retry_percentage) * self.
→interchange_fee

    # calculate cost of missing fraudulent transactions
    false_negatives = (y_true & ~y_predicted) * fraud_cost

    # calculate money lost from fees
    false_positives = (~y_true & y_predicted) * interchange_cost

    loss = false_negatives.sum() + false_positives.sum()

    loss_per_total_processed = loss / transaction_amount.sum()

    return loss_per_total_processed

```

4.6 Model Understanding

Simply examining a model’s performance metrics is not enough to select a model and promote it for use in a production setting. While developing an ML algorithm, it is important to understand how the model behaves on the data, to examine the key factors influencing its predictions and to consider where it may be deficient. Determination of what “success” may mean for an ML project depends first and foremost on the user’s domain expertise.

EvalML includes a variety of tools for understanding models, from graphing utilities to methods for explaining predictions.

** Graphing methods on Jupyter Notebook and Jupyter Lab require [ipywidgets](#) to be installed.

** If graphing on Jupyter Lab, [jupyterlab-plotly](#) required. To download this, make sure you have [npm](#) installed.

4.6.1 Graphing Utilities

First, let's train a pipeline on some data.

```
[1]: import evalml
from evalml.pipelines import BinaryClassificationPipeline
X, y = evalml.demos.load_breast_cancer()

X_train, X_holdout, y_train, y_holdout = evalml.preprocessing.split_data(X, y,
    ↪problem_type='binary',
    test_size=0.
    ↪2, random_seed=0)

pipeline_binary = BinaryClassificationPipeline(component_graph = {
    "Label Encoder": ["Label Encoder", "X", "y"],
    "Imputer": ["Imputer", "X", "Label Encoder.y"],
    "Random Forest Classifier": [
        "Random Forest Classifier",
        "Imputer.x",
        "Label Encoder.y",
    ],
})
pipeline_binary.fit(X_train, y_train)
print(pipeline_binary.score(X_holdout, y_holdout, objectives=['log loss binary']))
```

```

      Number of Features
Numeric                30

Number of training examples: 569
Targets
benign          62.74%
malignant       37.26%
Name: target, dtype: object
OrderedDict([('Log Loss Binary', 0.1686746297113362)])
```

Feature Importance

We can get the importance associated with each feature of the resulting pipeline

```
[2]: pipeline_binary.feature_importance
```

```
[2]:
```

	feature	importance
0	mean concave points	0.138857
1	worst perimeter	0.137780
2	worst concave points	0.117782
3	worst radius	0.100584
4	mean concavity	0.086402
5	worst area	0.072027
6	mean perimeter	0.046500
7	worst concavity	0.043408
8	mean radius	0.037664
9	mean area	0.033683
10	radius error	0.025036
11	area error	0.019324
12	worst texture	0.014754
13	worst compactness	0.014462

(continues on next page)

(continued from previous page)

14	mean texture	0.013856
15	worst smoothness	0.013710
16	worst symmetry	0.011395
17	perimeter error	0.010284
18	mean compactness	0.008162
19	mean smoothness	0.008154
20	worst fractal dimension	0.007034
21	fractal dimension error	0.005502
22	compactness error	0.004953
23	smoothness error	0.004728
24	texture error	0.004384
25	symmetry error	0.004250
26	mean fractal dimension	0.004164
27	concavity error	0.004089
28	mean symmetry	0.003997
29	concave points error	0.003076

We can also create a bar plot of the feature importances

```
[3]: pipeline_binary.graph_feature_importance()
```

Data type cannot be displayed: application/vnd.plotly.v1+json, text/html

Permutation Importance

We can also compute and plot the permutation importance of the pipeline.

```
[4]: from evalml.model_understanding import calculate_permutation_importance
      calculate_permutation_importance(pipeline_binary, X_holdout, y_holdout, 'log loss_
      ↪binary')
```

```
[4]:
```

	feature	importance
0	worst perimeter	0.063657
1	worst area	0.045759
2	worst radius	0.041926
3	mean concave points	0.029325
4	worst concave points	0.021045
5	worst concavity	0.010105
6	worst texture	0.010044
7	mean texture	0.006178
8	mean symmetry	0.005857
9	mean area	0.004745
10	worst smoothness	0.003190
11	area error	0.003113
12	mean perimeter	0.002478
13	mean fractal dimension	0.001981
14	compactness error	0.001968
15	concavity error	0.001947
16	texture error	0.000291
17	smoothness error	-0.000206
18	mean smoothness	-0.000745
19	fractal dimension error	-0.000835
20	worst compactness	-0.002392

(continues on next page)

(continued from previous page)

```

21         mean concavity    -0.003188
22         mean compactness  -0.005377
23         radius error      -0.006229
24         mean radius       -0.006870
25     worst fractal dimension -0.007415
26         symmetry error    -0.008175
27         perimeter error   -0.008980
28         concave points error -0.010415
29         worst symmetry    -0.018645

```

```
[5]: from evalml.model_understanding import graph_permutation_importance
graph_permutation_importance(pipeline_binary, X_holdout, y_holdout, 'log loss binary')
```

Data type cannot be displayed: application/vnd.plotly.v1+json, text/html

Human Readable Importance

We can generate a more human-comprehensible understanding of either the feature or permutation importance by using `readable_explanation(pipeline)`. This picks out a subset of features that have the highest impact on the output of the model, sorting them into either “heavily” or “somewhat” influential on the model. These features are selected either by feature importance or permutation importance with a given objective. If there are any features that actively decrease the performance of the pipeline, this function highlights those and recommends removal.

Note that permutation importance runs on the original input features, while feature importance runs on the features as they were passed in to the final estimator, having gone through a number of preprocessing steps. The two methods will highlight different features as being important, and feature names may vary as well.

```
[6]: from evalml.model_understanding import readable_explanation
readable_explanation(pipeline_binary, X_holdout, y_holdout, objective="log loss binary",
                    importance_method="permutation")
```

```

Random Forest Classifier: The output as measured by log loss binary is heavily
↳ influenced by worst perimeter, and is somewhat influenced by worst area, worst
↳ radius, mean concave points, and worst concave points.
The features smoothness error, mean smoothness, fractal dimension error, worst
↳ compactness, mean concavity, mean compactness, radius error, mean radius, worst
↳ fractal dimension, symmetry error, perimeter error, concave points error, and worst
↳ symmetry detracted from model performance. We suggest removing these features.

```

```
[7]: readable_explanation(pipeline_binary, importance_method="feature") # feature
↳ importance doesn't require X and y
```

```

Random Forest Classifier: The output is somewhat influenced by mean concave points,
↳ worst perimeter, worst concave points, worst radius, and mean concavity.

```

We can adjust the number of most important features visible with the `max_features` argument, or modify the minimum threshold for “importance” with `min_importance_threshold`. However, these values will not affect any detrimental features displayed, as this function always displays all of them.

Partial Dependence Plots

We can calculate the one-way [partial dependence plots](#) for a feature.

```
[8]: from evalml.model_understanding.graphs import partial_dependence
partial_dependence(pipeline_binary, X_holdout, features='mean radius', grid_
↳ resolution=5)
```

```
[8]: feature_values  partial_dependence  class_label
0          9.69092          0.392453    malignant
1         12.40459          0.395962    malignant
2         15.11826          0.417396    malignant
3         17.83193          0.429542    malignant
4         20.54560          0.429717    malignant
```

```
[9]: from evalml.model_understanding.graphs import graph_partial_dependence
graph_partial_dependence(pipeline_binary, X_holdout, features='mean radius', grid_
↳ resolution=5)
```

Data type cannot be displayed: application/vnd.plotly.v1+json, text/html

You can also compute the partial dependence for a categorical feature. We will demonstrate this on the fraud dataset.

```
[10]: X_fraud, y_fraud = evalml.demos.load_fraud(100, verbose=False)
X_fraud.ww.init(logical_types={"provider": "Categorical", 'region': "Categorical",
                                "currency": "Categorical", "expiration_date":
                                ↳ "Categorical"})

fraud_pipeline = BinaryClassificationPipeline(["DateTime Featurization Component",
↳ "One Hot Encoder", "Random Forest Classifier"])
fraud_pipeline.fit(X_fraud, y_fraud)

graph_partial_dependence(fraud_pipeline, X_fraud, features='provider')
```

Data type cannot be displayed: application/vnd.plotly.v1+json, text/html

Two-way partial dependence plots are also possible and invoke the same API.

```
[11]: partial_dependence(pipeline_binary, X_holdout, features=('worst perimeter', 'worst_
↳ radius'), grid_resolution=5)
```

```
[11]: 10.6876  14.404924999999999  18.12225  21.839575  25.5569  \
69.140700  0.279038          0.282898  0.435179  0.435355  0.435355
94.334275  0.304335          0.308194  0.458283  0.458458  0.458458
119.527850  0.464455          0.468314  0.612137  0.616932  0.616932
144.721425  0.483437          0.487297  0.631120  0.635915  0.635915
169.915000  0.483437          0.487297  0.631120  0.635915  0.635915

class_label
69.140700    malignant
94.334275    malignant
119.527850    malignant
144.721425    malignant
169.915000    malignant
```



```
[12]: graph_partial_dependence(pipeline_binary, X_holdout, features=('worst perimeter',
↪ 'worst radius'), grid_resolution=5)
```

Data type cannot be displayed: application/vnd.plotly.v1+json, text/html

Confusion Matrix

For binary or multiclass classification, we can view a [confusion matrix](#) of the classifier's predictions. In the DataFrame output of `confusion_matrix()`, the column header represents the predicted labels while row header represents the actual labels.

```
[13]: from evalml.model_understanding.graphs import confusion_matrix
y_pred = pipeline_binary.predict(X_holdout)
confusion_matrix(y_holdout, y_pred)
```

```
[13]:      benign  malignant
benign    0.930556   0.069444
malignant 0.023810   0.976190
```

```
[14]: from evalml.model_understanding.graphs import graph_confusion_matrix
y_pred = pipeline_binary.predict(X_holdout)
graph_confusion_matrix(y_holdout, y_pred)
```

Data type cannot be displayed: application/vnd.plotly.v1+json, text/html

Precision-Recall Curve

For binary classification, we can view the precision-recall curve of the pipeline.

```
[15]: from evalml.model_understanding.graphs import graph_precision_recall_curve
# get the predicted probabilities associated with the "true" label
import woodwork as ww
y_encoded = y_holdout.ww.map({'benign': 0, 'malignant': 1})
y_pred_proba = pipeline_binary.predict_proba(X_holdout)["malignant"]
graph_precision_recall_curve(y_encoded, y_pred_proba)
```

Data type cannot be displayed: application/vnd.plotly.v1+json, text/html

ROC Curve

For binary and multiclass classification, we can view the [Receiver Operating Characteristic \(ROC\)](#) curve of the pipeline.

```
[16]: from evalml.model_understanding.graphs import graph_roc_curve
# get the predicted probabilities associated with the "malignant" label
y_pred_proba = pipeline_binary.predict_proba(X_holdout)["malignant"]
graph_roc_curve(y_encoded, y_pred_proba)
```

Data type cannot be displayed: application/vnd.plotly.v1+json, text/html

The ROC curve can also be generated for multiclass classification problems. For multiclass problems, the graph will show a one-vs-many ROC curve for each class.

```
[17]: from evalml.pipelines import MulticlassClassificationPipeline
X_multi, y_multi = evalml.demos.load_wine()

pipeline_multi = MulticlassClassificationPipeline(['Simple Imputer', 'Random Forest_
↪Classifier'])
pipeline_multi.fit(X_multi, y_multi)

y_pred_proba = pipeline_multi.predict_proba(X_multi)
graph_roc_curve(y_multi, y_pred_proba)
```

```

      Number of Features
Numeric                13

Number of training examples: 178
Targets
class_1    39.89%
class_0    33.15%
class_2    26.97%
Name: target, dtype: object
```

Data type cannot be displayed: application/vnd.plotly.v1+json, text/html

Binary Objective Score vs. Threshold Graph

Some binary classification objectives (objectives that have `score_needs_proba` set to `False`) are sensitive to a decision threshold. For those objectives, we can obtain and graph the scores for thresholds from zero to one, calculated at evenly-spaced intervals determined by `steps`.

```
[18]: from evalml.model_understanding.graphs import binary_objective_vs_threshold
binary_objective_vs_threshold(pipeline_binary, X_holdout, y_holdout, 'f1', steps=10)
```

```
[18]:
```

	threshold	score
0	0.0	0.538462
1	0.1	0.811881
2	0.2	0.891304
3	0.3	0.901099
4	0.4	0.931818
5	0.5	0.931818

(continues on next page)

(continued from previous page)

6	0.6	0.941176
7	0.7	0.951220
8	0.8	0.936709
9	0.9	0.923077
10	1.0	0.000000

```
[19]: from evalml.model_understanding.graphs import graph_binary_objective_vs_threshold
graph_binary_objective_vs_threshold(pipeline_binary, X_holdout, y_holdout, 'f1',
↳ steps=100)
```

Data type cannot be displayed: application/vnd.plotly.v1+json, text/html

Predicted Vs Actual Values Graph for Regression Problems

We can also create a scatterplot comparing predicted vs actual values for regression problems. We can specify an `outlier_threshold` to color values differently if the absolute difference between the actual and predicted values are outside of a given threshold.

```
[20]: from evalml.model_understanding.graphs import graph_prediction_vs_actual
from evalml.pipelines import RegressionPipeline

X_regress, y_regress = evalml.demos.load_diabetes()
X_train, X_test, y_train, y_test = evalml.preprocessing.split_data(X_regress, y_
↳ regress, problem_type='regression')

pipeline_regress = RegressionPipeline(['One Hot Encoder', 'Linear Regressor'])
pipeline_regress.fit(X_train, y_train)

y_pred = pipeline_regress.predict(X_test)
graph_prediction_vs_actual(y_test, y_pred, outlier_threshold=50)
```

```

      Number of Features
Numeric                10

Number of training examples: 442
Targets
200.0    1.36%
 72.0    1.36%
 90.0    1.13%
178.0    1.13%
 71.0    1.13%
...
 73.0    0.23%
222.0    0.23%
 86.0    0.23%
 79.0    0.23%
 57.0    0.23%
Name: target, Length: 214, dtype: object
```

Data type cannot be displayed: application/vnd.plotly.v1+json, text/html

Now let's train a decision tree on some data.

```
[21]: pipeline_dt = BinaryClassificationPipeline(['Simple Imputer', 'Decision Tree_
↳ Classifier'])
pipeline_dt.fit(X_train, y_train)

[21]: pipeline = BinaryClassificationPipeline(component_graph={'Simple Imputer': ['Simple_
↳ Imputer', 'X', 'y'], 'Decision Tree Classifier': ['Decision Tree Classifier',
↳ 'Simple Imputer.x', 'y']}, parameters={'Simple Imputer':{'impute_strategy': 'most_
↳ frequent', 'fill_value': None}, 'Decision Tree Classifier':{'criterion': 'gini',
↳ 'max_features': 'auto', 'max_depth': 6, 'min_samples_split': 2, 'min_weight_
↳ fraction_leaf': 0.0}}, random_seed=0)
```

Tree Visualization

We can visualize the structure of the Decision Tree that was fit to that data, and save it if necessary.

```
[22]: from evalml.model_understanding.graphs import visualize_decision_tree

visualize_decision_tree(pipeline_dt.estimator, max_depth=2, rotate=False, filled=True,
↳ filepath=None)

[22]:
```

4.6.2 Explaining Predictions

We can explain why the model made certain predictions with the [explain_predictions](#) function. This will use the [Shapley Additive Explanations \(SHAP\)](#) algorithm to identify the top features that explain the predicted value.

This function can explain both classification and regression models - all you need to do is provide the pipeline, the input features, and a list of rows corresponding to the indices of the input features you want to explain. The function will return a table that you can print summarizing the top 3 most positive and negative contributing features to the predicted value.

In the example below, we explain the prediction for the third data point in the data set. We see that the worst concave points feature increased the estimated probability that the tumor is malignant by 20% while the worst radius feature decreased the probability the tumor is malignant by 5%.

```
[23]: from evalml.model_understanding.prediction_explanations import explain_predictions

table = explain_predictions(pipeline=pipeline_binary, input_features=X_holdout,
↳ y=None, indices_to_explain=[3],
↳ top_k_features=6, include_shap_values=True)
print(table)
```

Random Forest Classifier w/ Label Encoder + Imputer

```
{'Imputer': {'categorical_impute_strategy': 'most_frequent', 'numeric_impute_strategy
↳ ': 'mean', 'categorical_fill_value': None, 'numeric_fill_value': None}, 'Random_
↳ Forest Classifier': {'n_estimators': 100, 'max_depth': 6, 'n_jobs': -1}}
```

1 of 1

	Feature Name	Feature Value	Contribution to Prediction
↳ SHAP Value			
↳ =====			

(continues on next page)

(continued from previous page)

↪0.02	worst concavity	0.18	-	-
↪0.03	mean concavity	0.04	-	-
↪0.03	worst area	599.50	-	-
↪0.05	worst radius	14.04	-	-
↪0.05	mean concave points	0.03	-	-
↪0.06	worst perimeter	92.80	-	-

The interpretation of the table is the same for regression problems - but the SHAP value now corresponds to the change in the estimated value of the dependent variable rather than a change in probability. For multiclass classification problems, a table will be output for each possible class.

Below is an example of how you would explain three predictions with *explain_predictions*.

```
[24]: from evalml.model_understanding.prediction_explanations import explain_predictions

report = explain_predictions(pipeline=pipeline_binary,
                             input_features=X_holdout, y=y_holdout, indices_to_
                             ↪explain=[0, 4, 9], include_shap_values=True,
                             ↪output_format='text')
print(report)
```

Random Forest Classifier w/ Label Encoder + Imputer

```
{'Imputer': {'categorical_impute_strategy': 'most_frequent', 'numeric_impute_strategy'
↪': 'mean', 'categorical_fill_value': None, 'numeric_fill_value': None}, 'Random_
↪Forest Classifier': {'n_estimators': 100, 'max_depth': 6, 'n_jobs': -1}}
```

1 of 3

↪SHAP Value	Feature Name	Feature Value	Contribution to Prediction
↪-0.04	worst perimeter	101.20	-
↪-0.05	worst concave points	0.06	-
↪-0.05	mean concave points	0.01	-

2 of 3

↪SHAP Value	Feature Name	Feature Value	Contribution to Prediction
↪0.05	worst radius	11.94	-

(continues on next page)

(continued from previous page)

	worst perimeter	80.78	-	-
↪0.06				
	mean concave points	0.02	-	-
↪0.06				
3 of 3				
	Feature Name	Feature Value	Contribution to Prediction	
↪SHAP Value				
↪=====				
	worst concave points	0.10	-	
↪-0.05				
	worst perimeter	99.21	-	
↪-0.06				
	mean concave points	0.03	-	
↪-0.08				

Explaining Best and Worst Predictions

When debugging machine learning models, it is often useful to analyze the best and worst predictions the model made. The `explain_predictions_best_worst` function can help us with this.

This function will display the output of `explain_predictions` for the best 2 and worst 2 predictions. By default, the best and worst predictions are determined by the absolute error for regression problems and `cross entropy` for classification problems.

We can specify our own ranking function by passing in a function to the `metric` parameter. This function will be called on `y_true` and `y_pred`. By convention, lower scores are better.

At the top of each table, we can see the predicted probabilities, target value, error, and row index for that prediction. For a regression problem, we would see the predicted value instead of predicted probabilities.

```
[25]: from evalml.model_understanding.prediction_explanations import explain_predictions_
      ↪best_worst

report = explain_predictions_best_worst(pipeline=pipeline_binary, input_features=X_
      ↪holdout, y_true=y_holdout,
                                         include_shap_values=True, top_k_features=6,
      ↪num_to_explain=2)

print(report)
```

Random Forest Classifier w/ Label Encoder + Imputer

```
{'Imputer': {'categorical_impute_strategy': 'most_frequent', 'numeric_impute_strategy'
      ↪': 'mean', 'categorical_fill_value': None, 'numeric_fill_value': None}, 'Random_
      ↪Forest Classifier': {'n_estimators': 100, 'max_depth': 6, 'n_jobs': -1}}
```

Best 1 of 2

Predicted Probabilities: [benign: 1.0, malignant: 0.0]

(continues on next page)

(continued from previous page)

Predicted Value: benign Target Value: benign Cross Entropy: 0.0 Index ID: 502			
↪SHAP Value	Feature Name	Feature Value	Contribution to Prediction
=====			
↪-0.03	mean concavity	0.06	-
↪-0.03	worst area	552.00	-
↪-0.05	worst concave points	0.08	-
↪-0.05	worst radius	13.57	-
↪-0.05	mean concave points	0.03	-
↪-0.06	worst perimeter	86.67	-
Best 2 of 2			
Predicted Probabilities: [benign: 1.0, malignant: 0.0] Predicted Value: benign Target Value: benign Cross Entropy: 0.0 Index ID: 52			
↪SHAP Value	Feature Name	Feature Value	Contribution to Prediction
=====			
↪-0.02	mean concavity	0.02	-
↪-0.03	worst area	527.20	-
↪-0.04	worst radius	13.10	-
↪-0.04	worst concave points	0.06	-
↪-0.05	mean concave points	0.01	-
↪-0.06	worst perimeter	83.67	-
Worst 1 of 2			
Predicted Probabilities: [benign: 0.266, malignant: 0.734] Predicted Value: malignant Target Value: benign Cross Entropy: 1.325 Index ID: 363			

(continues on next page)

(continued from previous page)

	Feature Name	Feature Value	Contribution to Prediction	SHAP
↪Value				
↪=====				
	worst perimeter	117.20	+	0.13
	worst radius	18.13	+	0.12
	worst area	1009.00	+	0.11
	mean area	838.10	+	0.06
	mean radius	16.50	+	0.05
	worst concavity	0.17	-	-0.05
Worst 2 of 2				
Predicted Probabilities: [benign: 1.0, malignant: 0.0]				
Predicted Value: benign				
Target Value: malignant				
Cross Entropy: 7.987				
Index ID: 135				
↪SHAP Value	Feature Name	Feature Value	Contribution to Prediction	
↪=====				
	mean concavity	0.05	-	
↪-0.03				
	worst area	653.60	-	
↪-0.04				
	worst concave points	0.09	-	
↪-0.05				
	worst radius	14.49	-	
↪-0.05				
	worst perimeter	92.04	-	
↪-0.06				
	mean concave points	0.03	-	
↪-0.06				

We use a custom metric ([hinge loss](#)) for selecting the best and worst predictions. See this example:

```
import numpy as np

def hinge_loss(y_true, y_pred_proba):
    probabilities = np.clip(y_pred_proba.iloc[:, 1], 0.001, 0.999)
    y_true[y_true == 0] = -1

    return np.clip(1 - y_true * np.log(probabilities / (1 - probabilities)), a_min=0,
↪a_max=None)

report = explain_predictions_best_worst(pipeline=pipeline, input_features=X, y_true=y,
↪include_shap_values=True, num_to_explain=5,
↪metric=hinge_loss)

print(report)
```


Changing Output Formats

Instead of getting the prediction explanations as text, you can get the report as a python dictionary or pandas dataframe. All you have to do is pass `output_format="dict"` or `output_format="dataframe"` to either `explain_prediction`, `explain_predictions`, or `explain_predictions_best_worst`.

Single prediction as a dictionary

```
[26]: import json
single_prediction_report = explain_predictions(pipeline=pipeline_binary, input_
↳ features=X_holdout, indices_to_explain=[3],
y=y_holdout, top_k_features=6, include_
↳ shap_values=True,
output_format="dict")
print(json.dumps(single_prediction_report, indent=2))

{
  "explanations": [
    {
      "explanations": [
        {
          "feature_names": [
            "worst concavity",
            "mean concavity",
            "worst area",
            "worst radius",
            "mean concave points",
            "worst perimeter"
          ],
          "feature_values": [
            0.1791,
            0.038,
            599.5,
            14.04,
            0.034,
            92.8
          ],
          "qualitative_explanation": [
            "-",
            "-",
            "-",
            "-",
            "-",
            "-"
          ],
          "quantitative_explanation": [
            -0.023008481104309524,
            -0.02621982146725469,
            -0.033821592020020774,
            -0.04666659740586632,
            -0.0541511910494414,
            -0.05523688273171911
          ],
          "drill_down": {},
          "class_name": "malignant",
          "expected_value": 0.3711208791208791
        }
      ]
    }
  ]
}
```

(continues on next page)

(continued from previous page)

```

    ]
  }
]
}

```

Single prediction as a dataframe

```
[27]: single_prediction_report = explain_predictions(pipeline=pipeline_binary, input_
↳ features=X_holdout,
                                     indices_to_explain=[3],
                                     y=y_holdout, top_k_features=6, include_
↳ shap_values=True,
                                     output_format="dataframe")
single_prediction_report
```

```
[27]:
```

	feature_names	feature_values	qualitative_explanation	\
0	worst concavity	0.1791		-
1	mean concavity	0.0380		-
2	worst area	599.5000		-
3	worst radius	14.0400		-
4	mean concave points	0.0340		-
5	worst perimeter	92.8000		-

	quantitative_explanation	class_name	prediction_number
0	-0.023008	malignant	0
1	-0.026220	malignant	0
2	-0.033822	malignant	0
3	-0.046667	malignant	0
4	-0.054151	malignant	0
5	-0.055237	malignant	0

Best and worst predictions as a dictionary

```
[28]: report = explain_predictions_best_worst(pipeline=pipeline_binary, input_features=X, y_
↳ true=y,
                                     num_to_explain=1, top_k_features=6,
                                     include_shap_values=True, output_format="dict
↳ ")
print(json.dumps(report, indent=2))
```

```
{
  "explanations": [
    {
      "rank": {
        "prefix": "best",
        "index": 1
      },
      "predicted_values": {
        "probabilities": {
          "benign": 1.0,
          "malignant": 0.0
        },
        "predicted_value": "benign",
        "target_value": "benign",

```

(continues on next page)

(continued from previous page)

```

    "error_name": "Cross Entropy",
    "error_value": 0.0001970443507070075,
    "index_id": 475
  },
  "explanations": [
    {
      "feature_names": [
        "mean concavity",
        "worst area",
        "worst radius",
        "worst concave points",
        "worst perimeter",
        "mean concave points"
      ],
      "feature_values": [
        0.05835,
        605.8,
        14.09,
        0.09783,
        93.22,
        0.03078
      ],
      "qualitative_explanation": [
        "-",
        "-",
        "-",
        "-",
        "-",
        "-"
      ],
      "quantitative_explanation": [
        -0.028481050954786636,
        -0.03050522196002462,
        -0.042922079201003216,
        -0.04429366151003684,
        -0.05486784013962313,
        -0.05639460900233733
      ],
      "drill_down": {},
      "class_name": "malignant",
      "expected_value": 0.3711208791208791
    }
  ]
},
{
  "rank": {
    "prefix": "worst",
    "index": 1
  },
  "predicted_values": {
    "probabilities": {
      "benign": 1.0,
      "malignant": 0.0
    },
    "predicted_value": "benign",
    "target_value": "malignant",
    "error_name": "Cross Entropy",

```

(continues on next page)

(continued from previous page)

```
    "error_value": 7.986911819330411,
    "index_id": 135
  },
  "explanations": [
    {
      "feature_names": [
        "mean concavity",
        "worst area",
        "worst concave points",
        "worst radius",
        "worst perimeter",
        "mean concave points"
      ],
      "feature_values": [
        0.04711,
        653.6,
        0.09331,
        14.49,
        92.04,
        0.02704
      ],
      "qualitative_explanation": [
        "-",
        "-",
        "-",
        "-",
        "-",
        "-"
      ],
      "quantitative_explanation": [
        -0.029936744551331215,
        -0.03748357654576422,
        -0.04553126236476177,
        -0.0483274199182721,
        -0.06039220265366764,
        -0.060441902449258976
      ],
      "drill_down": {},
      "class_name": "malignant",
      "expected_value": 0.3711208791208791
    }
  ]
}
```

Best and worst predictions as a dataframe

```
[29]: report = explain_predictions_best_worst(pipeline=pipeline_binary, input_features=X_
↳holdout, y_true=y_holdout,
                                     num_to_explain=1, top_k_features=6,
                                     include_shap_values=True, output_format=
↳"dataframe")
report
```

```
[29]:
```

	feature_names	feature_values	qualitative_explanation	\
0	mean concavity	0.05928	-	
1	worst area	552.00000	-	
2	worst concave points	0.08411	-	
3	worst radius	13.57000	-	
4	mean concave points	0.03279	-	
5	worst perimeter	86.67000	-	
6	mean concavity	0.04711	-	
7	worst area	653.60000	-	
8	worst concave points	0.09331	-	
9	worst radius	14.49000	-	
10	worst perimeter	92.04000	-	
11	mean concave points	0.02704	-	

	quantitative_explanation	class_name	label_benign_probability	\
0	-0.029022	malignant	1.0	
1	-0.034112	malignant	1.0	
2	-0.046896	malignant	1.0	
3	-0.046928	malignant	1.0	
4	-0.052902	malignant	1.0	
5	-0.064320	malignant	1.0	
6	-0.029937	malignant	1.0	
7	-0.037484	malignant	1.0	
8	-0.045531	malignant	1.0	
9	-0.048327	malignant	1.0	
10	-0.060392	malignant	1.0	
11	-0.060442	malignant	1.0	

	label_malignant_probability	predicted_value	target_value	error_name	\
0	0.0	benign	benign	Cross Entropy	
1	0.0	benign	benign	Cross Entropy	
2	0.0	benign	benign	Cross Entropy	
3	0.0	benign	benign	Cross Entropy	
4	0.0	benign	benign	Cross Entropy	
5	0.0	benign	benign	Cross Entropy	
6	0.0	benign	malignant	Cross Entropy	
7	0.0	benign	malignant	Cross Entropy	
8	0.0	benign	malignant	Cross Entropy	
9	0.0	benign	malignant	Cross Entropy	
10	0.0	benign	malignant	Cross Entropy	
11	0.0	benign	malignant	Cross Entropy	

	error_value	index_id	rank	prefix
0	0.000197	502	1	best
1	0.000197	502	1	best
2	0.000197	502	1	best
3	0.000197	502	1	best
4	0.000197	502	1	best
5	0.000197	502	1	best

(continues on next page)

(continued from previous page)

6	7.986912	135	1	worst
7	7.986912	135	1	worst
8	7.986912	135	1	worst
9	7.986912	135	1	worst
10	7.986912	135	1	worst
11	7.986912	135	1	worst

Force Plots

Force plots can be generated to predict single or multiple rows for binary, multiclass and regression problem types. Here's an example of predicting a single row on a binary classification dataset. The force plots show the predictive power of each of the features in making the negative ("Class: 0") prediction and the positive ("Class: 1") prediction.

```
[30]: import shap

from evalml.model_understanding.force_plots import graph_force_plot

rows_to_explain = [0] # Should be a list of integer indices of the rows to explain.

results = graph_force_plot(pipeline_binary, rows_to_explain=rows_to_explain,
                           training_data=X_holdout, y=y_holdout)

for result in results:
    for cls in result:
        print("Class:", cls)
        display(result[cls]["plot"])

<IPython.core.display.HTML object>

Class: malignant

<shap.plots._force.AdditiveForceVisualizer at 0x7fddc3debc40>
```

Here's an example of a force plot explaining multiple predictions on a multiclass problem. These plots show the force plots for each row arranged as consecutive columns that can be ordered by the dropdown above. Clicking the column indicates which row explanation is underneath.

```
[31]: rows_to_explain = [0,1,2,3,4] # Should be a list of integer indices of the rows to_
      ↪explain.

results = graph_force_plot(pipeline_multi,
                           rows_to_explain=rows_to_explain,
                           training_data=X_multi, y=y_multi)

for idx, result in enumerate(results):
    print("Row:", idx)
    for cls in result:
        print("Class:", cls)
        display(result[cls]["plot"])

<IPython.core.display.HTML object>

Row: 0
Class: class_0

<shap.plots._force.AdditiveForceVisualizer at 0x7fddc383d220>
```

Class: class_1
<shap.plots._force.AdditiveForceVisualizer at 0x7fddc37e3a60>
Class: class_2
<shap.plots._force.AdditiveForceVisualizer at 0x7fddf129f190>
Row: 1
Class: class_0
<shap.plots._force.AdditiveForceVisualizer at 0x7fddc37e3a90>
Class: class_1
<shap.plots._force.AdditiveForceVisualizer at 0x7fddf12a2b50>
Class: class_2
<shap.plots._force.AdditiveForceVisualizer at 0x7fddf12a2ca0>
Row: 2
Class: class_0
<shap.plots._force.AdditiveForceVisualizer at 0x7fddc37e34f0>
Class: class_1
<shap.plots._force.AdditiveForceVisualizer at 0x7fddc37fa0a0>
Class: class_2
<shap.plots._force.AdditiveForceVisualizer at 0x7fddc37fab50>
Row: 3
Class: class_0
<shap.plots._force.AdditiveForceVisualizer at 0x7fddc37e3160>
Class: class_1
<shap.plots._force.AdditiveForceVisualizer at 0x7fddc3706850>
Class: class_2
<shap.plots._force.AdditiveForceVisualizer at 0x7fddc3706ac0>
Row: 4
Class: class_0
<shap.plots._force.AdditiveForceVisualizer at 0x7fddc3706670>
Class: class_1
<shap.plots._force.AdditiveForceVisualizer at 0x7fddc3706820>
Class: class_2
<shap.plots._force.AdditiveForceVisualizer at 0x7fddc3706880>

4.7 Data Checks

EvalML provides data checks to help guide you in achieving the highest performing model. These utility functions help deal with problems such as overfitting, abnormal data, and missing data. These data checks can be found under `evalml/data_checks`. Below we will cover examples for each available data check in EvalML, as well as the `DefaultDataChecks` collection of data checks.

4.7.1 Missing Data

Missing data or rows with NaN values provide many challenges for machine learning pipelines. In the worst case, many algorithms simply will not run with missing data! EvalML pipelines contain imputation *components* to ensure that doesn't happen. Imputation works by approximating missing values with existing values. However, if a column contains a high number of missing values, a large percentage of the column would be approximated by a small percentage. This could potentially create a column without useful information for machine learning pipelines. By using `HighlyNullDataCheck`, EvalML will alert you to this potential problem by returning the columns that pass the missing values threshold.

```
[1]: import numpy as np
import pandas as pd

from evalml.data_checks import HighlyNullDataCheck

X = pd.DataFrame([[1, 2, 3],
                  [0, 4, np.nan],
                  [1, 4, np.nan],
                  [9, 4, np.nan],
                  [8, 6, np.nan]])

null_check = HighlyNullDataCheck(pct_null_col_threshold=0.8, pct_null_row_threshold=0.
↪8)
results = null_check.validate(X)

for message in results['warnings']:
    print("Warning:", message['message'])

for message in results['errors']:
    print("Error:", message['message'])

Warning: Column '2' is 80.0% or more null
```

4.7.2 Abnormal Data

EvalML provides a few data checks to check for abnormal data:

- `NoVarianceDataCheck`
- `ClassImbalanceDataCheck`
- `TargetLeakageDataCheck`
- `InvalidTargetDataCheck`
- `IDColumnsDataCheck`
- `OutliersDataCheck`
- `HighVarianceCVDataCheck`

- MulticollinearityDataCheck
- UniquenessDataCheck
- TargetDistributionDataCheck
- DateTimeFormatDataCheck

Zero Variance

Data with zero variance indicates that all values are identical. If a feature has zero variance, it is not likely to be a useful feature. Similarly, if the target has zero variance, there is likely something wrong. `NoVarianceDataCheck` checks if the target or any feature has only one unique value and alerts you to any such columns.

```
[2]: from evalml.data_checks import NoVarianceDataCheck
X = pd.DataFrame({"no var col": [0, 0, 0],
                  "good col": [0, 4, 1]})
y = pd.Series([1, 0, 1])
no_variance_data_check = NoVarianceDataCheck()
results = no_variance_data_check.validate(X, y)

for message in results['warnings']:
    print("Warning:", message['message'])

for message in results['errors']:
    print("Error:", message['message'])

Error: no var col has 1 unique value.
```

Note that you can set `NaN` to count as an unique value, but `NoVarianceDataCheck` will still return a warning if there is only one unique non-`NaN` value in a given column.

```
[3]: from evalml.data_checks import NoVarianceDataCheck

X = pd.DataFrame({"no var col": [0, 0, 0],
                  "no var col with nan": [1, np.nan, 1],
                  "good col": [0, 4, 1]})
y = pd.Series([1, 0, 1])

no_variance_data_check = NoVarianceDataCheck(count_nan_as_value=True)
results = no_variance_data_check.validate(X, y)

for message in results['warnings']:
    print("Warning:", message['message'])

for message in results['errors']:
    print("Error:", message['message'])

Warning: no var col with nan has two unique values including nulls. Consider encoding
↳ the nulls for this column to be useful for machine learning.
Error: no var col has 1 unique value.
```

Class Imbalance

For classification problems, the distribution of examples across each class can vary. For small variations, this is normal and expected. However, when the number of examples for each class label is disproportionately biased or skewed towards a particular class (or classes), it can be difficult for machine learning models to predict well. In addition, having a low number of examples for a given class could mean that one or more of the CV folds generated for the training data could only have few or no examples from that class. This may cause the model to only predict the majority class and ultimately resulting in a poor-performant model.

`ClassImbalanceDataCheck` checks if the target labels are imbalanced beyond a specified threshold for a certain number of CV folds. It returns `DataCheckError` messages for any classes that have less samples than double the number of CV folds specified (since that indicates the likelihood of having at little to no samples of that class in a given fold), and `DataCheckWarning` messages for any classes that fall below the set threshold percentage.

```
[4]: from evalml.data_checks import ClassImbalanceDataCheck

X = pd.DataFrame([[1, 2, 0, 1],
                  [4, 1, 9, 0],
                  [4, 4, 8, 3],
                  [9, 2, 7, 1]])
y = pd.Series([0, 1, 1, 1, 1])

class_imbalance_check = ClassImbalanceDataCheck(threshold=0.25, num_cv_folds=4)
results = class_imbalance_check.validate(X, y)

for message in results['warnings']:
    print("Warning:", message['message'])

for message in results['errors']:
    print("Error:", message['message'])

Warning: The following labels fall below 25% of the target: [0]
Warning: The following labels in the target have severe class imbalance because they
↳fall under 25% of the target and have less than 100 samples: [0]
Error: The number of instances of these targets is less than 2 * the number of cross
↳folds = 8 instances: [0, 1]
```

Target Leakage

Target leakage, also known as data leakage, can occur when you train your model on a dataset that includes information that should not be available at the time of prediction. This causes the model to score suspiciously well, but perform poorly in production. `TargetLeakageDataCheck` checks for features that could potentially be “leaking” information by calculating the Pearson correlation coefficient between each feature and the target to warn users if there are features are highly correlated with the target. Currently, only numerical features are considered.

```
[5]: from evalml.data_checks import TargetLeakageDataCheck

X = pd.DataFrame({'leak': [10, 42, 31, 51, 61],
                  'x': [42, 54, 12, 64, 12],
                  'y': [12, 5, 13, 74, 24]})
y = pd.Series([10, 42, 31, 51, 40])

target_leakage_check = TargetLeakageDataCheck(pct_corr_threshold=0.8)
results = target_leakage_check.validate(X, y)

for message in results['warnings']:
    print("Warning:", message['message'])
```

(continues on next page)

(continued from previous page)

```
for message in results['errors']:
    print("Error:", message['message'])
```

```
Warning: Column 'leak' is 80.0% or more correlated with the target
Warning: Column 'x' is 80.0% or more correlated with the target
Warning: Column 'y' is 80.0% or more correlated with the target
```

Invalid Target Data

The `InvalidTargetDataCheck` checks if the target data contains any missing or invalid values. Specifically:

- if any of the target values are missing, a `DataCheckError` message is returned
- if the specified problem type is a binary classification problem but there is more or less than two unique values in the target, a `DataCheckError` message is returned
- if binary classification target classes are numeric values not equal to `{0, 1}`, a `DataCheckError` message is returned because it can cause unpredictable behavior when passed to pipelines

```
[6]: from evalml.data_checks import InvalidTargetDataCheck

X = pd.DataFrame({})
y = pd.Series([0, 1, None, None])

invalid_target_check = InvalidTargetDataCheck('binary', 'Log Loss Binary')
results = invalid_target_check.validate(X, y)

for message in results['warnings']:
    print("Warning:", message['message'])

for message in results['errors']:
    print("Error:", message['message'])

Warning: Input target and features have different lengths
Warning: Input target and features have mismatched indices
Error: 2 row(s) (50.0%) of target values are null
```

ID Columns

ID columns in your dataset provide little to no benefit to a machine learning pipeline as the pipeline cannot extrapolate useful information from unique identifiers. Thus, `IDColumnsDataCheck` reminds you if these columns exists. In the given example, 'user_number' and 'id' columns are both identified as potentially being unique identifiers that should be removed.

```
[7]: from evalml.data_checks import IDColumnsDataCheck

X = pd.DataFrame([[0, 53, 6325, 5], [1, 90, 6325, 10], [2, 90, 18, 20]], columns=['user_
→number', 'cost', 'revenue', 'id'])

id_col_check = IDColumnsDataCheck(id_threshold=0.9)
results = id_col_check.validate(X, y)

for message in results['warnings']:
    print("Warning:", message['message'])
```

(continues on next page)

(continued from previous page)

```
for message in results['errors']:
    print("Error:", message['message'])
```

Warning: Column 'id' is 90.0% or more likely to be an ID column

Warning: Column 'user_number' is 90.0% or more likely to be an ID column

Multicollinearity

The `MulticollinearityDataCheck` data check is used in to detect if are any set of features that are likely to be multicollinear. Multicollinear features affect the performance of a model, but more importantly, it may greatly impact model interpretation. EvalML uses mutual information to determine collinearity.

```
[8]: from evalml.data_checks import MulticollinearityDataCheck
```

```
y = pd.Series([1, 0, 2, 3, 4])
X = pd.DataFrame({'col_1': y,
                  'col_2': y * 3,
                  'col_3': ~y,
                  'col_4': y / 2,
                  'col_5': y + 1,
                  'not_collinear': [0, 1, 0, 0, 0]})
```

```
multi_check = MulticollinearityDataCheck(threshold=0.95)
results = multi_check.validate(X, y)
```

```
for message in results['warnings']:
    print("Warning:", message['message'])
```

```
for message in results['errors']:
    print("Error:", message['message'])
```

Warning: Columns are likely to be correlated: [('col_1', 'col_2'), ('col_1', 'col_3'),
 ↳ ('col_1', 'col_4'), ('col_1', 'col_5'), ('col_2', 'col_3'), ('col_2', 'col_4'), (
 ↳ 'col_2', 'col_5'), ('col_3', 'col_4'), ('col_3', 'col_5'), ('col_4', 'col_5')]

Uniqueness

The `UniquenessDataCheck` is used to detect columns with either too unique or not unique enough values. For regression type problems, the data is checked for a lower limit of uniqueness. For multiclass type problems, the data is checked for an upper limit.

```
[9]: import pandas as pd
from evalml.data_checks import UniquenessDataCheck
```

```
X = pd.DataFrame({'most_unique': [float(x) for x in range(10)], # [0,1,2,3,4,5,6,7,8,
↳ 9]
                  'more_unique': [x % 5 for x in range(10)], # [0,1,2,3,4,0,1,2,3,4]
                  'unique': [x % 3 for x in range(10)], # [0,1,2,0,1,2,0,1,2,0]
                  'less_unique': [x % 2 for x in range(10)], # [0,1,0,1,0,1,0,1,0,1]
                  'not_unique': [float(1) for x in range(10)]}) # [1,1,1,1,1,1,1,1,1,1,
↳ 1]
```

```
uniqueness_check = UniquenessDataCheck(problem_type="regression",
```

(continues on next page)

(continued from previous page)

```

                                threshold=.5)
results = uniqueness_check.validate(X, y=None)

for message in results['warnings']:
    print("Warning:", message['message'])

for message in results['errors']:
    print("Error:", message['message'])
Warning: Input columns (not_unique) for regression problem type are not unique enough.

```

Sparsity

The SparsityDataCheck is used to identify features that contain a sparsity of values.

```

[10]: from evalml.data_checks import SparsityDataCheck

X = pd.DataFrame({'most_sparse': [float(x) for x in range(10)], # [0,1,2,3,4,5,6,7,8,
→9]
                  'more_sparse': [x % 5 for x in range(10)],    # [0,1,2,3,4,0,1,2,3,
→4]
                  'sparse': [x % 3 for x in range(10)],         # [0,1,2,0,1,2,0,1,2,
→0]
                  'less_sparse': [x % 2 for x in range(10)],    # [0,1,0,1,0,1,0,1,0,
→1]
                  'not_sparse': [float(1) for x in range(10)]}) # [1,1,1,1,1,1,1,1,1,
→1]

sparsity_check = SparsityDataCheck(problem_type="multiclass",
                                   threshold=.4,
                                   unique_count_threshold=3)
results = sparsity_check.validate(X,y=None)

for message in results['warnings']:
    print("Warning:", message['message'])

for message in results['errors']:
    print("Error:", message['message'])
Warning: Input columns (most_sparse) for multiclass problem type are too sparse.
Warning: Input columns (more_sparse) for multiclass problem type are too sparse.
Warning: Input columns (sparse) for multiclass problem type are too sparse.

```

Outliers

Outliers are observations that differ significantly from other observations in the same sample. Many machine learning pipelines suffer in performance if outliers are not dropped from the training set as they are not representative of the data. OutliersDataCheck() uses IQR to notify you if a sample can be considered an outlier.

Below we generate a random dataset with some outliers.

```

[11]: data = np.tile(np.arange(10) * 0.01, (100, 10))
X = pd.DataFrame(data=data)

```

(continues on next page)

(continued from previous page)

```
# generate some outliers in columns 3, 25, 55, and 72
X.iloc[0, 3] = -10000
X.iloc[3, 25] = 10000
X.iloc[5, 55] = 10000
X.iloc[10, 72] = -10000
```

We then utilize `OutliersDataCheck()` to rediscover these outliers.

```
[12]: from evalml.data_checks import OutliersDataCheck

outliers_check = OutliersDataCheck()
results = outliers_check.validate(X, y)

for message in results['warnings']:
    print("Warning:", message['message'])

for message in results['errors']:
    print("Error:", message['message'])

Warning: Column(s) '3', '25', '55', '72' are likely to have outlier data.
```

Target Distribution

Target data can come in a variety of distributions, such as Gaussian or Lognormal. When we work with machine learning models, we feed data into an estimator that learns from the training data provided. Sometimes the data can be significantly spread out with a long tail or outliers, which could lead to a lognormal distribution. This can cause machine learning model performance to suffer.

To help the estimators better understand the underlying relationships in the data between the features and the target, we can use the `TargetDistributionDataCheck` to identify such a distribution.

```
[13]: from scipy.stats import lognorm
from evalml.data_checks import TargetDistributionDataCheck

data = np.tile(np.arange(10) * 0.01, (100, 10))
X = pd.DataFrame(data=data)
y = pd.Series(lognorm.rvs(s=0.4, loc=1, scale=1, size=100))

target_dist_check = TargetDistributionDataCheck()
results = target_dist_check.validate(X, y)

for message in results['warnings']:
    print("Warning:", message['message'])

for message in results['errors']:
    print("Error:", message['message'])

Warning: Target may have a lognormal distribution.
```

Datetime Format

Datetime information is a necessary component of time series problems, but sometimes the data we deal with may contain flaws that make it impossible for time series models to work with them. For example, in order to identify a frequency in the datetime information there has to be equal interval spacing between data points i.e. January 1, 2021, January 3, 2021, January 5, 2021, ...etc which are separated by two days. If instead there are random jumps in the datetime data i.e. January 1, 2021, January 3, 2021, January 12, 2021, then a frequency can't be inferred. Another common issue with time series models are that they can't handle datetime information that isn't properly sorted. Datetime values that aren't monotonically increasing (sorted in ascending order) will encounter this issue and their frequency cannot be inferred.

To make it easy to verify that the datetime column you're working with is properly spaced and sorted, we can leverage the `DatetimeFormatDataCheck`. When initializing the data check, pass in the name of the column that contains your datetime information (or pass in "index" if it's found in either your X or y indices).

```
[14]: from evalml.data_checks import DateTimeFormatDataCheck

X = pd.DataFrame(pd.date_range("January 1, 2021", periods=8, freq='2D'), columns=[
    ↪ "dates"])
y = pd.Series([1, 2, 4, 2, 1, 2, 3, 1])

# Replaces the last entry with January 16th instead of January 15th
# so that the data is no longer evenly spaced.
X.iloc[7] = "January 16, 2021"

datetime_format_check = DateTimeFormatDataCheck(datetime_column="dates")
results = datetime_format_check.validate(X, y)

for message in results['warnings']:
    print("Warning:", message['message'])

for message in results['errors']:
    print("Error:", message['message'])

print("-----")

# Reverses the order of the index datetime values to be decreasing.
X = X[::-1]
results = datetime_format_check.validate(X, y)

for message in results['warnings']:
    print("Warning:", message['message'])

for message in results['errors']:
    print("Error:", message['message'])

Error: No frequency could be detected in dates, possibly due to uneven intervals.
-----
Error: No frequency could be detected in dates, possibly due to uneven intervals.
Error: Datetime values must be sorted in ascending order.
```

4.7.3 Data Check Messages

Each data check's `validate` method returns a list of `DataCheckMessage` objects indicating warnings or errors found; warnings are stored as a `DataCheckWarning` object ([API reference](#)) and errors are stored as a `DataCheckError` object ([API reference](#)). You can filter the messages returned by a data check by checking for the type of message returned. Below, `NoVarianceDataCheck` returns a list containing a `DataCheckWarning` and a `DataCheckError` message. We can determine which is which by checking the type of each message.

```
[15]: from evalml.data_checks import NoVarianceDataCheck, DataCheckError, DataCheckWarning

X = pd.DataFrame({"no var col": [0, 0, 0],
                  "no var col with nan": [1, np.nan, 1],
                  "good col": [0, 4, 1]})
y = pd.Series([1, 0, 1])

no_variance_data_check = NoVarianceDataCheck(count_nan_as_value=True)
results = no_variance_data_check.validate(X, y)

for message in results['warnings']:
    print("Warning:", message['message'])

for message in results['errors']:
    print("Error:", message['message'])

Warning: no var col with nan has two unique values including nulls. Consider encoding
↳ the nulls for this column to be useful for machine learning.
Error: no var col has 1 unique value.
```

4.7.4 Writing Your Own Data Check

If you would prefer to write your own data check, you can do so by extending the `DataCheck` class and implementing the `validate(self, X, y)` class method. Below, we've created a new `DataCheck`, `ZeroVarianceDataCheck`, which is similar to `NoVarianceDataCheck` defined in EvalML. The `validate(self, X, y)` method should return a dictionary with 'warnings' and 'errors' as keys mapping to list of warnings and errors, respectively.

```
[16]: from evalml.data_checks import DataCheck

class ZeroVarianceDataCheck(DataCheck):
    def validate(self, X, y):
        messages = {'warnings': [], 'errors': []}
        if not isinstance(X, pd.DataFrame):
            X = pd.DataFrame(X)
        warning_msg = "Column '{}' has zero variance"
        messages['warnings'].extend([DataCheckError(warning_msg.format(column), self.
↳ name) for column in X.columns if len(X[column].unique()) == 1])
```


4.7.5 Defining Collections of Data Checks

For convenience, EvalML provides a `DataChecks` class to represent a collection of data checks. We will go over `DefaultDataChecks` ([API reference](#)), a collection defined to check for some of the most common data issues.

Default Data Checks

`DefaultDataChecks` is a collection of data checks defined to check for some of the most common data issues. They include:

- `HighlyNullDataCheck`
- `IDColumnsDataCheck`
- `TargetLeakageDataCheck`
- `InvalidTargetDataCheck`
- `TargetDistributionDataCheck` (for regression problem types)
- `ClassImbalanceDataCheck` (for classification problem types)
- `NoVarianceDataCheck`
- `DateTimeNaNDataCheck`
- `NaturalLanguageNaNDataCheck`
- `DateTimeFormatDataCheck` (for time series problem types)

4.7.6 Writing Your Own Collection of Data Checks

If you would prefer to create your own collection of data checks, you could either write your own data checks class by extending the `DataChecks` class and setting the `self.data_checks` attribute to the list of `DataCheck` classes or objects, or you could pass that list of data checks to the constructor of the `DataChecks` class. Below, we create two identical collections of data checks using the two different methods.

```
[17]: # Create a subclass of `DataChecks`
from evalml.data_checks import DataChecks, HighlyNullDataCheck,
↳ InvalidTargetDataCheck, NoVarianceDataCheck, ClassImbalanceDataCheck,
↳ TargetLeakageDataCheck
from evalml.problem_types import ProblemTypes, handle_problem_types

class MyCustomDataChecks(DataChecks):

    data_checks = [HighlyNullDataCheck, InvalidTargetDataCheck, NoVarianceDataCheck,
↳ TargetLeakageDataCheck]

    def __init__(self, problem_type, objective):
        """
        A collection of basic data checks.
        Args:
            problem_type (str): The problem type that is being validated. Can be
↳ regression, binary, or multiclass.
        """
        if handle_problem_types(problem_type) == ProblemTypes.REGRESSION:
            super().__init__(self.data_checks,
                             data_check_params={"InvalidTargetDataCheck": {"problem_
↳ type": problem_type,
```

(continues on next page)

(continued from previous page)

```

        ↪": objective}})
        else:
            super().__init__(self.data_checks + [ClassImbalanceDataCheck],
                             data_check_params={"InvalidTargetDataCheck": {"problem_
        ↪type": problem_type,
        ↪": objective}})

custom_data_checks = MyCustomDataChecks(problem_type=ProblemTypes.REGRESSION, ↪
        ↪objective="R2")
for data_check in custom_data_checks.data_checks:
    print(data_check.name)

HighlyNullDataCheck
InvalidTargetDataCheck
NoVarianceDataCheck
TargetLeakageDataCheck

```

```

[18]: # Pass list of data checks to the `data_checks` parameter of DataChecks
same_custom_data_checks = DataChecks(data_checks=[HighlyNullDataCheck, ↪
        ↪InvalidTargetDataCheck, NoVarianceDataCheck, TargetLeakageDataCheck],
        data_check_params={"InvalidTargetDataCheck": {
        ↪"problem_type": ProblemTypes.REGRESSION,
        ↪"objective": "R2"}})
for data_check in custom_data_checks.data_checks:
    print(data_check.name)

HighlyNullDataCheck
InvalidTargetDataCheck
NoVarianceDataCheck
TargetLeakageDataCheck

```

4.8 Understanding Data Actions

EvalML streamlines the creation and implementation of machine learning models for tabular data. One of the many features it offers is [data checks](#), which are geared towards determining the health of the data before we train a model on it. These data checks have associated actions with them and will be shown in this notebook. In our default data checks, we have the following checks:

- `HighlyNullDataCheck`: Checks whether the rows or columns are highly null
- `IDColumnsDataCheck`: Checks for columns that could be ID columns
- `TargetLeakageDataCheck`: Checks if any of the input features have high association with the targets
- `InvalidTargetDataCheck`: Checks if there are null or other invalid values in the target
- `NoVarianceDataCheck`: Checks if either the target or any features have no variance
- `NaturalLanguageNaNDataCheck`: Checks if any natural language columns have missing data
- `DateTimeNaNDataCheck`: Checks if any datetime columns have missing data

EvalML has additional data checks that can be seen [here](#), with usage examples [here](#). Below, we will walk through usage of EvalML's default data checks and actions.

First, we import the necessary requirements to demonstrate these checks.

```
[1]: import woodwork as ww
import pandas as pd
from evalml import AutoMLSearch
from evalml.demos import load_fraud
from evalml.preprocessing import split_data
```

Let's look at the input feature data. EvalML uses the [Woodwork](#) library to represent this data. The demo data that EvalML returns is a Woodwork DataTable and DataColumn.

```
[2]: X, y = load_fraud(n_rows=1500)
X
```

```

      Number of Features
Boolean                1
Categorical             6
Numeric                5

Number of training examples: 1500
Targets
False      86.60%
True       13.40%
Name: fraud, dtype: object
```

```
[2]:
```

	card_id	store_id	datetime	amount	currency	\
id						
0	32261	8516	2019-01-01 00:12:26	24900	CUC	
1	16434	8516	2019-01-01 09:42:03	15789	MYR	
2	23468	8516	2019-04-17 08:17:01	1883	AUD	
3	14364	8516	2019-01-30 11:54:30	82120	KRW	
4	29407	8516	2019-05-01 17:59:36	25745	MUR	
...	
1495	9389	9389	2019-06-05 04:09:15	70510	XDR	
1496	21867	7301	2019-03-02 18:32:43	75234	CNY	
1497	10016	7301	2019-02-05 06:14:25	61331	LKR	
1498	15971	7301	2019-01-03 13:19:19	77846	GTQ	
1499	23638	7301	2019-04-26 17:20:41	76886	USD	

	customer_present	expiration_date	provider	lat	\
id					
0	True	08/24	Mastercard	38.58894	
1	False	11/21	Discover	38.58894	
2	False	09/27	Discover	38.58894	
3	True	09/20	JCB 16 digit	38.58894	
4	True	09/22	American Express	38.58894	
...	
1495	False	06/20	VISA 16 digit	9.53500	
1496	True	02/23	Diners Club / Carte Blanche	37.49073	
1497	True	02/27	VISA 13 digit	37.49073	
1498	True	01/24	JCB 15 digit	37.49073	
1499	True	02/29	American Express	37.49073	

	lng	region	country
id			
0	-89.99038	Fairview Heights	US
1	-89.99038	Fairview Heights	US
2	-89.99038	Fairview Heights	US
3	-89.99038	Fairview Heights	US

(continues on next page)

(continued from previous page)

```

4      -89.99038  Fairview Heights      US
...      ...
1495 -13.68778      Camayenne      GN
1496  -2.77259      Baza      ES
1497  -2.77259      Baza      ES
1498  -2.77259      Baza      ES
1499  -2.77259      Baza      ES

[1500 rows x 12 columns]

```

4.8.1 Adding noise and unclean data

This data is already clean and compatible with EvalML's AutoMLSearch. In order to demonstrate EvalML default data checks, we will add the following:

- A column of mostly null values (<0.5% non-null)
- A column with low/no variance
- A row of null values
- A missing target value

We will add the first two columns to the whole dataset and we will only add the last two to the training data. Note: these only represent some of the scenarios that EvalML default data checks can catch.

```

[3]: # add a column with no variance in the data
X['no_variance'] = [1 for _ in range(X.shape[0])]

# add a column with >99.5% null values
X['mostly_nulls'] = [None] * (X.shape[0] - 5) + [i for i in range(5)]

# since we changed the data, let's reinitialize the woodwork datatable
X.ww.init()
# let's split some training and validation data
X_train, X_valid, y_train, y_valid = split_data(X, y, problem_type='binary')

```

```

[4]: # let's copy the datetime at row 1 for future use
date = X_train.iloc[1]['datetime']

# make row 1 all nan values
X_train.iloc[1] = [None] * X_train.shape[1]

# make one of the target values null
y_train[990] = None

X_train.ww.init()
y_train = ww.init_series(y_train)
# Let's take another look at the new X_train data
X_train

```

```

[4]:      card_id  store_id      datetime  amount  currency  \
id
872   15492.0    2868.0  2019-08-03 02:50:04  80719.0      HNL
1477      NaN      NaN              NaT      NaN      NaN
158   22440.0    6813.0  2019-07-12 11:07:25   1849.0      SEK
808    8096.0    8096.0  2019-06-11 21:33:36  41358.0      MOP

```

(continues on next page)

(continued from previous page)

336	33270.0	1529.0	2019-03-23	21:44:00	32594.0	CUC
...
339	8484.0	5358.0	2019-01-10	07:47:28	89503.0	GMD
1383	17565.0	3929.0	2019-01-15	01:11:02	14264.0	DKK
893	108.0	44.0	2019-05-17	00:53:39	93218.0	SLL
385	29983.0	152.0	2019-06-09	06:50:29	41105.0	RWF
1074	26197.0	4927.0	2019-05-22	15:57:27	50481.0	MNT

	customer_present	expiration_date	provider	lat	lng	\
id						
872	True	08/27	American Express	5.47090	100.24529	
1477	NaN	NaN	NaN	NaN	NaN	
158	True	09/20	American Express	26.26490	81.54855	
808	True	04/29	VISA 13 digit	59.37722	28.19028	
336	False	04/22	Mastercard	51.39323	0.47713	
...
339	False	11/24	Maestro	47.30997	8.52462	
1383	True	06/20	VISA 13 digit	50.72043	11.34046	
893	True	12/24	JCB 16 digit	15.72892	120.57224	
385	False	07/20	JCB 16 digit	-6.80000	39.25000	
1074	False	05/26	JCB 15 digit	41.00510	-73.78458	

	region	country	no_variance	mostly_nulls
id				
872	Batu Feringgi	MY	1.0	NaN
1477	NaN	NaN	NaN	NaN
158	Jais	IN	1.0	NaN
808	Narva	EE	1.0	NaN
336	Strood	GB	1.0	NaN
...
339	Adliswil	CH	1.0	NaN
1383	Rudolstadt	DE	1.0	NaN
893	Burgos	PH	1.0	NaN
385	Magomeni	TZ	1.0	NaN
1074	Scarsdale	US	1.0	NaN

[1200 rows x 14 columns]

If we call `AutoMLSearch.search()` on this data, the search will fail due to the columns and issues we've added above. Note: we use a `try/except` here to catch the resulting `ValueError` that `AutoMLSearch` raises.

```
[5]: automl = AutoMLSearch(X_train=X_train, y_train=y_train, problem_type='binary')
try:
    automl.search()
except ValueError as e:
    # to make the error message more distinct
    print("=" * 80, "\n")
    print("Search errored out! Message received is: {}".format(e))
    print("=" * 80, "\n")

=====

Search errored out! Message received is: Input contains NaN, infinity or a value too
↪large for dtype('float64').

=====
```

We can use the `search_iterative()` function provided in `EvalML` to determine what potential health issues our

data has. We can see that this `search_iterative` function is a public method available through `evalml automl` and is different from the `search` function of the `AutoMLSearch` class in EvalML. This `search_iterative()` function allows us to run the default data checks on the data, and, if there are no errors, automatically runs `AutoMLSearch.search()`.

```
[6]: from evalml.automl import search_iterative
results = search_iterative(X_train, y_train, problem_type='binary')
results

[6]: (None,
      {'warnings': [{'message': '1 out of 1200 rows are more than 95.0% null',
                              'data_check_name': 'HighlyNullDataCheck',
                              'level': 'warning',
                              'code': 'HIGHLY_NULL_ROWS',
                              'details': {'pct_null_cols': id
                                         1477      1.0
                                         dtype: float64}},
                    {'message': "Column 'mostly_nulls' is 95.0% or more null",
                              'data_check_name': 'HighlyNullDataCheck',
                              'level': 'warning',
                              'code': 'HIGHLY_NULL_COLS',
                              'details': {'column': 'mostly_nulls',
                                           'pct_null_rows': 0.9966666666666667}}}],
      'errors': [{'message': '1 row(s) (0.08333333333333334%) of target values are null',
                  'data_check_name': 'InvalidTargetDataCheck',
                  'level': 'error',
                  'code': 'TARGET_HAS_NULL',
                  'details': {'num_null_rows': 1, 'pct_null_rows': 0.08333333333333334}},
                 {'message': 'no_variance has 1 unique value.',
                  'data_check_name': 'NoVarianceDataCheck',
                  'level': 'error',
                  'code': 'NO_VARIANCE',
                  'details': {'column': 'no_variance'}}],
      'actions': [{'code': 'DROP_ROWS', 'metadata': {'rows': [1477]}},
                  {'code': 'DROP_COL', 'metadata': {'column': 'mostly_nulls'}},
                  {'code': 'IMPUTE_COL',
                   'metadata': {'column': None,
                                'is_target': True,
                                'impute_strategy': 'most_frequent'}},
                  {'code': 'DROP_COL', 'metadata': {'column': 'no_variance'}}]})
```

The return value of the `search_iterative` function above is a tuple. The first element is the `AutoMLSearch` object if it runs (and `None` otherwise), and the second element is a dictionary of potential warnings and errors that the default data checks find on the passed-in `X` and `y` data. In this dictionary, warnings are suggestions that the datachecks give that can useful to address to make the search better but will not break `AutoMLSearch`. On the flip side, errors will break `AutoMLSearch` and need to be addressed by the user.

4.8.2 Addressing DataCheck errors

We will show that we can address errors to allow AutoMLSearch to run. However, ignoring warnings will come at the expense of performance.

We can print out the errors first to make it easier to read, and then we'll create new features and targets from the original training data.

```
[7]: results[1]['errors']
[7]: [{'message': '1 row(s) (0.08333333333333334%) of target values are null',
      'data_check_name': 'InvalidTargetDataCheck',
      'level': 'error',
      'code': 'TARGET_HAS_NULL',
      'details': {'num_null_rows': 1, 'pct_null_rows': 0.08333333333333334}},
      {'message': 'no_variance has 1 unique value.',
      'data_check_name': 'NoVarianceDataCheck',
      'level': 'error',
      'code': 'NO_VARIANCE',
      'details': {'column': 'no_variance'}},
      {'message': 'Input datetime column(s) (datetime) contains NaN values. Please impute,
      ↳NaN values or drop these rows or columns.',
      'data_check_name': 'DateTimeNaNDataCheck',
      'level': 'error',
      'code': 'DATETIME_HAS_NAN',
      'details': {'columns': 'datetime'}}]
```

```
[8]: # copy the DataTables to new variables
X_train_no_errors = X_train.copy()
y_train_no_errors = y_train.copy()

# We address the errors by looking at the resulting dictionary errors listed

# first, let's address the `TARGET_HAS_NULL` error
y_train_no_errors.fillna(False, inplace=True)

# here, we address the `NO_VARIANCE` error
X_train_no_errors.drop("no_variance", axis=1, inplace=True)

# lastly, we address the `DATETIME_HAS_NAN` error with the date we had saved earlier
X_train_no_errors.iloc[1, 2] = date

# let's reinitialize the Woodwork DataTable
X_train_no_errors.ww.init()
X_train_no_errors.head()
```

```
[8]:
```

	card_id	store_id		datetime	amount	currency	\
id							
872	15492.0	2868.0	2019-08-03	02:50:04	80719.0	HNL	
1477	NaN	NaN	2019-08-05	21:05:57	NaN	NaN	
158	22440.0	6813.0	2019-07-12	11:07:25	1849.0	SEK	
808	8096.0	8096.0	2019-06-11	21:33:36	41358.0	MOP	
336	33270.0	1529.0	2019-03-23	21:44:00	32594.0	CUC	

	customer_present	expiration_date		provider	lat	lng	\
id							
872	True	08/27		American Express	5.47090	100.24529	
1477	NaN	NaN		NaN	NaN	NaN	
158	True	09/20		American Express	26.26490	81.54855	

(continues on next page)

(continued from previous page)

808	True	04/29	VISA 13 digit	59.37722	28.19028
336	False	04/22	Mastercard	51.39323	0.47713

	region	country	mostly_nulls
id			
872	Batu Feringgi	MY	NaN
1477	NaN	NaN	NaN
158	Jais	IN	NaN
808	Narva	EE	NaN
336	Strood	GB	NaN

We can now run search on `X_train_no_errors` and `y_train_no_errors`. Note that the search here doesn't fail since we addressed the errors, but there will still exist warnings in the returned tuple. This search allows the `mostly_nulls` column to remain in the features during search.

```
[9]: results_no_errors = search_iterative(X_train_no_errors, y_train_no_errors, problem_
    ↪type='binary')
    results_no_errors

    High coefficient of variation (cv >= 0.5) within cross validation scores.
    Decision Tree Classifier w/ Label Encoder + Imputer + DateTime Featurization_
    ↪Component + One Hot Encoder + Oversampler may not perform as estimated on unseen_
    ↪data.

[9]: (<evalml.automl.automl_search.AutoMLSearch at 0x7fad366642b0>,
     {'warnings': [{'message': "Column 'mostly_nulls' is 95.0% or more null",
       'data_check_name': 'HighlyNullDataCheck',
       'level': 'warning',
       'code': 'HIGHLY_NULL_COLS',
       'details': {'column': 'mostly_nulls',
         'pct_null_rows': 0.9966666666666667}]}],
     'errors': [],
     'actions': [{'code': 'DROP_COL', 'metadata': {'column': 'mostly_nulls'}}]})
```

4.8.3 Addressing all warnings and errors

We can look at the `actions` key of the dictionary in order to see how we can fix and clean all of the data. This will help us clean both the warnings and errors from the data and provide us with a better model.

```
[10]: results[1]['actions']

[10]: [{'code': 'DROP_ROWS', 'metadata': {'rows': [1477]}},
     {'code': 'DROP_COL', 'metadata': {'column': 'mostly_nulls'}},
     {'code': 'IMPUTE_COL',
      'metadata': {'column': None,
        'is_target': True,
        'impute_strategy': 'most_frequent'}},
     {'code': 'DROP_COL', 'metadata': {'column': 'no_variance'}}]
```

We note that there are four action tasks that we can take to clean the data. Three of the tasks ask us to drop a row or column in the features, while one task asks us to impute the target value.

```
[11]: # The first action states to drop the row given by the action code
X_train.drop(1477, axis=0, inplace=True)
# we must also drop this for y since we are removing its associated feature input
y_train.drop(index=1477, inplace=True)
```

(continues on next page)

(continued from previous page)

```
print("The new length of X_train is {} and y_train is {}".format(len(X_train), len(y_
    ↪train)))
```

```
The new length of X_train is 1199 and y_train is 1199
```

```
[12]: # Remove the 'mostly_nulls' column from X_train, which is the second action item
X_train.drop('mostly_nulls', axis=1, inplace=True)
X_train.head()
```

```
[12]:
```

	card_id	store_id	datetime	amount	currency	\
id						
872	15492.0	2868.0	2019-08-03 02:50:04	80719.0	HNL	
158	22440.0	6813.0	2019-07-12 11:07:25	1849.0	SEK	
808	8096.0	8096.0	2019-06-11 21:33:36	41358.0	MOP	
336	33270.0	1529.0	2019-03-23 21:44:00	32594.0	CUC	
1262	22829.0	8390.0	2019-01-23 04:39:29	86149.0	SCR	

	customer_present	expiration_date	provider	lat	lng	\
id						
872	True	08/27	American Express	5.47090	100.24529	
158	True	09/20	American Express	26.26490	81.54855	
808	True	04/29	VISA 13 digit	59.37722	28.19028	
336	False	04/22	Mastercard	51.39323	0.47713	
1262	True	03/25	Maestro	48.84490	17.22635	

	region	country	no_variance
id			
872	Batu Feringgi	MY	1.0
158	Jais	IN	1.0
808	Narva	EE	1.0
336	Strood	GB	1.0
1262	Skalica	SK	1.0

```
[13]: # Address the null in targets, which is the third action item
y_train.fillna(False, inplace=True)
y_train.isna().any()
```

```
[13]: False
```

```
[14]: # Finally, we can drop the 'no_variance' column, which is the final action item
X_train.drop('no_variance', axis=1, inplace=True)
X_train.head()
```

```
[14]:
```

	card_id	store_id	datetime	amount	currency	\
id						
872	15492.0	2868.0	2019-08-03 02:50:04	80719.0	HNL	
158	22440.0	6813.0	2019-07-12 11:07:25	1849.0	SEK	
808	8096.0	8096.0	2019-06-11 21:33:36	41358.0	MOP	
336	33270.0	1529.0	2019-03-23 21:44:00	32594.0	CUC	
1262	22829.0	8390.0	2019-01-23 04:39:29	86149.0	SCR	

	customer_present	expiration_date	provider	lat	lng	\
id						
872	True	08/27	American Express	5.47090	100.24529	
158	True	09/20	American Express	26.26490	81.54855	
808	True	04/29	VISA 13 digit	59.37722	28.19028	

(continues on next page)

(continued from previous page)

336	False	04/22	Mastercard	51.39323	0.47713
1262	True	03/25	Maestro	48.84490	17.22635

	region	country
id		
872	Batu Feringgi	MY
158	Jais	IN
808	Narva	EE
336	Strood	GB
1262	Skalica	SK

```
[15]: # let's reinitialize the dataframe using Woodwork and try the search again
X_train.ww.init()
results_cleaned = search_iterative(X_train, y_train, problem_type='binary')
```

Note that this time, we do get an `AutoMLSearch` object returned to us, as well as an empty dictionary of warnings and errors. We can use the `AutoMLSearch` object as needed, and we can see that the resulting warning dictionary is empty.

```
[16]: aml = results_cleaned[0]
aml.rankings
```

```
[16]:   id                pipeline_name  search_order  \
0   6  XGBoost Classifier w/ Label Encoder + Imputer ...      6
1   3  Random Forest Classifier w/ Label Encoder + Im...      3
2   4  LightGBM Classifier w/ Label Encoder + Imputer...      4
3   7  Extra Trees Classifier w/ Label Encoder + Impu...      7
4   1  Elastic Net Classifier w/ Label Encoder + Impu...      1
5   5  Logistic Regression Classifier w/ Label Encode...      5
6   8  CatBoost Classifier w/ Label Encoder + Imputer...      8
7   2  Decision Tree Classifier w/ Label Encoder + Im...      2
8   0  Mode Baseline Binary Classification Pipeline      0

   mean_cv_score  standard_deviation_cv_score  validation_score  \
0      0.245210             0.033784             0.283381
1      0.261529             0.015703             0.279336
2      0.342549             0.068008             0.407373
3      0.350142             0.007130             0.358375
4      0.392373             0.014820             0.404130
5      0.394584             0.014575             0.405650
6      0.546942             0.001789             0.548985
7      0.632121             0.156515             0.665526
8      4.637776             0.043230             4.662735

   percent_better_than_baseline  high_variance_cv  \
0                94.712762                False
1                94.360903                False
2                92.613932                False
3                92.450223                False
4                91.539639                False
5                91.491950                False
6                88.206800                False
7                86.370173                False
8                 0.000000                False

   parameters
0  {'Imputer': {'categorical_impute_strategy': 'm...
```

(continues on next page)

(continued from previous page)

```

1 {'Imputer': {'categorical_impute_strategy': 'm...
2 {'Imputer': {'categorical_impute_strategy': 'm...
3 {'Imputer': {'categorical_impute_strategy': 'm...
4 {'Imputer': {'categorical_impute_strategy': 'm...
5 {'Imputer': {'categorical_impute_strategy': 'm...
6 {'Imputer': {'categorical_impute_strategy': 'm...
7 {'Imputer': {'categorical_impute_strategy': 'm...
8     {'Baseline Classifier': {'strategy': 'mode'}}

```

```
[17]: data_check_results = results_cleaned[1]
      data_check_results
```

```
[17]: {'warnings': [], 'errors': [], 'actions': []}
```

4.8.4 Comparing removing only errors versus removing both warnings and errors

Let's see the differences in model performance when we remove only errors versus remove both warnings and errors. To do this, we compare the performance of the best pipelines on the validation data. Remember that in the search where we only address errors, we still have the `mostly_nulls` column present in the data, so we leave that column in the validation data for its respective search. We drop the other `no_variance` column from both searches.

Additionally, we do some logical type setting since we had added additional noise to just the training data. This allows the data to be of the same types in both training and validation.

```
[18]: # drop the no_variance column
      X_valid.drop("no_variance", axis=1, inplace=True)

      # logical type management
      X_valid.ww.init(logical_types={"customer_present": "Categorical"})
      y_valid = ww.init_series(y_valid, logical_type="Categorical")

      best_pipeline_no_errors = results_no_errors[0].best_pipeline
      print("Only dropping errors:", best_pipeline_no_errors.score(X_valid, y_valid, ["Log_
↳ Loss Binary"]), "\n")

      # drop the mostly_nulls column and reinitialize the DataTable
      X_valid.drop("mostly_nulls", axis=1, inplace=True)
      X_valid.ww.init()

      best_pipeline_clean = results_cleaned[0].best_pipeline
      print("Addressing all actions:", best_pipeline_clean.score(X_valid, y_valid, ["Log_
↳ Loss Binary"]), "\n")

      Only dropping errors: OrderedDict([('Log Loss Binary', 0.2252137942060951)])

      Addressing all actions: OrderedDict([('Log Loss Binary', 0.2282781904970938)])

```

We can compare the differences in model performance when we address all action items (warnings and errors) in comparison to when we only address errors. While it isn't guaranteed that addressing all actions will always have better performance, we do recommend doing so since we only raise these issues when we believe the features have problems that could negatively impact or not benefit the search.

In the future, we aim to provide a helper function to allow users to quickly clean the data by taking in the list of actions and creating an appropriate pipeline of transformers to alter the data.

4.9 Utilities

4.9.1 Configuring Logging

EvalML uses [the standard Python logging package](#). Default logging behavior prints WARNING level logs and above (ERROR and CRITICAL) to stdout. To configure different behavior, please refer to the Python logging documentation.

To see up-to-date feedback as `AutoMLSearch` runs, use the argument `verbose=True` when instantiating the object. This will temporarily set up a logging object to print INFO level logs and above to stdout, as well as display a graph of the best score over pipeline iterations.

4.9.2 System Information

EvalML provides a command-line interface (CLI) tool prints the version of EvalML and core dependencies installed, as well as some basic system information. To use this tool, just run `evalml info` in your shell or terminal. This could be useful for debugging purposes or tracking down any version-related issues.

```
[1]: !evalml info

EvalML version: 0.35.0
EvalML installation directory: /home/docs/checkouts/readthedocs.org/user_builds/
    ↪ feature-labs-inc-evalml/envs/v0.35.0/lib/python3.8/site-packages/evalml

SYSTEM INFO
-----
python: 3.8.6.final.0
python-bits: 64
OS: Linux
OS-release: 5.4.0-1035-aws
machine: x86_64
processor: x86_64
byteorder: little
LC_ALL: None
LANG: C.UTF-8
LOCALE: en_US.UTF-8
# of CPUS: 2
Available memory: 6.1G

INSTALLED VERSIONS
-----
zict: 2.0.0
xgboost: 1.4.2
wrapt: 1.12.1
woodwork: 0.8.1
widgetsnbextension: 3.5.1
wheel: 0.37.0
webencodings: 0.5.1
wcwidth: 0.2.5
urllib3: 1.26.7
unidecode: 1.3.2
traitlets: 5.1.0
tqdm: 4.62.3
tornado: 6.1
toolz: 0.11.1
threadpoolctl: 3.0.0
texttable: 1.6.4
```

(continues on next page)

(continued from previous page)

```
testpath: 0.5.0
terminado: 0.12.1
tenacity: 8.0.1
tblib: 1.7.0
statsmodels: 0.13.0
sphinxcontrib-websupport: 1.2.4
sphinxcontrib-serializinghtml: 1.1.5
sphinxcontrib-qthelp: 1.0.3
sphinxcontrib-jsmath: 1.0.1
sphinxcontrib-htmlhelp: 2.0.0
sphinxcontrib-devhelp: 1.0.2
sphinxcontrib-applehelp: 1.0.2
sphinx: 3.5.4
sphinx-rtd-theme: 0.4.3
sphinx-autoapi: 1.8.3
soupsieve: 2.2.1
sortedcontainers: 2.4.0
snowballstemmer: 2.1.0
slicer: 0.0.7
sktime: 0.8.0
six: 1.16.0
shap: 0.39.0
setuptools: 58.2.0
send2trash: 1.8.0
seaborn: 0.11.2
scipy: 1.7.1
scikit-optimize: 0.9.0
scikit-learn: 0.24.2
requirements-parser: 0.2.0
requests: 2.26.0
regex: 2021.10.8
recommonmark: 0.5.0
readthedocs-sphinx-ext: 2.1.4
pyzmq: 22.3.0
pyyaml: 6.0
pytz: 2021.3
python-dateutil: 2.8.2
pysistent: 0.18.0
pyparsing: 2.4.7
pygments: 2.10.0
pydata-sphinx-theme: 0.7.1
pyparser: 2.20
pyaml: 21.10.1
ptyprocess: 0.7.0
psutil: 5.8.0
prompt-toolkit: 3.0.20
prometheus-client: 0.11.0
pmdarima: 1.8.0
plotly: 5.3.1
pip: 21.3
pillow: 8.3.2
pickleshare: 0.7.5
pexpect: 4.8.0
patsy: 0.5.2
partd: 1.2.0
parso: 0.8.2
pandocfilters: 1.5.0
```

(continues on next page)

(continued from previous page)

```
pandas: 1.3.3
packaging: 21.0
numpy: 1.21.2
numba: 0.53.0
notebook: 6.4.4
nltk: 3.6.5
nlp-primitives: 2.0.0
networkx: 2.5.1
nest-asyncio: 1.5.1
nbsphinx: 0.8.7
nbformat: 5.1.3
nbconvert: 6.2.0
nbclient: 0.5.4
msgpack: 1.0.2
mock: 1.0.1
mistune: 0.8.4
matplotlib: 3.4.3
matplotlib-inline: 0.1.3
markupsafe: 2.0.1
loket: 0.2.1
llvmlite: 0.36.0
lightgbm: 3.3.0
lazy-object-proxy: 1.6.0
kiwisolver: 1.3.2
kaleido: 0.2.1
jupyterlab-widgets: 1.0.2
jupyterlab-pygments: 0.1.2
jupyter-core: 4.8.1
jupyter-client: 7.0.6
jsonschema: 4.1.0
joblib: 1.1.0
jinja2: 3.0.2
jedi: 0.18.0
ipywidgets: 7.6.5
ipython: 7.28.0
ipython-genutils: 0.2.0
ipykernel: 6.4.1
imbalanced-learn: 0.8.1
imagesize: 1.2.0
idna: 3.3
heapdict: 1.0.1
graphviz: 0.17
future: 0.18.2
fsspec: 2021.10.0
featuretools: 1.0.0
evalml: 0.35.0
entrypoints: 0.3
docutils: 0.16
distributed: 2021.9.1
defusedxml: 0.7.1
decorator: 4.4.2
debugpy: 1.5.0
dask: 2021.9.1
cython: 0.29.17
cyclr: 0.10.0
commonmark: 0.8.1
colorama: 0.4.4
```

(continues on next page)

(continued from previous page)

```
cloudpickle: 2.0.0
click: 8.0.3
charset-normalizer: 2.0.7
cffi: 1.15.0
certifi: 2021.10.8
category-encoders: 2.3.0
catboost: 1.0.0
bleach: 4.1.0
beautifulsoup4: 4.10.0
backcall: 0.2.0
babel: 2.9.1
attrs: 21.2.0
astroid: 2.6.6
argon2-cffi: 21.1.0
alabaster: 0.7.12
```

4.10 AutoMLSearch for time series problems

In this guide, we'll show how you can use EvalML to perform an automated search of machine learning pipelines for time series problems. Time series support is still being actively developed in EvalML so expect this page to improve over time.

4.10.1 But first, what is a time series?

A time series is a series of measurements taken at different moments in time ([Wikipedia](#)). The main difference between a time series dataset and a normal dataset is that the rows of a time series dataset are ordered with time. This relationship between the rows does not exist in non-time series datasets. In a non-time-series dataset, you can shuffle the rows and the dataset still has the same meaning. If you shuffle the rows of a time series dataset, the relationship between the rows is completely different!

4.10.2 What does AutoMLSearch for time series do?

In a machine learning setting, we are usually interested in using past values of the time series to predict future values. That is what EvalML's time series functionality is built to do.

4.10.3 Loading the data

In this guide, we work with daily minimum temperature recordings from Melbourne, Australia from the beginning of 1981 to end of 1990.

We start by loading the temperature data into two splits. The first split will be a training split consisting of data from 1981 to end of 1989. This is the data we'll use to find the best pipeline with AutoML. The second split will be a testing split consisting of data from 1990. This is the split we'll use to evaluate how well our pipeline generalizes on unseen data.

```
[1]: from evalml.demos import load_weather
X, y = load_weather()
```

```
[2]: train_dates, test_dates = X.Date < "1990-01-01", X.Date >= "1990-01-01"
X_train, y_train = X.ww.loc[train_dates], y.ww.loc[train_dates]
X_test, y_test = X.ww.loc[test_dates], y.ww.loc[test_dates]
```

Visualizing the training set

```
[3]: import plotly.graph_objects as go
```

```
[4]: data = [
    go.Scatter(
        x=X_train["Date"],
        y=y_train,
        mode="lines+markers",
        name="Temperature (C)",
        line=dict(color="#1f77b4"),
    )
]
# Let plotly pick the best date format.
layout = go.Layout(
    title={"text": "Min Daily Temperature, Melbourne 1980-1989"},
    xaxis={"title": "Time"},
    yaxis={"title": "Temperature (C)"},
)

go.Figure(data=data, layout=layout)
```

Data type cannot be displayed: application/vnd.plotly.v1+json, text/html

4.10.4 Running AutoMLSearch

AutoMLSearch for time series problems works very similarly to the other problem types with the exception that users need to pass in a new parameter called `problem_configuration`.

The `problem_configuration` is a dictionary specifying the following values:


- **forecast_horizon**: The number of time periods we are trying to forecast. In this example, we're interested in predicting weather for the next 7 days, so the value is 7.
- **gap**: The number of time periods between the end of the training set and the start of the test set. For example, in our case we are interested in predicting the weather for the next 7 days with the data as it is "today", so the gap is 0. However, if we had to predict the weather for next Monday-Sunday with the data as it was on the previous Friday, the gap would be 2 (Saturday and Sunday separate Monday from Friday). It is important to select a value that matches the realistic delay between the forecast date and the most recently available data that can be used to make that forecast.
- **max_delay**: The maximum number of rows to look in the past from the current row in order to compute features. In our example, we'll say we can use the previous week's weather to predict the current week's.
- **date_index**: The column of the training dataset that contains the date corresponding to each observation. Currently, this parameter is only used by some time-series specific models so in this example, we are passing in `None`.

Note that the values of these parameters must be in the same units as the training/testing data.

Visualization of forecast horizon and gap

Forecast Horizon: 2

Gap: 1

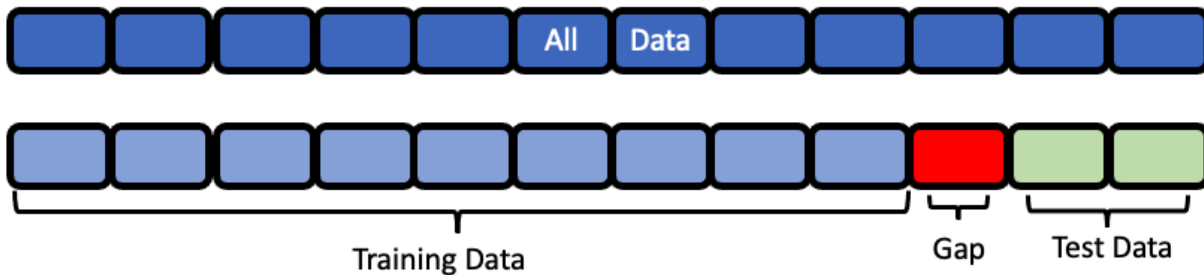

```
[5]: from evalml automl import AutoMLSearch

automl = AutoMLSearch(X_train, y_train, problem_type="time series regression",
                      max_batches=1,
                      problem_configuration={"gap": 0, "max_delay": 7,
                                           "forecast_horizon": 7, "date_index":
↳None},
                      allowed_model_families=["xgboost", "random_forest", "linear_
↳model", "extra_trees",
                                           "decision_tree"]
                      )

/home/docs/checkouts/readthedocs.org/user_builds/feature-labs-inc-evalml/envs/v0.35.0/
↳lib/python3.8/site-packages/evalml/automl/automl_search.py:456: UserWarning:

Time series support in evalml is still in beta, which means we are still actively_
↳building its core features. Please be mindful of that when running search().
```

```
[6]: automl.search()

/home/docs/checkouts/readthedocs.org/user_builds/feature-labs-inc-evalml/envs/v0.35.0/
↳lib/python3.8/site-packages/sklearn/linear_model/_coordinate_descent.py:530:
↳ConvergenceWarning:

Objective did not converge. You might want to increase the number of iterations.
↳Duality gap: 4089.24423870312, tolerance: 1.7012860284653468

/home/docs/checkouts/readthedocs.org/user_builds/feature-labs-inc-evalml/envs/v0.35.0/
↳lib/python3.8/site-packages/sklearn/linear_model/_coordinate_descent.py:530:
↳ConvergenceWarning:

Objective did not converge. You might want to increase the number of iterations.
↳Duality gap: 7638.417351298465, tolerance: 2.9630934475138115

/home/docs/checkouts/readthedocs.org/user_builds/feature-labs-inc-evalml/envs/v0.35.0/
↳lib/python3.8/site-packages/sklearn/linear_model/_coordinate_descent.py:530:
↳ConvergenceWarning:

Objective did not converge. You might want to increase the number of iterations.
↳Duality gap: 11061.119581322855, tolerance: 4.09238672
```


(continues on next page)

4.10.5 Understanding what happened under the hood

This is great, `AutoMLSearch` is able to find a pipeline that scores an R^2 value of 0.44 compared to a baseline pipeline that is only able to score 0.07. But how did it do that?

Data Splitting

EvalML uses [rolling origin cross validation](#) for time series problems. Basically, we take successive cuts of the training data while keeping the validation set size fixed. Note that the splits are not separated by `gap` number of units. This is because we need access to all the data to generate features for every row of the validation set. However, the feature engineering done by our pipelines respects the `gap` value. This is explained more in the [feature engineering section](#).

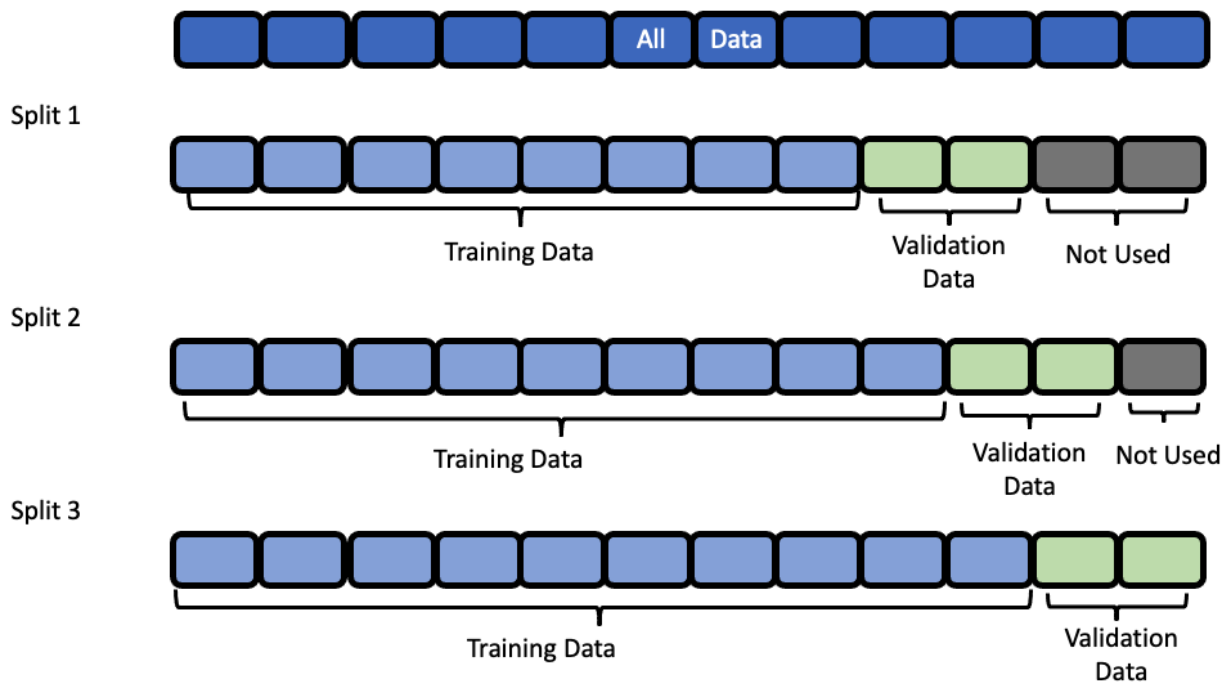

Baseline Pipeline

The most naive thing we can do in a time series problem is use the most recently available observation to predict the next observation. In our example, this means we'll use the measurement from 7 days ago as the prediction for the current date.

```
[7]: import pandas as pd
baseline = automl.get_pipeline(0)
baseline.fit(X_train, y_train)
naive_baseline_preds = baseline.predict_in_sample(X_test, y_test, objective=None,
                                                X_train=X_train, y_train=y_train)
expected_preds = pd.concat([y_train.iloc[-7:], y_test]).shift(7).iloc[7:]
pd.testing.assert_series_equal(expected_preds, naive_baseline_preds)
```

Feature Engineering

EvalML uses the values of `gap`, `forecast_horizon`, and `max_delay` to calculate a “window” of allowed dates that can be used for engineering the features of each row in the validation/test set. The formula for computing the bounds of the window is:

$$[t - (\text{max_delay} + \text{forecast_horizon} + \text{gap}), t - (\text{forecast_horizon} + \text{gap})]$$

As an example, this is what the features for the first five days of August would look like in our current problem:

Forecast Horizon: 7


Gap: 0

Max Delay: 7

	Prediction Date	Latest date for lagging	Earliest date for lagging
■ Prediction point	08-01	07-25	07-18
■ Data before the forecast point	08-02	07-26	07-19
	08-03	07-27	07-20
	08-04	07-28	07-21
	08-05	07-29	07-22

The estimator then takes these features to generate predictions:

How the estimator generates predictions

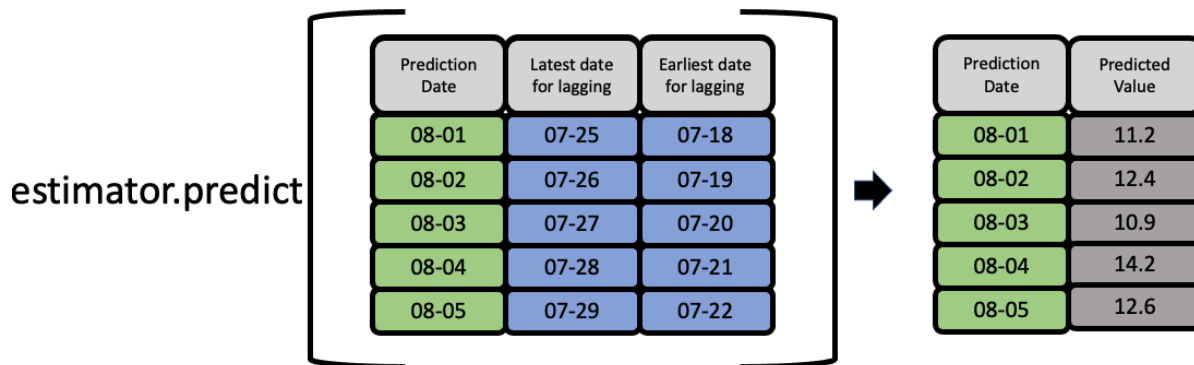

4.10.6 Evaluate best pipeline on test data

Now that we have covered the mechanics of how EvalML runs `AutoMLSearch` for time series pipelines, we can compare the performance on the test set of the best pipeline found during search and the baseline pipeline.

```
[8]: pl = automl.best_pipeline
pl.fit(X_train, y_train)
best_pipeline_score = pl.score(X_test, y_test, ['R2'], X_train, y_train)['R2']
```

```
[9]: best_pipeline_score
```

```
[9]: 0.5502791890460579
```

```
[10]: baseline = automl.get_pipeline(0)
baseline.fit(X_train, y_train)
naive_baseline_score = baseline.score(X_test, y_test, ['R2'], X_train, y_train)['R2']
```

```
[11]: naive_baseline_score
```

```
[11]: 0.14924457197371788
```

The pipeline found by AutoMLSearch has a 268% improvement over the naive forecast!

```
[12]: automl.objective.calculate_percent_difference(best_pipeline_score, naive_baseline_
↪score)
```

```
[12]: 268.7096835541615
```

4.10.7 Visualize the predictions over time

```
[13]: from evalml.model_understanding import graph_prediction_vs_actual_over_time

fig = graph_prediction_vs_actual_over_time(pl, X_test, y_test, X_train, y_train,
↪dates=X_test['Date'])
fig
```

Data type cannot be displayed: application/vnd.plotly.v1+json, text/html

4.10.8 Predicting on unseen data

You'll notice that in the code snippets here, we use the `predict_in_sample` pipeline method as opposed to the usual `predict` method. What's the difference?

- `predict_in_sample` is used when the target value is known on the dates we are predicting on. This is true in cross validation. This method has an expected `y` parameter so that we can compute features using previous target values for all of the observations on the holdout set.
- `predict` is used when the target value is not known, e.g. the test dataset. The `y` parameter is not expected as only the target is observed in the training set. The test dataset must be separated by `gap` days from the training dataset. For the moment, the test set size must match `forecast_horizon`.

Here is an example of these two methods in action:

predict_in_sample

```
[14]: pl.predict_in_sample(X_test, y_test, objective=None, X_train=X_train, y_train=y_train)
```

```
[14]: 3285    14.222870
      3286    14.278846
      3287    14.022847
      3288    13.738781
      3289    13.530056
      ...
      3645    14.148007
      3646    13.927396
      3647    14.022316
      3648    14.045560
      3649    13.694097
      Name: Temp, Length: 365, dtype: float64
```

predict

```
[15]: pl.predict(X_test.iloc[:pl.forecast_horizon], objective=None, X_train=X_train, y_
      ↪train=y_train)
```

```
[15]: 3285    14.222870
      3286    14.278846
      3287    14.022847
      3288    13.738781
      3289    13.530056
      3290    13.988278
      3291    13.638807
      Name: Temp, dtype: float64
```

4.11 FAQ

4.11.1 Q: What is the difference between EvalML and other AutoML libraries?

EvalML optimizes machine learning pipelines on *custom practical objectives* instead of vague machine learning loss functions so that it will find the best pipelines for your specific needs. Furthermore, EvalML *pipelines* are able to take in all kinds of data (missing values, categorical, etc.) as long as the data are in a single table. EvalML also allows you to build your own pipelines with existing or custom components so you can have more control over the AutoML process. Moreover, EvalML also provides you with support in the form of *data checks* to ensure that you are aware of potential issues your data may cause with machine learning algorithms.

4.11.2 Q: How does EvalML handle missing values?

EvalML contains imputation components in its pipelines so that missing values are taken care of. EvalML optimizes over different types of imputation to search for the best possible pipeline. You can find more information about components [here](#) and in the API reference [here] (`../generated/evalml.pipelines.components.Imputer.ipynb`).

4.11.3 Q: How does EvalML handle categorical encoding?

EvalML provides a [one-hot-encoding component] ([../generated/evalml.pipelines.components.OneHotEncoder.ipynb](#)) in its pipelines for categorical variables. EvalML plans to support other encoders in the future.

4.11.4 Q: How does EvalML handle feature selection?

EvalML currently utilizes scikit-learn's [SelectFromModel](#) with a Random Forest classifier/regressor to handle feature selection. EvalML plans on supporting more feature selectors in the future. You can find more information in the API reference [\[here\]](#) ([../generated/evalml.pipelines.components.RFClassifierSelectFromModel.ipynb](#)).

4.11.5 Q: How is feature importance calculated?

Feature importance depends on the estimator used. Variable coefficients are used for regression-based estimators (Logistic Regression and Linear Regression) and Gini importance is used for tree-based estimators (Random Forest and XGBoost).

4.11.6 Q: How does hyperparameter tuning work?

EvalML tunes hyperparameters for its pipelines through Bayesian optimization. In the future we plan to support more optimization techniques such as random search.

4.11.7 Q: Can I create my own objective metric?

Yes you can! You can *create your own custom objective* so that EvalML optimizes the best model for your needs.

4.11.8 Q: How does EvalML avoid overfitting?

EvalML provides *data checks* to combat overfitting. Such data checks include detecting label leakage, unstable pipelines, hold-out datasets and cross validation. EvalML defaults to using Stratified K-Fold cross-validation for classification problems and K-Fold cross-validation for regression problems but allows you to utilize your own cross-validation methods as well.

4.11.9 Q: Can I create my own pipeline for EvalML?

Yes! EvalML allows you to create *custom pipelines* using modular components. This allows you to customize EvalML pipelines for your own needs or for AutoML.

4.11.10 Q: Does EvalML work with X algorithm?

EvalML is constantly improving and adding new components and will allow your own algorithms to be used as components in our pipelines.

API REFERENCE**5.1 Demo Datasets**

<i>load_breast_cancer</i>	Load breast cancer dataset. Binary classification problem.
<i>load_diabetes</i>	Load diabetes dataset. Used for regression problem.
<i>load_fraud</i>	Load credit card fraud dataset.
<i>load_wine</i>	Load wine dataset. Multiclass problem.
<i>load_churn</i>	Load churn dataset, which can be used for binary classification problems.

5.2 Preprocessing

Utilities to preprocess data before using evalml.

<i>load_data</i>	Load features and target from file.
<i>target_distribution</i>	Get the target distributions.
<i>number_of_features</i>	Get the number of features of each specific dtype in a DataFrame.
<i>split_data</i>	Split data into train and test sets.

5.3 Exceptions

<i>MethodPropertyNotFoundError</i>	Exception to raise when a class does not have an expected method or property.
<i>PipelineNotFoundError</i>	An exception raised when a particular pipeline is not found in automl search results.
<i>ObjectiveNotFoundError</i>	Exception to raise when specified objective does not exist.
<i>MissingComponentError</i>	An exception raised when a component is not found in <code>all_components()</code> .
<i>ComponentNotYetFittedError</i>	An exception to be raised when <code>predict/predict_proba/transform</code> is called on a component without fitting first.

continues on next page

Table 3 – continued from previous page

<i>PipelineNotYetFittedError</i>	An exception to be raised when predict/predict_proba/transform is called on a pipeline without fitting first.
<i>AutoMLSearchException</i>	Exception raised when all pipelines in an automl batch return a score of NaN for the primary objective.
<i>EnsembleMissingPipelinesError</i>	An exception raised when an ensemble is missing <i>estimators</i> (list) as a parameter.
<i>PipelineScoreError</i>	An exception raised when a pipeline errors while scoring any objective in a list of objectives.
<i>DataCheckInitError</i>	Exception raised when a data check can't initialize with the parameters given.
<i>NullsInColumnWarning</i>	Warning thrown when there are null values in the column of interest.

5.4 AutoML

5.4.1 AutoML Search Interface

<i>AutoMLSearch</i>	Automated Pipeline search.
---------------------	----------------------------

5.4.2 AutoML Utils

<i>search</i>	Given data and configuration, run an automl search.
<i>get_default_primary_search_objective</i>	Get the default primary search objective for a problem type.
<i>make_data_splitter</i>	Given the training data and ML problem parameters, compute a data splitting method to use during AutoML search.

5.4.3 AutoML Algorithm Classes

<i>AutoMLAlgorithm</i>	Base class for the AutoML algorithms which power EvalML.
<i>IterativeAlgorithm</i>	An automl algorithm which first fits a base round of pipelines with default parameters, then does a round of parameter tuning on each pipeline in order of performance.

5.4.4 AutoML Callbacks

<i>silent_error_callback</i>	No-op.
<i>log_error_callback</i>	Logs the exception thrown as an error.
<i>raise_error_callback</i>	Raises the exception thrown by the AutoMLSearch object.

5.4.5 AutoML Engines

<i>SequentialEngine</i>	The default engine for the AutoML search.
<i>CFEngine</i>	The concurrent.futures (CF) engine.
<i>DaskEngine</i>	The dask engine.

5.5 Pipelines

5.5.1 Pipeline Base Classes

<i>PipelineBase</i>	Machine learning pipeline.
<i>ClassificationPipeline</i>	Pipeline subclass for all classification pipelines.
<i>BinaryClassificationPipeline</i>	Pipeline subclass for all binary classification pipelines.
<i>MulticlassClassificationPipeline</i>	Pipeline subclass for all multiclass classification pipelines.
<i>RegressionPipeline</i>	Pipeline subclass for all regression pipelines.
<i>TimeSeriesClassificationPipeline</i>	Pipeline base class for time series classification problems.
<i>TimeSeriesBinaryClassificationPipeline</i>	Pipeline base class for time series binary classification problems.
<i>TimeSeriesMulticlassClassificationPipeline</i>	Pipeline base class for time series multiclass classification problems.
<i>TimeSeriesRegressionPipeline</i>	Pipeline base class for time series regression problems.

5.5.2 Pipeline Utils

<i>make_pipeline</i>	Given input data, target data, an estimator class and the problem type, generates a pipeline class with a preprocessing chain which was recommended based on the inputs. The pipeline will be a subclass of the appropriate pipeline base class for the specified problem_type.
<i>generate_pipeline_code</i>	Creates and returns a string that contains the Python imports and code required for running the EvalML pipeline.

5.6 Component Graphs

<i>ComponentGraph</i>	Component graph for a pipeline as a directed acyclic graph (DAG).
-----------------------	---

5.7 Components

5.7.1 Component Base Classes

Components represent a step in a pipeline.

<i>ComponentBase</i>	Base class for all components.
<i>Transformer</i>	A component that may or may not need fitting that transforms data. These components are used before an estimator.
<i>Estimator</i>	A component that fits and predicts given data.

5.7.2 Component Utils

<i>allowed_model_families</i>	List the model types allowed for a particular problem type.
<i>get_estimators</i>	Returns the estimators allowed for a particular problem type.
<i>generate_component_code</i>	Creates and returns a string that contains the Python imports and code required for running the EvalML component.

5.7.3 Transformers

Transformers are components that take in data as input and output transformed data.

<i>DropColumns</i>	Drops specified columns in input data.
<i>SelectColumns</i>	Selects specified columns in input data.
<i>SelectByType</i>	Selects columns by specified Woodwork logical type or semantic tag in input data.
<i>OneHotEncoder</i>	A transformer that encodes categorical features in a one-hot numeric array.
<i>TargetEncoder</i>	A transformer that encodes categorical features into target encodings.
<i>PerColumnImputer</i>	Imputes missing data according to a specified imputation strategy per column.
<i>Imputer</i>	Imputes missing data according to a specified imputation strategy.
<i>SimpleImputer</i>	Imputes missing data according to a specified imputation strategy.

continues on next page

Table 14 – continued from previous page

<i>StandardScaler</i>	A transformer that standardizes input features by removing the mean and scaling to unit variance.
<i>RFRegressorSelectFromModel</i>	Selects top features based on importance weights using a Random Forest regressor.
<i>RFClassifierSelectFromModel</i>	Selects top features based on importance weights using a Random Forest classifier.
<i>DropNullColumns</i>	Transformer to drop features whose percentage of NaN values exceeds a specified threshold.
<i>DateTimeFeaturizer</i>	Transformer that can automatically extract features from datetime columns.
<i>TextFeaturizer</i>	Transformer that can automatically featurize text columns using featuretools' nlp_primitives.
<i>DelayedFeatureTransformer</i>	Transformer that delays input features and target variable for time series problems.
<i>DFSTransformer</i>	Featuretools DFS component that generates features for the input features.
<i>PolynomialDetrender</i>	Removes trends from time series by fitting a polynomial to the data.
<i>Undersampler</i>	Initializes an undersampling transformer to downsample the majority classes in the dataset.
<i>Oversampler</i>	SMOTE Oversampler component. Will automatically select whether to use SMOTE, SMOTEN, or SMO-TENC based on inputs to the component.

5.7.4 Estimators

Classifiers

Classifiers are components that output a predicted class label.

<i>CatBoostClassifier</i>	CatBoost Classifier, a classifier that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.
<i>ElasticNetClassifier</i>	Elastic Net Classifier. Uses Logistic Regression with elasticnet penalty as the base estimator.
<i>ExtraTreesClassifier</i>	Extra Trees Classifier.
<i>RandomForestClassifier</i>	Random Forest Classifier.
<i>LightGBMClassifier</i>	LightGBM Classifier.
<i>LogisticRegressionClassifier</i>	Logistic Regression Classifier.
<i>XGBoostClassifier</i>	XGBoost Classifier.
<i>BaselineClassifier</i>	Classifier that predicts using the specified strategy.
<i>StackedEnsembleClassifier</i>	Stacked Ensemble Classifier.
<i>DecisionTreeClassifier</i>	Decision Tree Classifier.
<i>KNeighborsClassifier</i>	K-Nearest Neighbors Classifier.
<i>SVMClassifier</i>	Support Vector Machine Classifier.

Regressors

Regressors are components that output a predicted target value.

<i>ARIMAREgressor</i>	Autoregressive Integrated Moving Average Model. The three parameters (p, d, q) are the AR order, the degree of differencing, and the MA order. More information here: https://www.statsmodels.org/devel/generated/statsmodels.tsa.arima_model.ARIMA.html .
<i>CatBoostRegressor</i>	CatBoost Regressor, a regressor that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.
<i>ElasticNetRegressor</i>	Elastic Net Regressor.
<i>LinearRegressor</i>	Linear Regressor.
<i>ExtraTreesRegressor</i>	Extra Trees Regressor.
<i>RandomForestRegressor</i>	Random Forest Regressor.
<i>XGBoostRegressor</i>	XGBoost Regressor.
<i>BaselineRegressor</i>	Baseline regressor that uses a simple strategy to make predictions. This is useful as a simple baseline regressor to compare with other regressors.
<i>TimeSeriesBaselineEstimator</i>	Time series estimator that predicts using the naive forecasting approach.
<i>StackedEnsembleRegressor</i>	Stacked Ensemble Regressor.
<i>DecisionTreeRegressor</i>	Decision Tree Regressor.
<i>LightGBMRegressor</i>	LightGBM Regressor.
<i>SVMRegressor</i>	Support Vector Machine Regressor.

5.8 Model Understanding

5.8.1 Utility Methods

<i>confusion_matrix</i>	Confusion matrix for binary and multiclass classification.
<i>normalize_confusion_matrix</i>	Normalizes a confusion matrix.
<i>precision_recall_curve</i>	Given labels and binary classifier predicted probabilities, compute and return the data representing a precision-recall curve.
<i>roc_curve</i>	Given labels and classifier predicted probabilities, compute and return the data representing a Receiver Operating Characteristic (ROC) curve. Works with binary or multiclass problems.
<i>calculate_permutation_importance</i>	Calculates permutation importance for features.
<i>calculate_permutation_importance_one_column</i>	Calculates permutation importance for one column in the original dataframe.
<i>binary_objective_vs_threshold</i>	Computes objective score as a function of potential binary classification decision thresholds for a fitted binary classification pipeline.
<i>get_prediction_vs_actual_over_time_data</i>	Get the data needed for the prediction_vs_actual_over_time plot.

continues on next page

Table 17 – continued from previous page

<i>partial_dependence</i>	Calculates one or two-way partial dependence.
<i>get_prediction_vs_actual_data</i>	Combines <code>y_true</code> and <code>y_pred</code> into a single dataframe and adds a column for outliers. Used in <i>graph_prediction_vs_actual()</i> .
<i>get_linear_coefficients</i>	Returns a dataframe showing the features with the greatest predictive power for a linear model.
<i>t_sne</i>	Get the transformed output after fitting X to the embedded space using t-SNE.

5.8.2 Graph Utility Methods

<i>graph_precision_recall_curve</i>	Generate and display a precision-recall plot.
<i>graph_roc_curve</i>	Generate and display a Receiver Operating Characteristic (ROC) plot for binary and multiclass classification problems.
<i>graph_confusion_matrix</i>	Generate and display a confusion matrix plot.
<i>graph_permutation_importance</i>	Generate a bar graph of the pipeline’s permutation importance.
<i>graph_binary_objective_vs_threshold</i>	Generates a plot graphing objective score vs. decision thresholds for a fitted binary classification pipeline.
<i>graph_prediction_vs_actual</i>	Generate a scatter plot comparing the true and predicted values. Used for regression plotting.
<i>graph_prediction_vs_actual_over_time</i>	Plot the target values and predictions against time on the x-axis.
<i>graph_partial_dependence</i>	Create an one-way or two-way partial dependence plot.
<i>graph_t_sne</i>	Plot high dimensional data into lower dimensional space using t-SNE.

5.8.3 Prediction Explanations

<i>explain_predictions</i>	Creates a report summarizing the top contributing features for each data point in the input features.
<i>explain_predictions_best_worst</i>	Creates a report summarizing the top contributing features for the best and worst points in the dataset as measured by error to true labels.

5.9 Objectives

5.9.1 Objective Base Classes

<i>ObjectiveBase</i>	Base class for all objectives.
<i>BinaryClassificationObjective</i>	Base class for all binary classification objectives.
<i>MulticlassClassificationObjective</i>	Base class for all multiclass classification objectives.
<i>RegressionObjective</i>	Base class for all regression objectives.

5.9.2 Domain-Specific Objectives

<i>FraudCost</i>	Score the percentage of money lost of the total transaction amount process due to fraud.
<i>LeadScoring</i>	Lead scoring.
<i>CostBenefitMatrix</i>	Score using a cost-benefit matrix. Scores quantify the benefits of a given value, so greater numeric scores represents a better score. Costs and scores can be negative, indicating that a value is not beneficial. For example, in the case of monetary profit, a negative cost and/or score represents loss of cash flow.

5.9.3 Classification Objectives

<i>AccuracyBinary</i>	Accuracy score for binary classification.
<i>AccuracyMulticlass</i>	Accuracy score for multiclass classification.
<i>AUC</i>	AUC score for binary classification.
<i>AUCMacro</i>	AUC score for multiclass classification using macro averaging.
<i>AUCMicro</i>	AUC score for multiclass classification using micro averaging.
<i>AUCWeighted</i>	AUC Score for multiclass classification using weighted averaging.
<i>Gini</i>	Gini coefficient for binary classification.
<i>BalancedAccuracyBinary</i>	Balanced accuracy score for binary classification.
<i>BalancedAccuracyMulticlass</i>	Balanced accuracy score for multiclass classification.
<i>F1</i>	F1 score for binary classification.
<i>F1Micro</i>	F1 score for multiclass classification using micro averaging.
<i>F1Macro</i>	F1 score for multiclass classification using macro averaging.
<i>F1Weighted</i>	F1 score for multiclass classification using weighted averaging.
<i>LogLossBinary</i>	Log Loss for binary classification.
<i>LogLossMulticlass</i>	Log Loss for multiclass classification.
<i>MCCBinary</i>	Matthews correlation coefficient for binary classification.
<i>MCCMulticlass</i>	Matthews correlation coefficient for multiclass classification.
<i>Precision</i>	Precision score for binary classification.
<i>PrecisionMicro</i>	Precision score for multiclass classification using micro averaging.
<i>PrecisionMacro</i>	Precision score for multiclass classification using macro-averaging.
<i>PrecisionWeighted</i>	Precision score for multiclass classification using weighted averaging.
<i>Recall</i>	Recall score for binary classification.
<i>RecallMicro</i>	Recall score for multiclass classification using micro averaging.

continues on next page

Table 22 – continued from previous page

<i>RecallMacro</i>	Recall score for multiclass classification using macro averaging.
<i>RecallWeighted</i>	Recall score for multiclass classification using weighted averaging.

5.9.4 Regression Objectives

<i>R2</i>	Coefficient of determination for regression.
<i>MAE</i>	Mean absolute error for regression.
<i>MAPE</i>	Mean absolute percentage error for time series regression. Scaled by 100 to return a percentage.
<i>MSE</i>	Mean squared error for regression.
<i>MeanSquaredLogError</i>	Mean squared log error for regression.
<i>MedianAE</i>	Median absolute error for regression.
<i>MaxError</i>	Maximum residual error for regression.
<i>ExpVariance</i>	Explained variance score for regression.
<i>RootMeanSquaredError</i>	Root mean squared error for regression.
<i>RootMeanSquaredLogError</i>	Root mean squared log error for regression.

5.9.5 Objective Utils

<i>get_all_objective_names</i>	Get a list of the names of all objectives.
<i>get_core_objectives</i>	Returns all core objective instances associated with the given problem type.
<i>get_core_objective_names</i>	Get a list of all valid core objectives.
<i>get_non_core_objectives</i>	Get non-core objective classes.
<i>get_objective</i>	Returns the Objective class corresponding to a given objective name.

5.10 Problem Types

<i>handle_problem_types</i>	Handles <i>problem_type</i> by either returning the <i>ProblemTypes</i> or converting from a str.
<i>detect_problem_type</i>	Determine the type of problem is being solved based on the targets (binary vs multiclass classification, regression). Ignores missing and null data.
<i>ProblemTypes</i>	Enum defining the supported types of machine learning problems.

5.11 Model Family

<i>handle_model_family</i>	Handles <code>model_family</code> by either returning the <code>ModelFamily</code> or converting from a string.
<i>ModelFamily</i>	Enum for family of machine learning models.

5.12 Tuners

<i>Tuner</i>	Base Tuner class.
<i>SKOptTuner</i>	Bayesian Optimizer.
<i>GridSearchTuner</i>	Grid Search Optimizer, which generates all of the possible points to search for using a grid.
<i>RandomSearchTuner</i>	Random Search Optimizer.

5.13 Data Checks

5.13.1 Data Check Classes

<i>DataCheck</i>	Base class for all data checks.
<i>InvalidTargetDataCheck</i>	Check if the target data contains missing or invalid values.
<i>HighlyNullDataCheck</i>	Check if there are any highly-null columns and rows in the input.
<i>IDColumnsDataCheck</i>	Check if any of the features are likely to be ID columns.
<i>TargetLeakageDataCheck</i>	Check if any of the features are highly correlated with the target by using mutual information or Pearson correlation.
<i>OutliersDataCheck</i>	Checks if there are any outliers in input data by using IQR to determine score anomalies.
<i>NoVarianceDataCheck</i>	Check if the target or any of the features have no variance.
<i>ClassImbalanceDataCheck</i>	Check if any of the target labels are imbalanced, or if the number of values for each target are below 2 times the number of CV folds. Use for classification problems.
<i>MulticollinearityDataCheck</i>	Check if any set features are likely to be multicollinear.
<i>DateTimeNaNDataCheck</i>	Check each column in the input for datetime features and will issue an error if NaN values are present.
<i>NaturalLanguageNaNDataCheck</i>	Checks each column in the input for natural language features and will issue an error if NaN values are present.
<i>DateTimeFormatDataCheck</i>	Check if the datetime column has equally spaced intervals and is monotonically increasing or decreasing in order to be supported by time series estimators.
<i>DataChecks</i>	A collection of data checks.

continues on next page

Table 28 – continued from previous page

<i>DefaultDataChecks</i>	A collection of basic data checks that is used by AutoML by default.
--------------------------	--

5.13.2 Data Check Messages

<i>DataCheckMessage</i>	Base class for a message returned by a DataCheck, tagged by name.
<i>DataCheckError</i>	DataCheckMessage subclass for errors returned by data checks.
<i>DataCheckWarning</i>	DataCheckMessage subclass for warnings returned by data checks.

5.13.3 Data Check Message Types

<i>DataCheckMessageType</i>	Enum for type of data check message: WARNING or ERROR.
-----------------------------	--

5.13.4 Data Check Message Codes

<i>DataCheckMessageCode</i>	Enum for data check message code.
-----------------------------	-----------------------------------

5.14 Utils

5.14.1 General Utils

<i>import_or_raise</i>	Attempts to import the requested library by name. If the import fails, raises an ImportError or warning.
<i>convert_to_seconds</i>	Converts a string describing a length of time to its length in seconds.
<i>get_random_state</i>	Generates a numpy.random.RandomState instance using seed.
<i>get_random_seed</i>	Given a numpy.random.RandomState object, generate an int representing a seed value for another random number generator. Or, if given an int, return that int.
<i>pad_with_nans</i>	Pad the beginning num_to_pad rows with nans.
<i>drop_rows_with_nans</i>	Drop rows that have any NaNs in all dataframes or series.
<i>infer_feature_types</i>	Create a Woodwork structure from the given list, pandas, or numpy input, with specified types for columns. If a column's type is not specified, it will be inferred by Woodwork.
<i>save_plot</i>	Saves fig to filepath if specified, or to a default location if not.

continues on next page

Table 32 – continued from previous page

<code>is_all_numeric</code>	Checks if the given DataFrame contains only numeric values.
<code>get_importable_subclasses</code>	Get importable subclasses of a base class. Used to list all of our estimators, transformers, components and pipelines dynamically.

Evalml

EvalML.

Subpackages

Automl

AutoMLSearch and related modules.

Subpackages

automl_algorithm

AutoML algorithms that power EvalML.

Submodules

automl_algorithm

Base class for the AutoML algorithms which power EvalML.

Module Contents

Classes Summary

<code>AutoMLAlgorithm</code>	Base class for the AutoML algorithms which power EvalML.
------------------------------	--

Exceptions Summary

—

Contents

```
class evalml.automl.automl_algorithm.automl_algorithm.AutoMLAlgorithm(allowed_pipelines=None,
                                                                    cus-
                                                                    tom_hyperparameters=None,
                                                                    tuner_class=None,
                                                                    text_in_ensembling=False,
                                                                    ran-
                                                                    dom_seed=0,
                                                                    n_jobs=-
                                                                    1)
```

Base class for the AutoML algorithms which power EvalML.

This class represents an automated machine learning (AutoML) algorithm. It encapsulates the decision-making logic behind an automl search, by both deciding which pipelines to evaluate next and by deciding what set of parameters to configure the pipeline with.

To use this interface, you must define a `next_batch` method which returns the next group of pipelines to evaluate on the training data. That method may access state and results recorded from the previous batches, although that information is not tracked in a general way in this base class. Overriding `add_result` is a convenient way to record pipeline evaluation info if necessary.

Parameters

- **allowed_pipelines** (*list(class)*) – A list of PipelineBase subclasses indicating the pipelines allowed in the search. The default of None indicates all pipelines for this problem type are allowed.
- **custom_hyperparameters** (*dict*) – Custom hyperparameter ranges specified for pipelines to iterate over.
- **tuner_class** (*class*) – A subclass of Tuner, to be used to find parameters for each pipeline. The default of None indicates the SKOptTuner will be used.
- **text_in_ensembling** (*boolean*) – If True and ensembling is True, then `n_jobs` will be set to 1 to avoid downstream sklearn stacking issues related to nltk. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Methods

<code>add_result</code>	Register results from evaluating a pipeline.
<code>batch_number</code>	Returns the number of batches which have been recommended so far.
<code>next_batch</code>	Get the next batch of pipelines to evaluate.
<code>pipeline_number</code>	Returns the number of pipelines which have been recommended so far.

add_result (*self, score_to_minimize, pipeline, trained_pipeline_results*)

Register results from evaluating a pipeline.

Parameters

- **score_to_minimize** (*float*) – The score obtained by this pipeline on the primary objective, converted so that lower values indicate better pipelines.
- **pipeline** (*PipelineBase*) – The trained pipeline object which was used to compute the score.
- **trained_pipeline_results** (*dict*) – Results from training a pipeline.

Raises `PipelineNotFoundError` – If pipeline is not allowed in search.

property `batch_number` (*self*)

Returns the number of batches which have been recommended so far.

abstract `next_batch` (*self*)

Get the next batch of pipelines to evaluate.

Returns A list of instances of `PipelineBase` subclasses, ready to be trained and evaluated.

Return type `list[PipelineBase]`

property `pipeline_number` (*self*)

Returns the number of pipelines which have been recommended so far.

exception `evalml.automl.automl_algorithm.automl_algorithm.AutoMLAlgorithmException`

Exception raised when an error is encountered during the computation of the automl algorithm.

default_algorithm

An automl algorithm that consists of two modes: fast and long, where fast is a subset of long.

Module Contents

Classes Summary

<i>DefaultAlgorithm</i>	An automl algorithm that consists of two modes: fast and long, where fast is a subset of long.
-------------------------	--

Contents

```
class evalml.automl.automl_algorithm.default_algorithm.DefaultAlgorithm(X,
                                                                    y,
                                                                    prob-
                                                                    lem_type,
                                                                    sam-
                                                                    pler_name,
                                                                    tuner_class=None,
                                                                    ran-
                                                                    dom_seed=0,
                                                                    pipeline_params=None,
                                                                    cus-
                                                                    tom_hyperparameters=None,
                                                                    n_jobs=-
                                                                    1,
                                                                    text_in_ensembling=False,
                                                                    top_n=3,
                                                                    num_long_explore_pipeline
                                                                    num_long_pipelines_per_b
```

An automl algorithm that consists of two modes: fast and long, where fast is a subset of long.

1. Naive pipelines:

- a. run baseline with default preprocessing pipeline

- b. run naive linear model with default preprocessing pipeline
- c. run basic RF pipeline with default preprocessing pipeline

2. Naive pipelines with feature selection

- a. subsequent pipelines will use the selected features with a SelectedColumns transformer

At this point we have a single pipeline candidate for preprocessing and feature selection

3. Pipelines with preprocessing components:

- a. scan rest of estimators (our current batch 1).

4. First ensembling run

Fast mode ends here. Begin long mode.

6. Run top 3 estimators:

- a. Generate 50 random parameter sets. Run all 150 in one batch

7. Second ensembling run

8. Repeat these indefinitely until stopping criterion is met:

- a. For each of the previous top 3 estimators, sample 10 parameters from the tuner. Run all 30 in one batch
- b. Run ensembling

Parameters

- **X** (*pd.DataFrame*) – Training data.
- **y** (*pd.Series*) – Target data.
- **problem_type** (*ProblemType*) – Problem type associated with training data.
- **sampler_name** (*BaseSampler*) – Sampler to use for preprocessing.
- **tuner_class** (*class*) – A subclass of Tuner, to be used to find parameters for each pipeline. The default of None indicates the SKOptTuner will be used.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.
- **pipeline_params** (*dict or None*) – Pipeline-level parameters that should be passed to the proposed pipelines. Defaults to None.
- **custom_hyperparameters** (*dict or None*) – Custom hyperparameter ranges specified for pipelines to iterate over. Defaults to None.
- **n_jobs** (*int or None*) – Non-negative integer describing level of parallelism used for pipelines. Defaults to -1.
- **text_in_ensembling** (*boolean*) – If True and ensembling is True, then n_jobs will be set to 1 to avoid downstream sklearn stacking issues related to nltk. Defaults to False.
- **top_n** (*int*) – top n number of pipelines to use for long mode.
- **num_long_explore_pipelines** (*int*) – number of pipelines to explore for each top n pipeline at the start of long mode.
- **num_long_pipelines_per_batch** (*int*) – number of pipelines per batch for each top n pipeline through long mode.

Methods

<code>add_result</code>	Register results from evaluating a pipeline. In batch number 2, the selected column names from the feature selector are taken to be used in a column selector. Information regarding the best pipeline is updated here as well.
<code>batch_number</code>	Returns the number of batches which have been recommended so far.
<code>next_batch</code>	Get the next batch of pipelines to evaluate.
<code>pipeline_number</code>	Returns the number of pipelines which have been recommended so far.

add_result (*self*, *score_to_minimize*, *pipeline*, *trained_pipeline_results*)

Register results from evaluating a pipeline. In batch number 2, the selected column names from the feature selector are taken to be used in a column selector. Information regarding the best pipeline is updated here as well.

Parameters

- **score_to_minimize** (*float*) – The score obtained by this pipeline on the primary objective, converted so that lower values indicate better pipelines.
- **pipeline** (*PipelineBase*) – The trained pipeline object which was used to compute the score.
- **trained_pipeline_results** (*dict*) – Results from training a pipeline.

property batch_number (*self*)

Returns the number of batches which have been recommended so far.

next_batch (*self*)

Get the next batch of pipelines to evaluate.

Returns a list of instances of PipelineBase subclasses, ready to be trained and evaluated.

Return type list(PipelineBase)

property pipeline_number (*self*)

Returns the number of pipelines which have been recommended so far.

iterative_algorithm

An automl algorithm which first fits a base round of pipelines with default parameters, then does a round of parameter tuning on each pipeline in order of performance.

Module Contents

Classes Summary

IterativeAlgorithm

An automl algorithm which first fits a base round of pipelines with default parameters, then does a round of parameter tuning on each pipeline in order of performance.

Contents

```

class evalml.automl.automl_algorithm.iterative_algorithm.IterativeAlgorithm(X,
                                                                            y,
                                                                            prob-
                                                                            lem_type,
                                                                            sam-
                                                                            pler_name=None,
                                                                            al-
                                                                            lowed_model_families=
                                                                            al-
                                                                            lowed_component_gr-
                                                                            max_batches=None,
                                                                            max_iterations=None,
                                                                            tuner_class=None,
                                                                            ran-
                                                                            dom_seed=0,
                                                                            pipelines_per_batch=
                                                                            n_jobs=-

                                                                            1,
                                                                            num-
                                                                            ber_features=None,
                                                                            en-
                                                                            sem-
                                                                            bling=False,
                                                                            text_in_ensembling=
                                                                            pipeline_params=None,
                                                                            cus-
                                                                            tom_hyperparameters=
                                                                            _es-
                                                                            ti-
                                                                            ma-
                                                                            tor_family_order=None,
                                                                            ver-
                                                                            bose=False)

```

An automl algorithm which first fits a base round of pipelines with default parameters, then does a round of parameter tuning on each pipeline in order of performance.

Parameters

- **X** (*pd.DataFrame*) – Training data.
- **y** (*pd.Series*) – Target data.
- **problem_type** (*ProblemType*) – Problem type associated with training data.
- **sampler_name** (*BaseSampler*) – Sampler to use for preprocessing. Defaults to None.

- **allowed_model_families** (*list(str, ModelFamily)*) – The model families to search. The default of None searches over all model families. Run `evalml.pipelines.components.utils.allowed_model_families("binary")` to see options. Change *binary* to *multiclass* or *regression* depending on the problem type. Note that if `allowed_pipelines` is provided, this parameter will be ignored.
- **allowed_component_graphs** (*dict*) – A dictionary of lists or `ComponentGraphs` indicating the component graphs allowed in the search. The format should follow { "Name_0": [list_of_components], "Name_1": [`ComponentGraph(...)`] }

The default of None indicates all pipeline component graphs for this problem type are allowed. Setting this field will cause `allowed_model_families` to be ignored.

e.g. `allowed_component_graphs = { "My_Graph": ["Imputer", "One Hot Encoder", "Random Forest Classifier"] }`
- **max_batches** (*int*) – The maximum number of batches to be evaluated. Used to determine ensembling. Defaults to None.
- **max_iterations** (*int*) – The maximum number of iterations to be evaluated. Used to determine ensembling. Defaults to None.
- **tuner_class** (*class*) – A subclass of `Tuner`, to be used to find parameters for each pipeline. The default of None indicates the `SKOptTuner` will be used.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.
- **pipelines_per_batch** (*int*) – The number of pipelines to be evaluated in each batch, after the first batch. Defaults to 5.
- **n_jobs** (*int or None*) – Non-negative integer describing level of parallelism used for pipelines. Defaults to None.
- **number_features** (*int*) – The number of columns in the input features. Defaults to None.
- **ensembling** (*boolean*) – If True, runs ensembling in a separate batch after every allowed pipeline class has been iterated over. Defaults to False.
- **text_in_ensembling** (*boolean*) – If True and ensembling is True, then `n_jobs` will be set to 1 to avoid downstream sklearn stacking issues related to nltk. Defaults to False.
- **pipeline_params** (*dict or None*) – Pipeline-level parameters that should be passed to the proposed pipelines. Defaults to None.
- **custom_hyperparameters** (*dict or None*) – Custom hyperparameter ranges specified for pipelines to iterate over. Defaults to None.
- **_estimator_family_order** (*list(ModelFamily) or None*) – specify the sort order for the first batch. Defaults to None, which uses `_ESTIMATOR_FAMILY_ORDER`.
- **verbose** (*boolean*) – Whether or not to display logging information regarding pipeline building. Defaults to False.

Methods

<code>add_result</code>	Register results from evaluating a pipeline.
<code>batch_number</code>	Returns the number of batches which have been recommended so far.
<code>next_batch</code>	Get the next batch of pipelines to evaluate.

continues on next page

Table 39 – continued from previous page

<i>pipeline_number</i>	Returns the number of pipelines which have been recommended so far.
------------------------	---

add_result (*self*, *score_to_minimize*, *pipeline*, *trained_pipeline_results*)

Register results from evaluating a pipeline.

Parameters

- **score_to_minimize** (*float*) – The score obtained by this pipeline on the primary objective, converted so that lower values indicate better pipelines.
- **pipeline** (*PipelineBase*) – The trained pipeline object which was used to compute the score.
- **trained_pipeline_results** (*dict*) – Results from training a pipeline.

Raises **ValueError** – If default parameters are not in the acceptable hyperparameter ranges.

property *batch_number* (*self*)

Returns the number of batches which have been recommended so far.

next_batch (*self*)

Get the next batch of pipelines to evaluate.

Returns A list of instances of PipelineBase subclasses, ready to be trained and evaluated.

Return type list[PipelineBase]

Raises **AutoMLAlgorithmException** – If no results were reported from the first batch.

property *pipeline_number* (*self*)

Returns the number of pipelines which have been recommended so far.

Package Contents

Classes Summary

<i>AutoMLAlgorithm</i>	Base class for the AutoML algorithms which power EvalML.
<i>DefaultAlgorithm</i>	An automl algorithm that consists of two modes: fast and long, where fast is a subset of long.
<i>IterativeAlgorithm</i>	An automl algorithm which first fits a base round of pipelines with default parameters, then does a round of parameter tuning on each pipeline in order of performance.

Exceptions Summary

Contents

```
class evalml.automl.automl_algorithm.AutoMLAlgorithm(allowed_pipelines=None, custom_hyperparameters=None, tuner_class=None, text_in_ensembling=False, random_seed=0, n_jobs=-1)
```

Base class for the AutoML algorithms which power EvalML.

This class represents an automated machine learning (AutoML) algorithm. It encapsulates the decision-making logic behind an automl search, by both deciding which pipelines to evaluate next and by deciding what set of parameters to configure the pipeline with.

To use this interface, you must define a `next_batch` method which returns the next group of pipelines to evaluate on the training data. That method may access state and results recorded from the previous batches, although that information is not tracked in a general way in this base class. Overriding `add_result` is a convenient way to record pipeline evaluation info if necessary.

Parameters

- **allowed_pipelines** (*list(class)*) – A list of PipelineBase subclasses indicating the pipelines allowed in the search. The default of None indicates all pipelines for this problem type are allowed.
- **custom_hyperparameters** (*dict*) – Custom hyperparameter ranges specified for pipelines to iterate over.
- **tuner_class** (*class*) – A subclass of Tuner, to be used to find parameters for each pipeline. The default of None indicates the SKOptTuner will be used.
- **text_in_ensembling** (*boolean*) – If True and ensembling is True, then `n_jobs` will be set to 1 to avoid downstream sklearn stacking issues related to nltk. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Methods

<code>add_result</code>	Register results from evaluating a pipeline.
<code>batch_number</code>	Returns the number of batches which have been recommended so far.
<code>next_batch</code>	Get the next batch of pipelines to evaluate.
<code>pipeline_number</code>	Returns the number of pipelines which have been recommended so far.

add_result (*self, score_to_minimize, pipeline, trained_pipeline_results*)
Register results from evaluating a pipeline.

Parameters

- **score_to_minimize** (*float*) – The score obtained by this pipeline on the primary objective, converted so that lower values indicate better pipelines.
- **pipeline** (*PipelineBase*) – The trained pipeline object which was used to compute the score.

- **trained_pipeline_results** (*dict*) – Results from training a pipeline.

Raises PipelineNotFoundError – If pipeline is not allowed in search.

property batch_number (*self*)

Returns the number of batches which have been recommended so far.

abstract next_batch (*self*)

Get the next batch of pipelines to evaluate.

Returns A list of instances of PipelineBase subclasses, ready to be trained and evaluated.

Return type list[PipelineBase]

property pipeline_number (*self*)

Returns the number of pipelines which have been recommended so far.

exception evalml.automl.automl_algorithm.AutoMLAlgorithmException

Exception raised when an error is encountered during the computation of the automl algorithm.

```
class evalml.automl.automl_algorithm.DefaultAlgorithm(X, y, problem_type,
                                                    sampler_name,
                                                    tuner_class=None,
                                                    random_seed=0,
                                                    pipeline_params=None, cus-
                                                    tom_hyperparameters=None,
                                                    n_jobs=-1,
                                                    text_in_ensembling=False,
                                                    top_n=3,
                                                    num_long_explore_pipelines=50,
                                                    num_long_pipelines_per_batch=10)
```

An automl algorithm that consists of two modes: fast and long, where fast is a subset of long.

1. Naive pipelines:

- run baseline with default preprocessing pipeline
- run naive linear model with default preprocessing pipeline
- run basic RF pipeline with default preprocessing pipeline

2. Naive pipelines with feature selection

- subsequent pipelines will use the selected features with a SelectedColumns transformer

At this point we have a single pipeline candidate for preprocessing and feature selection

3. Pipelines with preprocessing components:

- scan rest of estimators (our current batch 1).

4. First ensembling run

Fast mode ends here. Begin long mode.

6. Run top 3 estimators:

- Generate 50 random parameter sets. Run all 150 in one batch

7. Second ensembling run

8. Repeat these indefinitely until stopping criterion is met:

- For each of the previous top 3 estimators, sample 10 parameters from the tuner. Run all 30 in one batch
- Run ensembling

Parameters

- **x** (*pd.DataFrame*) – Training data.
- **y** (*pd.Series*) – Target data.
- **problem_type** (*ProblemType*) – Problem type associated with training data.
- **sampler_name** (*BaseSampler*) – Sampler to use for preprocessing.
- **tuner_class** (*class*) – A subclass of Tuner, to be used to find parameters for each pipeline. The default of None indicates the SKOptTuner will be used.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.
- **pipeline_params** (*dict or None*) – Pipeline-level parameters that should be passed to the proposed pipelines. Defaults to None.
- **custom_hyperparameters** (*dict or None*) – Custom hyperparameter ranges specified for pipelines to iterate over. Defaults to None.
- **n_jobs** (*int or None*) – Non-negative integer describing level of parallelism used for pipelines. Defaults to -1.
- **text_in_ensembling** (*boolean*) – If True and ensembling is True, then n_jobs will be set to 1 to avoid downstream sklearn stacking issues related to nltk. Defaults to False.
- **top_n** (*int*) – top n number of pipelines to use for long mode.
- **num_long_explore_pipelines** (*int*) – number of pipelines to explore for each top n pipeline at the start of long mode.
- **num_long_pipelines_per_batch** (*int*) – number of pipelines per batch for each top n pipeline through long mode.

Methods

<code>add_result</code>	Register results from evaluating a pipeline. In batch number 2, the selected column names from the feature selector are taken to be used in a column selector. Information regarding the best pipeline is updated here as well.
<code>batch_number</code>	Returns the number of batches which have been recommended so far.
<code>next_batch</code>	Get the next batch of pipelines to evaluate.
<code>pipeline_number</code>	Returns the number of pipelines which have been recommended so far.

add_result (*self, score_to_minimize, pipeline, trained_pipeline_results*)

Register results from evaluating a pipeline. In batch number 2, the selected column names from the feature selector are taken to be used in a column selector. Information regarding the best pipeline is updated here as well.

Parameters

- **score_to_minimize** (*float*) – The score obtained by this pipeline on the primary objective, converted so that lower values indicate better pipelines.
- **pipeline** (*PipelineBase*) – The trained pipeline object which was used to compute the score.
- **trained_pipeline_results** (*dict*) – Results from training a pipeline.

property `batch_number` (*self*)

Returns the number of batches which have been recommended so far.

property `next_batch` (*self*)

Get the next batch of pipelines to evaluate.

Returns a list of instances of PipelineBase subclasses, ready to be trained and evaluated.

Return type list(PipelineBase)

property `pipeline_number` (*self*)

Returns the number of pipelines which have been recommended so far.

```
class evalml.automl.automl_algorithm.IterativeAlgorithm(X, y, problem_type,
                                                         sampler_name=None, al-
                                                         lowed_model_families=None, al-
                                                         lowed_component_graphs=None,
                                                         max_batches=None,
                                                         max_iterations=None,
                                                         tuner_class=None,
                                                         random_seed=0,
                                                         pipelines_per_batch=5,
                                                         n_jobs=-1, num-
                                                         ber_features=None,
                                                         ensembling=False,
                                                         text_in_ensembling=False,
                                                         pipeline_params=None,
                                                         cus-
                                                         tom_hyperparameters=None,
                                                         _estima-
                                                         tor_family_order=None,
                                                         verbose=False)
```

An automl algorithm which first fits a base round of pipelines with default parameters, then does a round of parameter tuning on each pipeline in order of performance.

Parameters

- **X** (*pd.DataFrame*) – Training data.
- **y** (*pd.Series*) – Target data.
- **problem_type** (*ProblemType*) – Problem type associated with training data.
- **sampler_name** (*BaseSampler*) – Sampler to use for preprocessing. Defaults to None.
- **allowed_model_families** (*list(str, ModelFamily)*) – The model families to search. The default of None searches over all model families. Run `evalml.pipelines.components.utils.allowed_model_families("binary")` to see options. Change *binary* to *multiclass* or *regression* depending on the problem type. Note that if `allowed_pipelines` is provided, this parameter will be ignored.
- **allowed_component_graphs** (*dict*) – A dictionary of lists or ComponentGraphs indicating the component graphs allowed in the search. The format should follow { "Name_0": [list_of_components], "Name_1": [ComponentGraph(...)] }

The default of None indicates all pipeline component graphs for this problem type are allowed. Setting this field will cause `allowed_model_families` to be ignored.

e.g. `allowed_component_graphs = { "My_Graph": ["Imputer", "One Hot Encoder", "Random Forest Classifier"] }`

- **max_batches** (*int*) – The maximum number of batches to be evaluated. Used to determine ensembling. Defaults to None.
- **max_iterations** (*int*) – The maximum number of iterations to be evaluated. Used to determine ensembling. Defaults to None.
- **tuner_class** (*class*) – A subclass of Tuner, to be used to find parameters for each pipeline. The default of None indicates the SKOptTuner will be used.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.
- **pipelines_per_batch** (*int*) – The number of pipelines to be evaluated in each batch, after the first batch. Defaults to 5.
- **n_jobs** (*int or None*) – Non-negative integer describing level of parallelism used for pipelines. Defaults to None.
- **number_features** (*int*) – The number of columns in the input features. Defaults to None.
- **ensembling** (*boolean*) – If True, runs ensembling in a separate batch after every allowed pipeline class has been iterated over. Defaults to False.
- **text_in_ensembling** (*boolean*) – If True and ensembling is True, then n_jobs will be set to 1 to avoid downstream sklearn stacking issues related to nltk. Defaults to False.
- **pipeline_params** (*dict or None*) – Pipeline-level parameters that should be passed to the proposed pipelines. Defaults to None.
- **custom_hyperparameters** (*dict or None*) – Custom hyperparameter ranges specified for pipelines to iterate over. Defaults to None.
- **_estimator_family_order** (*list (ModelFamily) or None*) – specify the sort order for the first batch. Defaults to None, which uses _ESTIMATOR_FAMILY_ORDER.
- **verbose** (*boolean*) – Whether or not to display logging information regarding pipeline building. Defaults to False.

Methods

<code>add_result</code>	Register results from evaluating a pipeline.
<code>batch_number</code>	Returns the number of batches which have been recommended so far.
<code>next_batch</code>	Get the next batch of pipelines to evaluate.
<code>pipeline_number</code>	Returns the number of pipelines which have been recommended so far.

add_result (*self, score_to_minimize, pipeline, trained_pipeline_results*)

Register results from evaluating a pipeline.

Parameters

- **score_to_minimize** (*float*) – The score obtained by this pipeline on the primary objective, converted so that lower values indicate better pipelines.
- **pipeline** (*PipelineBase*) – The trained pipeline object which was used to compute the score.
- **trained_pipeline_results** (*dict*) – Results from training a pipeline.

Raises ValueError – If default parameters are not in the acceptable hyperparameter ranges.

property `batch_number` (*self*)

Returns the number of batches which have been recommended so far.

property `next_batch` (*self*)

Get the next batch of pipelines to evaluate.

Returns A list of instances of PipelineBase subclasses, ready to be trained and evaluated.

Return type list[PipelineBase]

Raises `AutoMLAlgorithmException` – If no results were reported from the first batch.

property `pipeline_number` (*self*)

Returns the number of pipelines which have been recommended so far.

engine

EvalML Engine classes used to evaluate pipelines in AutoMLSearch.

Submodules

cf_engine

Custom CFClient API to match Dask's CFClient and allow context management.

Module Contents

Classes Summary

<code>CFClient</code>	Custom CFClient API to match Dask's CFClient and allow context management.
<code>CFComputation</code>	A Future-like wrapper around jobs created by the CFEngine.
<code>CFEngine</code>	The concurrent.futures (CF) engine.

Contents

class `evalml.automl.engine.cf_engine.CFClient` (*pool*)

Custom CFClient API to match Dask's CFClient and allow context management.

Parameters `pool` (`cf.ThreadPoolExecutor` or `cf.ProcessPoolExecutor`) – The resource pool to execute the futures work on.

Methods

<code>close</code>	Closes the underlying Executor.
<code>is_closed</code>	Property that determines whether the Engine's Client's resources are closed.
<code>submit</code>	Pass through to imitate Dask's Client API.

close (*self*)

Closes the underlying Executor.

property is_closed (*self*)

Property that determines whether the Engine's Client's resources are closed.

submit (*self*, **args*, ***kwargs*)

Pass through to imitate Dask's Client API.

class evalml.automl.engine.cf_engine.CFComputation (*future*)

A Future-like wrapper around jobs created by the CFEngine.

Parameters **future** (*cf.Future*) – The concurrent.futures.Future that is desired to be executed.

Methods

<i>cancel</i>	Cancel the current computation.
<i>done</i>	Returns whether the computation is done.
<i>get_result</i>	Gets the computation result. Will block until the computation is finished.
<i>is_cancelled</i>	Returns whether computation was cancelled.

cancel (*self*)

Cancel the current computation.

Returns

False if the call is currently being executed or finished running and cannot be cancelled.

True if the call can be canceled.

Return type bool

done (*self*)

Returns whether the computation is done.

get_result (*self*)

Gets the computation result. Will block until the computation is finished.

Raises

- **Exception** – If computation fails. Returns traceback.
- **cf.TimeoutError** – If computation takes longer than default timeout time.
- **cf.CancelledError** – If computation was canceled before completing.

Returns The result of the requested job.

property is_cancelled (*self*)

Returns whether computation was cancelled.

class evalml.automl.engine.cf_engine.CFEngine (*client=None*)

The concurrent.futures (CF) engine.

Parameters **client** (*None* or *CFClient*) – If None, creates a threaded pool for processing.

Defaults to None.

Methods

<i>close</i>	Function to properly shutdown the Engine's Client's resources.
--------------	--

continues on next page

Table 48 – continued from previous page

<code>is_closed</code>	Property that determines whether the Engine's Client's resources are shutdown.
<code>setup_job_log</code>	Set up logger for job.
<code>submit_evaluation_job</code>	Send evaluation job to cluster.
<code>submit_scoring_job</code>	Send scoring job to cluster.
<code>submit_training_job</code>	Send training job to cluster.

close (*self*)

Function to properly shutdown the Engine's Client's resources.

property is_closed (*self*)

Property that determines whether the Engine's Client's resources are shutdown.

static setup_job_log ()

Set up logger for job.

submit_evaluation_job (*self*, *automl_config*, *pipeline*, *X*, *y*)

Send evaluation job to cluster.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to evaluate.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.

Returns

An object wrapping a reference to a future-like computation occurring in the resource pool

Return type *CFComputation*

submit_scoring_job (*self*, *automl_config*, *pipeline*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Send scoring job to cluster.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to train.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.
- **X_train** (*pd.DataFrame*) – Training features. Used for feature engineering in time series.
- **y_train** (*pd.Series*) – Training target. Used for feature engineering in time series.
- **objectives** (*list [ObjectiveBase]*) – Objectives to score on.

Returns

An object wrapping a reference to a future-like computation occurring in the resource pool.

Return type *CFComputation*

submit_training_job (*self*, *automl_config*, *pipeline*, *X*, *y*)

Send training job to cluster.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to train.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.

Returns

An object wrapping a reference to a future-like computation occurring in the resource pool

Return type *CFComputation*

dask_engine

A Future-like wrapper around jobs created by the DaskEngine.

Module Contents**Classes Summary**

<i>DaskComputation</i>	A Future-like wrapper around jobs created by the DaskEngine.
<i>DaskEngine</i>	The dask engine.

Contents

class evalml.automl.engine.dask_engine.**DaskComputation** (*dask_future*)

A Future-like wrapper around jobs created by the DaskEngine.

Parameters **dask_future** (*callable*) – Computation to do.

Methods

<i>cancel</i>	Cancel the current computation.
<i>done</i>	Returns whether the computation is done.
<i>get_result</i>	Gets the computation result. Will block until the computation is finished.
<i>is_cancelled</i>	Returns whether computation was cancelled.

cancel (*self*)

Cancel the current computation.

done (*self*)

Returns whether the computation is done.

get_result (*self*)

Gets the computation result. Will block until the computation is finished.

Raises Exception – If computation fails. Returns traceback.

Returns Computation results.

property is_cancelled (*self*)

Returns whether computation was cancelled.

class evalml.engine.dask_engine.**DaskEngine** (*cluster=None*)

The dask engine.

Parameters **cluster** (*None* or *dd.Client*) – If *None*, creates a local, threaded Dask client for processing. Defaults to *None*.

Methods

<i>close</i>	Closes the underlying cluster.
<i>is_closed</i>	Property that determines whether the Engine's Client's resources are shutdown.
<i>send_data_to_cluster</i>	Send data to the cluster.
<i>setup_job_log</i>	Set up logger for job.
<i>submit_evaluation_job</i>	Send evaluation job to cluster.
<i>submit_scoring_job</i>	Send scoring job to cluster.
<i>submit_training_job</i>	Send training job to cluster.

close (*self*)

Closes the underlying cluster.

property is_closed (*self*)

Property that determines whether the Engine's Client's resources are shutdown.

send_data_to_cluster (*self*, *X*, *y*)

Send data to the cluster.

The implementation uses caching so the data is only sent once. This follows dask best practices.

Parameters

- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.

Returns The modeling data.

Return type *dask.Future*

static setup_job_log ()

Set up logger for job.

submit_evaluation_job (*self*, *automl_config*, *pipeline*, *X*, *y*)

Send evaluation job to cluster.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to evaluate.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.

Returns

An object wrapping a reference to a future-like computation occurring in the dask cluster.

Return type *DaskComputation*

submit_scoring_job (*self*, *automl_config*, *pipeline*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)
Send scoring job to cluster.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to train.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.
- **X_train** (*pd.DataFrame*) – Training features. Used for feature engineering in time series.
- **y_train** (*pd.Series*) – Training target. Used for feature engineering in time series.
- **objectives** (*list[ObjectiveBase]*) – List of objectives to score on.

Returns

An object wrapping a reference to a future-like computation occurring in the dask cluster.

Return type *DaskComputation*

submit_training_job (*self*, *automl_config*, *pipeline*, *X*, *y*)
Send training job to cluster.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to train.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.

Returns

An object wrapping a reference to a future-like computation occurring in the dask cluster.

Return type *DaskComputation*

engine_base

Base class for EvalML engines.

Module Contents

Classes Summary

<i>EngineBase</i>	Base class for EvalML engines.
<i>EngineComputation</i>	Wrapper around the result of a (possibly asynchronous) engine computation.
<i>JobLogger</i>	Mimic the behavior of a python logging.Logger but stores all messages rather than actually logging them.

Functions

<i>evaluate_pipeline</i>	Function submitted to the submit_evaluation_job engine method.
<i>score_pipeline</i>	Wrap around pipeline.score method to make it easy to score pipelines with dask.
<i>train_and_score_pipeline</i>	Given a pipeline, config and data, train and score the pipeline and return the CV or TV scores.
<i>train_pipeline</i>	Train a pipeline and tune the threshold if necessary.

Contents

class evalml.automl.engine.engine_base.**EngineBase**

Base class for EvalML engines.

Methods

<i>setup_job_log</i>	Set up logger for job.
<i>submit_evaluation_job</i>	Submit job for pipeline evaluation during AutoMLSearch.
<i>submit_scoring_job</i>	Submit job for pipeline scoring.
<i>submit_training_job</i>	Submit job for pipeline training.

static **setup_job_log()**

Set up logger for job.

abstract **submit_evaluation_job**(*self, automl_config, pipeline, X, y*)

Submit job for pipeline evaluation during AutoMLSearch.

abstract **submit_scoring_job**(*self, automl_config, pipeline, X, y, objectives, X_train=None, y_train=None*)

Submit job for pipeline scoring.

abstract **submit_training_job**(*self, automl_config, pipeline, X, y*)

Submit job for pipeline training.

class evalml.automl.engine.engine_base.**EngineComputation**

Wrapper around the result of a (possibly asynchronous) engine computation.

Methods

<code>cancel</code>	Cancel the computation.
<code>done</code>	Whether the computation is done.
<code>get_result</code>	Gets the computation result. Will block until the computation is finished.

abstract `cancel(self)`

Cancel the computation.

abstract `done(self)`

Whether the computation is done.

abstract `get_result(self)`

Gets the computation result. Will block until the computation is finished.

Raises Exception: If computation fails. Returns traceback.

`evalml.automl.engine.engine_base.evaluate_pipeline(pipeline, automl_config, X, y, logger)`

Function submitted to the `submit_evaluation_job` engine method.

Parameters

- **pipeline** (*PipelineBase*) – The pipeline to score.
- **automl_config** (*AutoMLConfig*) – The AutoMLSearch object, used to access config and the error callback.
- **X** (*pd.DataFrame*) – Training features.
- **y** (*pd.Series*) – Training target.
- **logger** – Logger object to write to.

Returns

First - A dict containing `cv_score_mean`, `cv_scores`, `training_time` and a `cv_data` structure with details.

Second - The pipeline class we trained and scored. Third - the job logger instance with all the recorded messages.

Return type tuple of three items

class `evalml.automl.engine.engine_base.JobLogger`

Mimic the behavior of a python logging.Logger but stores all messages rather than actually logging them.

This is used during engine jobs so that log messages are recorded after the job completes. This is desired so that all of the messages for a single job are grouped together in the log.

Methods

<code>debug</code>	Store message at the debug level.
<code>error</code>	Store message at the error level.
<code>info</code>	Store message at the info level.
<code>warning</code>	Store message at the warning level.
<code>write_to_logger</code>	Write all the messages to the logger, first in, first out (FIFO) order.

debug (*self*, *msg*)

Store message at the debug level.

error (*self*, *msg*)

Store message at the error level.

info (*self*, *msg*)

Store message at the info level.

warning (*self*, *msg*)

Store message at the warning level.

write_to_logger (*self*, *logger*)

Write all the messages to the logger, first in, first out (FIFO) order.

`evalml automl engine engine_base .score_pipeline` (*pipeline*, *X*, *y*, *objectives*,
X_train=None, *y_train=None*,
X_schema=None, *y_schema=None*)

Wrap around pipeline.score method to make it easy to score pipelines with dask.

Parameters

- **pipeline** (*PipelineBase*) – The pipeline to score.
- **X** (*pd.DataFrame*) – Features to score on.
- **y** (*pd.Series*) – Target used to calculate scores.
- **objectives** (*list[ObjectiveBase]*) – List of objectives to score on.
- **X_train** (*pd.DataFrame*) – Training features. Used for feature engineering in time series.
- **y_train** (*pd.Series*) – Training target. Used for feature engineering in time series.
- **X_schema** (*ww.TableSchema*) – Schema for features. Defaults to None.
- **y_schema** (*ww.ColumnSchema*) – Schema for columns. Defaults to None.

Returns Dictionary object containing pipeline scores.

Return type dict

`evalml automl engine engine_base .train_and_score_pipeline` (*pipeline*, *automl_config*,
full_X_train,
full_y_train, *logger*)

Given a pipeline, config and data, train and score the pipeline and return the CV or TV scores.

Parameters

- **pipeline** (*PipelineBase*) – The pipeline to score.
- **automl_config** (*AutoMLSearch*) – The AutoMLSearch object, used to access config and the error callback.
- **full_X_train** (*pd.DataFrame*) – Training features.
- **full_y_train** (*pd.Series*) – Training target.
- **logger** – Logger object to write to.

Raises Exception – If there are missing target values in the training set after data split.

Returns

First - A dict containing **cv_score_mean**, **cv_scores**, **training_time** and a **cv_data** structure with details.
 Second - The pipeline class we trained and scored. Third - the job logger instance with all the recorded messages.

Return type tuple of three items

`evalml.automl.engine.engine_base.train_pipeline` (*pipeline*, *X*, *y*, *automl_config*,
schema=True)

Train a pipeline and tune the threshold if necessary.

Parameters

- **pipeline** (*PipelineBase*) – Pipeline to train.
- **X** (*pd.DataFrame*) – Features to train on.
- **y** (*pd.Series*) – Target to train on.
- **automl_config** (*AutoMLSearch*) – The AutoMLSearch object, used to access config and the error callback.
- **schema** (*bool*) – Whether to use the schemas for X and y. Defaults to True.

Returns A trained pipeline instance.

Return type pipeline (*PipelineBase*)

sequential_engine

A Future-like api for jobs created by the SequentialEngine, an Engine that sequentially computes the submitted jobs.

Module Contents

Classes Summary

<i>SequentialComputation</i>	A Future-like api for jobs created by the SequentialEngine, an Engine that sequentially computes the submitted jobs.
<i>SequentialEngine</i>	The default engine for the AutoML search.

Contents

class `evalml.automl.engine.sequential_engine.SequentialComputation` (*work*,
***kwargs*)

A Future-like api for jobs created by the SequentialEngine, an Engine that sequentially computes the submitted jobs.

In order to separate the engine from the AutoMLSearch loop, we need the sequential computations to behave the same way as concurrent computations from AutoMLSearch’s point-of-view. One way to do this is by delaying the computation in the sequential engine until `get_result` is called. Since AutoMLSearch will call `get_result` only when the computation is “done”, by always returning True in `done()` we make sure that `get_result` is called in the order that the jobs are submitted. So the computations happen sequentially!

Parameters **work** (*callable*) – Computation that should be done by the engine.

Methods

<i>cancel</i>	Cancel the current computation.
<i>done</i>	Whether the computation is done.

continues on next page

Table 58 – continued from previous page

<code>get_result</code>	Gets the computation result. Will block until the computation is finished.
-------------------------	--

cancel (*self*)

Cancel the current computation.

done (*self*)

Whether the computation is done.

Returns Always returns True.

Return type bool

get_result (*self*)

Gets the computation result. Will block until the computation is finished.

Raises **Exception** – If computation fails. Returns traceback.

Returns Computation results.

class evalml automl.engine.sequential_engine.**SequentialEngine**

The default engine for the AutoML search.

Trains and scores pipelines locally and sequentially.

Methods

<code>close</code>	No-op.
<code>setup_job_log</code>	Set up logger for job.
<code>submit_evaluation_job</code>	Submit a job to evaluate a pipeline.
<code>submit_scoring_job</code>	Submit a job to score a pipeline.
<code>submit_training_job</code>	Submit a job to train a pipeline.

close (*self*)

No-op.

static **setup_job_log** ()

Set up logger for job.

submit_evaluation_job (*self*, *automl_config*, *pipeline*, *X*, *y*)

Submit a job to evaluate a pipeline.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to evaluate.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.

Returns Computation result.

Return type *SequentialComputation*

submit_scoring_job (*self*, *automl_config*, *pipeline*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Submit a job to score a pipeline.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.

- **pipeline** (*pipeline.PipelineBase*) – Pipeline to train.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.
- **X_train** (*pd.DataFrame*) – Training features. Used for feature engineering in time series.
- **y_train** (*pd.Series*) – Training target. Used for feature engineering in time series.
- **objectives** (*list[ObjectiveBase]*) – List of objectives to score on.

Returns Computation result.

Return type *SequentialComputation*

submit_training_job (*self, automl_config, pipeline, X, y*)

Submit a job to train a pipeline.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to evaluate.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.

Returns Computation result.

Return type *SequentialComputation*

Package Contents

Classes Summary

<i>CFEngine</i>	The concurrent.futures (CF) engine.
<i>DaskEngine</i>	The dask engine.
<i>EngineBase</i>	Base class for EvalML engines.
<i>EngineComputation</i>	Wrapper around the result of a (possibly asynchronous) engine computation.
<i>SequentialEngine</i>	The default engine for the AutoML search.

Functions

<i>evaluate_pipeline</i>	Function submitted to the submit_evaluation_job engine method.
<i>train_and_score_pipeline</i>	Given a pipeline, config and data, train and score the pipeline and return the CV or TV scores.
<i>train_pipeline</i>	Train a pipeline and tune the threshold if necessary.

Contents

class evalml.engine.CFEngine (*client=None*)

The concurrent.futures (CF) engine.

Parameters *client* (*None* or *CFClient*) – If *None*, creates a threaded pool for processing. Defaults to *None*.

Methods

<i>close</i>	Function to properly shutdown the Engine's Client's resources.
<i>is_closed</i>	Property that determines whether the Engine's Client's resources are shutdown.
<i>setup_job_log</i>	Set up logger for job.
<i>submit_evaluation_job</i>	Send evaluation job to cluster.
<i>submit_scoring_job</i>	Send scoring job to cluster.
<i>submit_training_job</i>	Send training job to cluster.

close (*self*)

Function to properly shutdown the Engine's Client's resources.

property is_closed (*self*)

Property that determines whether the Engine's Client's resources are shutdown.

static setup_job_log ()

Set up logger for job.

submit_evaluation_job (*self*, *automl_config*, *pipeline*, *X*, *y*)

Send evaluation job to cluster.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to evaluate.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.

Returns

An object wrapping a reference to a future-like computation occurring in the resource pool

Return type CFComputation

submit_scoring_job (*self*, *automl_config*, *pipeline*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Send scoring job to cluster.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to train.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.
- **X_train** (*pd.DataFrame*) – Training features. Used for feature engineering in time series.

- **y_train** (*pd.Series*) – Training target. Used for feature engineering in time series.
- **objectives** (*list[ObjectiveBase]*) – Objectives to score on.

Returns

An object wrapping a reference to a future-like computation occurring in the resource pool.

Return type CFComputation

submit_training_job (*self, automl_config, pipeline, X, y*)
Send training job to cluster.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to train.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.

Returns

An object wrapping a reference to a future-like computation occurring in the resource pool

Return type CFComputation

class evalml.automl.engine.**DaskEngine** (*cluster=None*)
The dask engine.

Parameters **cluster** (*None or dd.Client*) – If None, creates a local, threaded Dask client for processing. Defaults to None.

Methods

<i>close</i>	Closes the underlying cluster.
<i>is_closed</i>	Property that determines whether the Engine's Client's resources are shutdown.
<i>send_data_to_cluster</i>	Send data to the cluster.
<i>setup_job_log</i>	Set up logger for job.
<i>submit_evaluation_job</i>	Send evaluation job to cluster.
<i>submit_scoring_job</i>	Send scoring job to cluster.
<i>submit_training_job</i>	Send training job to cluster.

close (*self*)
Closes the underlying cluster.

property is_closed (*self*)
Property that determines whether the Engine's Client's resources are shutdown.

send_data_to_cluster (*self, X, y*)
Send data to the cluster.

The implementation uses caching so the data is only sent once. This follows dask best practices.

Parameters

- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.

Returns The modeling data.

Return type `dask.Future`

static setup_job_log()

Set up logger for job.

submit_evaluation_job(*self*, *automl_config*, *pipeline*, *X*, *y*)

Send evaluation job to cluster.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to evaluate.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.

Returns

An object wrapping a reference to a future-like computation occurring in the dask cluster.

Return type `DaskComputation`

submit_scoring_job(*self*, *automl_config*, *pipeline*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Send scoring job to cluster.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to train.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.
- **X_train** (*pd.DataFrame*) – Training features. Used for feature engineering in time series.
- **y_train** (*pd.Series*) – Training target. Used for feature engineering in time series.
- **objectives** (*list[ObjectiveBase]*) – List of objectives to score on.

Returns

An object wrapping a reference to a future-like computation occurring in the dask cluster.

Return type `DaskComputation`

submit_training_job(*self*, *automl_config*, *pipeline*, *X*, *y*)

Send training job to cluster.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to train.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.

Returns

An object wrapping a reference to a future-like computation occurring in the `dask` cluster.

Return type `DaskComputation`

class `evalml.automl.engine.EngineBase`

Base class for EvalML engines.

Methods

<code>setup_job_log</code>	Set up logger for job.
<code>submit_evaluation_job</code>	Submit job for pipeline evaluation during <code>AutoMLSearch</code> .
<code>submit_scoring_job</code>	Submit job for pipeline scoring.
<code>submit_training_job</code>	Submit job for pipeline training.

static `setup_job_log()`

Set up logger for job.

abstract `submit_evaluation_job(self, automl_config, pipeline, X, y)`

Submit job for pipeline evaluation during `AutoMLSearch`.

abstract `submit_scoring_job(self, automl_config, pipeline, X, y, objectives, X_train=None, y_train=None)`

Submit job for pipeline scoring.

abstract `submit_training_job(self, automl_config, pipeline, X, y)`

Submit job for pipeline training.

class `evalml.automl.engine.EngineComputation`

Wrapper around the result of a (possibly asynchronous) engine computation.

Methods

<code>cancel</code>	Cancel the computation.
<code>done</code>	Whether the computation is done.
<code>get_result</code>	Gets the computation result. Will block until the computation is finished.

abstract `cancel(self)`

Cancel the computation.

abstract `done(self)`

Whether the computation is done.

abstract `get_result(self)`

Gets the computation result. Will block until the computation is finished.

Raises `Exception`: If computation fails. Returns `traceback`.

`evalml.automl.engine.evaluate_pipeline(pipeline, automl_config, X, y, logger)`

Function submitted to the `submit_evaluation_job` engine method.

Parameters

- **pipeline** (`PipelineBase`) – The pipeline to score.
- **automl_config** (`AutoMLConfig`) – The `AutoMLSearch` object, used to access config and the error callback.
- **X** (`pd.DataFrame`) – Training features.

- **y** (*pd.Series*) – Training target.
- **logger** – Logger object to write to.

Returns

First - A dict containing **cv_score_mean**, **cv_scores**, **training_time** and a **cv_data** structure with details.
 Second - The pipeline class we trained and scored. Third - the job logger instance with all the recorded messages.

Return type tuple of three items

class evalml.automl.engine.**SequentialEngine**

The default engine for the AutoML search.

Trains and scores pipelines locally and sequentially.

Methods

<code>close</code>	No-op.
<code>setup_job_log</code>	Set up logger for job.
<code>submit_evaluation_job</code>	Submit a job to evaluate a pipeline.
<code>submit_scoring_job</code>	Submit a job to score a pipeline.
<code>submit_training_job</code>	Submit a job to train a pipeline.

close (*self*)

No-op.

static setup_job_log ()

Set up logger for job.

submit_evaluation_job (*self*, *automl_config*, *pipeline*, *X*, *y*)

Submit a job to evaluate a pipeline.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to evaluate.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.

Returns Computation result.

Return type SequentialComputation

submit_scoring_job (*self*, *automl_config*, *pipeline*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Submit a job to score a pipeline.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to train.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.
- **X_train** (*pd.DataFrame*) – Training features. Used for feature engineering in time series.
- **y_train** (*pd.Series*) – Training target. Used for feature engineering in time series.

- **objectives** (*list [ObjectiveBase]*) – List of objectives to score on.

Returns Computation result.

Return type SequentialComputation

submit_training_job (*self, automl_config, pipeline, X, y*)

Submit a job to train a pipeline.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to evaluate.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.

Returns Computation result.

Return type SequentialComputation

`evalml.automl.engine.train_and_score_pipeline` (*pipeline, automl_config, full_X_train, full_y_train, logger*)

Given a pipeline, config and data, train and score the pipeline and return the CV or TV scores.

Parameters

- **pipeline** (*PipelineBase*) – The pipeline to score.
- **automl_config** (*AutoMLSearch*) – The AutoMLSearch object, used to access config and the error callback.
- **full_X_train** (*pd.DataFrame*) – Training features.
- **full_y_train** (*pd.Series*) – Training target.
- **logger** – Logger object to write to.

Raises **Exception** – If there are missing target values in the training set after data split.

Returns

First - A dict containing **cv_score_mean**, **cv_scores**, **training_time** and a **cv_data** structure with details.
Second - The pipeline class we trained and scored. Third - the job logger instance with all the recorded messages.

Return type tuple of three items

`evalml.automl.engine.train_pipeline` (*pipeline, X, y, automl_config, schema=True*)

Train a pipeline and tune the threshold if necessary.

Parameters

- **pipeline** (*PipelineBase*) – Pipeline to train.
- **X** (*pd.DataFrame*) – Features to train on.
- **y** (*pd.Series*) – Target to train on.
- **automl_config** (*AutoMLSearch*) – The AutoMLSearch object, used to access config and the error callback.
- **schema** (*bool*) – Whether to use the schemas for X and y. Defaults to True.

Returns A trained pipeline instance.

Return type pipeline (PipelineBase)

Submodules

automl_search

EvalML's core AutoML object.

Module Contents

Classes Summary

<i>AutoMLSearch</i>	Automated Pipeline search.
---------------------	----------------------------

Functions

<i>build_engine_from_str</i>	Function that converts a convenience string for an parallel engine type and returns an instance of that engine.
<i>search</i>	Given data and configuration, run an automl search.
<i>search_iterative</i>	Given data and configuration, run an automl search.

Contents

```
class evalml.automl.automl_search.AutoMLSearch(X_train=None, y_train=None,
problem_type=None, objective='auto', max_iterations=None,
max_time=None, patience=None, tolerance=None, data_splitter=None,
allowed_component_graphs=None, allowed_model_families=None,
start_iteration_callback=None, add_result_callback=None,
error_callback=None, additional_objectives=None, alter-
nate_thresholding_objective='F1',
random_seed=0, n_jobs=-1, tuner_class=None, opti-
mize_thresholds=True, ensem-
bling=False, max_batches=None,
problem_configuration=None,
train_best_pipeline=True,
pipeline_parameters=None, cus-
tom_hyperparameters=None,
sampler_method='auto', sam-
pler_balanced_ratio=0.25,
_ensembling_split_size=0.2,
_pipelines_per_batch=5, _au-
toml_algorithm='iterative', en-
gine='sequential', verbose=False)
```

Automated Pipeline search.

Parameters

- **x_train** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]. Required.
- **y_train** (*pd.Series*) – The target training data of length [n_samples]. Required for supervised learning tasks.
- **problem_type** (*str or ProblemTypes*) – Type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.
- **objective** (*str, ObjectiveBase*) – The objective to optimize for. Used to propose and rank pipelines, but not for optimizing each pipeline during fit-time. When set to 'auto', chooses: - `LogLossBinary` for binary classification problems, - `LogLossMulticlass` for multiclass classification problems, and - `R2` for regression problems.
- **max_iterations** (*int*) – Maximum number of iterations to search. If `max_iterations` and `max_time` is not set, then `max_iterations` will default to `max_iterations` of 5.
- **max_time** (*int, str*) – Maximum time to search for pipelines. This will not start a new pipeline search after the duration has elapsed. If it is an integer, then the time will be in seconds. For strings, time can be specified as seconds, minutes, or hours.
- **patience** (*int*) – Number of iterations without improvement to stop search early. Must be positive. If `None`, early stopping is disabled. Defaults to `None`.
- **tolerance** (*float*) – Minimum percentage difference to qualify as score improvement for early stopping. Only applicable if `patience` is not `None`. Defaults to `None`.
- **allowed_component_graphs** (*dict*) – A dictionary of lists or `ComponentGraphs` indicating the component graphs allowed in the search. The format should follow { "Name_0": [list_of_components], "Name_1": `ComponentGraph(...)` }

The default of `None` indicates all pipeline component graphs for this problem type are allowed. Setting this field will cause `allowed_model_families` to be ignored.

e.g. `allowed_component_graphs = { "My_Graph": ["Imputer", "One Hot Encoder", "Random Forest Classifier"] }`
- **allowed_model_families** (*list(str, ModelFamily)*) – The model families to search. The default of `None` searches over all model families. Run `evalml.pipelines.components.utils.allowed_model_families("binary")` to see options. Change *binary* to *multiclass* or *regression* depending on the problem type. Note that if `allowed_pipelines` is provided, this parameter will be ignored.
- **data_splitter** (*sklearn.model_selection.BaseCrossValidator*) – Data splitting method to use. Defaults to `StratifiedKFold`.
- **tuner_class** – The tuner class to use. Defaults to `SKOptTuner`.
- **optimize_thresholds** (*bool*) – Whether or not to optimize the binary pipeline threshold. Defaults to `True`.
- **start_iteration_callback** (*callable*) – Function called before each pipeline training iteration. Callback function takes three positional parameters: The pipeline instance and the `AutoMLSearch` object.
- **add_result_callback** (*callable*) – Function called after each pipeline training iteration. Callback function takes three positional parameters: A dictionary containing the training results for the new pipeline, an `untrained_pipeline` containing the parameters used during training, and the `AutoMLSearch` object.

- **error_callback** (*callable*) – Function called when *search()* errors and raises an Exception. Callback function takes three positional parameters: the Exception raised, the traceback, and the AutoMLSearch object. Must also accepts kwargs, so AutoMLSearch is able to pass along other appropriate parameters by default. Defaults to None, which will call *log_error_callback*.
- **additional_objectives** (*list*) – Custom set of objectives to score on. Will override default objectives for problem type if not empty.
- **alternate_thresholding_objective** (*str*) – The objective to use for thresholding binary classification pipelines if the main objective provided isn't tuneable. Defaults to F1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.
- **n_jobs** (*int or None*) – Non-negative integer describing level of parallelism used for pipelines. None and 1 are equivalent. If set to -1, all CPUs are used. For n_jobs below -1, (n_cpus + 1 + n_jobs) are used.
- **ensembling** (*boolean*) – If True, runs ensembling in a separate batch after every allowed pipeline class has been iterated over. If the number of unique pipelines to search over per batch is one, ensembling will not run. Defaults to False.
- **max_batches** (*int*) – The maximum number of batches of pipelines to search. Parameters max_time, and max_iterations have precedence over stopping the search.
- **problem_configuration** (*dict, None*) – Additional parameters needed to configure the search. For example, in time series problems, values should be passed in for the date_index, gap, forecast_horizon, and max_delay variables.
- **train_best_pipeline** (*boolean*) – Whether or not to train the best pipeline before returning it. Defaults to True.
- **pipeline_parameters** (*dict*) – A dict of the parameters used to initialize a pipeline with. Keys should consist of the component names and values should specify parameter values
e.g. pipeline_parameters = { 'Imputer' : { 'numeric_impute_strategy': 'most_frequent' } }
- **custom_hyperparameters** (*dict*) – A dict of the hyperparameter ranges used to iterate over during search. Keys should consist of the component names and values should specify a singular value or skopt.Space.
e.g. custom_hyperparameters = { 'Imputer' : { 'numeric_impute_strategy': Categorical(['most_frequent', 'median']) } }
- **sampler_method** (*str*) – The data sampling component to use in the pipelines if the problem type is classification and the target balance is smaller than the sampler_balanced_ratio. Either 'auto', which will use our preferred sampler for the data, 'Undersampler', 'Oversampler', or None. Defaults to 'auto'.
- **sampler_balanced_ratio** (*float*) – The minority:majority class ratio that we consider balanced, so a 1:4 ratio would be equal to 0.25. If the class balance is larger than this provided value, then we will not add a sampler since the data is then considered balanced. Overrides the *sampler_ratio* of the samplers. Defaults to 0.25.
- **_ensembling_split_size** (*float*) – The amount of the training data we'll set aside for training ensemble metalearners. Only used when ensembling is True. Must be between 0 and 1, exclusive. Defaults to 0.2

- **`_pipelines_per_batch`** (*int*) – The number of pipelines to train for every batch after the first one. The first batch will train a baseline pipeline + one of each pipeline family allowed in the search.
- **`_automl_algorithm`** (*str*) – The automl algorithm to use. Currently the two choices are ‘iterative’ and ‘default’. Defaults to *iterative*.
- **`engine`** (*EngineBase or str*) – The engine instance used to evaluate pipelines. Dask or concurrent.futures engines can also be chosen by providing a string from the list [“sequential”, “cf_threaded”, “cf_process”, “dask_threaded”, “dask_process”]. If a parallel engine is selected this way, the maximum amount of parallelism, as determined by the engine, will be used. Defaults to “sequential”.
- **`verbose`** (*boolean*) – Whether or not to display semi-real-time updates to stdout while search is running. Defaults to False.

Methods

<code>add_to_rankings</code>	Fits and evaluates a given pipeline then adds the results to the automl rankings with the requirement that automl search has been run.
<code>best_pipeline</code>	Returns a trained instance of the best pipeline and parameters found during automl search. If <i>train_best_pipeline</i> is set to False, returns an untrained pipeline instance.
<code>close_engine</code>	Function to explicitly close the engine, client, parallel resources.
<code>describe_pipeline</code>	Describe a pipeline.
<code>full_rankings</code>	Returns a pandas.DataFrame with scoring results from all pipelines searched.
<code>get_pipeline</code>	Given the ID of a pipeline training result, returns an untrained instance of the specified pipeline initialized with the parameters used to train that pipeline during automl search.
<code>load</code>	Loads AutoML object at file path.
<code>plot</code>	Return an instance of the plot with the latest scores.
<code>rankings</code>	Returns a pandas.DataFrame with scoring results from the highest-scoring set of parameters used with each pipeline.
<code>results</code>	Class that allows access to a copy of the results from <i>automl_search</i> .
<code>save</code>	Saves AutoML object at file path.
<code>score_pipelines</code>	Score a list of pipelines on the given holdout data.
<code>search</code>	Find the best pipeline for the data set.
<code>train_pipelines</code>	Train a list of pipelines on the training data.

`add_to_rankings` (*self, pipeline*)

Fits and evaluates a given pipeline then adds the results to the automl rankings with the requirement that automl search has been run.

Parameters **`pipeline`** (*PipelineBase*) – pipeline to train and evaluate.

property **`best_pipeline`** (*self*)

Returns a trained instance of the best pipeline and parameters found during automl search. If *train_best_pipeline* is set to False, returns an untrained pipeline instance.

Returns A trained instance of the best pipeline and parameters found during automl search. If *train_best_pipeline* is set to False, returns an untrained pipeline instance.

Return type PipelineBase

Raises **PipelineNotFoundError** – If this is called before *.search()* is called.

close_engine (*self*)

Function to explicitly close the engine, client, parallel resources.

describe_pipeline (*self*, *pipeline_id*, *return_dict=False*)

Describe a pipeline.

Parameters

- **pipeline_id** (*int*) – pipeline to describe
- **return_dict** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Description of specified pipeline. Includes information such as type of pipeline components, problem, training time, cross validation, etc.

Raises **PipelineNotFoundError** – If *pipeline_id* is not a valid ID.

property full_rankings (*self*)

Returns a pandas.DataFrame with scoring results from all pipelines searched.

get_pipeline (*self*, *pipeline_id*)

Given the ID of a pipeline training result, returns an untrained instance of the specified pipeline initialized with the parameters used to train that pipeline during automl search.

Parameters **pipeline_id** (*int*) – Pipeline to retrieve.

Returns Untrained pipeline instance associated with the provided ID.

Return type PipelineBase

Raises **PipelineNotFoundError** – if *pipeline_id* is not a valid ID.

static load (*file_path*, *pickle_type='cloudpickle'*)

Loads AutoML object at file path.

Parameters

- **file_path** (*str*) – Location to find file to load
- **pickle_type** (*{ "pickle", "cloudpickle" }*) – The pickling library to use. Currently not used since the standard pickle library can handle cloudpickles.

Returns AutoSearchBase object

property plot (*self*)

Return an instance of the plot with the latest scores.

property rankings (*self*)

Returns a pandas.DataFrame with scoring results from the highest-scoring set of parameters used with each pipeline.

property results (*self*)

Class that allows access to a copy of the results from *automl_search*.

Returns

Dictionary containing *pipeline_results*, a dict with results from each pipeline, and *search_order*, a list describing the order the pipelines were searched.

Return type dict

save (*self*, *file_path*, *pickle_type*='cloudpickle', *pickle_protocol*=cloudpickle.DEFAULT_PROTOCOL)
Saves AutoML object at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_type** ({*"pickle"*, *"cloudpickle"*}) – The pickling library to use.
- **pickle_protocol** (*int*) – The pickle data stream format.

Raises **ValueError** – If *pickle_type* is not “pickle” or “cloudpickle”.

score_pipelines (*self*, *pipelines*, *X_holdout*, *y_holdout*, *objectives*)
Score a list of pipelines on the given holdout data.

Parameters

- **pipelines** (*list* [*PipelineBase*]) – List of pipelines to train.
- **X_holdout** (*pd.DataFrame*) – Holdout features.
- **y_holdout** (*pd.Series*) – Holdout targets for scoring.
- **objectives** (*list* [*str*], *list* [*ObjectiveBase*]) – Objectives used for scoring.

Returns Dictionary keyed by pipeline name that maps to a dictionary of scores. Note that the any pipelines that error out during scoring will not be included in the dictionary but the exception and stacktrace will be displayed in the log.

Return type dict[str, Dict[str, float]]

search (*self*, *show_iteration_plot*=*True*)
Find the best pipeline for the data set.

Parameters **show_iteration_plot** (*boolean*, *True*) – Shows an iteration vs. score plot in Jupyter notebook. Disabled by default in non-Jupyter environments.

Raises **AutoMLSearchException** – If all pipelines in the current AutoML batch produced a score of np.nan on the primary objective.

train_pipelines (*self*, *pipelines*)
Train a list of pipelines on the training data.

This can be helpful for training pipelines once the search is complete.

Parameters **pipelines** (*list* [*PipelineBase*]) – List of pipelines to train.

Returns Dictionary keyed by pipeline name that maps to the fitted pipeline. Note that the any pipelines that error out during training will not be included in the dictionary but the exception and stacktrace will be displayed in the log.

Return type Dict[str, PipelineBase]

`evalml automl automl_search.build_engine_from_str (engine_str)`
Function that converts a convenience string for an parallel engine type and returns an instance of that engine.

Parameters **engine_str** (*str*) – String representing the requested engine.

Returns Instance of the requested engine.

Return type (EngineBase)

Raises **ValueError** – If *engine_str* is not a valid engine.

```
evalml automl automl_search.search(X_train=None, y_train=None, problem_type=None,
                                   objective='auto', mode='fast', max_time=None,
                                   patience=None, tolerance=None, problem_configuration=None, verbose=False)
```

Given data and configuration, run an automl search.

This method will run EvalML's default suite of data checks. If the data checks produce errors, the data check results will be returned before running the automl search. In that case we recommend you alter your data to address these errors and try again. This method is provided for convenience. If you'd like more control over when each of these steps is run, consider making calls directly to the various pieces like the data checks and AutoMLSearch, instead of using this method.

Parameters

- **X_train** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]. Required.
- **y_train** (*pd.Series*) – The target training data of length [n_samples]. Required for supervised learning tasks.
- **problem_type** (*str or ProblemTypes*) – Type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.
- **objective** (*str, ObjectiveBase*) – The objective to optimize for. Used to propose and rank pipelines, but not for optimizing each pipeline during fit-time. When set to 'auto', chooses: - LogLossBinary for binary classification problems, - LogLossMulticlass for multiclass classification problems, and - R2 for regression problems.
- **mode** (*str*) – mode for DefaultAlgorithm. There are two modes: fast and long, where fast is a subset of long. Please look at DefaultAlgorithm for more details.
- **max_time** (*int, str*) – Maximum time to search for pipelines. This will not start a new pipeline search after the duration has elapsed. If it is an integer, then the time will be in seconds. For strings, time can be specified as seconds, minutes, or hours.
- **patience** (*int*) – Number of iterations without improvement to stop search early. Must be positive. If None, early stopping is disabled. Defaults to None.
- **tolerance** (*float*) – Minimum percentage difference to qualify as score improvement for early stopping. Only applicable if patience is not None. Defaults to None.
- **problem_configuration** (*dict*) – Additional parameters needed to configure the search. For example, in time series problems, values should be passed in for the `date_index`, `gap`, and `max_delay` variables.
- **verbose** (*boolean*) – Whether or not to display semi-real-time updates to stdout while search is running. Defaults to False.

Returns The automl search object containing pipelines and rankings, and the results from running the data checks. If the data check results contain errors, automl search will not be run and an automl search object will not be returned.

Return type (*AutoMLSearch, dict*)

Raises **ValueError** – If search configuration is not valid.

```
evalml automl automl_search.search_iterative(X_train=None, y_train=None, problem_type=None,
                                              objective='auto', problem_configuration=None, **kwargs)
```

Given data and configuration, run an automl search.

This method will run EvalML's default suite of data checks. If the data checks produce errors, the data check results will be returned before running the automl search. In that case we recommend you alter your data to

address these errors and try again. This method is provided for convenience. If you'd like more control over when each of these steps is run, consider making calls directly to the various pieces like the data checks and `AutoMLSearch`, instead of using this method.

Parameters

- **x_train** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]. Required.
- **y_train** (*pd.Series*) – The target training data of length [n_samples]. Required for supervised learning tasks.
- **problem_type** (*str or ProblemTypes*) – Type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.
- **objective** (*str, ObjectiveBase*) – The objective to optimize for. Used to propose and rank pipelines, but not for optimizing each pipeline during fit-time. When set to 'auto', chooses: - `LogLossBinary` for binary classification problems, - `LogLossMulticlass` for multiclass classification problems, and - `R2` for regression problems.
- **problem_configuration** (*dict*) – Additional parameters needed to configure the search. For example, in time series problems, values should be passed in for the `date_index`, `gap`, `forecast_horizon`, and `max_delay` variables.
- ****kwargs** – Other keyword arguments which are provided will be passed to `AutoMLSearch`.

Returns the automl search object containing pipelines and rankings, and the results from running the data checks. If the data check results contain errors, automl search will not be run and an automl search object will not be returned.

Return type (*AutoMLSearch, dict*)

Raises **ValueError** – If the search configuration is invalid.

callbacks

Callbacks available to pass to AutoML.

Module Contents

Functions

<code>log_error_callback</code>	Logs the exception thrown as an error.
<code>raise_error_callback</code>	Raises the exception thrown by the AutoMLSearch object.
<code>silent_error_callback</code>	No-op.

Attributes Summary

logger

Contents

`evalml automl callbacks.log_error_callback(exception, traceback, automl, **kwargs)`

Logs the exception thrown as an error.

Will not throw. This is the default behavior for AutoMLSearch.

Parameters

- **exception** – Exception to log.
- **traceback** – Exception traceback to log.
- **automl** – AutoMLSearch object.
- ****kwargs** – Other relevant keyword arguments to log.

`evalml automl callbacks.logger`

`evalml automl callbacks.raise_error_callback(exception, traceback, automl, **kwargs)`

Raises the exception thrown by the AutoMLSearch object.

Also logs the exception as an error.

Parameters

- **exception** – Exception to log and raise.
- **traceback** – Exception traceback to log.
- **automl** – AutoMLSearch object.
- ****kwargs** – Other relevant keyword arguments to log.

Raises **exception** – Raises the input exception.

`evalml automl callbacks.silent_error_callback(exception, traceback, automl, **kwargs)`

No-op.

pipeline_search_plots

Plots displayed during pipeline search.

Module Contents

Classes Summary

<i>PipelineSearchPlots</i>	Plots for the AutoMLSearch class during search.
<i>SearchIterationPlot</i>	Search iteration plot.

Contents

class evalml automl pipeline_search_plots **PipelineSearchPlots** (*results*, *objective*)

Plots for the AutoMLSearch class during search.

Parameters

- **results** (*dict*) – Dictionary of current results.
- **objective** (*ObjectiveBase*) – Objective that AutoML is optimizing for.

Methods

<i>search_iteration_plot</i>	Shows a plot of the best score at each iteration using data gathered during training.
------------------------------	---

search_iteration_plot (*self*, *interactive_plot=False*)

Shows a plot of the best score at each iteration using data gathered during training.

Parameters **interactive_plot** (*bool*) – Whether or not to show an interactive plot. Defaults to False.

Returns plot

Raises **ValueError** – If engine_str is not a valid engine.

class evalml automl pipeline_search_plots **SearchIterationPlot** (*results*, *objective*)

Search iteration plot.

Parameters

- **results** (*dict*) – Dictionary of current results.
- **objective** (*ObjectiveBase*) – Objective that AutoML is optimizing for.

Methods

<i>update</i>	Update the search plot.
---------------	-------------------------

update (*self*, *results*, *objective*)

Update the search plot.

utils

Utilities useful in AutoML.

Module Contents

Functions

<code>check_all_pipeline_names_unique</code>	Checks whether all the pipeline names are unique.
<code>get_best_sampler_for_data</code>	Returns the name of the sampler component to use for AutoMLSearch.
<code>get_default_primary_search_objective</code>	Get the default primary search objective for a problem type.
<code>get_pipelines_from_component_graphs</code>	Returns created pipelines from passed component graphs based on the specified problem type.
<code>make_data_splitter</code>	Given the training data and ML problem parameters, compute a data splitting method to use during AutoML search.
<code>tune_binary_threshold</code>	Tunes the threshold of a binary pipeline to the X and y thresholding data.

Attributes Summary

<code>AutoMLConfig</code>

Contents

`evalml automl utils`. **AutoMLConfig**

`evalml automl utils`. **check_all_pipeline_names_unique** (*pipelines*)

Checks whether all the pipeline names are unique.

Parameters *pipelines* (*list [PipelineBase]*) – List of pipelines to check if all names are unique.

Raises **ValueError** – If any pipeline names are duplicated.

`evalml automl utils`. **get_best_sampler_for_data** (*X*, *y*, *sampler_method*, *sampler_balanced_ratio*)

Returns the name of the sampler component to use for AutoMLSearch.

Parameters

- **X** (*pd.DataFrame*) – The input feature data
- **y** (*pd.Series*) – The input target data
- **sampler_method** (*str*) – The *sampler_type* argument passed to AutoMLSearch
- **sampler_balanced_ratio** (*float*) – The ratio of min:majority targets that we would consider balanced, or should balance the classes to.

Returns The string name of the sampling component to use, or None if no sampler is necessary

Return type *str*, None

`evalml automl utils`. **get_default_primary_search_objective** (*problem_type*)

Get the default primary search objective for a problem type.

- **objective** (*ObjectiveBase*) – The objective we want to tune with. If not tuneable and `best_pipeline` is `True`, will use F1.
- **problem_type** (*ProblemType*) – The problem type of the pipeline.
- **x_threshold_tuning** (*pd.DataFrame*) – Features to tune pipeline to.
- **y_threshold_tuning** (*pd.Series*) – Target data to tune pipeline to.

Package Contents

Classes Summary

<i>AutoMLSearch</i>	Automated Pipeline search.
<i>EngineBase</i>	Base class for EvalML engines.
<i>SequentialEngine</i>	The default engine for the AutoML search.

Functions

<i>get_default_primary_search_objective</i>	Get the default primary search objective for a problem type.
<i>make_data_splitter</i>	Given the training data and ML problem parameters, compute a data splitting method to use during AutoML search.
<i>search</i>	Given data and configuration, run an automl search.
<i>search_iterative</i>	Given data and configuration, run an automl search.
<i>tune_binary_threshold</i>	Tunes the threshold of a binary pipeline to the X and y thresholding data.

Contents

```
class evalml.automl.AutoMLSearch (X_train=None, y_train=None, problem_type=None,
                                objective='auto', max_iterations=None,
                                max_time=None, patience=None, tolerance=None,
                                data_splitter=None, allowed_component_graphs=None,
                                allowed_model_families=None,
                                start_iteration_callback=None, add_result_callback=None,
                                error_callback=None, additional_objectives=None, al-
                                ternate_thresholding_objective='F1', random_seed=0,
                                n_jobs=-1, tuner_class=None, optimize_thresholds=True,
                                ensembling=False, max_batches=None, prob-
                                lem_configuration=None, train_best_pipeline=True,
                                pipeline_parameters=None, custom_hyperparameters=None,
                                sampler_method='auto', sampler_balanced_ratio=0.25,
                                _ensembling_split_size=0.2, _pipelines_per_batch=5,
                                _automl_algorithm='iterative', engine='sequential', ver-
                                bose=False)
```

Automated Pipeline search.

Parameters

- **X_train** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]. Required.
- **y_train** (*pd.Series*) – The target training data of length [n_samples]. Required for supervised learning tasks.
- **problem_type** (*str or ProblemTypes*) – Type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.
- **objective** (*str, ObjectiveBase*) – The objective to optimize for. Used to propose and rank pipelines, but not for optimizing each pipeline during fit-time. When set to 'auto', chooses: - LogLossBinary for binary classification problems, - LogLossMulticlass for multiclass classification problems, and - R2 for regression problems.
- **max_iterations** (*int*) – Maximum number of iterations to search. If max_iterations and max_time is not set, then max_iterations will default to max_iterations of 5.
- **max_time** (*int, str*) – Maximum time to search for pipelines. This will not start a new pipeline search after the duration has elapsed. If it is an integer, then the time will be in seconds. For strings, time can be specified as seconds, minutes, or hours.
- **patience** (*int*) – Number of iterations without improvement to stop search early. Must be positive. If None, early stopping is disabled. Defaults to None.
- **tolerance** (*float*) – Minimum percentage difference to qualify as score improvement for early stopping. Only applicable if patience is not None. Defaults to None.
- **allowed_component_graphs** (*dict*) – A dictionary of lists or ComponentGraphs indicating the component graphs allowed in the search. The format should follow { "Name_0": [list_of_components], "Name_1": ComponentGraph(...) }

The default of None indicates all pipeline component graphs for this problem type are allowed. Setting this field will cause allowed_model_families to be ignored.

e.g. `allowed_component_graphs = { "My_Graph": ["Imputer", "One Hot Encoder", "Random Forest Classifier"] }`

- **allowed_model_families** (*list(str, ModelFamily)*) – The model families to search. The default of None searches over all model families. Run `evalml.pipelines.components.utils.allowed_model_families("binary")` to see options. Change *binary* to *multiclass* or *regression* depending on the problem type. Note that if allowed_pipelines is provided, this parameter will be ignored.
- **data_splitter** (*sklearn.model_selection.BaseCrossValidator*) – Data splitting method to use. Defaults to StratifiedKFold.
- **tuner_class** – The tuner class to use. Defaults to SKOptTuner.
- **optimize_thresholds** (*bool*) – Whether or not to optimize the binary pipeline threshold. Defaults to True.
- **start_iteration_callback** (*callable*) – Function called before each pipeline training iteration. Callback function takes three positional parameters: The pipeline instance and the AutoMLSearch object.
- **add_result_callback** (*callable*) – Function called after each pipeline training iteration. Callback function takes three positional parameters: A dictionary containing the training results for the new pipeline, an untrained_pipeline containing the parameters used during training, and the AutoMLSearch object.
- **error_callback** (*callable*) – Function called when *search()* errors and raises an Exception. Callback function takes three positional parameters: the Exception raised, the

traceback, and the AutoMLSearch object. Must also accepts kwargs, so AutoMLSearch is able to pass along other appropriate parameters by default. Defaults to None, which will call `log_error_callback`.

- **additional_objectives** (*list*) – Custom set of objectives to score on. Will override default objectives for problem type if not empty.
- **alternate_thresholding_objective** (*str*) – The objective to use for thresholding binary classification pipelines if the main objective provided isn't tuneable. Defaults to F1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.
- **n_jobs** (*int or None*) – Non-negative integer describing level of parallelism used for pipelines. None and 1 are equivalent. If set to -1, all CPUs are used. For `n_jobs` below -1, (`n_cpus + 1 + n_jobs`) are used.
- **ensembling** (*boolean*) – If True, runs ensembling in a separate batch after every allowed pipeline class has been iterated over. If the number of unique pipelines to search over per batch is one, ensembling will not run. Defaults to False.
- **max_batches** (*int*) – The maximum number of batches of pipelines to search. Parameters `max_time`, and `max_iterations` have precedence over stopping the search.
- **problem_configuration** (*dict, None*) – Additional parameters needed to configure the search. For example, in time series problems, values should be passed in for the `date_index`, `gap`, `forecast_horizon`, and `max_delay` variables.
- **train_best_pipeline** (*boolean*) – Whether or not to train the best pipeline before returning it. Defaults to True.
- **pipeline_parameters** (*dict*) – A dict of the parameters used to initialize a pipeline with. Keys should consist of the component names and values should specify parameter values
e.g. `pipeline_parameters = { 'Imputer' : { 'numeric_impute_strategy': 'most_frequent' } }`
- **custom_hyperparameters** (*dict*) – A dict of the hyperparameter ranges used to iterate over during search. Keys should consist of the component names and values should specify a singular value or `skopt.Space`.
e.g. `custom_hyperparameters = { 'Imputer' : { 'numeric_impute_strategy': Categorical(['most_frequent', 'median']) } }`
- **sampler_method** (*str*) – The data sampling component to use in the pipelines if the problem type is classification and the target balance is smaller than the `sampler_balanced_ratio`. Either 'auto', which will use our preferred sampler for the data, 'Undersampler', 'Oversampler', or None. Defaults to 'auto'.
- **sampler_balanced_ratio** (*float*) – The minority:majority class ratio that we consider balanced, so a 1:4 ratio would be equal to 0.25. If the class balance is larger than this provided value, then we will not add a sampler since the data is then considered balanced. Overrides the `sampler_ratio` of the samplers. Defaults to 0.25.
- **_ensembling_split_size** (*float*) – The amount of the training data we'll set aside for training ensemble metalearners. Only used when ensembling is True. Must be between 0 and 1, exclusive. Defaults to 0.2
- **_pipelines_per_batch** (*int*) – The number of pipelines to train for every batch after the first one. The first batch will train a baseline pipeline + one of each pipeline family allowed in the search.

- **`_automl_algorithm`** (*str*) – The automl algorithm to use. Currently the two choices are ‘iterative’ and ‘default’. Defaults to *iterative*.
- **`engine`** (*EngineBase* or *str*) – The engine instance used to evaluate pipelines. Dask or concurrent.futures engines can also be chosen by providing a string from the list [“sequential”, “cf_threaded”, “cf_process”, “dask_threaded”, “dask_process”]. If a parallel engine is selected this way, the maximum amount of parallelism, as determined by the engine, will be used. Defaults to “sequential”.
- **`verbose`** (*boolean*) – Whether or not to display semi-real-time updates to stdout while search is running. Defaults to False.

Methods

<code>add_to_rankings</code>	Fits and evaluates a given pipeline then adds the results to the automl rankings with the requirement that automl search has been run.
<code>best_pipeline</code>	Returns a trained instance of the best pipeline and parameters found during automl search. If <i>train_best_pipeline</i> is set to False, returns an untrained pipeline instance.
<code>close_engine</code>	Function to explicitly close the engine, client, parallel resources.
<code>describe_pipeline</code>	Describe a pipeline.
<code>full_rankings</code>	Returns a pandas.DataFrame with scoring results from all pipelines searched.
<code>get_pipeline</code>	Given the ID of a pipeline training result, returns an untrained instance of the specified pipeline initialized with the parameters used to train that pipeline during automl search.
<code>load</code>	Loads AutoML object at file path.
<code>plot</code>	Return an instance of the plot with the latest scores.
<code>rankings</code>	Returns a pandas.DataFrame with scoring results from the highest-scoring set of parameters used with each pipeline.
<code>results</code>	Class that allows access to a copy of the results from <i>automl_search</i> .
<code>save</code>	Saves AutoML object at file path.
<code>score_pipelines</code>	Score a list of pipelines on the given holdout data.
<code>search</code>	Find the best pipeline for the data set.
<code>train_pipelines</code>	Train a list of pipelines on the training data.

`add_to_rankings` (*self*, *pipeline*)

Fits and evaluates a given pipeline then adds the results to the automl rankings with the requirement that automl search has been run.

Parameters **`pipeline`** (*PipelineBase*) – pipeline to train and evaluate.

property **`best_pipeline`** (*self*)

Returns a trained instance of the best pipeline and parameters found during automl search. If *train_best_pipeline* is set to False, returns an untrained pipeline instance.

Returns A trained instance of the best pipeline and parameters found during automl search. If *train_best_pipeline* is set to False, returns an untrained pipeline instance.

Return type PipelineBase

Raises PipelineNotFoundError – If this is called before `.search()` is called.

close_engine (*self*)

Function to explicitly close the engine, client, parallel resources.

describe_pipeline (*self*, *pipeline_id*, *return_dict=False*)

Describe a pipeline.

Parameters

- **pipeline_id** (*int*) – pipeline to describe
- **return_dict** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Description of specified pipeline. Includes information such as type of pipeline components, problem, training time, cross validation, etc.

Raises PipelineNotFoundError – If *pipeline_id* is not a valid ID.

property full_rankings (*self*)

Returns a pandas.DataFrame with scoring results from all pipelines searched.

get_pipeline (*self*, *pipeline_id*)

Given the ID of a pipeline training result, returns an untrained instance of the specified pipeline initialized with the parameters used to train that pipeline during automl search.

Parameters pipeline_id (*int*) – Pipeline to retrieve.

Returns Untrained pipeline instance associated with the provided ID.

Return type PipelineBase

Raises PipelineNotFoundError – if *pipeline_id* is not a valid ID.

static load (*file_path*, *pickle_type='cloudpickle'*)

Loads AutoML object at file path.

Parameters

- **file_path** (*str*) – Location to find file to load
- **pickle_type** (*{ "pickle", "cloudpickle" }*) – The pickling library to use. Currently not used since the standard pickle library can handle cloudpickles.

Returns AutoSearchBase object

property plot (*self*)

Return an instance of the plot with the latest scores.

property rankings (*self*)

Returns a pandas.DataFrame with scoring results from the highest-scoring set of parameters used with each pipeline.

property results (*self*)

Class that allows access to a copy of the results from *automl_search*.

Returns

Dictionary containing *pipeline_results*, a dict with results from each pipeline, and *search_order*, a list describing the order the pipelines were searched.

Return type dict

save (*self*, *file_path*, *pickle_type='cloudpickle'*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves AutoML object at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_type** (*{ "pickle", "cloudpickle" }*) – The pickling library to use.
- **pickle_protocol** (*int*) – The pickle data stream format.

Raises **ValueError** – If `pickle_type` is not “pickle” or “cloudpickle”.

score_pipelines (*self, pipelines, X_holdout, y_holdout, objectives*)

Score a list of pipelines on the given holdout data.

Parameters

- **pipelines** (*list [PipelineBase]*) – List of pipelines to train.
- **X_holdout** (*pd.DataFrame*) – Holdout features.
- **y_holdout** (*pd.Series*) – Holdout targets for scoring.
- **objectives** (*list [str], list [ObjectiveBase]*) – Objectives used for scoring.

Returns Dictionary keyed by pipeline name that maps to a dictionary of scores. Note that the any pipelines that error out during scoring will not be included in the dictionary but the exception and stacktrace will be displayed in the log.

Return type dict[str, Dict[str, float]]

search (*self, show_iteration_plot=True*)

Find the best pipeline for the data set.

Parameters **show_iteration_plot** (*boolean, True*) – Shows an iteration vs. score plot in Jupyter notebook. Disabled by default in non-Jupyter environments.

Raises **AutoMLSearchException** – If all pipelines in the current AutoML batch produced a score of `np.nan` on the primary objective.

train_pipelines (*self, pipelines*)

Train a list of pipelines on the training data.

This can be helpful for training pipelines once the search is complete.

Parameters **pipelines** (*list [PipelineBase]*) – List of pipelines to train.

Returns Dictionary keyed by pipeline name that maps to the fitted pipeline. Note that the any pipelines that error out during training will not be included in the dictionary but the exception and stacktrace will be displayed in the log.

Return type Dict[str, PipelineBase]

class evalml.automl.EngineBase

Base class for EvalML engines.

Methods

<code>setup_job_log</code>	Set up logger for job.
<code>submit_evaluation_job</code>	Submit job for pipeline evaluation during AutoMLSearch.
<code>submit_scoring_job</code>	Submit job for pipeline scoring.
<code>submit_training_job</code>	Submit job for pipeline training.

static `setup_job_log()`

Set up logger for job.

abstract submit_evaluation_job (*self*, *automl_config*, *pipeline*, *X*, *y*)
Submit job for pipeline evaluation during AutoMLSearch.

abstract submit_scoring_job (*self*, *automl_config*, *pipeline*, *X*, *y*, *objectives*, *X_train=None*,
y_train=None)
Submit job for pipeline scoring.

abstract submit_training_job (*self*, *automl_config*, *pipeline*, *X*, *y*)
Submit job for pipeline training.

`evalml.automl.get_default_primary_search_objective` (*problem_type*)
Get the default primary search objective for a problem type.

Parameters *problem_type* (*str* or *ProblemType*) – problem type of interest.

Returns primary objective instance for the problem type.

Return type *ObjectiveBase*

`evalml.automl.make_data_splitter` (*X*, *y*, *problem_type*, *problem_configuration=None*,
n_splits=3, *shuffle=True*, *random_seed=0*)

Given the training data and ML problem parameters, compute a data splitting method to use during AutoML search.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [*n_samples*, *n_features*].
- **y** (*pd.Series*) – The target training data of length [*n_samples*].
- **problem_type** (*ProblemType*) – The type of machine learning problem.
- **problem_configuration** (*dict*, *None*) – Additional parameters needed to configure the search. For example, in time series problems, values should be passed in for the *date_index*, *gap*, and *max_delay* variables. Defaults to *None*.
- **n_splits** (*int*, *None*) – The number of CV splits, if applicable. Defaults to 3.
- **shuffle** (*bool*) – Whether or not to shuffle the data before splitting, if applicable. Defaults to *True*.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns Data splitting method.

Return type *sklearn.model_selection.BaseCrossValidator*

Raises **ValueError** – If *problem_configuration* is not given for a time-series problem.

`evalml.automl.search` (*X_train=None*, *y_train=None*, *problem_type=None*, *objective='auto'*,
mode='fast', *max_time=None*, *patience=None*, *tolerance=None*, *problem_configuration=None*, *verbose=False*)

Given data and configuration, run an automl search.

This method will run EvalML's default suite of data checks. If the data checks produce errors, the data check results will be returned before running the automl search. In that case we recommend you alter your data to address these errors and try again. This method is provided for convenience. If you'd like more control over when each of these steps is run, consider making calls directly to the various pieces like the data checks and AutoMLSearch, instead of using this method.

Parameters

- **X_train** (*pd.DataFrame*) – The input training data of shape [*n_samples*, *n_features*]. Required.

- **y_train** (*pd.Series*) – The target training data of length [n_samples]. Required for supervised learning tasks.
- **problem_type** (*str or ProblemTypes*) – Type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.
- **objective** (*str, ObjectiveBase*) – The objective to optimize for. Used to propose and rank pipelines, but not for optimizing each pipeline during fit-time. When set to 'auto', chooses: - `LogLossBinary` for binary classification problems, - `LogLossMulticlass` for multiclass classification problems, and - `R2` for regression problems.
- **mode** (*str*) – mode for `DefaultAlgorithm`. There are two modes: fast and long, where fast is a subset of long. Please look at `DefaultAlgorithm` for more details.
- **max_time** (*int, str*) – Maximum time to search for pipelines. This will not start a new pipeline search after the duration has elapsed. If it is an integer, then the time will be in seconds. For strings, time can be specified as seconds, minutes, or hours.
- **patience** (*int*) – Number of iterations without improvement to stop search early. Must be positive. If None, early stopping is disabled. Defaults to None.
- **tolerance** (*float*) – Minimum percentage difference to qualify as score improvement for early stopping. Only applicable if patience is not None. Defaults to None.
- **problem_configuration** (*dict*) – Additional parameters needed to configure the search. For example, in time series problems, values should be passed in for the `date_index`, `gap`, and `max_delay` variables.
- **verbose** (*boolean*) – Whether or not to display semi-real-time updates to stdout while search is running. Defaults to False.

Returns The automl search object containing pipelines and rankings, and the results from running the data checks. If the data check results contain errors, automl search will not be run and an automl search object will not be returned.

Return type (*AutoMLSearch, dict*)

Raises **ValueError** – If search configuration is not valid.

```
evalml.automl.search_iterative(X_train=None, y_train=None, problem_type=None, objective='auto', problem_configuration=None, **kwargs)
```

Given data and configuration, run an automl search.

This method will run EvalML's default suite of data checks. If the data checks produce errors, the data check results will be returned before running the automl search. In that case we recommend you alter your data to address these errors and try again. This method is provided for convenience. If you'd like more control over when each of these steps is run, consider making calls directly to the various pieces like the data checks and `AutoMLSearch`, instead of using this method.

Parameters

- **X_train** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]. Required.
- **y_train** (*pd.Series*) – The target training data of length [n_samples]. Required for supervised learning tasks.
- **problem_type** (*str or ProblemTypes*) – Type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.
- **objective** (*str, ObjectiveBase*) – The objective to optimize for. Used to propose and rank pipelines, but not for optimizing each pipeline during fit-time. When set to

‘auto’, chooses: - LogLossBinary for binary classification problems, - LogLossMulticlass for multiclass classification problems, and - R2 for regression problems.

- **problem_configuration** (*dict*) – Additional parameters needed to configure the search. For example, in time series problems, values should be passed in for the `date_index`, `gap`, `forecast_horizon`, and `max_delay` variables.
- ****kwargs** – Other keyword arguments which are provided will be passed to `AutoMLSearch`.

Returns the automl search object containing pipelines and rankings, and the results from running the data checks. If the data check results contain errors, automl search will not be run and an automl search object will not be returned.

Return type (*AutoMLSearch*, dict)

Raises **ValueError** – If the search configuration is invalid.

class evalml.automl.**SequentialEngine**

The default engine for the AutoML search.

Trains and scores pipelines locally and sequentially.

Methods

<code>close</code>	No-op.
<code>setup_job_log</code>	Set up logger for job.
<code>submit_evaluation_job</code>	Submit a job to evaluate a pipeline.
<code>submit_scoring_job</code>	Submit a job to score a pipeline.
<code>submit_training_job</code>	Submit a job to train a pipeline.

close (*self*)

No-op.

static setup_job_log ()

Set up logger for job.

submit_evaluation_job (*self*, *automl_config*, *pipeline*, *X*, *y*)

Submit a job to evaluate a pipeline.

Parameters

- **automl_config** – Structure containing data passed from `AutoMLSearch` instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to evaluate.
- **X** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.

Returns Computation result.

Return type `SequentialComputation`

submit_scoring_job (*self*, *automl_config*, *pipeline*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Submit a job to score a pipeline.

Parameters

- **automl_config** – Structure containing data passed from `AutoMLSearch` instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to train.
- **X** (*pd.DataFrame*) – Input data for modeling.

- **y** (*pd.Series*) – Target data for modeling.
- **x_train** (*pd.DataFrame*) – Training features. Used for feature engineering in time series.
- **y_train** (*pd.Series*) – Training target. Used for feature engineering in time series.
- **objectives** (*list[ObjectiveBase]*) – List of objectives to score on.

Returns Computation result.

Return type SequentialComputation

submit_training_job (*self, automl_config, pipeline, X, y*)

Submit a job to train a pipeline.

Parameters

- **automl_config** – Structure containing data passed from AutoMLSearch instance.
- **pipeline** (*pipeline.PipelineBase*) – Pipeline to evaluate.
- **x** (*pd.DataFrame*) – Input data for modeling.
- **y** (*pd.Series*) – Target data for modeling.

Returns Computation result.

Return type SequentialComputation

evalml.automl.tune_binary_threshold (*pipeline, objective, problem_type, X_threshold_tuning, y_threshold_tuning*)

Tunes the threshold of a binary pipeline to the X and y thresholding data.

Parameters

- **pipeline** (*Pipeline*) – Pipeline instance to threshold.
- **objective** (*ObjectiveBase*) – The objective we want to tune with. If not tuneable and best_pipeline is True, will use F1.
- **problem_type** (*ProblemType*) – The problem type of the pipeline.
- **x_threshold_tuning** (*pd.DataFrame*) – Features to tune pipeline to.
- **y_threshold_tuning** (*pd.Series*) – Target data to tune pipeline to.

Data Checks

Data checks.

Submodules

class_imbalance_data_check

Data check that checks if any of the target labels are imbalanced, or if the number of values for each target are below 2 times the number of CV folds.

Use for classification problems.

Module Contents

Classes Summary

<i>ClassImbalanceDataCheck</i>	Check if any of the target labels are imbalanced, or if the number of values for each target are below 2 times the number of CV folds. Use for classification problems.
--------------------------------	---

Contents

class evalml.data_checks.class_imbalance_data_check.**ClassImbalanceDataCheck** (*threshold=0.1, min_samples=100, num_cv_folds=3*)

Check if any of the target labels are imbalanced, or if the number of values for each target are below 2 times the number of CV folds. Use for classification problems.

Parameters

- **threshold** (*float*) – The minimum threshold allowed for class imbalance before a warning is raised. This threshold is calculated by comparing the number of samples in each class to the sum of samples in that class and the majority class. For example, a multi-class case with [900, 900, 100] samples per classes 0, 1, and 2, respectively, would have a 0.10 threshold for class 2 ($100 / (900 + 100)$). Defaults to 0.10.
- **min_samples** (*int*) – The minimum number of samples per accepted class. If the minority class is both below the threshold and min_samples, then we consider this severely imbalanced. Must be greater than 0. Defaults to 100.
- **num_cv_folds** (*int*) – The number of cross-validation folds. Must be positive. Choose 0 to ignore this warning. Defaults to 3.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if any target labels are imbalanced beyond a threshold for binary and multiclass problems.

name (*cls*)

Return a name describing the data check.

validate (*self, X, y*)

Check if any target labels are imbalanced beyond a threshold for binary and multiclass problems.

Ignores NaN values in target labels if they appear.

Parameters

- **X** (*pd.DataFrame, np.ndarray*) – Features. Ignored.
- **y** (*pd.Series, np.ndarray*) – Target labels to check for imbalanced data.

Returns

Dictionary with **DataCheckWarnings** if imbalance in classes is less than the threshold, and **DataCheckErrors** if the number of values for each target is below $2 * \text{num_cv_folds}$.

Return type dict

Example

```
>>> import pandas as pd
>>> X = pd.DataFrame()
>>> y = pd.Series([0, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1])
>>> target_check = ClassImbalanceDataCheck(threshold=0.10)
>>> assert target_check.validate(X, y) == {"errors": [{"message": "The number_
↳ of instances of these targets is less than 2 * the number of cross folds =_
↳ 6 instances: [0]",
...                                     "data_check_name":
↳ "ClassImbalanceDataCheck",
...                                     "level": "error",
...                                     "code": "CLASS_
↳ IMBALANCE_BELOW_FOLDS",
...                                     "details": {"target_
↳ values": [0]}},
...                                     "warnings": [{"message": "The_
↳ following labels fall below 10% of the target: [0]",
...                                     "data_check_name":
↳ "ClassImbalanceDataCheck",
...                                     "level": "warning",
...                                     "code": "CLASS_
↳ IMBALANCE_BELOW_THRESHOLD",
...                                     "details": {"target_
↳ values": [0]}},
...                                     {"message": "The_
↳ following labels in the target have severe class imbalance because they_
↳ fall under 10% of the target and have less than 100 samples: [0]",
...                                     "data_check_name":
↳ "ClassImbalanceDataCheck",
...                                     "level": "warning",
...                                     "code": "CLASS_
↳ IMBALANCE_SEVERE",
...                                     "details": {"target_
↳ values": [0]}},
...                                     "actions": []}]}
```

data_check

Base class for all data checks.

Module Contents

Classes Summary

DataCheck

Base class for all data checks.

Contents

class evalml.data_checks.data_check.**DataCheck**

Base class for all data checks.

Data checks are a set of heuristics used to determine if there are problems with input data.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Inspect and validate the input data, runs any necessary calculations or algorithms, and returns a list of warnings and errors if applicable.

name (*cls*)

Return a name describing the data check.

abstract validate (*self*, *X*, *y=None*)

Inspect and validate the input data, runs any necessary calculations or algorithms, and returns a list of warnings and errors if applicable.

Parameters

- **X** (*pd.DataFrame*) – The input data of shape [n_samples, n_features]
- **y** (*pd.Series, optional*) – The target data of length [n_samples]

Returns Dictionary of DataCheckError and DataCheckWarning messages

Return type dict (DataCheckMessage)

data_check_action

Recommended action returned by a DataCheck.

Module Contents

Classes Summary

<i>DataCheckAction</i>	A recommended action returned by a DataCheck.
------------------------	---

Contents

class evalml.data_checks.data_check_action.**DataCheckAction** (*action_code*, *metadata=None*)

A recommended action returned by a DataCheck.

Parameters

- **action_code** (*DataCheckActionCode*) – Action code associated with the action.
- **metadata** (*dict, optional*) – Additional useful information associated with the action. Defaults to None.

Methods

<code>to_dict</code>	Return a dictionary form of the data check action.
----------------------	--

to_dict (*self*)
Return a dictionary form of the data check action.

data_check_action_code

Enum for data check action code.

Module Contents

Classes Summary

<code>DataCheckActionCode</code>	Enum for data check action code.
----------------------------------	----------------------------------

Contents

class evalml.data_checks.data_check_action_code.**DataCheckActionCode**
Enum for data check action code.

Attributes

DROP_COL	Action code for dropping a column.
DROP_ROWS	Action code for dropping rows.
IM- PUTE_COL	Action code for imputing a column.
TRANS- FORM_TARGET	Action code for transforming the target data.

Methods

<code>name</code>	The name of the Enum member.
<code>value</code>	The value of the Enum member.

name (*self*)
The name of the Enum member.

value (*self*)
The value of the Enum member.

data_check_message

Messages returned by a DataCheck, tagged by name.

Module Contents

Classes Summary

<i>DataCheckError</i>	DataCheckMessage subclass for errors returned by data checks.
<i>DataCheckMessage</i>	Base class for a message returned by a DataCheck, tagged by name.
<i>DataCheckWarning</i>	DataCheckMessage subclass for warnings returned by data checks.

Contents

class evalml.data_checks.data_check_message.**DataCheckError** (*message*,
data_check_name,
message_code=None,
details=None)

DataCheckMessage subclass for errors returned by data checks.

Attributes

mes- sage_type	DataCheckMessageType.ERROR
---------------------------	----------------------------

Methods

<i>to_dict</i>	Return a dictionary form of the data check message.
----------------	---

to_dict (*self*)
 Return a dictionary form of the data check message.

class evalml.data_checks.data_check_message.**DataCheckMessage** (*message*,
data_check_name,
*mes-
sage_code=None*,
details=None)

Base class for a message returned by a DataCheck, tagged by name.

Parameters

- **message** (*str*) – Message string.
- **data_check_name** (*str*) – Name of data check.
- **message_code** (*DataCheckMessageCode*) – Message code associated with message. Defaults to None.
- **details** (*dict*) – Additional useful information associated with the message. Defaults to None.

Attributes

message_type	None
---------------------	------

Methods

<code>to_dict</code>	Return a dictionary form of the data check message.
----------------------	---

```
to_dict (self)
```

Return a dictionary form of the data check message.

[illegible]

DataCheckMessage subclass for warnings returned by data checks.

Attributes

message_type	DataCheckMessageType.WARNING
---------------------	------------------------------

Methods

<code>to_dict</code>	Return a dictionary form of the data check message.
----------------------	---

to_dict (*self*)

Return a dictionary form of the data check message.

data_check_message_code

Enum for data check message code.

Module Contents

Classes Summary

<i>DataCheckMessageCode</i>	Enum for data check message code.
-----------------------------	-----------------------------------

Contents

class evalml.data_checks.data_check_message_code.**DataCheckMessageCode**

Enum for data check message code.

Attributes

CLASS_IMBALANCE_BELOW_FOLDS	Message code for when number of values for each target is below 2 * number of CV folds.
CLASS_IMBALANCE_BELOW_THRESHOLD	Message code for when number of classes is less than the threshold.
CLASS_IMBALANCE_SEVERE	Message code for when balance in classes is less than the threshold and minimum class is less than minimum number of accepted samples.
DATE-TIME_HAS_NAN	Message code for when input datetime columns contain NaN values.
DATE-TIME_HAS_UNEVEN_INTERVALS	Message code for when the datetime values have uneven intervals.
DATE-TIME_INFORMATION_NOT_FOUND	Message code for when datetime information can not be found or is in an unaccepted format.
DATE-TIME_IS_NOT_MONOTONIC	Message code for when the datetime values are not monotonically increasing.
HAS_ID_COLUMNS	Message code for data that has ID columns.
HAS_OUTLIERS	Message code for when outliers are detected.
HIGH_VARIANCE	Message code for when high variance is detected for cross-validation.
HIGHLY_NULL_COLUMNS	Message code for highly null columns.
HIGHLY_NULL_ROWS	Message code for highly null rows.
IS_MULTICOLLINEAR	Message code for when data is potentially multicollinear.
MIS-MATCHED_INDICES	Message code for when input target and features have mismatched indices.
MIS-MATCHED_INDICES_ORDER	Message code for when input target and features have mismatched indices order. The two indices have the same index values, but shuffled.
MIS-MATCHED_LENGTHS	Message code for when input target and features have different lengths.
NATURAL_LANGUAGE_HAS_NAN	Message code for when input natural language columns contain NaN values.
NO_VARIANCE	Message code for when data has no variance (1 unique value).
NO_VARIANCE_WITH_NULL	Message code for when data has one unique value and NaN values.
NOT_UNIQUE_ENOUGH	Message code for when data does not possess enough unique values.
TARGET_BINARY_NOT_TWO_UNIQUE_VALUES	Message code for target data for a binary classification problem that does not have two unique values.
TARGET_HAS_NULL	Message code for target data that has null values.
TARGET_INCOMPATIBLE_OBJECTIVE	Message code for target data that has incompatible values for the specified objective.
TARGET_IS_EMPTY_OR_FULLY_NULL	Message code for target data that is empty or has all null values.
TARGET_IS_NONE	Message code for when target is None.
TARGET_LEAKAGE	Message code for when target leakage is detected.
TARGET_LOGNORMAL_DISTRIBUTION	Message code for target data with a lognormal distribution.

continues on next page

Table 95 – continued from previous page

TAR- GET_MULTICLASS_HIGH_UNIQUE_CLASS	Message code for target data for a multi classification problem that has an abnormally large number of target values.
TAR- GET_MULTICLASS_NOT_ENOUGH_CLASSES	Message code for target data for a multi classification problem that does not have more than 10 classes.
TAR- GET_MULTICLASS_NOT_TWO_EXAMPLES_PER_CLASS	Message code for target data for a multi classification problem that does not have two examples per class.
TAR- GET_UNSUPPORTED_PROBLEM_TYPE	Message code for target data that is being checked against an unsupported problem type.
TAR- GET_UNSUPPORTED_TYPE	Message code for target data that is of an unsupported type.
TOO_SPARSE	Message code for when multiclass data has values that are too sparsely populated.
TOO_UNIQUE	Message code for when data possesses too many unique values.

Methods

<i>name</i>	The name of the Enum member.
<i>value</i>	The value of the Enum member.

name (*self*)
The name of the Enum member.

value (*self*)
The value of the Enum member.

data_check_message_type

Enum for type of data check message.

Module Contents**Classes Summary**

<i>DataCheckMessageType</i>	Enum for type of data check message: WARNING or ERROR.
-----------------------------	--

Contents

class evalml.data_checks.data_check_message_type.**DataCheckMessageType**
Enum for type of data check message: WARNING or ERROR.

Attributes

ERROR	Error message returned by a data check.
WARNING	Warning message returned by a data check.

Methods

<i>name</i>	The name of the Enum member.
<i>value</i>	The value of the Enum member.

name (*self*)

The name of the Enum member.

value (*self*)

The value of the Enum member.

data_checks

A collection of data checks.

Module Contents

Classes Summary

<i>DataChecks</i>	A collection of data checks.
-------------------	------------------------------

Contents

class evalml.data_checks.data_checks.**DataChecks** (*data_checks=None*,
data_check_params=None)

A collection of data checks.

Parameters

- **data_checks** (*list* (*DataCheck*)) – List of DataCheck objects.
- **data_check_params** (*dict*) – Parameters for passed DataCheck objects.

Methods

<i>validate</i>	Inspect and validate the input data against data checks and returns a list of warnings and errors if applicable.
-----------------	--

validate (*self*, *X*, *y=None*)

Inspect and validate the input data against data checks and returns a list of warnings and errors if applicable.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – The input data of shape [n_samples, n_features]
- **y** (*pd.Series*, *np.ndarray*) – The target data of length [n_samples]

Returns Dictionary containing DataCheckMessage objects

Return type dict

datetime_format_data_check

Data check that checks if the datetime column has equally spaced intervals and is monotonically increasing or decreasing in order to be supported by time series estimators.

Module Contents

Classes Summary

<code>DateTimeFormatDataCheck</code>	Check if the datetime column has equally spaced intervals and is monotonically increasing or decreasing in order to be supported by time series estimators.
--------------------------------------	---

Contents

class evalml.data_checks.datetime_format_data_check.**DateTimeFormatDataCheck** (*datetime_column='index'*)
Check if the datetime column has equally spaced intervals and is monotonically increasing or decreasing in order to be supported by time series estimators.

Parameters **datetime_column** (*str, int*) – The name of the datetime column. If the datetime values are in the index, then pass “index”.

Methods

<code>name</code>	Return a name describing the data check.
<code>validate</code>	Checks if the target data has equal intervals and is sorted.

name (*cls*)
Return a name describing the data check.

validate (*self, X, y*)
Checks if the target data has equal intervals and is sorted.

Parameters

- **X** (*pd.DataFrame, np.ndarray*) – Features.
- **y** (*pd.Series, np.ndarray*) – Target data.

Returns List with DataCheckErrors if unequal intervals are found in the datetime column.

Return type dict (DataCheckError)

Example

```
>>> from pandas as pd
>>> X = pd.DataFrame(pd.date_range("January 1, 2021", periods=8), columns=[
↳ "dates"])
>>> y = pd.Series([1, 2, 4, 2, 1, 2, 3, 1])
>>> X.iloc[7] = "January 9, 2021"
>>> datetime_format_check = DateTimeFormatDataCheck()
>>> assert datetime_format_check.validate(X, y) == {
...     "errors": [{"message": "No frequency could be detected in dates,
↳ possibly due to uneven intervals.",
...                 "data_check_name": "EqualIntervalDataCheck",
...                 "level": "error",
...                 "code": "DATETIME_HAS_UNEVEN_INTERVALS",
...                 "details": {}}],
...     "warnings": [],
...     "actions": []}
```

datetime_nan_data_check

Data check that checks each column in the input for datetime features and will issue an error if NaN values are present.

Module Contents

Classes Summary

<i>DateTimeNaNDataCheck</i>	Check each column in the input for datetime features and will issue an error if NaN values are present.
-----------------------------	---

Attributes Summary

<i>error_contains_nan</i>	
---------------------------	--

Contents

class evalml.data_checks.datetime_nan_data_check.**DateTimeNaNDataCheck**

Check each column in the input for datetime features and will issue an error if NaN values are present.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if any datetime columns contain NaN values.

name (*cls*)

Return a name describing the data check.

validate (*self*, *X*, *y=None*)

Check if any datetime columns contain NaN values.

Parameters

- **x** (*pd.DataFrame*, *np.ndarray*) – Features.
- **y** (*pd.Series*, *np.ndarray*) – Ignored. Defaults to None.

Returns dict with a *DataCheckError* if NaN values are present in datetime columns.

Return type dict

Example

```
>>> import pandas as pd
>>> import woodwork as ww
>>> import numpy as np
>>> dates = np.arange(np.datetime64('2017-01-01'), np.datetime64('2017-01-08
↳'))
>>> dates[0] = np.datetime64('NaT')
>>> df = pd.DataFrame(dates, columns=['index'])
>>> df.ww.init()
>>> dt_nan_check = DateTimeNaNDataCheck()
>>> assert dt_nan_check.validate(df) == {"warnings": [],
...                                     "actions": [],
...                                     "errors": [
↳DataCheckError(message='Input datetime column(s) (index) contains NaN
↳values. Please impute NaN values or drop these rows or columns.',
...                                     data_
↳check_name=DateTimeNaNDataCheck.name,
...                                     ]
↳message_code=DataCheckMessageCode.DATETIME_HAS_NAN,
...                                     ]
↳details={"columns": 'index'}).to_dict()]}
```

`evalml.data_checks.datetime_nan_data_check.error_contains_nan = Input datetime column(s) (`

default_data_checks

A default set of data checks that can be used for a variety of datasets.

Module Contents

Classes Summary

DefaultDataChecks

A collection of basic data checks that is used by AutoML by default.

Contents

class evalml.data_checks.default_data_checks.**DefaultDataChecks** (*problem_type*,
objective,
n_splits=3,
date-
time_column=None)

A collection of basic data checks that is used by AutoML by default.

Includes:

- *HighlyNullDataCheck*
- *HighlyNullRowsDataCheck*
- *IDColumnsDataCheck*
- *TargetLeakageDataCheck*
- *InvalidTargetDataCheck*
- *NoVarianceDataCheck*
- *ClassImbalanceDataCheck* (for classification problem types)
- *DateTimeNaNDataCheck*
- *NaturalLanguageNaNDataCheck*
- *TargetDistributionDataCheck* (for regression problem types)
- *DateTimeFormatDataCheck* (for time series problem types)

Parameters

- **problem_type** (*str*) – The problem type that is being validated. Can be regression, binary, or multiclass.
- **objective** (*str* or *ObjectiveBase*) – Name or instance of the objective class.
- **n_splits** (*int*) – The number of splits as determined by the data splitter being used. Defaults to 3.
- **datetime_column** (*str*) – The name of the column containing datetime information to be used for time series problems.
- **to "index" indicating that the datetime information is in the index of X or y. (Default)** –

Methods

<i>validate</i>	Inspect and validate the input data against data checks and returns a list of warnings and errors if applicable.
-----------------	--

validate (*self*, *X*, *y*=None)

Inspect and validate the input data against data checks and returns a list of warnings and errors if applicable.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – The input data of shape [n_samples, n_features]
- **y** (*pd.Series*, *np.ndarray*) – The target data of length [n_samples]

Returns Dictionary containing DataCheckMessage objects

Return type dict

highly_null_data_check

Data check that checks if there are any highly-null columns and rows in the input.

Module Contents

Classes Summary

<i>HighlyNullDataCheck</i>	Check if there are any highly-null columns and rows in the input.
----------------------------	---

Contents

class evalml.data_checks.highly_null_data_check.**HighlyNullDataCheck** (*pct_null_col_threshold=0.95, pct_null_row_threshold=0.95*)

Check if there are any highly-null columns and rows in the input.

Parameters

- **pct_null_col_threshold** (*float*) – If the percentage of NaN values in an input feature exceeds this amount, that column will be considered highly-null. Defaults to 0.95.
- **pct_null_row_threshold** (*float*) – If the percentage of NaN values in an input row exceeds this amount, that row will be considered highly-null. Defaults to 0.95.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if there are any highly-null columns or rows in the input.

name (*cls*)

Return a name describing the data check.

validate (*self, X, y=None*)

Check if there are any highly-null columns or rows in the input.

Parameters

- **X** (*pd.DataFrame, np.ndarray*) – Features.
- **y** (*pd.Series, np.ndarray*) – Ignored. Defaults to None.

Returns dict with a DataCheckWarning if there are any highly-null columns or rows.

Return type dict

Example

```

>>> import pandas as pd
>>> class SeriesWrap():
...     def __init__(self, series):
...         self.series = series
...
...     def __eq__(self, series_2):
...         return all(self.series.eq(series_2.series))
...
>>> df = pd.DataFrame({
...     'lots_of_null': [None, None, None, None, 5],
...     'no_null': [1, 2, 3, 4, 5]
... })
>>> null_check = HighlyNullDataCheck(pct_null_col_threshold=0.50, pct_null_
↪row_threshold=0.50)
>>> validation_results = null_check.validate(df)
>>> validation_results['warnings'][0]['details']['pct_null_cols'] =
↪SeriesWrap(validation_results['warnings'][0]['details']['pct_null_cols'])
>>> highly_null_rows = SeriesWrap(pd.Series([0.5, 0.5, 0.5, 0.5]))
>>> assert validation_results == {
...     "errors": [],
...     "warnings": [{"message": "4 out of 5 rows are more than 50.0% null",
...         "data_check_name": "HighlyNullDataCheck",
...         "level": "warning",
...         "code": "HIGHLY_NULL_ROWS",
...         "details": {"pct_null_cols": highly_null_rows}},
...     {"message": "Column 'lots_of_null' is 50.0% or more null
↪",
...         "data_check_name": "HighlyNullDataCheck",
...         "level": "warning",
...         "code": "HIGHLY_NULL_COLS",
...         "details": {"column": "lots_of_null", "pct_null_rows":
↪0.8}}}],
...     "actions": [{"code": "DROP_ROWS", "metadata": {"rows": [0, 1, 2, 3]}},
...     {"code": "DROP_COL", "metadata": {"column": "lots_of_null"}}
↪}]

```

id_columns_data_check

Data check that checks if any of the features are likely to be ID columns.

Module Contents

Classes Summary

<i>IDColumnsDataCheck</i>	Check if any of the features are likely to be ID columns.
---------------------------	---

Contents

class evalml.data_checks.id_columns_data_check.IDColumnsDataCheck (*id_threshold=1.0*)
Check if any of the features are likely to be ID columns.

Parameters *id_threshold* (*float*) – The probability threshold to be considered an ID column.
Defaults to 1.0.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if any of the features are likely to be ID columns. Currently performs a number of simple checks.

name (*cls*)
Return a name describing the data check.

validate (*self, X, y=None*)
Check if any of the features are likely to be ID columns. Currently performs a number of simple checks.

Checks performed are:

- column name is “id”
- column name ends in “_id”
- column contains all unique values (and is categorical / integer type)

Parameters

- *X* (*pd.DataFrame, np.ndarray*) – The input features to check.
- *y* (*pd.Series*) – The target. Defaults to None. Ignored.

Returns A dictionary of features with column name or index and their probability of being ID columns

Return type dict

Example

```
>>> import pandas as pd
>>> df = pd.DataFrame({
...     'df_id': [0, 1, 2, 3, 4],
...     'x': [10, 42, 31, 51, 61],
...     'y': [42, 54, 12, 64, 12]
... })
>>> id_col_check = IDColumnsDataCheck()
>>> assert id_col_check.validate(df) == {
...     "errors": [],
...     "warnings": [{"message": "Column 'df_id' is 100.0% or more likely to_
↳ be an ID column",
...                     "data_check_name": "IDColumnsDataCheck",
...                     "level": "warning",
...                     "code": "HAS_ID_COLUMN",
...                     "details": {"column": "df_id"}}],
...     "actions": [{"code": "DROP_COL",
...                     "metadata": {"column": "df_id"}}]}
```

invalid_targets_data_check

Data check that checks if the target data contains missing or invalid values.

Module Contents

Classes Summary

<i>InvalidTargetDataCheck</i>	Check if the target data contains missing or invalid values.
-------------------------------	--

Contents

class evalml.data_checks.invalid_targets_data_check.**InvalidTargetDataCheck** (*problem_type*, *objective*, *n_unique=100*)

Check if the target data contains missing or invalid values.

Parameters

- **problem_type** (*str* or *ProblemTypes*) – The specific problem type to data check for. e.g. ‘binary’, ‘multiclass’, ‘regression’, ‘time series regression’
- **objective** (*str* or *ObjectiveBase*) – Name or instance of the objective class.
- **n_unique** (*int*) – Number of unique target values to store when problem type is binary and target incorrectly has more than 2 unique values. Non-negative integer. If None, stores all unique values. Defaults to 100.

Attributes

multi-class_continuous_threshold	0.05
---	------

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if the target data contains missing or invalid values.

name (*cls*)

Return a name describing the data check.

validate (*self*, *X*, *y*)

Check if the target data contains missing or invalid values.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – Features. Ignored.
- **y** (*pd.Series*, *np.ndarray*) – Target data to check for invalid values.

Returns List with DataCheckErrors if any invalid values are found in the target data.

Return type dict (DataCheckError)

Example

```
>>> import pandas as pd
>>> X = pd.DataFrame({"col": [1, 2, 3, 1]})
>>> y = pd.Series([0, 1, None, None])
>>> target_check = InvalidTargetDataCheck('binary', 'Log Loss Binary')
>>> assert target_check.validate(X, y) == {
...     "errors": [{"message": "2 row(s) (50.0%) of target values are null",
...                   "data_check_name": "InvalidTargetDataCheck",
...                   "level": "error",
...                   "code": "TARGET_HAS_NULL",
...                   "details": {"num_null_rows": 2, "pct_null_rows": 50}}],
...     "warnings": [],
...     "actions": [{"code": 'IMPUTE_COL', 'metadata': {'column': None,
...     ↪ 'impute_strategy': 'most_frequent', 'is_target': True}}]}
```

multicollinearity_data_check

Data check to check if any set features are likely to be multicollinear.

Module Contents

Classes Summary

<i>MulticollinearityDataCheck</i>	Check if any set features are likely to be multicollinear.
-----------------------------------	--

Contents

class evalml.data_checks.multicollinearity_data_check.**MulticollinearityDataCheck** (*threshold=0.9*)

Check if any set features are likely to be multicollinear.

Parameters **threshold** (*float*) – The threshold to be considered. Defaults to 0.9.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if any set of features are likely to be multicollinear.

name (*cls*)

Return a name describing the data check.

validate (*self, X, y=None*)

Check if any set of features are likely to be multicollinear.

Parameters

- **x** (`pd.DataFrame`) – The input features to check.
- **y** (`pd.Series`) – The target. Ignored.

Returns dict with a `DataCheckWarning` if there are any potentially multicollinear columns.

Return type dict

Example

```
>>> import pandas as pd
>>> col = pd.Series([1, 0, 2, 3, 4])
>>> X = pd.DataFrame({"col_1": col, "col_2": col * 3})
>>> y = pd.Series([1, 0, 0, 1, 0])
>>> multicollinearity_check = MulticollinearityDataCheck(threshold=0.8)
>>> assert multicollinearity_check.validate(X, y) == {
...     "errors": [],
...     "warnings": [{"message": "Columns are likely to be correlated: [('col_
↩1', 'col_2')]",
...                     "data_check_name": "MulticollinearityDataCheck",
...                     "level": "warning",
...                     "code": "IS_MULTICOLLINEAR",
...                     "details": {'columns': [('col_1', 'col_2')]}},
...     "actions": []}
```

natural_language_nan_data_check

Data check that checks each column in the input for natural language features and will issue an error if NaN values are present.

Module Contents

Classes Summary

<code>NaturalLanguageNaNDataCheck</code>	Checks each column in the input for natural language features and will issue an error if NaN values are present.
--	--

Attributes Summary

<code>error_contains_nan</code>

Contents

`evalml.data_checks.natural_language_nan_data_check.error_contains_nan = Input natural language`

class `evalml.data_checks.natural_language_nan_data_check.NaturalLanguageNaNDataCheck`

Checks each column in the input for natural language features and will issue an error if NaN values are present.

Methods

<code>name</code>	Return a name describing the data check.
<code>validate</code>	Check if any natural language columns contain NaN values.

name (*cls*)

Return a name describing the data check.

validate (*self*, *X*, *y=None*)

Check if any natural language columns contain NaN values.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – Features.
- **y** (*pd.Series*, *np.ndarray*) – Ignored. Defaults to None.

Returns dict with a `DataCheckError` if NaN values are present in natural language columns.

Return type dict

Example

```
>>> import pandas as pd
>>> import woodwork as ww
>>> import numpy as np
>>> data = pd.DataFrame()
>>> data['A'] = [None, "string_that_is_long_enough_for_natural_language"]
>>> data['B'] = ['string_that_is_long_enough_for_natural_language', 'string_
↳that_is_long_enough_for_natural_language']
>>> data['C'] = np.random.randint(0, 3, size=len(data))
>>> data.ww.init(logical_types={'A': 'NaturalLanguage', 'B': 'NaturalLanguage
↳'})
>>> nl_nan_check = NaturalLanguageNaNDataCheck()
>>> assert nl_nan_check.validate(data) == {
...     "warnings": [],
...     "actions": [],
...     "errors": [DataCheckError(message='Input natural language_
↳column(s) (A) contains NaN values. Please impute NaN values or drop these_
↳rows or columns.',
...                                     data_check_name=NaturalLanguageNaNDataCheck.name,
...                                     message_code=DataCheckMessageCode.NATURAL_LANGUAGE_
↳HAS_NAN,
...                                     details={"columns": 'A'}).to_dict()]
... }
```

no_variance_data_check

Data check that checks if the target or any of the features have no variance.

Module Contents

Classes Summary

<i>NoVarianceDataCheck</i>	Check if the target or any of the features have no variance.
----------------------------	--

Contents

class evalml.data_checks.no_variance_data_check.**NoVarianceDataCheck** (*count_nan_as_value=False*)
 Check if the target or any of the features have no variance.

Parameters **count_nan_as_value** (*bool*) – If True, missing values will be counted as their own unique value. Additionally, if true, will return a DataCheckWarning instead of an error if the feature has mostly missing data and only one unique value. Defaults to False.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if the target or any of the features have no variance (1 unique value).

name (*cls*)
 Return a name describing the data check.

validate (*self, X, y*)
 Check if the target or any of the features have no variance (1 unique value).

Parameters

- **X** (*pd.DataFrame, np.ndarray*) – The input features.
- **y** (*pd.Series, np.ndarray*) – The target data.

Returns dict of warnings/errors corresponding to features or target with no variance.

Return type dict

outliers_data_check

Data check that checks if there are any outliers in input data by using IQR to determine score anomalies.

Module Contents

Classes Summary

<i>OutliersDataCheck</i>	Checks if there are any outliers in input data by using IQR to determine score anomalies.
--------------------------	---

Contents

class evalml.data_checks.outliers_data_check.OutliersDataCheck

Checks if there are any outliers in input data by using IQR to determine score anomalies.

Columns with score anomalies are considered to contain outliers.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if there are any outliers in a dataframe by using IQR to determine column anomalies. Column with anomalies are considered to contain outliers.

name (*cls*)

Return a name describing the data check.

validate (*self, X, y=None*)

Check if there are any outliers in a dataframe by using IQR to determine column anomalies. Column with anomalies are considered to contain outliers.

Parameters

- **X** (*pd.DataFrame, np.ndarray*) – Input features.
- **y** (*pd.Series, np.ndarray*) – Ignored. Defaults to None.

Returns A dictionary with warnings if any columns have outliers.

Return type dict

Example

```
>>> import pandas as pd
>>> df = pd.DataFrame({
...     'x': [1, 2, 3, 4, 5],
...     'y': [6, 7, 8, 9, 10],
...     'z': [-1, -2, -3, -1201, -4]
... })
>>> outliers_check = OutliersDataCheck()
>>> assert outliers_check.validate(df) == {
...     "warnings": [{"message": "Column(s) 'z' are likely to have outlier_
↪data.",
...     "data_check_name": "OutliersDataCheck",
...     "level": "warning",
...     "code": "HAS_OUTLIERS",
...     "details": {"columns": ["z"]}}],
```

(continues on next page)

(continued from previous page)

```
...     "errors": [],
...     "actions": []}
```

sparsity_data_check

Data check that checks if there are any columns with sparsely populated values in the input.

Module Contents

Classes Summary

<i>SparsityDataCheck</i>	Check if there are any columns with sparsely populated values in the input.
--------------------------	---

Attributes Summary

<i>warning_too_unique</i>	
---------------------------	--

Contents

class evalml.data_checks.sparsity_data_check.**SparsityDataCheck** (*problem_type*, *threshold*, *unique_count_threshold=10*)

Check if there are any columns with sparsely populated values in the input.

Parameters

- **problem_type** (*str* or *ProblemTypes*) – The specific problem type to data check for. ‘multiclass’ or ‘time series multiclass’ is the only accepted problem type.
- **threshold** (*float*) – The threshold value, or percentage of each column’s unique values, below which, a column exhibits sparsity. Should be between 0 and 1.
- **unique_count_threshold** (*int*) – The minimum number of times a unique value has to be present in a column to not be considered “sparse.” Defaults to 10.

Methods

<i>name</i>	Return a name describing the data check.
<i>sparsity_score</i>	Calculate a sparsity score for the given value counts by calculating the percentage of unique values that exceed the count_threshold.
<i>validate</i>	Calculate what percentage of each column’s unique values exceed the count threshold and compare that percentage to the sparsity threshold stored in the class instance.

name (*cls*)

Return a name describing the data check.

static sparsity_score (*col*, *count_threshold=10*)

Calculate a sparsity score for the given value counts by calculating the percentage of unique values that exceed the *count_threshold*.

Parameters

- **col** (*pd.Series*) – Feature values.
- **count_threshold** (*int*) – The number of instances below which a value is considered sparse. Default is 10.

Returns Sparsity score, or the percentage of the unique values that exceed *count_threshold*.

Return type (float)

validate (*self*, *X*, *y=None*)

Calculate what percentage of each column's unique values exceed the count threshold and compare that percentage to the sparsity threshold stored in the class instance.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – Features.
- **y** (*pd.Series*, *np.ndarray*) – Ignored.

Returns dict with a `DataCheckWarning` if there are any sparse columns.

Return type dict

Example

```
>>> import pandas as pd
>>> df = pd.DataFrame({
...     'sparse': [float(x) for x in range(100)],
...     'not_sparse': [float(1) for x in range(100)]
... })
>>> sparsity_check = SparsityDataCheck(problem_type="multiclass", threshold=0.
↳5, unique_count_threshold=10)
>>> assert sparsity_check.validate(df) == {
...     "errors": [],
...     "warnings": [{"message": "Input columns (sparse) for multiclass_
↳problem type are too sparse.",
...                     "data_check_name": "SparsityDataCheck",
...                     "level": "warning",
...                     "code": "TOO_SPARSE",
...                     "details": {"column": "sparse", 'sparsity_score': 0.0}}
↳],
...     "actions": [{"code": "DROP_COL",
...                   "metadata": {"column": "sparse"}}}]
... }
```

`evalml.data_checks.sparsity_data_check.warning_too_unique = Input columns ({}) for {} prob`

target_distribution_data_check

Data check that checks if the target data contains certain distributions that may need to be transformed prior training to improve model performance.

Module Contents

Classes Summary

<i>TargetDistributionDataCheck</i>	Check if the target data contains certain distributions that may need to be transformed prior training to improve model performance. Uses the Shapiro-Wilks test when the dataset is ≤ 5000 samples, otherwise uses Jarque-Bera.
------------------------------------	---

Contents

class evalml.data_checks.target_distribution_data_check.**TargetDistributionDataCheck**
 Check if the target data contains certain distributions that may need to be transformed prior training to improve model performance. Uses the Shapiro-Wilks test when the dataset is ≤ 5000 samples, otherwise uses Jarque-Bera.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if the target data has a certain distribution.

name (*cls*)

Return a name describing the data check.

validate (*self*, *X*, *y*)

Check if the target data has a certain distribution.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – Features. Ignored.
- **y** (*pd.Series*, *np.ndarray*) – Target data to check for underlying distributions.

Returns List with DataCheckErrors if certain distributions are found in the target data.

Return type dict (DataCheckError)

Example

```
>>> from scipy.stats import lognorm
>>> X = None
>>> y = [0.946, 0.972, 1.154, 0.954, 0.969, 1.222, 1.038, 0.999, 0.973, 0.897]
>>> target_check = TargetDistributionDataCheck()
>>> assert target_check.validate(X, y) == {
...     "errors": [],
...     "warnings": [{"message": "Target may have a lognormal distribution.",
...                           "data_check_name": "TargetDistributionDataCheck",
...                           "level": "warning",
...                           "code": "TARGET_LOGNORMAL_DISTRIBUTION",
...                           "details": {"shapiro-statistic/pvalue": '0.84/0.045'}}],
...     "actions": [{'code': 'TRANSFORM_TARGET', 'metadata': {'column': None,
...     ↪ 'transformation_strategy': 'lognormal', 'is_target': True}}]}
```

target_leakage_data_check

Data check that checks if any of the features are highly correlated with the target by using mutual information or Pearson correlation.

Module Contents

Classes Summary

<i>TargetLeakageDataCheck</i>	Check if any of the features are highly correlated with the target by using mutual information or Pearson correlation.
-------------------------------	--

Contents

class evalml.data_checks.target_leakage_data_check.**TargetLeakageDataCheck** (*pct_corr_threshold=0.95*, *method='mutual'*)

Check if any of the features are highly correlated with the target by using mutual information or Pearson correlation.

If *method='mutual'*, this data check uses mutual information and supports all target and feature types. Otherwise, if *method='pearson'*, it uses Pearson correlation and only supports binary with numeric and boolean dtypes. Pearson correlation returns a value in [-1, 1], while mutual information returns a value in [0, 1].

Parameters

- **pct_corr_threshold** (*float*) – The correlation threshold to be considered leakage. Defaults to 0.95.
- **method** (*string*) – The method to determine correlation. Use ‘mutual’ for mutual information, otherwise ‘pearson’ for Pearson correlation. Defaults to ‘mutual’.

Methods

<i>name</i>	Return a name describing the data check.
-------------	--

continues on next page

Table 129 – continued from previous page

<code>validate</code>	Check if any of the features are highly correlated with the target by using mutual information or Pearson correlation.
-----------------------	--

name (*cls*)

Return a name describing the data check.

validate (*self*, *X*, *y*)

Check if any of the features are highly correlated with the target by using mutual information or Pearson correlation.

If *method*='mutual', supports all target and feature types. Otherwise, if *method*='pearson' only supports binary with numeric and boolean dtypes. Pearson correlation returns a value in [-1, 1], while mutual information returns a value in [0, 1].

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – The input features to check.
- **y** (*pd.Series*, *np.ndarray*) – The target data.

Returns dict with a DataCheckWarning if target leakage is detected.

Return type dict (DataCheckWarning)

Example

```
>>> import pandas as pd
>>> X = pd.DataFrame({
...     'leak': [10, 42, 31, 51, 61],
...     'x': [42, 54, 12, 64, 12],
...     'y': [13, 5, 13, 74, 24],
... })
>>> y = pd.Series([10, 42, 31, 51, 40])
>>> target_leakage_check = TargetLeakageDataCheck(pct_corr_threshold=0.95)
>>> assert target_leakage_check.validate(X, y) == {
...     "warnings": [{"message": "Column 'leak' is 95.0% or more correlated_
↳with the target",
...                     "data_check_name": "TargetLeakageDataCheck",
...                     "level": "warning",
...                     "code": "TARGET_LEAKAGE",
...                     "details": {"column": "leak"}}],
...     "errors": [],
...     "actions": [{"code": "DROP_COL",
...                   "metadata": {"column": "leak"}}]}
```

uniqueness_data_check

Data check that checks if there are any columns in the input that are either too unique for classification problems or not unique enough for regression problems.

Module Contents

Classes Summary

<code>UniquenessDataCheck</code>	Check if there are any columns in the input that are either too unique for classification problems or not unique enough for regression problems.
----------------------------------	--

Attributes Summary

<code>warning_not_unique_enough</code>
<code>warning_too_unique</code>

Contents

class evalml.data_checks.uniqueness_data_check.**UniquenessDataCheck** (*problem_type*, *thresh-*
old=0.5)

Check if there are any columns in the input that are either too unique for classification problems or not unique enough for regression problems.

Parameters

- **problem_type** (*str* or *ProblemTypes*) – The specific problem type to data check for. e.g. ‘binary’, ‘multiclass’, ‘regression’, ‘time series regression’
- **threshold** (*float*) – The threshold to set as an upper bound on uniqueness for classification type problems or lower bound on for regression type problems. Defaults to 0.50.

Methods

<code>name</code>	Return a name describing the data check.
<code>uniqueness_score</code>	Calculate a uniqueness score for the provided field. NaN values are not considered as unique values in the calculation.
<code>validate</code>	Check if there are any columns in the input that are too unique in the case of classification problems or not unique enough in the case of regression problems.

name (*cls*)

Return a name describing the data check.

static uniqueness_score (*col*)

Calculate a uniqueness score for the provided field. NaN values are not considered as unique values in the calculation.

Based on the Herfindahl–Hirschman Index.

Parameters *col* (*pd.Series*) – Feature values.

Returns Uniqueness score.

Return type (float)

validate (*self*, *X*, *y=None*)

Check if there are any columns in the input that are too unique in the case of classification problems or not unique enough in the case of regression problems.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – Features.
- **y** (*pd.Series*, *np.ndarray*) – Ignored. Defaults to None.

Returns

dict with a DataCheckWarning if there are any too unique or not unique enough columns.

Return type dict

Example

```
>>> import pandas as pd
>>> df = pd.DataFrame({
...     'regression_unique_enough': [float(x) for x in range(100)],
...     'regression_not_unique_enough': [float(1) for x in range(100)]
... })
>>> uniqueness_check = UniquenessDataCheck(problem_type="regression",
↳ threshold=0.8)
>>> assert uniqueness_check.validate(df) == {
...     "errors": [],
...     "warnings": [{"message": "Input columns (regression_not_unique_
↳ enough) for regression problem type are not unique enough.",
...                     "data_check_name": "UniquenessDataCheck",
...                     "level": "warning",
...                     "code": "NOT_UNIQUE_ENOUGH",
...                     "details": {"column": "regression_not_unique_enough",
↳ 'uniqueness_score': 0.0}}],
...     "actions": [{"code": "DROP_COL",
...                     "metadata": {"column": "regression_not_unique_enough"}}}]
```

evalml.data_checks.uniqueness_data_check.warning_not_unique_enough = Input columns ({} for {} pr
evalml.data_checks.uniqueness_data_check.warning_too_unique = Input columns ({} for {} pr

Package Contents

Classes Summary

<i>ClassImbalanceDataCheck</i>	Check if any of the target labels are imbalanced, or if the number of values for each target are below 2 times the number of CV folds. Use for classification problems.
<i>DataCheck</i>	Base class for all data checks.
<i>DataCheckAction</i>	A recommended action returned by a DataCheck.
<i>DataCheckActionCode</i>	Enum for data check action code.

continues on next page

Table 133 – continued from previous page

<i>DataCheckError</i>	DataCheckMessage subclass for errors returned by data checks.
<i>DataCheckMessage</i>	Base class for a message returned by a DataCheck, tagged by name.
<i>DataCheckMessageCode</i>	Enum for data check message code.
<i>DataCheckMessageType</i>	Enum for type of data check message: WARNING or ERROR.
<i>DataChecks</i>	A collection of data checks.
<i>DataCheckWarning</i>	DataCheckMessage subclass for warnings returned by data checks.
<i>DateTimeFormatDataCheck</i>	Check if the datetime column has equally spaced intervals and is monotonically increasing or decreasing in order to be supported by time series estimators.
<i>DateTimeNaNDataCheck</i>	Check each column in the input for datetime features and will issue an error if NaN values are present.
<i>DefaultDataChecks</i>	A collection of basic data checks that is used by AutoML by default.
<i>HighlyNullDataCheck</i>	Check if there are any highly-null columns and rows in the input.
<i>IDColumnsDataCheck</i>	Check if any of the features are likely to be ID columns.
<i>InvalidTargetDataCheck</i>	Check if the target data contains missing or invalid values.
<i>MulticollinearityDataCheck</i>	Check if any set features are likely to be multicollinear.
<i>NaturalLanguageNaNDataCheck</i>	Checks each column in the input for natural language features and will issue an error if NaN values are present.
<i>NoVarianceDataCheck</i>	Check if the target or any of the features have no variance.
<i>OutliersDataCheck</i>	Checks if there are any outliers in input data by using IQR to determine score anomalies.
<i>SparsityDataCheck</i>	Check if there are any columns with sparsely populated values in the input.
<i>TargetDistributionDataCheck</i>	Check if the target data contains certain distributions that may need to be transformed prior training to improve model performance. Uses the Shapiro-Wilks test when the dataset is ≤ 5000 samples, otherwise uses Jarque-Bera.
<i>TargetLeakageDataCheck</i>	Check if any of the features are highly correlated with the target by using mutual information or Pearson correlation.
<i>UniquenessDataCheck</i>	Check if there are any columns in the input that are either too unique for classification problems or not unique enough for regression problems.

Contents

class evalml.data_checks.**ClassImbalanceDataCheck** (*threshold=0.1*, *min_samples=100*, *num_cv_folds=3*)

Check if any of the target labels are imbalanced, or if the number of values for each target are below 2 times the number of CV folds. Use for classification problems.

Parameters

- **threshold** (*float*) – The minimum threshold allowed for class imbalance before a warning is raised. This threshold is calculated by comparing the number of samples in each class to the sum of samples in that class and the majority class. For example, a multi-class case with [900, 900, 100] samples per classes 0, 1, and 2, respectively, would have a 0.10 threshold for class 2 ($100 / (900 + 100)$). Defaults to 0.10.
- **min_samples** (*int*) – The minimum number of samples per accepted class. If the minority class is both below the threshold and min_samples, then we consider this severely imbalanced. Must be greater than 0. Defaults to 100.
- **num_cv_folds** (*int*) – The number of cross-validation folds. Must be positive. Choose 0 to ignore this warning. Defaults to 3.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if any target labels are imbalanced beyond a threshold for binary and multiclass problems.

name (*cls*)

Return a name describing the data check.

validate (*self*, *X*, *y*)

Check if any target labels are imbalanced beyond a threshold for binary and multiclass problems.

Ignores NaN values in target labels if they appear.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – Features. Ignored.
- **y** (*pd.Series*, *np.ndarray*) – Target labels to check for imbalanced data.

Returns

Dictionary with DataCheckWarnings if imbalance in classes is less than the threshold,
and DataCheckErrors if the number of values for each target is below $2 * \text{num_cv_folds}$.

Return type dict

Example

```
>>> import pandas as pd
>>> X = pd.DataFrame()
>>> y = pd.Series([0, 1, 1, 1, 1, 1, 1, 1, 1, 1])
>>> target_check = ClassImbalanceDataCheck(threshold=0.10)
>>> assert target_check.validate(X, y) == {"errors": [{"message": "The number
↳ of instances of these targets is less than 2 * the number of cross folds =
↳ 6 instances: [0]",
...                                     "data_check_name":
↳ "ClassImbalanceDataCheck",
```

(continues on next page)

(continued from previous page)

```

...                                     "level": "error",
...                                     "code": "CLASS_
↪IMBALANCE_BELOW_FOLDS",
...                                     "details": {"target_
↪values": [0]}}},
...                                     "warnings": [{"message": "The_
↪following labels fall below 10% of the target: [0]",
...                                     "data_check_name":
↪"ClassImbalanceDataCheck",
...                                     "level": "warning",
...                                     "code": "CLASS_
↪IMBALANCE_BELOW_THRESHOLD",
...                                     "details": {"target_
↪values": [0]}}},
...                                     {"message": "The_
↪following labels in the target have severe class imbalance because they_
↪fall under 10% of the target and have less than 100 samples: [0]",
...                                     "data_check_name":
↪"ClassImbalanceDataCheck",
...                                     "level": "warning",
...                                     "code": "CLASS_
↪IMBALANCE_SEVERE",
...                                     "details": {"target_
↪values": [0]}}}],
...                                     "actions": []}

```

class evalml.data_checks.DataCheck

Base class for all data checks.

Data checks are a set of heuristics used to determine if there are problems with input data.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Inspect and validate the input data, runs any necessary calculations or algorithms, and returns a list of warnings and errors if applicable.

name (*cls*)

Return a name describing the data check.

abstract validate (*self*, *X*, *y=None*)

Inspect and validate the input data, runs any necessary calculations or algorithms, and returns a list of warnings and errors if applicable.

Parameters

- **X** (*pd.DataFrame*) – The input data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target data of length [n_samples]

Returns Dictionary of DataCheckError and DataCheckWarning messages**Return type** dict (*DataCheckMessage*)**class** evalml.data_checks.DataCheckAction (*action_code*, *metadata=None*)

A recommended action returned by a DataCheck.

Parameters

- **action_code** (`DataCheckActionCode`) – Action code associated with the action.
- **metadata** (`dict`, *optional*) – Additional useful information associated with the action. Defaults to `None`.

Methods

<code>to_dict</code>	Return a dictionary form of the data check action.
----------------------	--

```
to_dict (self)
```

Return a dictionary form of the data check action.

```
class evalml.data_checks.DataCheckActionCode
```

Enum for data check action code.

Attributes

DROP_COL	Action code for dropping a column.
DROP_ROWS	Action code for dropping rows.
IM- PUTE_COL	Action code for imputing a column.
TRANS- FORM_TARGET	Action code for transforming the target data.

Methods

<i>name</i>	The name of the Enum member.
<i>value</i>	The value of the Enum member.

name (*self*)

The name of the Enum member.

value (*self*)

The value of the Enum member.

```
class evalml.data_checks.DataCheckError (message, data_check_name, message_code=None,
                                         details=None)
```

DataCheckMessage subclass for errors returned by data checks.

Attributes

message_type	DataCheckMessageType.ERROR
---------------------	----------------------------

Methods

<code>to_dict</code>	Return a dictionary form of the data check message.
----------------------	---

to dict (*self*)

Return a dictionary form of the data check message.

[illegible]

Base class for a message returned by a DataCheck, tagged by name.

Parameters

- **message** (*str*) – Message string.
- **data_check_name** (*str*) – Name of data check.
- **message_code** (*DataCheckMessageCode*) – Message code associated with message. Defaults to None.
- **details** (*dict*) – Additional useful information associated with the message. Defaults to None.

Attributes

message_type	None
---------------------	------

Methods

<i>to_dict</i>	Return a dictionary form of the data check message.
----------------	---

to_dict (*self*)

Return a dictionary form of the data check message.

class evalml.data_checks.**DataCheckMessageCode**

Enum for data check message code.

Attributes

CLASS_IMBALANCE_BELOW_FOLDS	Message code for when number of values for each target is below 2 * number of CV folds.
CLASS_IMBALANCE_BELOW_THRESHOLD	Message code for when number of classes is less than the threshold.
CLASS_IMBALANCE_SEVERE	Message code for when balance in classes is less than the threshold and minimum class is less than minimum number of accepted samples.
DATE-TIME_HAS_NAN	Message code for when input datetime columns contain NaN values.
DATE-TIME_HAS_UNEVEN_INTERVALS	Message code for when the datetime values have uneven intervals.
DATE-TIME_INFORMATION_NOT_FOUND	Message code for when datetime information can not be found or is in an unaccepted format.
DATE-TIME_IS_NOT_MONOTONIC	Message code for when the datetime values are not monotonically increasing.
HAS_ID_COLUMNS	Message code for data that has ID columns.
HAS_OUTLIERS	Message code for when outliers are detected.
HIGH_VARIANCE	Message code for when high variance is detected for cross-validation.
HIGHLY_NULL_COLUMNS	Message code for highly null columns.
HIGHLY_NULL_ROWS	Message code for highly null rows.
IS_MULTICOLLINEAR	Message code for when data is potentially multicollinear.
MIS-MATCHED_INDICES	Message code for when input target and features have mismatched indices.
MIS-MATCHED_INDICES_ORDER	Message code for when input target and features have mismatched indices order. The two have the same index values, but shuffled.
MIS-MATCHED_LENGTHS	Message code for when input target and features have different lengths.
NATURAL_LANGUAGE_HAS_NAN	Message code for when input natural language columns contain NaN values.

continues on next page

Table 140 – continued from previous page

NO_VARIANCE	Message code for when data has no variance (1 unique value).
NO_VARIANCE_WITH_NULL	Message code for when data has one unique value and NaN values.
NOT_UNIQUE_ENOUGH	Message code for when data does not possess enough unique values.
TAR-GET_BINARY_NOT_TWO_UNIQUE_VALUES	Message code for target data for a binary classification problem that does not have two unique values.
TAR-GET_HAS_NULL	Message code for target data that has null values.
TAR-GET_INCOMPATIBLE_OBJECTIVE	Message code for target data that has incompatible values for the specified objective
TAR-GET_IS_EMPTY_OR_FULLY_NULL	Message code for target data that is empty or has all null values.
TAR-GET_IS_NONE	Message code for when target is None.
TAR-GET_LEAKAGE	Message code for when target leakage is detected.
TAR-GET_LOGNORMAL_DISTRIBUTION	Message code for target data with a lognormal distribution.
TAR-GET_MULTICLASS_HIGH_UNIQUE_CLASS	Message code for target data for a multi classification problem that has an abnormally large number of target values.
TAR-GET_MULTICLASS_NOT_ENOUGH_CLASSES	Message code for target data for a multi classification problem that does not have more than a minimum number of classes.
TAR-GET_MULTICLASS_NOT_TWO_EXAMPLES_PER_CLASS	Message code for target data for a multi classification problem that does not have two examples per class.
TAR-GET_UNSUPPORTED_PROBLEM_TYPE	Message code for target data that is being checked against an unsupported problem type.
TAR-GET_UNSUPPORTED_TYPE	Message code for target data that is of an unsupported type.
TOO_SPARSE	Message code for when multiclass data has values that are too sparsely populated.
TOO_UNIQUE	Message code for when data possesses too many unique values.

Methods

<i>name</i>	The name of the Enum member.
<i>value</i>	The value of the Enum member.

name (*self*)

The name of the Enum member.

value (*self*)

The value of the Enum member.

class evalml.data_checks.DataCheckMessageType

Enum for type of data check message: WARNING or ERROR.

Attributes

ERROR	Error message returned by a data check.
WARNING	Warning message returned by a data check.

Methods

<i>name</i>	The name of the Enum member.
<i>value</i>	The value of the Enum member.

name (*self*)

The name of the Enum member.

value (*self*)

The value of the Enum member.

class evalml.data_checks.**DataChecks** (*data_checks=None, data_check_params=None*)

A collection of data checks.

Parameters

- **data_checks** (*list* (**DataCheck**)) – List of DataCheck objects.
- **data_check_params** (*dict*) – Parameters for passed DataCheck objects.

Methods

<i>validate</i>	Inspect and validate the input data against data checks and returns a list of warnings and errors if applicable.
-----------------	--

validate (*self, X, y=None*)

Inspect and validate the input data against data checks and returns a list of warnings and errors if applicable.

Parameters

- **X** (*pd.DataFrame, np.ndarray*) – The input data of shape [n_samples, n_features]
- **y** (*pd.Series, np.ndarray*) – The target data of length [n_samples]

Returns Dictionary containing DataCheckMessage objects

Return type dict

class evalml.data_checks.**DataCheckWarning** (*message, data_check_name, message_code=None, details=None*)

DataCheckMessage subclass for warnings returned by data checks.

Attributes

message_type	DataCheckMessageType.WARNING
---------------------	------------------------------

Methods

<i>to_dict</i>	Return a dictionary form of the data check message.
----------------	---

to_dict (*self*)

Return a dictionary form of the data check message.

class evalml.data_checks.**DateTimeFormatDataCheck** (*datetime_column='index'*)

Check if the datetime column has equally spaced intervals and is monotonically increasing or decreasing in order to be supported by time series estimators.

Parameters **datetime_column** (*str, int*) – The name of the datetime column. If the datetime values are in the index, then pass “index”.

Methods

<code>name</code>	Return a name describing the data check.
<code>validate</code>	Checks if the target data has equal intervals and is sorted.

name (*cls*)

Return a name describing the data check.

validate (*self*, *X*, *y*)

Checks if the target data has equal intervals and is sorted.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – Features.
- **y** (*pd.Series*, *np.ndarray*) – Target data.

Returns List with `DataCheckErrors` if unequal intervals are found in the datetime column.**Return type** dict (*DataCheckError*)**Example**

```
>>> from pandas as pd
>>> X = pd.DataFrame(pd.date_range("January 1, 2021", periods=8), columns=["dates"])
>>> y = pd.Series([1, 2, 4, 2, 1, 2, 3, 1])
>>> X.iloc[7] = "January 9, 2021"
>>> datetime_format_check = DateTimeFormatDataCheck()
>>> assert datetime_format_check.validate(X, y) == {
...     "errors": [{"message": "No frequency could be detected in dates, possibly due to uneven intervals.",
...                     "data_check_name": "EqualIntervalDataCheck",
...                     "level": "error",
...                     "code": "DATETIME_HAS_UNEVEN_INTERVALS",
...                     "details": {}}],
...     "warnings": [],
...     "actions": []}
```

class evalml.data_checks.**DateTimeNaNDataCheck**

Check each column in the input for datetime features and will issue an error if NaN values are present.

Methods

<code>name</code>	Return a name describing the data check.
<code>validate</code>	Check if any datetime columns contain NaN values.

name (*cls*)

Return a name describing the data check.

validate (*self*, *X*, *y=None*)

Check if any datetime columns contain NaN values.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – Features.

- **y** (*pd.Series*, *np.ndarray*) – Ignored. Defaults to None.

Returns dict with a `DataCheckError` if NaN values are present in datetime columns.

Return type dict

Example

```
>>> import pandas as pd
>>> import woodwork as ww
>>> import numpy as np
>>> dates = np.arange(np.datetime64('2017-01-01'), np.datetime64('2017-01-08
↳'))
>>> dates[0] = np.datetime64('NaT')
>>> df = pd.DataFrame(dates, columns=['index'])
>>> df.ww.init()
>>> dt_nan_check = DateTimeNaNDataCheck()
>>> assert dt_nan_check.validate(df) == {"warnings": [],
...                                     "actions": [],
...                                     "errors": [
↳[DataCheckError(message='Input datetime column(s) (index) contains NaN
↳values. Please impute NaN values or drop these rows or columns.',
...                                                         data_
↳check_name=DateTimeNaNDataCheck.name,
...                                                         ]
↳message_code=DataCheckMessageCode.DATETIME_HAS_NAN,
...                                                         ]
↳details={"columns": 'index'}).to_dict()]}
```

class evalml.data_checks.**DefaultDataChecks** (*problem_type*, *objective*, *n_splits*=3, *date-time_column*=None)

A collection of basic data checks that is used by AutoML by default.

Includes:

- *HighlyNullDataCheck*
- *HighlyNullRowsDataCheck*
- *IDColumnsDataCheck*
- *TargetLeakageDataCheck*
- *InvalidTargetDataCheck*
- *NoVarianceDataCheck*
- *ClassImbalanceDataCheck* (for classification problem types)
- *DateTimeNaNDataCheck*
- *NaturalLanguageNaNDataCheck*
- *TargetDistributionDataCheck* (for regression problem types)
- *DateTimeFormatDataCheck* (for time series problem types)

Parameters

- **problem_type** (*str*) – The problem type that is being validated. Can be regression, binary, or multiclass.
- **objective** (*str* or *ObjectiveBase*) – Name or instance of the objective class.

- **n_splits** (*int*) – The number of splits as determined by the data splitter being used. Defaults to 3.
- **datetime_column** (*str*) – The name of the column containing datetime information to be used for time series problems.
- **to "index" indicating that the datetime information is in the index of X or y.** (*Default*) –

Methods

<i>validate</i>	Inspect and validate the input data against data checks and returns a list of warnings and errors if applicable.
-----------------	--

validate (*self*, *X*, *y=None*)

Inspect and validate the input data against data checks and returns a list of warnings and errors if applicable.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – The input data of shape [n_samples, n_features]
- **y** (*pd.Series*, *np.ndarray*) – The target data of length [n_samples]

Returns Dictionary containing DataCheckMessage objects

Return type dict

class evalml.data_checks.**HighlyNullDataCheck** (*pct_null_col_threshold=0.95*,
pct_null_row_threshold=0.95)

Check if there are any highly-null columns and rows in the input.

Parameters

- **pct_null_col_threshold** (*float*) – If the percentage of NaN values in an input feature exceeds this amount, that column will be considered highly-null. Defaults to 0.95.
- **pct_null_row_threshold** (*float*) – If the percentage of NaN values in an input row exceeds this amount, that row will be considered highly-null. Defaults to 0.95.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if there are any highly-null columns or rows in the input.

name (*cls*)

Return a name describing the data check.

validate (*self*, *X*, *y=None*)

Check if there are any highly-null columns or rows in the input.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – Features.
- **y** (*pd.Series*, *np.ndarray*) – Ignored. Defaults to None.

Returns dict with a DataCheckWarning if there are any highly-null columns or rows.

Return type dict

Example

```
>>> import pandas as pd
>>> class SeriesWrap():
...     def __init__(self, series):
...         self.series = series
...
...     def __eq__(self, series_2):
...         return all(self.series.eq(series_2.series))
...
>>> df = pd.DataFrame({
...     'lots_of_null': [None, None, None, None, 5],
...     'no_null': [1, 2, 3, 4, 5]
... })
>>> null_check = HighlyNullDataCheck(pct_null_col_threshold=0.50, pct_null_
↪row_threshold=0.50)
>>> validation_results = null_check.validate(df)
>>> validation_results['warnings'][0]['details']['pct_null_cols'] =
↪SeriesWrap(validation_results['warnings'][0]['details']['pct_null_cols'])
>>> highly_null_rows = SeriesWrap(pd.Series([0.5, 0.5, 0.5, 0.5]))
>>> assert validation_results == {
...     "errors": [],
...     "warnings": [{"message": "4 out of 5 rows are more than 50.0% null",
...         "data_check_name": "HighlyNullDataCheck",
...         "level": "warning",
...         "code": "HIGHLY_NULL_ROWS",
...         "details": {"pct_null_cols": highly_null_rows}},
...     {"message": "Column 'lots_of_null' is 50.0% or more null
↪",
...         "data_check_name": "HighlyNullDataCheck",
...         "level": "warning",
...         "code": "HIGHLY_NULL_COLS",
...         "details": {"column": "lots_of_null", "pct_null_rows":
↪0.8}}}],
...     "actions": [{"code": "DROP_ROWS", "metadata": {"rows": [0, 1, 2, 3]}},
...     {"code": "DROP_COL", "metadata": {"column": "lots_of_null"}}
↪}]}
```

class evalml.data_checks.IDColumnsDataCheck (*id_threshold=1.0*)

Check if any of the features are likely to be ID columns.

Parameters *id_threshold* (*float*) – The probability threshold to be considered an ID column.
Defaults to 1.0.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if any of the features are likely to be ID columns. Currently performs a number of simple checks.

name (*cls*)

Return a name describing the data check.

validate (*self, X, y=None*)

Check if any of the features are likely to be ID columns. Currently performs a number of simple checks.

Checks performed are:

- column name is “id”
- column name ends in “_id”
- column contains all unique values (and is categorical / integer type)

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – The input features to check.
- **y** (*pd.Series*) – The target. Defaults to None. Ignored.

Returns A dictionary of features with column name or index and their probability of being ID columns

Return type dict

Example

```
>>> import pandas as pd
>>> df = pd.DataFrame({
...     'df_id': [0, 1, 2, 3, 4],
...     'x': [10, 42, 31, 51, 61],
...     'y': [42, 54, 12, 64, 12]
... })
>>> id_col_check = IDColumnsDataCheck()
>>> assert id_col_check.validate(df) == {
...     "errors": [],
...     "warnings": [{"message": "Column 'df_id' is 100.0% or more likely to_
↳ be an ID column",
...                     "data_check_name": "IDColumnsDataCheck",
...                     "level": "warning",
...                     "code": "HAS_ID_COLUMN",
...                     "details": {"column": "df_id"}}],
...     "actions": [{"code": "DROP_COL",
...                     "metadata": {"column": "df_id"}}]}
```

class evalml.data_checks.InvalidTargetDataCheck (*problem_type*, *objective*, *n_unique=100*)

Check if the target data contains missing or invalid values.

Parameters

- **problem_type** (*str* or *ProblemTypes*) – The specific problem type to data check for. e.g. ‘binary’, ‘multiclass’, ‘regression’, ‘time series regression’
- **objective** (*str* or *ObjectiveBase*) – Name or instance of the objective class.
- **n_unique** (*int*) – Number of unique target values to store when problem type is binary and target incorrectly has more than 2 unique values. Non-negative integer. If None, stores all unique values. Defaults to 100.

Attributes

multi-class_continuous_threshold	0.05
---	------

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if the target data contains missing or invalid values.

name (*cls*)

Return a name describing the data check.

validate (*self*, *X*, *y*)

Check if the target data contains missing or invalid values.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – Features. Ignored.
- **y** (*pd.Series*, *np.ndarray*) – Target data to check for invalid values.

Returns List with *DataCheckErrors* if any invalid values are found in the target data.

Return type dict (*DataCheckError*)

Example

```
>>> import pandas as pd
>>> X = pd.DataFrame({"col": [1, 2, 3, 1]})
>>> y = pd.Series([0, 1, None, None])
>>> target_check = InvalidTargetDataCheck('binary', 'Log Loss Binary')
>>> assert target_check.validate(X, y) == {
...     "errors": [{"message": "2 row(s) (50.0%) of target values are null",
...                   "data_check_name": "InvalidTargetDataCheck",
...                   "level": "error",
...                   "code": "TARGET_HAS_NULL",
...                   "details": {"num_null_rows": 2, "pct_null_rows": 50}}],
...     "warnings": [],
...     "actions": [{"code": 'IMPUTE_COL', 'metadata': {'column': None,
...     ↪ 'impute_strategy': 'most_frequent', 'is_target': True}}]}
```

class evalml.data_checks.**MulticollinearityDataCheck** (*threshold=0.9*)

Check if any set features are likely to be multicollinear.

Parameters **threshold** (*float*) – The threshold to be considered. Defaults to 0.9.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if any set of features are likely to be multicollinear.

name (*cls*)

Return a name describing the data check.

validate (*self*, *X*, *y=None*)

Check if any set of features are likely to be multicollinear.

Parameters

- **X** (*pd.DataFrame*) – The input features to check.
- **y** (*pd.Series*) – The target. Ignored.

Returns dict with a DataCheckWarning if there are any potentially multicollinear columns.

Return type dict

Example

```
>>> import pandas as pd
>>> col = pd.Series([1, 0, 2, 3, 4])
>>> X = pd.DataFrame({"col_1": col, "col_2": col * 3})
>>> y = pd.Series([1, 0, 0, 1, 0])
>>> multicollinearity_check = MulticollinearityDataCheck(threshold=0.8)
>>> assert multicollinearity_check.validate(X, y) == {
...     "errors": [],
...     "warnings": [{"message": "Columns are likely to be correlated: [('col_1', 'col_2')]",
...     "data_check_name": "MulticollinearityDataCheck",
...     "level": "warning",
...     "code": "IS_MULTICOLLINEAR",
...     "details": {'columns': [('col_1', 'col_2')]}},
...     "actions": []}
```

class evalml.data_checks.NaturalLanguageNaNDataCheck

Checks each column in the input for natural language features and will issue an error if NaN values are present.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if any natural language columns contain NaN values.

name (*cls*)

Return a name describing the data check.

validate (*self*, *X*, *y=None*)

Check if any natural language columns contain NaN values.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – Features.
- **y** (*pd.Series*, *np.ndarray*) – Ignored. Defaults to None.

Returns dict with a DataCheckError if NaN values are present in natural language columns.

Return type dict

Example

```
>>> import pandas as pd
>>> import woodwork as ww
>>> import numpy as np
>>> data = pd.DataFrame()
>>> data['A'] = [None, "string_that_is_long_enough_for_natural_language"]
>>> data['B'] = ['string_that_is_long_enough_for_natural_language', 'string_
that_is_long_enough_for_natural_language']
>>> data['C'] = np.random.randint(0, 3, size=len(data))
```

(continues on next page)

(continued from previous page)

```

>>> data.wv.init(logical_types={'A': 'NaturalLanguage', 'B': 'NaturalLanguage
↳'})
>>> nl_nan_check = NaturalLanguageNaNDataCheck()
>>> assert nl_nan_check.validate(data) == {
...     "warnings": [],
...     "actions": [],
...     "errors": [DataCheckError(message='Input natural language_
↳column(s) (A) contains NaN values. Please impute NaN values or drop these_
↳rows or columns.',
...                               data_check_name=NaturalLanguageNaNDataCheck.name,
...                               message_code=DataCheckMessageCode.NATURAL_LANGUAGE_
↳HAS_NAN,
...                               details={"columns": 'A'}).to_dict()]
...     }

```

class evalml.data_checks.NoVarianceDataCheck(count_nan_as_value=False)

Check if the target or any of the features have no variance.

Parameters **count_nan_as_value** (*bool*) – If True, missing values will be counted as their own unique value. Additionally, if true, will return a DataCheckWarning instead of an error if the feature has mostly missing data and only one unique value. Defaults to False.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if the target or any of the features have no variance (1 unique value).

name (*cls*)

Return a name describing the data check.

validate (*self*, *X*, *y*)

Check if the target or any of the features have no variance (1 unique value).

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – The input features.
- **y** (*pd.Series*, *np.ndarray*) – The target data.

Returns dict of warnings/errors corresponding to features or target with no variance.

Return type dict

class evalml.data_checks.OutliersDataCheck

Checks if there are any outliers in input data by using IQR to determine score anomalies.

Columns with score anomalies are considered to contain outliers.

Methods

<i>name</i>	Return a name describing the data check.
<i>validate</i>	Check if there are any outliers in a dataframe by using IQR to determine column anomalies. Column with anomalies are considered to contain outliers.

name (*cls*)

Return a name describing the data check.

validate (*self*, *X*, *y=None*)

Check if there are any outliers in a dataframe by using IQR to determine column anomalies. Column with anomalies are considered to contain outliers.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – Input features.
- **y** (*pd.Series*, *np.ndarray*) – Ignored. Defaults to None.

Returns A dictionary with warnings if any columns have outliers.

Return type dict

Example

```
>>> import pandas as pd
>>> df = pd.DataFrame({
...     'x': [1, 2, 3, 4, 5],
...     'y': [6, 7, 8, 9, 10],
...     'z': [-1, -2, -3, -1201, -4]
... })
>>> outliers_check = OutliersDataCheck()
>>> assert outliers_check.validate(df) == {
...     "warnings": [{"message": "Column(s) 'z' are likely to have outlier_
↳data.",
...
...         "data_check_name": "OutliersDataCheck",
...         "level": "warning",
...         "code": "HAS_OUTLIERS",
...         "details": {"columns": ["z"]}}],
...     "errors": [],
...     "actions": []}
```

class evalml.data_checks.**SparsityDataCheck** (*problem_type*, *threshold*,
unique_count_threshold=10)

Check if there are any columns with sparsely populated values in the input.

Parameters

- **problem_type** (*str* or *ProblemTypes*) – The specific problem type to data check for. ‘multiclass’ or ‘time series multiclass’ is the only accepted problem type.
- **threshold** (*float*) – The threshold value, or percentage of each column’s unique values, below which, a column exhibits sparsity. Should be between 0 and 1.
- **unique_count_threshold** (*int*) – The minimum number of times a unique value has to be present in a column to not be considered “sparse.” Defaults to 10.

Methods

<i>name</i>	Return a name describing the data check.
<i>sparsity_score</i>	Calculate a sparsity score for the given value counts by calculating the percentage of unique values that exceed the count_threshold.
<i>validate</i>	Calculate what percentage of each column’s unique values exceed the count threshold and compare that percentage to the sparsity threshold stored in the class instance.

name (*cls*)

Return a name describing the data check.

static sparsity_score (*col*, *count_threshold=10*)

Calculate a sparsity score for the given value counts by calculating the percentage of unique values that exceed the *count_threshold*.

Parameters

- **col** (*pd.Series*) – Feature values.
- **count_threshold** (*int*) – The number of instances below which a value is considered sparse. Default is 10.

Returns Sparsity score, or the percentage of the unique values that exceed *count_threshold*.

Return type (float)

validate (*self*, *X*, *y=None*)

Calculate what percentage of each column's unique values exceed the count threshold and compare that percentage to the sparsity threshold stored in the class instance.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – Features.
- **y** (*pd.Series*, *np.ndarray*) – Ignored.

Returns dict with a `DataCheckWarning` if there are any sparse columns.

Return type dict

Example

```
>>> import pandas as pd
>>> df = pd.DataFrame({
...     'sparse': [float(x) for x in range(100)],
...     'not_sparse': [float(1) for x in range(100)]
... })
>>> sparsity_check = SparsityDataCheck(problem_type="multiclass", threshold=0.
↳5, unique_count_threshold=10)
>>> assert sparsity_check.validate(df) == {
...     "errors": [],
...     "warnings": [{"message": "Input columns (sparse) for multiclass_
↳problem type are too sparse.",
...                     "data_check_name": "SparsityDataCheck",
...                     "level": "warning",
...                     "code": "TOO_SPARSE",
...                     "details": {"column": "sparse", 'sparsity_score': 0.0}}
↳],
...     "actions": [{"code": "DROP_COL",
...                   "metadata": {"column": "sparse"}}}]}
```

class evalml.data_checks.TargetDistributionDataCheck

Check if the target data contains certain distributions that may need to be transformed prior training to improve model performance. Uses the Shapiro-Wilks test when the dataset is ≤ 5000 samples, otherwise uses Jarque-Bera.

Methods

<code>name</code>	Return a name describing the data check.
<code>validate</code>	Check if the target data has a certain distribution.

name (*cls*)

Return a name describing the data check.

validate (*self*, *X*, *y*)

Check if the target data has a certain distribution.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – Features. Ignored.
- **y** (*pd.Series*, *np.ndarray*) – Target data to check for underlying distributions.

Returns List with `DataCheckErrors` if certain distributions are found in the target data.

Return type dict (*DataCheckError*)

Example

```
>>> from scipy.stats import lognorm
>>> X = None
>>> y = [0.946, 0.972, 1.154, 0.954, 0.969, 1.222, 1.038, 0.999, 0.973, 0.897]
>>> target_check = TargetDistributionDataCheck()
>>> assert target_check.validate(X, y) == {
...     "errors": [],
...     "warnings": [{"message": "Target may have a lognormal distribution.",
...                           "data_check_name": "TargetDistributionDataCheck",
...                           "level": "warning",
...                           "code": "TARGET_LOGNORMAL_DISTRIBUTION",
...                           "details": {"shapiro-statistic/pvalue": '0.84/0.045'}}],
...     "actions": [{"code": 'TRANSFORM_TARGET', 'metadata': {'column': None,
...     ↪ 'transformation_strategy': 'lognormal', 'is_target': True}}]}
```

class evalml.data_checks.**TargetLeakageDataCheck** (*pct_corr_threshold=0.95*,
method='mutual')

Check if any of the features are highly correlated with the target by using mutual information or Pearson correlation.

If *method='mutual'*, this data check uses mutual information and supports all target and feature types. Otherwise, if *method='pearson'*, it uses Pearson correlation and only supports binary with numeric and boolean dtypes. Pearson correlation returns a value in $[-1, 1]$, while mutual information returns a value in $[0, 1]$.

Parameters

- **pct_corr_threshold** (*float*) – The correlation threshold to be considered leakage. Defaults to 0.95.
- **method** (*string*) – The method to determine correlation. Use ‘mutual’ for mutual information, otherwise ‘pearson’ for Pearson correlation. Defaults to ‘mutual’.

Methods

<code>name</code>	Return a name describing the data check.
<code>validate</code>	Check if any of the features are highly correlated with the target by using mutual information or Pearson correlation.

name (*cls*)

Return a name describing the data check.

validate (*self*, *X*, *y*)

Check if any of the features are highly correlated with the target by using mutual information or Pearson correlation.

If *method*='mutual', supports all target and feature types. Otherwise, if *method*='pearson' only supports binary with numeric and boolean dtypes. Pearson correlation returns a value in [-1, 1], while mutual information returns a value in [0, 1].

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – The input features to check.
- **y** (*pd.Series*, *np.ndarray*) – The target data.

Returns dict with a *DataCheckWarning* if target leakage is detected.

Return type dict (*DataCheckWarning*)

Example

```
>>> import pandas as pd
>>> X = pd.DataFrame({
...     'leak': [10, 42, 31, 51, 61],
...     'x': [42, 54, 12, 64, 12],
...     'y': [13, 5, 13, 74, 24],
... })
>>> y = pd.Series([10, 42, 31, 51, 40])
>>> target_leakage_check = TargetLeakageDataCheck(pct_corr_threshold=0.95)
>>> assert target_leakage_check.validate(X, y) == {
...     "warnings": [{ "message": "Column 'leak' is 95.0% or more correlated_
↳ with the target",
...                     "data_check_name": "TargetLeakageDataCheck",
...                     "level": "warning",
...                     "code": "TARGET_LEAKAGE",
...                     "details": { "column": "leak" } }],
...     "errors": [],
...     "actions": [{ "code": "DROP_COL",
...                   "metadata": { "column": "leak" } } ] }
```

class evalml.data_checks.UniquenessDataCheck (*problem_type*, *threshold*=0.5)

Check if there are any columns in the input that are either too unique for classification problems or not unique enough for regression problems.

Parameters

- **problem_type** (*str* or *ProblemTypes*) – The specific problem type to data check for. e.g. 'binary', 'multiclass', 'regression', 'time series regression'
- **threshold** (*float*) – The threshold to set as an upper bound on uniqueness for classification type problems or lower bound on for regression type problems. Defaults to 0.50.

Methods

name

Return a name describing the data check.

continues on next page

Table 158 – continued from previous page

<code>uniqueness_score</code>	Calculate a uniqueness score for the provided field. NaN values are not considered as unique values in the calculation.
<code>validate</code>	Check if there are any columns in the input that are too unique in the case of classification problems or not unique enough in the case of regression problems.

name (*cls*)

Return a name describing the data check.

static uniqueness_score (*col*)

Calculate a uniqueness score for the provided field. NaN values are not considered as unique values in the calculation.

Based on the Herfindahl–Hirschman Index.

Parameters *col* (*pd.Series*) – Feature values.

Returns Uniqueness score.

Return type (float)

validate (*self*, *X*, *y=None*)

Check if there are any columns in the input that are too unique in the case of classification problems or not unique enough in the case of regression problems.

Parameters

- *X* (*pd.DataFrame*, *np.ndarray*) – Features.
- *y* (*pd.Series*, *np.ndarray*) – Ignored. Defaults to None.

Returns

dict with a `DataCheckWarning` if there are any too unique or not unique enough columns.

Return type dict

Example

```
>>> import pandas as pd
>>> df = pd.DataFrame({
...     'regression_unique_enough': [float(x) for x in range(100)],
...     'regression_not_unique_enough': [float(1) for x in range(100)]
... })
>>> uniqueness_check = UniquenessDataCheck(problem_type="regression",
↳ threshold=0.8)
>>> assert uniqueness_check.validate(df) == {
...     "errors": [],
...     "warnings": [{"message": "Input columns (regression_not_unique_
↳ enough) for regression problem type are not unique enough.",
...                     "data_check_name": "UniquenessDataCheck",
...                     "level": "warning",
...                     "code": "NOT_UNIQUE_ENOUGH",
...                     "details": {"column": "regression_not_unique_enough",
↳ 'uniqueness_score': 0.0}}],
```

(continues on next page)

(continued from previous page)

```
...     "actions": [{"code": "DROP_COL",
...                  "metadata": {"column": "regression_not_unique_enough"}}]}
```

Demos

Demo datasets.

Submodules

breast_cancer

Load the breast cancer dataset, which can be used for binary classification problems.

Module Contents

Functions

<code>load_breast_cancer</code>	Load breast cancer dataset. Binary classification problem.
---------------------------------	--

Contents

`evalml.demos.breast_cancer.load_breast_cancer()`

Load breast cancer dataset. Binary classification problem.

Returns X and y

Return type (pd.DataFrame, pd.Series)

churn

Load the churn dataset, which can be used for binary classification problems.

Module Contents

Functions

<code>load_churn</code>	Load churn dataset, which can be used for binary classification problems.
-------------------------	---

Contents

`evalml.demos.churn.load_churn(n_rows=None, verbose=True)`

Load churn dataset, which can be used for binary classification problems.

Parameters

- **n_rows** (*int*) – Number of rows from the dataset to return
- **verbose** (*bool*) – Whether to print information about features and labels

Returns X and y

Return type (pd.DataFrame, pd.Series)

diabetes

Load the diabetes dataset, which can be used for regression problems.

Module Contents

Functions

<code>load_diabetes</code>	Load diabetes dataset. Used for regression problem.
----------------------------	---

Contents

`evalml.demos.diabetes.load_diabetes()`

Load diabetes dataset. Used for regression problem.

Returns X and y

Return type (pd.DataFrame, pd.Series)

fraud

Load the credit card fraud dataset, which can be used for binary classification problems.

Module Contents

Functions

<code>load_fraud</code>	Load credit card fraud dataset.
-------------------------	---------------------------------

Contents

`evalml.demos.fraud.load_fraud(n_rows=None, verbose=True)`

Load credit card fraud dataset.

The fraud dataset can be used for binary classification problems.

Parameters

- **n_rows** (*int*) – Number of rows from the dataset to return
- **verbose** (*bool*) – Whether to print information about features and labels

Returns X and y

Return type (pd.DataFrame, pd.Series)

weather

The Australian daily-min-temperatures weather dataset.

Module Contents

Functions

<code>load_weather</code>	Load the Australian daily-min-temperatures weather dataset.
---------------------------	---

Contents

`evalml.demos.weather.load_weather()`

Load the Australian daily-min-temperatures weather dataset.

wine

Load and return the wine dataset, which can be used for multiclass classification problems.

Module Contents

Functions

<code>load_wine</code>	Load wine dataset. Multiclass problem.
------------------------	--

Contents

`evalml.demos.wine.load_wine()`
Load wine dataset. Multiclass problem.

Returns X and y

Return type (pd.DataFrame, pd.Series)

Package Contents

Functions

<code>load_breast_cancer</code>	Load breast cancer dataset. Binary classification problem.
<code>load_churn</code>	Load churn dataset, which can be used for binary classification problems.
<code>load_diabetes</code>	Load diabetes dataset. Used for regression problem.
<code>load_fraud</code>	Load credit card fraud dataset.
<code>load_weather</code>	Load the Australian daily-min-termperatures weather dataset.
<code>load_wine</code>	Load wine dataset. Multiclass problem.

Contents

`evalml.demos.load_breast_cancer()`
Load breast cancer dataset. Binary classification problem.

Returns X and y

Return type (pd.DataFrame, pd.Series)

`evalml.demos.load_churn(n_rows=None, verbose=True)`
Load churn dataset, which can be used for binary classification problems.

Parameters

- **n_rows** (*int*) – Number of rows from the dataset to return
- **verbose** (*bool*) – Whether to print information about features and labels

Returns X and y

Return type (pd.DataFrame, pd.Series)

`evalml.demos.load_diabetes()`
Load diabetes dataset. Used for regression problem.

Returns X and y

Return type (pd.DataFrame, pd.Series)

`evalml.demos.load_fraud(n_rows=None, verbose=True)`
Load credit card fraud dataset.

The fraud dataset can be used for binary classification problems.

Parameters

- **n_rows** (*int*) – Number of rows from the dataset to return
- **verbose** (*bool*) – Whether to print information about features and labels

Returns X and y

Return type (pd.DataFrame, pd.Series)

`evalml.demos.load_weather()`

Load the Australian daily-min-temperatures weather dataset.

`evalml.demos.load_wine()`

Load wine dataset. Multiclass problem.

Returns X and y

Return type (pd.DataFrame, pd.Series)

Exceptions

Exceptions used in EvalML.

Submodules

exceptions

Exceptions used in EvalML.

Module Contents

Classes Summary

<i>PartialDependenceErrorCode</i>	Enum identifying the type of error encountered in partial dependence.
-----------------------------------	---

Exceptions Summary

Contents

exception `evalml.exceptions.exceptions.AutoMLSearchException`

Exception raised when all pipelines in an automl batch return a score of NaN for the primary objective.

exception `evalml.exceptions.exceptions.ComponentNotYetFittedError`

An exception to be raised when predict/predict_proba/transform is called on a component without fitting first.

exception `evalml.exceptions.exceptions.DataCheckInitError`

Exception raised when a data check can't initialize with the parameters given.

exception `evalml.exceptions.exceptions.EnsembleMissingPipelinesError`

An exception raised when an ensemble is missing *estimators* (list) as a parameter.

exception evalml.exceptions.exceptions.**MethodPropertyNotFoundError**

Exception to raise when a class does not have an expected method or property.

exception evalml.exceptions.exceptions.**MissingComponentError**

An exception raised when a component is not found in `all_components()`.

exception evalml.exceptions.exceptions.**NoPositiveLabelException**

Exception when a particular classification label for the ‘positive’ class cannot be found in the column index or unique values.

exception evalml.exceptions.exceptions.**NullsInColumnWarning**

Warning thrown when there are null values in the column of interest.

exception evalml.exceptions.exceptions.**ObjectiveCreationError**

Exception when `get_objective` tries to instantiate an objective and required args are not provided.

exception evalml.exceptions.exceptions.**ObjectiveNotFoundError**

Exception to raise when specified objective does not exist.

exception evalml.exceptions.exceptions.**ParameterNotUsedWarning** (*components*)

Warning thrown when a pipeline parameter isn’t used in a defined pipeline’s component graph during initialization.

exception evalml.exceptions.exceptions.**PartialDependenceError** (*message, code*)

Exception raised for all errors that partial dependence can raise.

class evalml.exceptions.exceptions.**PartialDependenceErrorCode**

Enum identifying the type of error encountered in partial dependence.

Attributes

ALL_OTHER_ERRORS	Errors
COMPUTED_PERCENTILES_TOO_CLOSE	<code>computed_percentiles_too_close</code>
FEATURE_IS_ALL_NANS	<code>feature_is_all_nans</code>
FEATURE_IS_MOSTLY_ONE_VALUE	<code>feature_is_mostly_one_value</code>
FEATURES_ARGUMENT_INCORRECT_TYPES	<code>features_argument_incorrect_types</code>
ICE_PLOT_REQUESTED_FOR_TWO_WAY_PLOT	<code>ice_dependence_plot</code>
INVALID_CLASS_LABEL	<code>invalid_class_label_requested_for_plot</code>
INVALID_FEATURE_TYPE	<code>invalid_feature_type</code>
PIPELINE_IS_BASELINE	<code>baseline</code>
TOO_MANY_FEATURES	<code>features</code>
TWO_WAY_REQUESTED_FOR_DATES	<code>dates</code>
UNFITTED_PIPELINE	<code>unfitted_pipeline</code>

Methods

<i>name</i>	The name of the Enum member.
<i>value</i>	The value of the Enum member.

name (*self*)

The name of the Enum member.

value (*self*)

The value of the Enum member.

exception evalml.exceptions.exceptions.**PipelineNotFoundError**

An exception raised when a particular pipeline is not found in automl search results.

exception evalml.exceptions.exceptions.**PipelineNotYetFittedError**

An exception to be raised when predict/predict_proba/transform is called on a pipeline without fitting first.

exception evalml.exceptions.exceptions.**PipelineScoreError** (*exceptions,*
scored_successfully)

An exception raised when a pipeline errors while scoring any objective in a list of objectives.

Parameters

- **exceptions** (*dict*) – A dictionary mapping an objective name (str) to a tuple of the form (exception, traceback). All of the objectives that errored will be stored here.
- **scored_successfully** (*dict*) – A dictionary mapping an objective name (str) to a score value. All of the objectives that did not error will be stored here.

Package Contents

Classes Summary

<i>PartialDependenceErrorCode</i>	Enum identifying the type of error encountered in partial dependence.
-----------------------------------	---

Exceptions Summary

Contents

exception evalml.exceptions.**AutoMLSearchException**

Exception raised when all pipelines in an automl batch return a score of NaN for the primary objective.

exception evalml.exceptions.**ComponentNotYetFittedError**

An exception to be raised when predict/predict_proba/transform is called on a component without fitting first.

exception evalml.exceptions.**DataCheckInitError**

Exception raised when a data check can't initialize with the parameters given.

exception evalml.exceptions.**EnsembleMissingPipelinesError**

An exception raised when an ensemble is missing *estimators* (list) as a parameter.

exception evalml.exceptions.**MethodPropertyNotFoundError**

Exception to raise when a class does not have an expected method or property.

exception evalml.exceptions.**MissingComponentError**

An exception raised when a component is not found in all_components().

exception evalml.exceptions.**NoPositiveLabelException**

Exception when a particular classification label for the 'positive' class cannot be found in the column index or

unique values.

exception evalml.exceptions.NullsInColumnWarning

Warning thrown when there are null values in the column of interest.

exception evalml.exceptions.ObjectiveCreationError

Exception when get_objective tries to instantiate an objective and required args are not provided.

exception evalml.exceptions.ObjectiveNotFoundError

Exception to raise when specified objective does not exist.

exception evalml.exceptions.ParameterNotUsedWarning (*components*)

Warning thrown when a pipeline parameter isn't used in a defined pipeline's component graph during initialization.

exception evalml.exceptions.PartialDependenceError (*message, code*)

Exception raised for all errors that partial dependence can raise.

class evalml.exceptions.PartialDependenceErrorCode

Enum identifying the type of error encountered in partial dependence.

Attributes

ALL_OTHER_ERRORS	Errors
COMPUTED_PERCENTILES_TOO_CLOSE	computed_percentiles_too_close
FEATURE_IS_ALL_NANS	feature_is_all_nans
FEATURE_IS_MOSTLY_ONE_VALUE	feature_is_mostly_one_value
FEATURES_ARGUMENT_INCORRECT_TYPES	features_argument_incorrect_types
ICE_PLOT_REQUESTED_FOR_TWO_WAY_PLOT	ice_dependence_plot
INVALID_CLASS_LABEL	invalid_class_label_requested_for_plot
INVALID_FEATURE_TYPE	invalid_feature_type
PIPELINE_IS_BASELINE	baseline
TOO_MANY_FEATURES	features
TWO_WAY_REQUESTED_FOR_DATES	dates
UNFITTED_PIPELINE	unfitted_pipeline

Methods

<i>name</i>	The name of the Enum member.
<i>value</i>	The value of the Enum member.

name (*self*)

The name of the Enum member.

value (*self*)

The value of the Enum member.

exception evalml.exceptions.PipelineNotFoundError

An exception raised when a particular pipeline is not found in automl search results.

exception `evalml.exceptions.PipelineNotYetFittedError`

An exception to be raised when `predict/predict_proba/transform` is called on a pipeline without fitting first.

exception `evalml.exceptions.PipelineScoreError` (*exceptions, scored_successfully*)

An exception raised when a pipeline errors while scoring any objective in a list of objectives.

Parameters

- **exceptions** (*dict*) – A dictionary mapping an objective name (*str*) to a tuple of the form (*exception, traceback*). All of the objectives that errored will be stored here.
- **scored_successfully** (*dict*) – A dictionary mapping an objective name (*str*) to a score value. All of the objectives that did not error will be stored here.

Model Family

Family of machine learning models.

Submodules

`model_family`

Enum for family of machine learning models.

Module Contents

Classes Summary

ModelFamily

Enum for family of machine learning models.

Contents

class `evalml.model_family.model_family.ModelFamily`

Enum for family of machine learning models.

Attributes

ARIMA	ARIMA model family.
BASELINE	Baseline model family.
CAT-BOOST	CatBoost model family.
DECISION_TREE	Decision Tree model family.
ENSEMBLE	Ensemble model family.
EXTRA_TREES	Extra Trees model family.
K_NEIGHBORS	K Nearest Neighbors model family.
LIGHTGBM	LightGBM model family.
LINEAR_MODEL	Linear model family.
NONE	None
PROPHET	Prophet model family.
RANDOM_FOREST	Random Forest model family.
SVM	SVM model family.
XGBOOST	XGBoost model family.

Methods

<i>is_tree_estimator</i>	Checks whether the estimator's model family uses trees.
<i>name</i>	The name of the Enum member.
<i>value</i>	The value of the Enum member.

is_tree_estimator (*self*)

Checks whether the estimator's model family uses trees.

name (*self*)

The name of the Enum member.

value (*self*)

The value of the Enum member.

utils

Utility methods for EvalML's model families.

Module Contents

Functions

<code>handle_model_family</code>	Handles <code>model_family</code> by either returning the <code>ModelFamily</code> or converting from a string.
----------------------------------	---

Contents

`evalml.model_family.utils.handle_model_family(model_family)`

Handles `model_family` by either returning the `ModelFamily` or converting from a string.

Parameters `model_family` (*str* or *ModelFamily*) – Model type that needs to be handled.

Returns `ModelFamily`

Raises

- **KeyError** – If input is not a valid model family.
- **ValueError** – If input is not a string or `ModelFamily` object.

Package Contents

Classes Summary

<code>ModelFamily</code>	Enum for family of machine learning models.
--------------------------	---

Functions

<code>handle_model_family</code>	Handles <code>model_family</code> by either returning the <code>ModelFamily</code> or converting from a string.
----------------------------------	---

Contents

`evalml.model_family.handle_model_family(model_family)`

Handles `model_family` by either returning the `ModelFamily` or converting from a string.

Parameters `model_family` (*str* or *ModelFamily*) – Model type that needs to be handled.

Returns `ModelFamily`

Raises

- **KeyError** – If input is not a valid model family.

- **ValueError** – If input is not a string or ModelFamily object.

class evalml.model_family.**ModelFamily**
Enum for family of machine learning models.

Attributes

ARIMA	ARIMA model family.
BASELINE	Baseline model family.
CAT-BOOST	CatBoost model family.
DECISION_TREE	Decision Tree model family.
ENSEMBLE	Ensemble model family.
EXTRA_TREES	Extra Trees model family.
K_NEIGHBORS	K Nearest Neighbors model family.
LIGHTGBM	LightGBM model family.
LINEAR_MODEL	Linear model family.
NONE	None
PROPHET	Prophet model family.
RANDOM_FOREST	Random Forest model family.
SVM	SVM model family.
XGBOOST	XGBoost model family.

Methods

<i>is_tree_estimator</i>	Checks whether the estimator's model family uses trees.
<i>name</i>	The name of the Enum member.
<i>value</i>	The value of the Enum member.

is_tree_estimator (*self*)
Checks whether the estimator's model family uses trees.

name (*self*)
The name of the Enum member.

value (*self*)
The value of the Enum member.

Model Understanding

Model understanding tools.

Subpackages

`prediction_explanations`

Prediction explanation tools.

Submodules

`explainers`

Prediction explanation tools.

Module Contents

Classes Summary

<code>ExplainPredictionsStage</code>	Enum for prediction stage.
--------------------------------------	----------------------------

Functions

<code>abs_error</code>	Computes the absolute error per data point for regression problems.
<code>cross_entropy</code>	Computes Cross Entropy Loss per data point for classification problems.
<code>explain_predictions</code>	Creates a report summarizing the top contributing features for each data point in the input features.
<code>explain_predictions_best_worst</code>	Creates a report summarizing the top contributing features for the best and worst points in the dataset as measured by error to true labels.

Attributes Summary

<code>DEFAULT_METRICS</code>

Contents

`evalml.model_understanding.prediction_explanations.explainers.abs_error(y_true, y_pred)`

Computes the absolute error per data point for regression problems.

Parameters

- **y_true** (*pd.Series*) – True labels.
- **y_pred** (*pd.Series*) – Predicted values.

Returns `np.ndarray`

`evalml.model_understanding.prediction_explanations.explainers.cross_entropy(y_true, y_pred_proba)`

Computes Cross Entropy Loss per data point for classification problems.

Parameters

- **y_true** (*pd.Series*) – True labels encoded as ints.
- **y_pred_proba** (*pd.DataFrame*) – Predicted probabilities. One column per class.

Returns `np.ndarray`

`evalml.model_understanding.prediction_explanations.explainers.DEFAULT_METRICS`

`evalml.model_understanding.prediction_explanations.explainers.explain_predictions(pipeline, input_features, y, indices_to_explain, top_k_features_to_explain, include_shap_values, include_expectations, output_format='train_data=Nones', train_target=1)`

Creates a report summarizing the top contributing features for each data point in the input features.

XGBoost and Stacked Ensemble models, as well as CatBoost multiclass classifiers, are not currently supported.

Parameters

- **pipeline** (*PipelineBase*) – Fitted pipeline whose predictions we want to explain with SHAP.
- **input_features** (*pd.DataFrame*) – Dataframe of input data to evaluate the pipeline on.
- **y** (*pd.Series*) – Labels for the input data.
- **indices_to_explain** (*list[int]*) – List of integer indices to explain.
- **top_k_features** (*int*) – How many of the highest/lowest contributing feature to include in the table for each data point. Default is 3.

- **include_shap_values** (*bool*) – Whether SHAP values should be included in the table. Default is False.
- **include_expected_value** (*bool*) – Whether the expected value should be included in the table. Default is False.
- **output_format** (*str*) – Either “text”, “dict”, or “dataframe”. Default is “text”.
- **training_data** (*pd.DataFrame, np.ndarray*) – Data the pipeline was trained on. Required and only used for time series pipelines.
- **training_target** (*pd.Series, np.ndarray*) – Targets used to train the pipeline. Required and only used for time series pipelines.

Returns

A report explaining the top contributing features to each prediction for each row of input_features.

The report will include the feature names, prediction contribution, and SHAP Value (optional).

Return type str, dict, or pd.DataFrame

Raises

- **ValueError** – if input_features is empty.
- **ValueError** – if an output_format outside of “text”, “dict” or “dataframe” is provided.
- **ValueError** – if the requested index falls outside the input_feature’s boundaries.

`evalml.model_understanding.prediction_explanations.explainers.explain_predictions_best_worst`

Creates a report summarizing the top contributing features for the best and worst points in the dataset as measured by error to true labels.

XGBoost and Stacked Ensemble models, as well as CatBoost multiclass classifiers, are not currently supported.

Parameters

- **pipeline** (*PipelineBase*) – Fitted pipeline whose predictions we want to explain with SHAP.
- **input_features** (*pd.DataFrame*) – Input data to evaluate the pipeline on.
- **y_true** (*pd.Series*) – True labels for the input data.
- **num_to_explain** (*int*) – How many of the best, worst, random data points to explain.

- **top_k_features** (*int*) – How many of the highest/lowest contributing feature to include in the table for each data point.
- **include_shap_values** (*bool*) – Whether SHAP values should be included in the table. Default is False.
- **metric** (*callable*) – The metric used to identify the best and worst points in the dataset. Function must accept the true labels and predicted value or probabilities as the only arguments and lower values must be better. By default, this will be the absolute error for regression problems and cross entropy loss for classification problems.
- **output_format** (*str*) – Either “text” or “dict”. Default is “text”.
- **callback** (*callable*) – Function to be called with incremental updates. Has the following parameters: - `progress_stage`: stage of computation - `time_elapsed`: total time in seconds that has elapsed since start of call
- **training_data** (*pd.DataFrame, np.ndarray*) – Data the pipeline was trained on. Required and only used for time series pipelines.
- **training_target** (*pd.Series, np.ndarray*) – Targets used to train the pipeline. Required and only used for time series pipelines.

Returns

A report explaining the top contributing features for the best/worst predictions in the `input_features`.

For each of the best/worst rows of `input_features`, the predicted values, true labels, metric value, feature names, prediction contribution, and SHAP Value (optional) will be listed.

Return type str, dict, or `pd.DataFrame`

Raises

- **ValueError** – If `input_features` does not have more than twice the requested features to explain.
- **ValueError** – If `y_true` and `input_features` have mismatched lengths.
- **ValueError** – If an `output_format` outside of “text”, “dict” or “dataframe” is provided.
- **PipelineScoreError** – If the pipeline errors out while scoring.

class `evalml.model_understanding.prediction_explanations.explainers.ExplainPredictionsStage`
Enum for prediction stage.

Attributes

COM- PUTE_FEATURE_STAGE	<code>compute_feature_stage</code>
COM- PUTE_SHAP_VALUES_STAGE	<code>compute_shap_value_stage</code>
DONE	<code>done</code>
PRE- DICT_STAGE	<code>predict_stage</code>
PREPRO- CESS- ING_STAGE	<code>preprocessing_stage</code>

Methods

<i>name</i>	The name of the Enum member.
<i>value</i>	The value of the Enum member.

name (*self*)
The name of the Enum member.

value (*self*)
The value of the Enum member.

Package Contents

Functions

<i>explain_predictions</i>	Creates a report summarizing the top contributing features for each data point in the input features.
<i>explain_predictions_best_worst</i>	Creates a report summarizing the top contributing features for the best and worst points in the dataset as measured by error to true labels.

Contents

`evalml.model_understanding.prediction_explanations.explain_predictions (pipeline,
input_features,
y,
indices_to_explain,
top_k_features=3,
include_shap_values=False,
include_expected_value=False,
output_format='text',
training_data=None,
training_target=None)`

Creates a report summarizing the top contributing features for each data point in the input features.
XGBoost and Stacked Ensemble models, as well as CatBoost multiclass classifiers, are not currently supported.

Parameters

- **pipeline** (*PipelineBase*) – Fitted pipeline whose predictions we want to explain with SHAP.
- **input_features** (*pd.DataFrame*) – Dataframe of input data to evaluate the pipeline on.
- **y** (*pd.Series*) – Labels for the input data.
- **indices_to_explain** (*list[int]*) – List of integer indices to explain.

- **top_k_features** (*int*) – How many of the highest/lowest contributing feature to include in the table for each data point. Default is 3.
- **include_shap_values** (*bool*) – Whether SHAP values should be included in the table. Default is False.
- **include_expected_value** (*bool*) – Whether the expected value should be included in the table. Default is False.
- **output_format** (*str*) – Either “text”, “dict”, or “dataframe”. Default is “text”.
- **training_data** (*pd.DataFrame, np.ndarray*) – Data the pipeline was trained on. Required and only used for time series pipelines.
- **training_target** (*pd.Series, np.ndarray*) – Targets used to train the pipeline. Required and only used for time series pipelines.

Returns

A report explaining the top contributing features to each prediction for each row of input_features.

The report will include the feature names, prediction contribution, and SHAP Value (optional).

Return type str, dict, or pd.DataFrame

Raises

- **ValueError** – if input_features is empty.
- **ValueError** – if an output_format outside of “text”, “dict” or “dataframe is provided.
- **ValueError** – if the requested index falls outside the input_feature’s boundaries.

```
evalml.model_understanding.prediction_explanations.explain_predictions_best_worst (pipeline,
in-
put_features,
y_true,
num_to_expl,
top_k_featur
in-
clude_shap_
met-
ric=None,
out-
put_format=
call-
back=None,
train-
ing_data=None,
train-
ing_target=None)
```

Creates a report summarizing the top contributing features for the best and worst points in the dataset as measured by error to true labels.

XGBoost and Stacked Ensemble models, as well as CatBoost multiclass classifiers, are not currently supported.

Parameters

- **pipeline** (*PipelineBase*) – Fitted pipeline whose predictions we want to explain with SHAP.
- **input_features** (*pd.DataFrame*) – Input data to evaluate the pipeline on.

- **y_true** (*pd.Series*) – True labels for the input data.
- **num_to_explain** (*int*) – How many of the best, worst, random data points to explain.
- **top_k_features** (*int*) – How many of the highest/lowest contributing feature to include in the table for each data point.
- **include_shap_values** (*bool*) – Whether SHAP values should be included in the table. Default is False.
- **metric** (*callable*) – The metric used to identify the best and worst points in the dataset. Function must accept the true labels and predicted value or probabilities as the only arguments and lower values must be better. By default, this will be the absolute error for regression problems and cross entropy loss for classification problems.
- **output_format** (*str*) – Either “text” or “dict”. Default is “text”.
- **callback** (*callable*) – Function to be called with incremental updates. Has the following parameters: - *progress_stage*: stage of computation - *time_elapsed*: total time in seconds that has elapsed since start of call
- **training_data** (*pd.DataFrame, np.ndarray*) – Data the pipeline was trained on. Required and only used for time series pipelines.
- **training_target** (*pd.Series, np.ndarray*) – Targets used to train the pipeline. Required and only used for time series pipelines.

Returns

A report explaining the top contributing features for the best/worst predictions in the input_features.

For each of the best/worst rows of *input_features*, the predicted values, true labels, metric value, feature names, prediction contribution, and SHAP Value (optional) will be listed.

Return type str, dict, or *pd.DataFrame*

Raises

- **ValueError** – If *input_features* does not have more than twice the requested features to explain.
- **ValueError** – If *y_true* and *input_features* have mismatched lengths.
- **ValueError** – If an *output_format* outside of “text”, “dict” or “dataframe” is provided.
- **PipelineScoreError** – If the pipeline errors out while scoring.

Submodules

feature_explanations

Human Readable Pipeline Explanations.

Module Contents

Functions

<code>get_influential_features</code>	Finds the most influential features as well as any detrimental features from a dataframe of feature importances.
<code>readable_explanation</code>	Outputs a human-readable explanation of trained pipeline behavior.

Contents

`evalml.model_understanding.feature_explanations.get_influential_features` (*imp_df*, *max_features=5*, *min_importance_threshold*, *linear_importance=False*)

Finds the most influential features as well as any detrimental features from a dataframe of feature importances.

Parameters

- **imp_df** (*pd.DataFrame*) – DataFrame containing feature names and associated importances.
- **max_features** (*int*) – The maximum number of features to include in an explanation. Defaults to 5.
- **min_importance_threshold** (*float*) – The minimum percent of total importance a single feature can have to be considered important. Defaults to 0.05.
- **linear_importance** (*bool*) – When True, negative feature importances are not considered detrimental. Defaults to False.

Returns Lists of feature names corresponding to heavily influential, somewhat influential, and detrimental features, respectively.

Return type (list, list, list)

`evalml.model_understanding.feature_explanations.readable_explanation` (*pipeline*, *X=None*, *y=None*, *importance_method='permutation'*, *max_features=5*, *min_importance_threshold=0.0*, *objective='auto'*)

Outputs a human-readable explanation of trained pipeline behavior.

Parameters

- **pipeline** (*PipelineBase*) – The pipeline to explain.
- **X** (*pd.DataFrame*) – If importance_method is permutation, the holdout X data to compute importance with. Ignored otherwise.

- **y** (*pd.Series*) – The holdout y data, used to obtain the name of the target class. If `importance_method` is `permutation`, used to compute importance with.
- **importance_method** (*str*) – The method of determining feature importance. One of [`“permutation”`, `“feature”`]. Defaults to `“permutation”`.
- **max_features** (*int*) – The maximum number of influential features to include in an explanation. This does not affect the number of detrimental features reported. Defaults to 5.
- **min_importance_threshold** (*float*) – The minimum percent of total importance a single feature can have to be considered important. Defaults to 0.05.
- **objective** (*str*, *ObjectiveBase*) – If `importance_method` is `permutation`, the objective to compute importance with. Ignored otherwise, defaults to `“auto”`.

Raises `ValueError` – if any arguments passed in are invalid or the pipeline is not fitted.

force_plots

Force plots.

Module Contents

Functions

<code>force_plot</code>	Function to generate the data required to build a force plot.
<code>graph_force_plot</code>	Function to generate force plots for the desired rows of the training data.

Contents

`evalml.model_understanding.force_plots.force_plot` (*pipeline*, *rows_to_explain*, *training_data*, *y*)

Function to generate the data required to build a force plot.

Parameters

- **pipeline** (*PipelineBase*) – The pipeline to generate the force plot for.
- **rows_to_explain** (*list[int]*) – A list of the indices of the `training_data` to explain.
- **training_data** (*pandas.DataFrame*) – The data used to train the pipeline.
- **y** (*pandas.Series*) – The target data.

Returns

list of dictionaries where each dict contains force plot data. Each dictionary entry represents the explanations for a single row.

For single row binary force plots:

```
[{'malignant': {'expected_value': 0.37, 'feature_names': ['worst concave points',
'worst perimeter', 'worst radius'], 'shap_values': [0.09, 0.09, 0.08], 'plot': Additive-ForceVisualizer}]
```

For two row binary force plots:

```
[{'malignant': {'expected_value': 0.37, 'feature_names': ['worst concave points',
'worst perimeter', 'worst radius'], 'shap_values': [0.09, 0.09, 0.08], 'plot': Additive-
ForceVisualizer},
{'malignant': {'expected_value': 0.29, 'feature_names': ['worst concave points',
'worst perimeter', 'worst radius'], 'shap_values': [0.05, 0.03, 0.02], 'plot': Additive-
ForceVisualizer}]
```

Return type list[dict]

Raises

- **TypeError** – If rows_to_explain is not a list.
- **TypeError** – If all values in rows_to_explain aren't integers.

```
evalml.model_understanding.force_plots.graph_force_plot (pipeline, rows_to_explain,
training_data, y, mat-
plotlib=False)
```

Function to generate force plots for the desired rows of the training data.

Parameters

- **pipeline** (*PipelineBase*) – The pipeline to generate the force plot for.
- **rows_to_explain** (*list[int]*) – A list of the indices indicating which of the rows of the training_data to explain.
- **training_data** (*pandas.DataFrame*) – The data used to train the pipeline.
- **y** (*pandas.Series*) – The target data for the pipeline.
- **matplotlib** (*bool*) – flag to display the force plot using matplotlib (outside of jupyter) Defaults to False.

Returns

The same as `force_plot()`, but with an additional key in each dictionary for the plot.

Return type list[dict[shap.AdditiveForceVisualizer]]

graphs

Model understanding graphing utilities.

Module Contents

Functions

<i>binary_objective_vs_threshold</i>	Computes objective score as a function of potential binary classification decision thresholds for a fitted binary classification pipeline.
<i>confusion_matrix</i>	Confusion matrix for binary and multiclass classification.
<i>decision_tree_data_from_estimator</i>	Return data for a fitted tree in a restructured format.
<i>decision_tree_data_from_pipeline</i>	Return data for a fitted pipeline in a restructured format.

continues on next page

Table 185 – continued from previous page

<code>get_linear_coefficients</code>	Returns a dataframe showing the features with the greatest predictive power for a linear model.
<code>get_prediction_vs_actual_data</code>	Combines <code>y_true</code> and <code>y_pred</code> into a single dataframe and adds a column for outliers. Used in <code>graph_prediction_vs_actual()</code> .
<code>get_prediction_vs_actual_over_time_data</code>	Get the data needed for the <code>prediction_vs_actual_over_time</code> plot.
<code>graph_binary_objective_vs_threshold</code>	Generates a plot graphing objective score vs. decision thresholds for a fitted binary classification pipeline.
<code>graph_confusion_matrix</code>	Generate and display a confusion matrix plot.
<code>graph_partial_dependence</code>	Create an one-way or two-way partial dependence plot.
<code>graph_permutation_importance</code>	Generate a bar graph of the pipeline's permutation importance.
<code>graph_precision_recall_curve</code>	Generate and display a precision-recall plot.
<code>graph_prediction_vs_actual</code>	Generate a scatter plot comparing the true and predicted values. Used for regression plotting.
<code>graph_prediction_vs_actual_over_time</code>	Plot the target values and predictions against time on the x-axis.
<code>graph_roc_curve</code>	Generate and display a Receiver Operating Characteristic (ROC) plot for binary and multiclass classification problems.
<code>graph_t_sne</code>	Plot high dimensional data into lower dimensional space using t-SNE.
<code>normalize_confusion_matrix</code>	Normalizes a confusion matrix.
<code>partial_dependence</code>	Calculates one or two-way partial dependence.
<code>precision_recall_curve</code>	Given labels and binary classifier predicted probabilities, compute and return the data representing a precision-recall curve.
<code>roc_curve</code>	Given labels and classifier predicted probabilities, compute and return the data representing a Receiver Operating Characteristic (ROC) curve. Works with binary or multiclass problems.
<code>t_sne</code>	Get the transformed output after fitting X to the embedded space using t-SNE.
<code>visualize_decision_tree</code>	Generate an image visualizing the decision tree.

Contents

`evalml.model_understanding.graphs.binary_objective_vs_threshold`(*pipeline*, *X*,
y, *objective*,
steps=100)

Computes objective score as a function of potential binary classification decision thresholds for a fitted binary classification pipeline.

Parameters

- **pipeline** (*BinaryClassificationPipeline obj*) – Fitted binary classification pipeline.
- **X** (*pd.DataFrame*) – The input data used to compute objective score.
- **y** (*pd.Series*) – The target labels.
- **objective** (*ObjectiveBase obj, str*) – Objective used to score.

- **steps** (*int*) – Number of intervals to divide and calculate objective score at.

Returns DataFrame with thresholds and the corresponding objective score calculated at each threshold.

Return type pd.DataFrame

Raises

- **ValueError** – If objective is not a binary classification objective.
- **ValueError** – If objective's *score_needs_proba* is not False.

`evalml.model_understanding.graphs.confusion_matrix(y_true, y_predicted, normalize_method='true')`

Confusion matrix for binary and multiclass classification.

Parameters

- **y_true** (*pd.Series or np.ndarray*) – True binary labels.
- **y_predicted** (*pd.Series or np.ndarray*) – Predictions from a binary classifier.
- **normalize_method** (*{'true', 'pred', 'all', None}*) – Normalization method to use, if not None. Supported options are: 'true' to normalize by row, 'pred' to normalize by column, or 'all' to normalize by all values. Defaults to 'true'.

Returns Confusion matrix. The column header represents the predicted labels while row header represents the actual labels.

Return type pd.DataFrame

`evalml.model_understanding.graphs.decision_tree_data_from_estimator(estimator)`

Return data for a fitted tree in a restructured format.

Parameters **estimator** (*ComponentBase*) – A fitted DecisionTree-based estimator.

Returns An OrderedDict of OrderedDicts describing a tree structure.

Return type OrderedDict

Raises

- **ValueError** – If estimator is not a decision tree-based estimator.
- **NotFittedError** – If estimator is not yet fitted.

`evalml.model_understanding.graphs.decision_tree_data_from_pipeline(pipeline_)`

Return data for a fitted pipeline in a restructured format.

Parameters **pipeline** (*PipelineBase*) – A pipeline with a DecisionTree-based estimator.

Returns An OrderedDict of OrderedDicts describing a tree structure.

Return type OrderedDict

Raises

- **ValueError** – If estimator is not a decision tree-based estimator.
- **NotFittedError** – If estimator is not yet fitted.

`evalml.model_understanding.graphs.get_linear_coefficients(estimator, features=None)`

Returns a dataframe showing the features with the greatest predictive power for a linear model.

Parameters

- **estimator** (*Estimator*) – Fitted linear model family estimator.

- **features** (*list[str]*) – List of feature names associated with the underlying data.

Returns Displaying the features by importance.

Return type `pd.DataFrame`

Raises

- **ValueError** – If the model is not a linear model.
- **NotFittedError** – If the model is not yet fitted.

`evalml.model_understanding.graphs.get_prediction_vs_actual_data(y_true, y_pred, outlier_threshold=None)`

Combines `y_true` and `y_pred` into a single dataframe and adds a column for outliers. Used in `graph_prediction_vs_actual()`.

Parameters

- **y_true** (*pd.Series, or np.ndarray*) – The real target values of the data
- **y_pred** (*pd.Series, or np.ndarray*) – The predicted values outputted by the regression model.
- **outlier_threshold** (*int, float*) – A positive threshold for what is considered an outlier value. This value is compared to the absolute difference between each value of `y_true` and `y_pred`. Values within this threshold will be blue, otherwise they will be yellow. Defaults to `None`.

Returns

- *prediction*: Predicted values from regression model.
- *actual*: Real target values.
- *outlier*: Colors indicating which values are in the threshold for what is considered an outlier value.

Return type `pd.DataFrame` with the following columns

Raises **ValueError** – If threshold is not positive.

`evalml.model_understanding.graphs.get_prediction_vs_actual_over_time_data(pipeline, X, y, X_train, y_train, dates)`

Get the data needed for the `prediction_vs_actual_over_time` plot.

Parameters

- **pipeline** (*TimeSeriesRegressionPipeline*) – Fitted time series regression pipeline.
- **X** (*pd.DataFrame*) – Features used to generate new predictions.
- **y** (*pd.Series*) – Target values to compare predictions against.
- **X_train** (*pd.DataFrame*) – Data the pipeline was trained on.
- **y_train** (*pd.Series*) – Target values for training data.
- **dates** (*pd.Series*) – Dates corresponding to target values and predictions.

Returns Predictions vs. time.

Return type `pd.DataFrame`

`evalml.model_understanding.graphs.graph_binary_objective_vs_threshold`(*pipeline*,
X, *y*,
ob-
jec-
tive,
steps=100)

Generates a plot graphing objective score vs. decision thresholds for a fitted binary classification pipeline.

Parameters

- **pipeline** (*PipelineBase* or *subclass*) – Fitted pipeline
- **x** (*pd.DataFrame*) – The input data used to score and compute scores
- **y** (*pd.Series*) – The target labels
- **objective** (*ObjectiveBase obj*, *str*) – Objective used to score, shown on the y-axis of the graph
- **steps** (*int*) – Number of intervals to divide and calculate objective score at

Returns `plotly.Figure` representing the objective score vs. threshold graph generated

`evalml.model_understanding.graphs.graph_confusion_matrix`(*y_true*, *y_pred*, *nor-*
malize_method='true',
title_addition=None)

Generate and display a confusion matrix plot.

If *normalize_method* is set, hover text will show raw count, otherwise hover text will show count normalized with method 'true'.

Parameters

- **y_true** (*pd.Series* or *np.ndarray*) – True binary labels.
- **y_pred** (*pd.Series* or *np.ndarray*) – Predictions from a binary classifier.
- **normalize_method** (*{'true', 'pred', 'all', None}*) – Normalization method to use, if not None. Supported options are: 'true' to normalize by row, 'pred' to normalize by column, or 'all' to normalize by all values. Defaults to 'true'.
- **title_addition** (*str*) – If not None, append to plot title. Defaults to None.

Returns `plotly.Figure` representing the confusion matrix plot generated.

`evalml.model_understanding.graphs.graph_partial_dependence`(*pipeline*, *X*, *features*,
class_label=None,
grid_resolution=100,
kind='average')

Create an one-way or two-way partial dependence plot.

Passing a single integer or string as features will create a one-way partial dependence plot with the feature values plotted against the partial dependence. Passing features a tuple of int/strings will create a two-way partial dependence plot with a contour of feature[0] in the y-axis, feature[1] in the x-axis and the partial dependence in the z-axis.

Parameters

- **pipeline** (*PipelineBase* or *subclass*) – Fitted pipeline.
- **x** (*pd.DataFrame*, *np.ndarray*) – The input data used to generate a grid of values for feature where partial dependence will be calculated at.

- **features** (*int, string, tuple[int or string]*) – The target feature for which to create the partial dependence plot for. If features is an int, it must be the index of the feature to use. If features is a string, it must be a valid column name in X. If features is a tuple of strings, it must contain valid column int/names in X.
- **class_label** (*string, optional*) – Name of class to plot for multiclass problems. If None, will plot the partial dependence for each class. This argument does not change behavior for regression or binary classification pipelines. For binary classification, the partial dependence for the positive label will always be displayed. Defaults to None.
- **grid_resolution** (*int*) – Number of samples of feature(s) for partial dependence plot.
- **kind** (*{'average', 'individual', 'both'}*) – Type of partial dependence to plot. ‘average’ creates a regular partial dependence (PD) graph, ‘individual’ creates an individual conditional expectation (ICE) plot, and ‘both’ creates a single-figure PD and ICE plot. ICE plots can only be shown for one-way partial dependence plots.

Returns figure object containing the partial dependence data for plotting

Return type `plotly.graph_objects.Figure`

Raises

- **PartialDependenceError** – if a graph is requested for a class name that isn’t present in the pipeline.
- **PartialDependenceError** – if an ICE plot is requested for a two-way partial dependence.

```
evalml.model_understanding.graphs.graph_permutation_importance(pipeline, X,
                                                                y, objective, importance_threshold=0)
```

Generate a bar graph of the pipeline’s permutation importance.

Parameters

- **pipeline** (*PipelineBase or subclass*) – Fitted pipeline.
- **X** (*pd.DataFrame*) – The input data used to score and compute permutation importance.
- **y** (*pd.Series*) – The target data.
- **objective** (*str, ObjectiveBase*) – Objective to score on.
- **importance_threshold** (*float, optional*) – If provided, graph features with a permutation importance whose absolute value is larger than importance_threshold. Defaults to 0.

Returns `plotly.Figure`, a bar graph showing features and their respective permutation importance.

Raises **ValueError** – If importance_threshold is not greater than or equal to 0.

```
evalml.model_understanding.graphs.graph_precision_recall_curve(y_true,
                                                                y_pred_proba,
                                                                title_addition=None)
```

Generate and display a precision-recall plot.

Parameters

- **y_true** (*pd.Series or np.ndarray*) – True binary labels.

- **y_pred_proba** (*pd.Series* or *np.ndarray*) – Predictions from a binary classifier, before thresholding has been applied. Note this should be the predicted probability for the “true” label.
- **title_addition** (*str* or *None*) – If not *None*, append to plot title. Defaults to *None*.

Returns *plotly.Figure* representing the precision-recall plot generated

`evalml.model_understanding.graphs.graph_prediction_vs_actual` (*y_true*, *y_pred*, *outlier_threshold=None*)
Generate a scatter plot comparing the true and predicted values. Used for regression plotting.

Parameters

- **y_true** (*pd.Series*) – The real target values of the data.
- **y_pred** (*pd.Series*) – The predicted values outputted by the regression model.
- **outlier_threshold** (*int*, *float*) – A positive threshold for what is considered an outlier value. This value is compared to the absolute difference between each value of *y_true* and *y_pred*. Values within this threshold will be blue, otherwise they will be yellow. Defaults to *None*.

Returns *plotly.Figure* representing the predicted vs. actual values graph

Raises **ValueError** – If threshold is not positive.

`evalml.model_understanding.graphs.graph_prediction_vs_actual_over_time` (*pipeline*, *X*, *y*, *X_train*, *y_train*, *dates*)
Plot the target values and predictions against time on the x-axis.

Parameters

- **pipeline** (*TimeSeriesRegressionPipeline*) – Fitted time series regression pipeline.
- **X** (*pd.DataFrame*) – Features used to generate new predictions.
- **y** (*pd.Series*) – Target values to compare predictions against.
- **X_train** (*pd.DataFrame*) – Data the pipeline was trained on.
- **y_train** (*pd.Series*) – Target values for training data.
- **dates** (*pd.Series*) – Dates corresponding to target values and predictions.

Returns Showing the prediction vs actual over time.

Return type *plotly.Figure*

Raises **ValueError** – If the pipeline is not a time-series regression pipeline.

`evalml.model_understanding.graphs.graph_roc_curve` (*y_true*, *y_pred_proba*, *custom_class_names=None*, *title_addition=None*)
Generate and display a Receiver Operating Characteristic (ROC) plot for binary and multiclass classification problems.

Parameters

- **y_true** (*pd.Series* or *np.ndarray*) – True labels.

- **y_pred_proba** (*pd.Series* or *np.ndarray*) – Predictions from a classifier, before thresholding has been applied. Note this should be a one dimensional array with the predicted probability for the “true” label in the binary case.
- **custom_class_names** (*list* or *None*) – If not *None*, custom labels for classes. Defaults to *None*.
- **title_addition** (*str* or *None*) – if not *None*, append to plot title. Defaults to *None*.

Returns *plotly.Figure* representing the ROC plot generated

Raises **ValueError** – If the number of custom class names does not match number of classes in the input data.

```
evalml.model_understanding.graphs.graph_t_sne(X, n_components=2, perplexity=30.0,  
                                              learning_rate=200.0, metric='euclidean',  
                                              marker_line_width=2, marker_size=7,  
                                              **kwargs)
```

Plot high dimensional data into lower dimensional space using t-SNE.

Parameters

- **X** (*np.ndarray*, *pd.DataFrame*) – Data to be transformed. Must be numeric.
- **n_components** (*int*, *optional*) – Dimension of the embedded space.
- **perplexity** (*float*, *optional*) – Related to the number of nearest neighbors that is used in other manifold learning algorithms. Larger datasets usually require a larger perplexity. Consider selecting a value between 5 and 50.
- **learning_rate** (*float*, *optional*) – Usually in the range [10.0, 1000.0]. If the cost function gets stuck in a bad local minimum, increasing the learning rate may help.
- **metric** (*str*, *optional*) – The metric to use when calculating distance between instances in a feature array.
- **marker_line_width** (*int*, *optional*) – Determines the line width of the marker boundary.
- **marker_size** (*int*, *optional*) – Determines the size of the marker.
- **kwargs** – Arbitrary keyword arguments.

Returns *Figure* representing the transformed data.

Return type *plotly.Figure*

Raises **ValueError** – If *marker_line_width* or *marker_size* are not valid values.

```
evalml.model_understanding.graphs.normalize_confusion_matrix(conf_mat, normalize_method='true')
```

Normalizes a confusion matrix.

Parameters

- **conf_mat** (*pd.DataFrame* or *np.ndarray*) – Confusion matrix to normalize.
- **normalize_method** (*{'true', 'pred', 'all'}*) – Normalization method. Supported options are: ‘true’ to normalize by row, ‘pred’ to normalize by column, or ‘all’ to normalize by all values. Defaults to ‘true’.

Returns normalized version of the input confusion matrix. The column header represents the predicted labels while row header represents the actual labels.

Return type *pd.DataFrame*

Raises `ValueError` – If configuration is invalid, or if the sum of a given axis is zero and normalization by axis is specified.

```
evalml.model_understanding.graphs.partial_dependence(pipeline, X, features, percentiles=(0.05, 0.95),
                                                    grid_resolution=100,
                                                    kind='average')
```

Calculates one or two-way partial dependence.

If a single integer or string is given for features, one-way partial dependence is calculated. If a tuple of two integers or strings is given, two-way partial dependence is calculated with the first feature in the y-axis and second feature in the x-axis.

Parameters

- **pipeline** (*PipelineBase* or *subclass*) – Fitted pipeline
- **X** (*pd.DataFrame*, *np.ndarray*) – The input data used to generate a grid of values for feature where partial dependence will be calculated at
- **features** (*int*, *string*, *tuple[int or string]*) – The target feature for which to create the partial dependence plot for. If features is an int, it must be the index of the feature to use. If features is a string, it must be a valid column name in X. If features is a tuple of int/strings, it must contain valid column integers/names in X.
- **percentiles** (*tuple[float]*) – The lower and upper percentile used to create the extreme values for the grid. Must be in [0, 1]. Defaults to (0.05, 0.95).
- **grid_resolution** (*int*) – Number of samples of feature(s) for partial dependence plot. If this value is less than the maximum number of categories present in categorical data within X, it will be set to the max number of categories + 1. Defaults to 100.
- **kind** (*{'average', 'individual', 'both'}*) – The type of predictions to return. ‘individual’ will return the predictions for all of the points in the grid for each sample in X. ‘average’ will return the predictions for all of the points in the grid but averaged over all of the samples in X.

Returns

When *kind*='average': DataFrame with averaged predictions for all points in the grid averaged over all samples of X and the values used to calculate those predictions.

When *kind*='individual': DataFrame with individual predictions for all points in the grid for each sample of X and the values used to calculate those predictions. If a two-way partial dependence is calculated, then the result is a list of DataFrames with each DataFrame representing one sample's predictions.

When *kind*='both': A tuple consisting of the averaged predictions (in a DataFrame) over all samples of X and the individual predictions (in a list of DataFrames) for each sample of X.

In the one-way case: The dataframe will contain two columns, “feature_values” (grid points at which the partial dependence was calculated) and “partial_dependence” (the partial dependence at that feature value). For classification problems, there will be a third column called “class_label” (the class label for which the partial dependence was calculated). For binary classification, the partial dependence is only calculated for the “positive” class.

In the two-way case: The data frame will contain *grid_resolution* number of columns and rows where the index and column headers are the sampled values of the first and second features, respectively, used to make the partial dependence contour. The values of the data frame contain the partial dependence data for each feature value pair.

Return type *pd.DataFrame*, *list(pd.DataFrame)*, or *tuple(pd.DataFrame, list(pd.DataFrame))*

Raises

- **ValueError** – Error during call to scikit-learn’s partial dependence method.
- **Exception** – All other errors during calculation.
- **PartialDependenceError** – if the user provides a tuple of not exactly two features.
- **PartialDependenceError** – if the provided pipeline isn’t fitted.
- **PartialDependenceError** – if the provided pipeline is a Baseline pipeline.
- **PartialDependenceError** – if any of the features passed in are completely NaN
- **PartialDependenceError** – if any of the features are low-variance. Defined as having one value occurring more than the upper percentile passed by the user. By default 95%.

`evalml.model_understanding.graphs.precision_recall_curve(y_true, y_pred_proba, pos_label_idx=-1)`

Given labels and binary classifier predicted probabilities, compute and return the data representing a precision-recall curve.

Parameters

- **y_true** (*pd.Series* or *np.ndarray*) – True binary labels.
- **y_pred_proba** (*pd.Series* or *np.ndarray*) – Predictions from a binary classifier, before thresholding has been applied. Note this should be the predicted probability for the “true” label.
- **pos_label_idx** (*int*) – the column index corresponding to the positive class. If predicted probabilities are two-dimensional, this will be used to access the probabilities for the positive class.

Returns

Dictionary containing metrics used to generate a precision-recall plot, with the following keys:

- *precision*: Precision values.
- *recall*: Recall values.
- *thresholds*: Threshold values used to produce the precision and recall.
- *auc_score*: The area under the ROC curve.

Return type list

Raises `NoPositiveLabelException` – If predicted probabilities do not contain a column at the specified label.

`evalml.model_understanding.graphs.roc_curve(y_true, y_pred_proba)`

Given labels and classifier predicted probabilities, compute and return the data representing a Receiver Operating Characteristic (ROC) curve. Works with binary or multiclass problems.

Parameters

- **y_true** (*pd.Series* or *np.ndarray*) – True labels.
- **y_pred_proba** (*pd.Series* or *np.ndarray*) – Predictions from a classifier, before thresholding has been applied.

Returns

A list of dictionaries (with one for each class) is returned. Binary classification problems return a list with one di

Each dictionary contains metrics used to generate an ROC plot with the following keys:

- *fpr_rate*: False positive rate.
- *tpr_rate*: True positive rate.
- *threshold*: Threshold values used to produce each pair of true/false positive rates.
- *auc_score*: The area under the ROC curve.

Return type list(dict)

```
evalml.model_understanding.graphs.t_sne(X, n_components=2, perplexity=30.0, learning_rate=200.0, metric='euclidean', **kwargs)
```

Get the transformed output after fitting X to the embedded space using t-SNE.

Args: X (np.ndarray, pd.DataFrame): Data to be transformed. Must be numeric. n_components (int, optional): Dimension of the embedded space. perplexity (float, optional): Related to the number of nearest neighbors that is used in other manifold learning algorithms. Larger datasets usually require a larger perplexity. Consider selecting a value between 5 and 50. learning_rate (float, optional): Usually in the range [10.0, 1000.0]. If the cost function gets stuck in a bad local minimum, increasing the learning rate may help. metric (str, optional): The metric to use when calculating distance between instances in a feature array. kwargs: Arbitrary keyword arguments.

Returns TSNE output.

Return type np.ndarray (n_samples, n_components)

Raises **ValueError** – If specified parameters are not valid values.

```
evalml.model_understanding.graphs.visualize_decision_tree(estimator,
                                                           max_depth=None,
                                                           rotate=False,
                                                           filled=False,
                                                           filepath=None)
```

Generate an image visualizing the decision tree.

Parameters

- **estimator** (*ComponentBase*) – A fitted DecisionTree-based estimator.
- **max_depth** (*int, optional*) – The depth to which the tree should be displayed. If set to None (as by default), tree is fully generated.
- **rotate** (*bool, optional*) – Orient tree left to right rather than top-down.
- **filled** (*bool, optional*) – Paint nodes to indicate majority class for classification, extremity of values for regression, or purity of node for multi-output.
- **filepath** (*str, optional*) – Path to where the graph should be saved. If set to None (as by default), the graph will not be saved.

Returns DOT object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Source

Raises

- **ValueError** – If estimator is not a decision tree-based estimator.
- **NotFittedError** – If estimator is not yet fitted.

permutation_importance

Permutation importance methods.

Module Contents

Functions

<code>calculate_permutation_importance</code>	Calculates permutation importance for features.
<code>calculate_permutation_importance_one_column</code>	Calculates permutation importance for one column in the original dataframe.

Contents

`evalml.model_understanding.permutation_importance.calculate_permutation_importance` (*pipeline*, *X*, *y*, *objective*, *n_repeats*, *n_jobs*, *random_seed*)

Calculates permutation importance for features.

Parameters

- **pipeline** (*PipelineBase* or *subclass*) – Fitted pipeline.
- **X** (*pd.DataFrame*) – The input data used to score and compute permutation importance.
- **y** (*pd.Series*) – The target data.
- **objective** (*str*, *ObjectiveBase*) – Objective to score on.
- **n_repeats** (*int*) – Number of times to permute a feature. Defaults to 5.
- **n_jobs** (*int* or *None*) – Non-negative integer describing level of parallelism used for pipelines. None and 1 are equivalent. If set to -1, all CPUs are used. For *n_jobs* below -1, (*n_cpus* + 1 + *n_jobs*) are used. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns Mean feature importance scores over a number of shuffles.

Return type *pd.DataFrame*

Raises **ValueError** – If objective cannot be used with the given pipeline.

```
evalml.model_understanding.permutation_importance.calculate_permutation_importance_one_col
```

Calculates permutation importance for one column in the original dataframe.

Parameters

- **pipeline** (*PipelineBase* or *subclass*) – Fitted pipeline.
- **X** (*pd.DataFrame*) – The input data used to score and compute permutation importance.
- **y** (*pd.Series*) – The target data.
- **col_name** (*str*, *int*) – The column in X to calculate permutation importance for.
- **objective** (*str*, *ObjectiveBase*) – Objective to score on.
- **n_repeats** (*int*) – Number of times to permute a feature. Defaults to 5.
- **fast** (*bool*) – Whether to use the fast method of calculating the permutation importance or not. Defaults to True.
- **precomputed_features** (*pd.DataFrame*) – Precomputed features necessary to calculate permutation importance using the fast method. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns Mean feature importance scores over a number of shuffles.

Return type float

Raises

- **ValueError** – If pipeline does not support fast permutation importance calculation.
- **ValueError** – If precomputed_features is None.

Package Contents

Functions

<code>binary_objective_vs_threshold</code>	Computes objective score as a function of potential binary classification decision thresholds for a fitted binary classification pipeline.
<code>calculate_permutation_importance</code>	Calculates permutation importance for features.
<code>calculate_permutation_importance_one_col</code>	Calculates permutation importance for one column in the original dataframe.

continues on next page

Table 187 – continued from previous page

<code>confusion_matrix</code>	Confusion matrix for binary and multiclass classification.
<code>explain_predictions</code>	Creates a report summarizing the top contributing features for each data point in the input features.
<code>explain_predictions_best_worst</code>	Creates a report summarizing the top contributing features for the best and worst points in the dataset as measured by error to true labels.
<code>get_linear_coefficients</code>	Returns a dataframe showing the features with the greatest predictive power for a linear model.
<code>get_prediction_vs_actual_data</code>	Combines <code>y_true</code> and <code>y_pred</code> into a single dataframe and adds a column for outliers. Used in <code>graph_prediction_vs_actual()</code> .
<code>get_prediction_vs_actual_over_time_data</code>	Get the data needed for the <code>prediction_vs_actual_over_time</code> plot.
<code>graph_binary_objective_vs_threshold</code>	Generates a plot graphing objective score vs. decision thresholds for a fitted binary classification pipeline.
<code>graph_confusion_matrix</code>	Generate and display a confusion matrix plot.
<code>graph_partial_dependence</code>	Create an one-way or two-way partial dependence plot.
<code>graph_permutation_importance</code>	Generate a bar graph of the pipeline's permutation importance.
<code>graph_precision_recall_curve</code>	Generate and display a precision-recall plot.
<code>graph_prediction_vs_actual</code>	Generate a scatter plot comparing the true and predicted values. Used for regression plotting.
<code>graph_prediction_vs_actual_over_time</code>	Plot the target values and predictions against time on the x-axis.
<code>graph_roc_curve</code>	Generate and display a Receiver Operating Characteristic (ROC) plot for binary and multiclass classification problems.
<code>graph_t_sne</code>	Plot high dimensional data into lower dimensional space using t-SNE.
<code>normalize_confusion_matrix</code>	Normalizes a confusion matrix.
<code>partial_dependence</code>	Calculates one or two-way partial dependence.
<code>precision_recall_curve</code>	Given labels and binary classifier predicted probabilities, compute and return the data representing a precision-recall curve.
<code>roc_curve</code>	Given labels and classifier predicted probabilities, compute and return the data representing a Receiver Operating Characteristic (ROC) curve. Works with binary or multiclass problems.
<code>t_sne</code>	Get the transformed output after fitting X to the embedded space using t-SNE.

Contents

`evalml.model_understanding.binary_objective_vs_threshold`(*pipeline*, *X*, *y*, *objective*, *steps=100*)

Computes objective score as a function of potential binary classification decision thresholds for a fitted binary classification pipeline.

Parameters

- **pipeline** (*BinaryClassificationPipeline obj*) – Fitted binary classification pipeline.
- **X** (*pd.DataFrame*) – The input data used to compute objective score.
- **y** (*pd.Series*) – The target labels.
- **objective** (*ObjectiveBase obj, str*) – Objective used to score.
- **steps** (*int*) – Number of intervals to divide and calculate objective score at.

Returns DataFrame with thresholds and the corresponding objective score calculated at each threshold.

Return type `pd.DataFrame`

Raises

- **ValueError** – If objective is not a binary classification objective.
- **ValueError** – If objective’s *score_needs_proba* is not False.

`evalml.model_understanding.calculate_permutation_importance`(*pipeline*, *X*, *y*, *objective*, *n_repeats=5*, *n_jobs=None*, *random_seed=0*)

Calculates permutation importance for features.

Parameters

- **pipeline** (*PipelineBase or subclass*) – Fitted pipeline.
- **X** (*pd.DataFrame*) – The input data used to score and compute permutation importance.
- **y** (*pd.Series*) – The target data.
- **objective** (*str, ObjectiveBase*) – Objective to score on.
- **n_repeats** (*int*) – Number of times to permute a feature. Defaults to 5.
- **n_jobs** (*int or None*) – Non-negative integer describing level of parallelism used for pipelines. None and 1 are equivalent. If set to -1, all CPUs are used. For *n_jobs* below -1, (*n_cpus* + 1 + *n_jobs*) are used. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns Mean feature importance scores over a number of shuffles.

Return type `pd.DataFrame`

Raises **ValueError** – If objective cannot be used with the given pipeline.

```
evalml.model_understanding.calculate_permutation_importance_one_column(pipeline,
                                                                    X, y,
                                                                    col_name,
                                                                    ob-
                                                                    jec-
                                                                    tive,
                                                                    n_repeats=5,
                                                                    fast=True,
                                                                    pre-
                                                                    com-
                                                                    puted_features=None,
                                                                    ran-
                                                                    dom_seed=0)
```

Calculates permutation importance for one column in the original dataframe.

Parameters

- **pipeline** (*PipelineBase* or *subclass*) – Fitted pipeline.
- **X** (*pd.DataFrame*) – The input data used to score and compute permutation importance.
- **y** (*pd.Series*) – The target data.
- **col_name** (*str*, *int*) – The column in X to calculate permutation importance for.
- **objective** (*str*, *ObjectiveBase*) – Objective to score on.
- **n_repeats** (*int*) – Number of times to permute a feature. Defaults to 5.
- **fast** (*bool*) – Whether to use the fast method of calculating the permutation importance or not. Defaults to True.
- **precomputed_features** (*pd.DataFrame*) – Precomputed features necessary to calculate permutation importance using the fast method. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns Mean feature importance scores over a number of shuffles.

Return type float

Raises

- **ValueError** – If pipeline does not support fast permutation importance calculation.
- **ValueError** – If precomputed_features is None.

```
evalml.model_understanding.confusion_matrix(y_true, y_predicted, normal-
                                           ize_method='true')
```

Confusion matrix for binary and multiclass classification.

Parameters

- **y_true** (*pd.Series* or *np.ndarray*) – True binary labels.
- **y_predicted** (*pd.Series* or *np.ndarray*) – Predictions from a binary classifier.
- **normalize_method** (*{'true', 'pred', 'all', None}*) – Normalization method to use, if not None. Supported options are: ‘true’ to normalize by row, ‘pred’ to normalize by column, or ‘all’ to normalize by all values. Defaults to ‘true’.

Returns Confusion matrix. The column header represents the predicted labels while row header represents the actual labels.

Return type *pd.DataFrame*

```
evalml.model_understanding.explain_predictions(pipeline, input_features, y, indices_to_explain, top_k_features=3, include_shap_values=False, include_expected_value=False, output_format='text', training_data=None, training_target=None)
```

Creates a report summarizing the top contributing features for each data point in the input features.

XGBoost and Stacked Ensemble models, as well as CatBoost multiclass classifiers, are not currently supported.

Parameters

- **pipeline** (*PipelineBase*) – Fitted pipeline whose predictions we want to explain with SHAP.
- **input_features** (*pd.DataFrame*) – Dataframe of input data to evaluate the pipeline on.
- **y** (*pd.Series*) – Labels for the input data.
- **indices_to_explain** (*list[int]*) – List of integer indices to explain.
- **top_k_features** (*int*) – How many of the highest/lowest contributing feature to include in the table for each data point. Default is 3.
- **include_shap_values** (*bool*) – Whether SHAP values should be included in the table. Default is False.
- **include_expected_value** (*bool*) – Whether the expected value should be included in the table. Default is False.
- **output_format** (*str*) – Either “text”, “dict”, or “dataframe”. Default is “text”.
- **training_data** (*pd.DataFrame, np.ndarray*) – Data the pipeline was trained on. Required and only used for time series pipelines.
- **training_target** (*pd.Series, np.ndarray*) – Targets used to train the pipeline. Required and only used for time series pipelines.

Returns

A report explaining the top contributing features to each prediction for each row of input_features.
The report will include the feature names, prediction contribution, and SHAP Value (optional).

Return type str, dict, or pd.DataFrame

Raises

- **ValueError** – if input_features is empty.
- **ValueError** – if an output_format outside of “text”, “dict” or “dataframe” is provided.
- **ValueError** – if the requested index falls outside the input_feature’s boundaries.

```
evalml.model_understanding.explain_predictions_best_worst(pipeline, input_features, y_true, num_to_explain=5, top_k_features=3, include_shap_values=False, metric=None, output_format='text', callback=None, training_data=None, training_target=None)
```

Creates a report summarizing the top contributing features for the best and worst points in the dataset as measured by error to true labels.

XGBoost and Stacked Ensemble models, as well as CatBoost multiclass classifiers, are not currently supported.

Parameters

- **pipeline** (*PipelineBase*) – Fitted pipeline whose predictions we want to explain with SHAP.
- **input_features** (*pd.DataFrame*) – Input data to evaluate the pipeline on.
- **y_true** (*pd.Series*) – True labels for the input data.
- **num_to_explain** (*int*) – How many of the best, worst, random data points to explain.
- **top_k_features** (*int*) – How many of the highest/lowest contributing feature to include in the table for each data point.
- **include_shap_values** (*bool*) – Whether SHAP values should be included in the table. Default is False.
- **metric** (*callable*) – The metric used to identify the best and worst points in the dataset. Function must accept the true labels and predicted value or probabilities as the only arguments and lower values must be better. By default, this will be the absolute error for regression problems and cross entropy loss for classification problems.
- **output_format** (*str*) – Either “text” or “dict”. Default is “text”.
- **callback** (*callable*) – Function to be called with incremental updates. Has the following parameters: - *progress_stage*: stage of computation - *time_elapsed*: total time in seconds that has elapsed since start of call
- **training_data** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on. Required and only used for time series pipelines.
- **training_target** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline. Required and only used for time series pipelines.

Returns

A report explaining the top contributing features for the best/worst predictions in the input_features.

For each of the best/worst rows of *input_features*, the predicted values, true labels, metric value, feature names, prediction contribution, and SHAP Value (optional) will be listed.

Return type *str*, *dict*, or *pd.DataFrame*

Raises

- **ValueError** – If *input_features* does not have more than twice the requested features to explain.
- **ValueError** – If *y_true* and *input_features* have mismatched lengths.

- **ValueError** – If an output_format outside of “text”, “dict” or “dataframe” is provided.
- **PipelineScoreError** – If the pipeline errors out while scoring.

`evalml.model_understanding.get_linear_coefficients(estimator, features=None)`

Returns a dataframe showing the features with the greatest predictive power for a linear model.

Parameters

- **estimator** (*Estimator*) – Fitted linear model family estimator.
- **features** (*list[str]*) – List of feature names associated with the underlying data.

Returns Displaying the features by importance.

Return type `pd.DataFrame`

Raises

- **ValueError** – If the model is not a linear model.
- **NotFittedError** – If the model is not yet fitted.

`evalml.model_understanding.get_prediction_vs_actual_data(y_true, y_pred, outlier_threshold=None)`

Combines `y_true` and `y_pred` into a single dataframe and adds a column for outliers. Used in `graph_prediction_vs_actual()`.

Parameters

- **y_true** (*pd.Series, or np.ndarray*) – The real target values of the data
- **y_pred** (*pd.Series, or np.ndarray*) – The predicted values outputted by the regression model.
- **outlier_threshold** (*int, float*) – A positive threshold for what is considered an outlier value. This value is compared to the absolute difference between each value of `y_true` and `y_pred`. Values within this threshold will be blue, otherwise they will be yellow. Defaults to `None`.

Returns

- *prediction*: Predicted values from regression model.
- *actual*: Real target values.
- *outlier*: Colors indicating which values are in the threshold for what is considered an outlier value.

Return type `pd.DataFrame` with the following columns

Raises **ValueError** – If threshold is not positive.

`evalml.model_understanding.get_prediction_vs_actual_over_time_data(pipeline, X, y, X_train, y_train, dates)`

Get the data needed for the `prediction_vs_actual_over_time` plot.

Parameters

- **pipeline** (*TimeSeriesRegressionPipeline*) – Fitted time series regression pipeline.
- **X** (*pd.DataFrame*) – Features used to generate new predictions.

- **y** (*pd.Series*) – Target values to compare predictions against.
- **x_train** (*pd.DataFrame*) – Data the pipeline was trained on.
- **y_train** (*pd.Series*) – Target values for training data.
- **dates** (*pd.Series*) – Dates corresponding to target values and predictions.

Returns Predictions vs. time.

Return type *pd.DataFrame*

```
evalml.model_understanding.graph_binary_objective_vs_threshold(pipeline, X,
                                                             y, objective,
                                                             steps=100)
```

Generates a plot graphing objective score vs. decision thresholds for a fitted binary classification pipeline.

Parameters

- **pipeline** (*PipelineBase* or *subclass*) – Fitted pipeline
- **x** (*pd.DataFrame*) – The input data used to score and compute scores
- **y** (*pd.Series*) – The target labels
- **objective** (*ObjectiveBase obj, str*) – Objective used to score, shown on the y-axis of the graph
- **steps** (*int*) – Number of intervals to divide and calculate objective score at

Returns *plotly.Figure* representing the objective score vs. threshold graph generated

```
evalml.model_understanding.graph_confusion_matrix(y_true, y_pred, normalize_method='true',
                                                  title_addition=None)
```

Generate and display a confusion matrix plot.

If *normalize_method* is set, hover text will show raw count, otherwise hover text will show count normalized with method 'true'.

Parameters

- **y_true** (*pd.Series* or *np.ndarray*) – True binary labels.
- **y_pred** (*pd.Series* or *np.ndarray*) – Predictions from a binary classifier.
- **normalize_method** (*{'true', 'pred', 'all', None}*) – Normalization method to use, if not None. Supported options are: 'true' to normalize by row, 'pred' to normalize by column, or 'all' to normalize by all values. Defaults to 'true'.
- **title_addition** (*str*) – If not None, append to plot title. Defaults to None.

Returns *plotly.Figure* representing the confusion matrix plot generated.

```
evalml.model_understanding.graph_partial_dependence(pipeline, X, features,
                                                    class_label=None,
                                                    grid_resolution=100,
                                                    kind='average')
```

Create an one-way or two-way partial dependence plot.

Passing a single integer or string as features will create a one-way partial dependence plot with the feature values plotted against the partial dependence. Passing features a tuple of int/strings will create a two-way partial dependence plot with a contour of feature[0] in the y-axis, feature[1] in the x-axis and the partial dependence in the z-axis.

Parameters

- **pipeline** (*PipelineBase* or *subclass*) – Fitted pipeline.
- **X** (*pd.DataFrame*, *np.ndarray*) – The input data used to generate a grid of values for feature where partial dependence will be calculated at.
- **features** (*int*, *string*, *tuple[int or string]*) – The target feature for which to create the partial dependence plot for. If features is an int, it must be the index of the feature to use. If features is a string, it must be a valid column name in X. If features is a tuple of strings, it must contain valid column int/names in X.
- **class_label** (*string*, *optional*) – Name of class to plot for multiclass problems. If None, will plot the partial dependence for each class. This argument does not change behavior for regression or binary classification pipelines. For binary classification, the partial dependence for the positive label will always be displayed. Defaults to None.
- **grid_resolution** (*int*) – Number of samples of feature(s) for partial dependence plot.
- **kind** (*{'average', 'individual', 'both'}*) – Type of partial dependence to plot. ‘average’ creates a regular partial dependence (PD) graph, ‘individual’ creates an individual conditional expectation (ICE) plot, and ‘both’ creates a single-figure PD and ICE plot. ICE plots can only be shown for one-way partial dependence plots.

Returns figure object containing the partial dependence data for plotting

Return type `plotly.graph_objects.Figure`

Raises

- **PartialDependenceError** – if a graph is requested for a class name that isn’t present in the pipeline.
- **PartialDependenceError** – if an ICE plot is requested for a two-way partial dependence.

`evalml.model_understanding.graph_permutation_importance` (*pipeline*, *X*, *y*, *objective*, *importance_threshold=0*)

Generate a bar graph of the pipeline’s permutation importance.

Parameters

- **pipeline** (*PipelineBase* or *subclass*) – Fitted pipeline.
- **X** (*pd.DataFrame*) – The input data used to score and compute permutation importance.
- **y** (*pd.Series*) – The target data.
- **objective** (*str*, *ObjectiveBase*) – Objective to score on.
- **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than importance_threshold. Defaults to 0.

Returns `plotly.Figure`, a bar graph showing features and their respective permutation importance.

Raises **ValueError** – If importance_threshold is not greater than or equal to 0.

`evalml.model_understanding.graph_precision_recall_curve` (*y_true*, *y_pred_proba*, *title_addition=None*)

Generate and display a precision-recall plot.

Parameters

- **y_true** (*pd.Series* or *np.ndarray*) – True binary labels.

- **y_pred_proba** (*pd.Series* or *np.ndarray*) – Predictions from a binary classifier, before thresholding has been applied. Note this should be the predicted probability for the “true” label.
- **title_addition** (*str* or *None*) – If not *None*, append to plot title. Defaults to *None*.

Returns *plotly*.Figure representing the precision-recall plot generated

`evalml.model_understanding.graph_prediction_vs_actual(y_true, y_pred, outlier_threshold=None)`

Generate a scatter plot comparing the true and predicted values. Used for regression plotting.

Parameters

- **y_true** (*pd.Series*) – The real target values of the data.
- **y_pred** (*pd.Series*) – The predicted values outputted by the regression model.
- **outlier_threshold** (*int*, *float*) – A positive threshold for what is considered an outlier value. This value is compared to the absolute difference between each value of *y_true* and *y_pred*. Values within this threshold will be blue, otherwise they will be yellow. Defaults to *None*.

Returns *plotly*.Figure representing the predicted vs. actual values graph

Raises **ValueError** – If threshold is not positive.

`evalml.model_understanding.graph_prediction_vs_actual_over_time(pipeline, X, y, X_train, y_train, dates)`

Plot the target values and predictions against time on the x-axis.

Parameters

- **pipeline** (*TimeSeriesRegressionPipeline*) – Fitted time series regression pipeline.
- **X** (*pd.DataFrame*) – Features used to generate new predictions.
- **y** (*pd.Series*) – Target values to compare predictions against.
- **X_train** (*pd.DataFrame*) – Data the pipeline was trained on.
- **y_train** (*pd.Series*) – Target values for training data.
- **dates** (*pd.Series*) – Dates corresponding to target values and predictions.

Returns Showing the prediction vs actual over time.

Return type *plotly*.Figure

Raises **ValueError** – If the pipeline is not a time-series regression pipeline.

`evalml.model_understanding.graph_roc_curve(y_true, y_pred_proba, custom_class_names=None, title_addition=None)`

Generate and display a Receiver Operating Characteristic (ROC) plot for binary and multiclass classification problems.

Parameters

- **y_true** (*pd.Series* or *np.ndarray*) – True labels.
- **y_pred_proba** (*pd.Series* or *np.ndarray*) – Predictions from a classifier, before thresholding has been applied. Note this should be a one dimensional array with the predicted probability for the “true” label in the binary case.

- **custom_class_names** (*list or None*) – If not None, custom labels for classes. Defaults to None.
- **title_addition** (*str or None*) – if not None, append to plot title. Defaults to None.

Returns `plotly.Figure` representing the ROC plot generated

Raises `ValueError` – If the number of custom class names does not match number of classes in the input data.

```
evalml.model_understanding.graph_t_sne(X, n_components=2, perplexity=30.0,
                                       learning_rate=200.0, metric='euclidean',
                                       marker_line_width=2, marker_size=7, **kwargs)
```

Plot high dimensional data into lower dimensional space using t-SNE.

Parameters

- **X** (*np.ndarray, pd.DataFrame*) – Data to be transformed. Must be numeric.
- **n_components** (*int, optional*) – Dimension of the embedded space.
- **perplexity** (*float, optional*) – Related to the number of nearest neighbors that is used in other manifold learning algorithms. Larger datasets usually require a larger perplexity. Consider selecting a value between 5 and 50.
- **learning_rate** (*float, optional*) – Usually in the range [10.0, 1000.0]. If the cost function gets stuck in a bad local minimum, increasing the learning rate may help.
- **metric** (*str, optional*) – The metric to use when calculating distance between instances in a feature array.
- **marker_line_width** (*int, optional*) – Determines the line width of the marker boundary.
- **marker_size** (*int, optional*) – Determines the size of the marker.
- **kwargs** – Arbitrary keyword arguments.

Returns Figure representing the transformed data.

Return type `plotly.Figure`

Raises `ValueError` – If `marker_line_width` or `marker_size` are not valid values.

```
evalml.model_understanding.normalize_confusion_matrix(conf_mat, normalize_method='true')
```

Normalizes a confusion matrix.

Parameters

- **conf_mat** (*pd.DataFrame or np.ndarray*) – Confusion matrix to normalize.
- **normalize_method** (*{'true', 'pred', 'all'}*) – Normalization method. Supported options are: 'true' to normalize by row, 'pred' to normalize by column, or 'all' to normalize by all values. Defaults to 'true'.

Returns normalized version of the input confusion matrix. The column header represents the predicted labels while row header represents the actual labels.

Return type `pd.DataFrame`

Raises `ValueError` – If configuration is invalid, or if the sum of a given axis is zero and normalization by axis is specified.

```
evalml.model_understanding.partial_dependence(pipeline, X, features, percentiles=(0.05,  
                                           0.95), grid_resolution=100,  
                                           kind='average')
```

Calculates one or two-way partial dependence.

If a single integer or string is given for features, one-way partial dependence is calculated. If a tuple of two integers or strings is given, two-way partial dependence is calculated with the first feature in the y-axis and second feature in the x-axis.

Parameters

- **pipeline** (*PipelineBase* or *subclass*) – Fitted pipeline
- **X** (*pd.DataFrame*, *np.ndarray*) – The input data used to generate a grid of values for feature where partial dependence will be calculated at
- **features** (*int*, *string*, *tuple[int or string]*) – The target feature for which to create the partial dependence plot for. If features is an int, it must be the index of the feature to use. If features is a string, it must be a valid column name in X. If features is a tuple of int/strings, it must contain valid column integers/names in X.
- **percentiles** (*tuple[float]*) – The lower and upper percentile used to create the extreme values for the grid. Must be in [0, 1]. Defaults to (0.05, 0.95).
- **grid_resolution** (*int*) – Number of samples of feature(s) for partial dependence plot. If this value is less than the maximum number of categories present in categorical data within X, it will be set to the max number of categories + 1. Defaults to 100.
- **kind** (*{'average', 'individual', 'both'}*) – The type of predictions to return. ‘individual’ will return the predictions for all of the points in the grid for each sample in X. ‘average’ will return the predictions for all of the points in the grid but averaged over all of the samples in X.

Returns

When *kind='average'*: *DataFrame* with averaged predictions for all points in the grid averaged over all samples of X and the values used to calculate those predictions.

When *kind='individual'*: *DataFrame* with individual predictions for all points in the grid for each sample of X and the values used to calculate those predictions. If a two-way partial dependence is calculated, then the result is a list of *DataFrames* with each *DataFrame* representing one sample’s predictions.

When *kind='both'*: A tuple consisting of the averaged predictions (in a *DataFrame*) over all samples of X and the individual predictions (in a list of *DataFrames*) for each sample of X.

In the one-way case: The dataframe will contain two columns, “feature_values” (grid points at which the partial dependence was calculated) and “partial_dependence” (the partial dependence at that feature value). For classification problems, there will be a third column called “class_label” (the class label for which the partial dependence was calculated). For binary classification, the partial dependence is only calculated for the “positive” class.

In the two-way case: The data frame will contain *grid_resolution* number of columns and rows where the index and column headers are the sampled values of the first and second features, respectively, used to make the partial dependence contour. The values of the data frame contain the partial dependence data for each feature value pair.

Return type *pd.DataFrame*, *list(pd.DataFrame)*, or *tuple(pd.DataFrame, list(pd.DataFrame))*

Raises

- **ValueError** – Error during call to scikit-learn’s partial dependence method.

- **Exception** – All other errors during calculation.
- **PartialDependenceError** – if the user provides a tuple of not exactly two features.
- **PartialDependenceError** – if the provided pipeline isn't fitted.
- **PartialDependenceError** – if the provided pipeline is a Baseline pipeline.
- **PartialDependenceError** – if any of the features passed in are completely NaN
- **PartialDependenceError** – if any of the features are low-variance. Defined as having one value occurring more than the upper percentile passed by the user. By default 95%.

```
evalml.model_understanding.precision_recall_curve(y_true, y_pred_proba,
                                                pos_label_idx=-1)
```

Given labels and binary classifier predicted probabilities, compute and return the data representing a precision-recall curve.

Parameters

- **y_true** (*pd.Series* or *np.ndarray*) – True binary labels.
- **y_pred_proba** (*pd.Series* or *np.ndarray*) – Predictions from a binary classifier, before thresholding has been applied. Note this should be the predicted probability for the “true” label.
- **pos_label_idx** (*int*) – the column index corresponding to the positive class. If predicted probabilities are two-dimensional, this will be used to access the probabilities for the positive class.

Returns

Dictionary containing metrics used to generate a precision-recall plot, with the following keys:

- *precision*: Precision values.
- *recall*: Recall values.
- *thresholds*: Threshold values used to produce the precision and recall.
- *auc_score*: The area under the ROC curve.

Return type

list

Raises NoPositiveLabelException – If predicted probabilities do not contain a column at the specified label.

```
evalml.model_understanding.roc_curve(y_true, y_pred_proba)
```

Given labels and classifier predicted probabilities, compute and return the data representing a Receiver Operating Characteristic (ROC) curve. Works with binary or multiclass problems.

Parameters

- **y_true** (*pd.Series* or *np.ndarray*) – True labels.
- **y_pred_proba** (*pd.Series* or *np.ndarray*) – Predictions from a classifier, before thresholding has been applied.

Returns

A list of dictionaries (with one for each class) is returned. Binary classification problems return a list with one di

Each dictionary contains metrics used to generate an ROC plot with the following keys:

- *fpr_rate*: False positive rate.

- *tpr_rate*: True positive rate.
- *threshold*: Threshold values used to produce each pair of true/false positive rates.
- *auc_score*: The area under the ROC curve.

Return type list(dict)

`evalml.model_understanding.t_sne(X, n_components=2, perplexity=30.0, learning_rate=200.0, metric='euclidean', **kwargs)`

Get the transformed output after fitting X to the embedded space using t-SNE.

Args: X (np.ndarray, pd.DataFrame): Data to be transformed. Must be numeric. n_components (int, optional): Dimension of the embedded space. perplexity (float, optional): Related to the number of nearest neighbors that is used in other manifold learning algorithms. Larger datasets usually require a larger perplexity. Consider selecting a value between 5 and 50. learning_rate (float, optional): Usually in the range [10.0, 1000.0]. If the cost function gets stuck in a bad local minimum, increasing the learning rate may help. metric (str, optional): The metric to use when calculating distance between instances in a feature array. kwargs: Arbitrary keyword arguments.

Returns TSNE output.

Return type np.ndarray (n_samples, n_components)

Raises **ValueError** – If specified parameters are not valid values.

Objectives

EvalML standard and custom objectives.

Submodules

binary_classification_objective

Base class for all binary classification objectives.

Module Contents

Classes Summary

<i>BinaryClassificationObjective</i>	Base class for all binary classification objectives.
--------------------------------------	--

Contents

class evalml.objectives.binary_classification_objective.**BinaryClassificationObjective**
Base class for all binary classification objectives.

Attributes

problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
----------------------	--

Methods

<code>calculate_percent_difference</code>	Calculate the percent difference between scores.
<code>can_optimize_threshold</code>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<code>decision_function</code>	Apply a learned threshold to predicted probabilities to get predicted classes.
<code>expected_range</code>	Returns the expected range of the objective, which is not necessarily the possible ranges.
<code>greater_is_better</code>	Returns a boolean determining if a greater score indicates better model performance.
<code>is_bounded_like_percentage</code>	Returns whether this objective is bounded between 0 and 1, inclusive.
<code>is_defined_for_problem_type</code>	Returns whether or not an objective is defined for a problem type.
<code>name</code>	Returns a name describing the objective.
<code>objective_function</code>	Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.
<code>optimize_threshold</code>	Learn a binary classification threshold which optimizes the current objective.
<code>perfect_score</code>	Returns the score obtained by evaluating this objective on a perfect model.
<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>score_needs_proba</code>	Returns a boolean determining if the score() method needs probability estimates.
<code>validate_inputs</code>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

property expected_range (*cls*)

Returns the expected range of the objective, which is not necessarily the possible ranges.

For example, our expected R2 range is from [-1, 1], although the actual range is (-inf, 1].

property greater_is_better (*cls*)

Returns a boolean determining if a greater score indicates better model performance.

property is_bounded_like_percentage (*cls*)

Returns whether this objective is bounded between 0 and 1, inclusive.

classmethod is_defined_for_problem_type (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

property name (*cls*)

Returns a name describing the objective.

abstract classmethod objective_function (*cls*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.

Args: *y_predicted* (*pd.Series*): Predicted values of length [n_samples] *y_true* (*pd.Series*): Actual class labels of length [n_samples] *X* (*pd.DataFrame* or *np.ndarray*): Extra data of shape [n_samples, n_features] necessary to calculate score *sample_weight* (*pd.DataFrame* or *np.ndarray*): Sample weights used in computing objective value result

Returns Numerical value used to calculate score

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

property perfect_score (*cls*)

Returns the score obtained by evaluating this objective on a perfect model.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **x** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

property score_needs_proba (*cls*)

Returns a boolean determining if the score() method needs probability estimates.

This should be true for objectives which work with predicted probabilities, like log loss or AUC, and false for objectives which compare predicted class labels to the actual labels, like F1 or correlation.

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

cost_benefit_matrix

Cost-benefit matrix objective.

Module Contents

Classes Summary

CostBenefitMatrix

Score using a cost-benefit matrix. Scores quantify the benefits of a given value, so greater numeric scores represents a better score. Costs and scores can be negative, indicating that a value is not beneficial. For example, in the case of monetary profit, a negative cost and/or score represents loss of cash flow.

Contents

class evalml.objectives.cost_benefit_matrix.**CostBenefitMatrix** (*true_positive*,
true_negative,
false_positive,
false_negative)

Score using a cost-benefit matrix. Scores quantify the benefits of a given value, so greater numeric scores represents a better score. Costs and scores can be negative, indicating that a value is not beneficial. For example, in the case of monetary profit, a negative cost and/or score represents loss of cash flow.

Parameters

- **true_positive** (*float*) – Cost associated with true positive predictions.
- **true_negative** (*float*) – Cost associated with true negative predictions.
- **false_positive** (*float*) – Cost associated with false positive predictions.
- **false_negative** (*float*) – Cost associated with false negative predictions.

Attributes

ex-pected_range	None
greater_is_better	True
is_bounded_like_percentage	False
name	Cost Benefit Matrix
per-fect_score	None
prob-lem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Calculates cost-benefit of the using the predicted and true values.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validate inputs for scoring.

classmethod calculate_percent_difference (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all

other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold(cls)`

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod `is_defined_for_problem_type(cls, problem_type)`

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Calculates cost-benefit of the using the predicted and true values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted labels.
- **y_true** (*pd.Series*) – True labels.
- **X** (*pd.DataFrame*) – Ignored.
- **sample_weight** (*pd.DataFrame*) – Ignored.

Returns Cost-benefit matrix score

Return type float

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises `RuntimeError` – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

fraud_cost

Score the percentage of money lost of the total transaction amount process due to fraud.

Module Contents

Classes Summary

<i>FraudCost</i>	Score the percentage of money lost of the total transaction amount process due to fraud.
------------------	--

Contents

class evalml.objectives.fraud_cost.**FraudCost** (*retry_percentage=0.5*, *interchange_fee=0.02*, *fraud_payout_percentage=1.0*, *amount_col='amount'*) *in-*

Score the percentage of money lost of the total transaction amount process due to fraud.

Parameters

- **retry_percentage** (*float*) – What percentage of customers that will retry a transaction if it is declined. Between 0 and 1. Defaults to 0.5.
- **interchange_fee** (*float*) – How much of each successful transaction you pay. Between 0 and 1. Defaults to 0.02.
- **fraud_payout_percentage** (*float*) – Percentage of fraud you will not be able to collect. Between 0 and 1. Defaults to 1.0.
- **amount_col** (*str*) – Name of column in data that contains the amount. Defaults to “amount”.

Attributes

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	True
name	Fraud Cost
perfect_score	0.0
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Calculate amount lost to fraud per transaction given predictions, true values, and dataframe with transaction amount.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod is_defined_for_problem_type (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X*, *sample_weight=None*)

Calculate amount lost to fraud per transaction given predictions, true values, and dataframe with transaction amount.

Parameters

- **y_predicted** (*pd.Series*) – Predicted fraud labels.
- **y_true** (*pd.Series*) – True fraud labels.
- **X** (*pd.DataFrame*) – Data with transaction amounts.
- **sample_weight** (*pd.DataFrame*) – Ignored.

Returns Amount lost to fraud per transaction.

Return type float

Raises **ValueError** – If *amount_col* is not a valid column in the input data.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **x** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)
Validate inputs for scoring.

lead_scoring

Lead scoring objective.

Module Contents

Classes Summary

LeadScoring

Lead scoring.

Contents

class evalml.objectives.lead_scoring.**LeadScoring** (*true_positives=1, false_positives=-1*)

Lead scoring.

Parameters

- **true_positives** (*int*) – Reward for a true positive. Defaults to 1.
- **false_positives** (*int*) – Cost for a false positive. Should be negative. Defaults to -1.

Attributes

ex-pected_range	None
greater_is_better	True
is_bounded_like_percentage	False
name	Lead Scoring
perfect_score	None
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

<code>calculate_percent_difference</code>	Calculate the percent difference between scores.
<code>can_optimize_threshold</code>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<code>decision_function</code>	Apply a learned threshold to predicted probabilities to get predicted classes.
<code>is_defined_for_problem_type</code>	Returns whether or not an objective is defined for a problem type.
<code>objective_function</code>	Calculate the profit per lead.
<code>optimize_threshold</code>	Learn a binary classification threshold which optimizes the current objective.
<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod is_defined_for_problem_type (*cls, problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self, y_true, y_predicted, X=None, sample_weight=None*)

Calculate the profit per lead.

Parameters

- **y_predicted** (*pd.Series*) – Predicted labels
- **y_true** (*pd.Series*) – True labels
- **X** (*pd.DataFrame*) – Ignored.
- **sample_weight** (*pd.DataFrame*) – Ignored.

Returns Profit per lead

Return type float

optimize_threshold (*self, ypred_proba, y_true, X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame, optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self, y_true, y_predicted, X=None, sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame or np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame or np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validate inputs for scoring.

multiclass_classification_objective

Base class for all multiclass classification objectives.

Module Contents

Classes Summary

<i>MulticlassClassificationObjective</i>	Base class for all multiclass classification objectives.
--	--

Contents

class evalml.objectives.multiclass_classification_objective.**MulticlassClassificationObjective**

Base class for all multiclass classification objectives.

Attributes

problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
----------------------	--

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>expected_range</i>	Returns the expected range of the objective, which is not necessarily the possible ranges.
<i>greater_is_better</i>	Returns a boolean determining if a greater score indicates better model performance.
<i>is_bounded_like_percentage</i>	Returns whether this objective is bounded between 0 and 1, inclusive.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>name</i>	Returns a name describing the objective.
<i>objective_function</i>	Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.
<i>perfect_score</i>	Returns the score obtained by evaluating this objective on a perfect model.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>score_needs_proba</i>	Returns a boolean determining if the score() method needs probability estimates.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls, score, baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property expected_range (*cls*)

Returns the expected range of the objective, which is not necessarily the possible ranges.

For example, our expected R2 range is from [-1, 1], although the actual range is (-inf, 1].

property greater_is_better (*cls*)

Returns a boolean determining if a greater score indicates better model performance.

property is_bounded_like_percentage (*cls*)

Returns whether this objective is bounded between 0 and 1, inclusive.

classmethod is_defined_for_problem_type (*cls, problem_type*)

Returns whether or not an objective is defined for a problem type.

property name (*cls*)

Returns a name describing the objective.

abstract classmethod objective_function (*cls, y_true, y_predicted, X=None, sample_weight=None*)

Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.

Args: *y_predicted* (pd.Series): Predicted values of length [n_samples] *y_true* (pd.Series): Actual class labels of length [n_samples] *X* (pd.DataFrame or np.ndarray): Extra data of shape [n_samples, n_features] necessary to calculate score *sample_weight* (pd.DataFrame or np.ndarray): Sample weights used in computing objective value result

Returns Numerical value used to calculate score

property perfect_score (*cls*)

Returns the score obtained by evaluating this objective on a perfect model.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self, y_true, y_predicted, X=None, sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame or np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame or np.ndarray*) – Sample weights used in computing objective value result

Returns score

property `score_needs_proba` (*cls*)

Returns a boolean determining if the `score()` method needs probability estimates.

This should be true for objectives which work with predicted probabilities, like log loss or AUC, and false for objectives which compare predicted class labels to the actual labels, like F1 or correlation.

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

objective_base

Base class for all objectives.

Module Contents

Classes Summary

<i>ObjectiveBase</i>	Base class for all objectives.
----------------------	--------------------------------

Contents

class `evalml.objectives.objective_base.ObjectiveBase`

Base class for all objectives.

Attributes

prob- lem_types	None
----------------------------	------

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>expected_range</i>	Returns the expected range of the objective, which is not necessarily the possible ranges.
<i>greater_is_better</i>	Returns a boolean determining if a greater score indicates better model performance.
<i>is_bounded_like_percentage</i>	Returns whether this objective is bounded between 0 and 1, inclusive.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>name</i>	Returns a name describing the objective.

continues on next page

Table 199 – continued from previous page

<i>objective_function</i>	Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.
<i>perfect_score</i>	Returns the score obtained by evaluating this objective on a perfect model.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>score_needs_proba</i>	Returns a boolean determining if the score() method needs probability estimates.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `expected_range` (*cls*)

Returns the expected range of the objective, which is not necessarily the possible ranges.

For example, our expected R2 range is from [-1, 1], although the actual range is (-inf, 1].

property `greater_is_better` (*cls*)

Returns a boolean determining if a greater score indicates better model performance.

property `is_bounded_like_percentage` (*cls*)

Returns whether this objective is bounded between 0 and 1, inclusive.

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

property `name` (*cls*)

Returns a name describing the objective.

abstract classmethod `objective_function` (*cls*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.

Args: *y_predicted* (pd.Series): Predicted values of length [n_samples] *y_true* (pd.Series): Actual class labels of length [n_samples] *X* (pd.DataFrame or np.ndarray): Extra data of shape [n_samples, n_features] necessary to calculate score *sample_weight* (pd.DataFrame or np.ndarray): Sample weights used in computing objective value result

Returns Numerical value used to calculate score

property `perfect_score` (*cls*)

Returns the score obtained by evaluating this objective on a perfect model.

property `positive_only` (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

property `score_needs_proba` (*cls*)

Returns a boolean determining if the score() method needs probability estimates.

This should be true for objectives which work with predicted probabilities, like log loss or AUC, and false for objectives which compare predicted class labels to the actual labels, like F1 or correlation.

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

regression_objective

Base class for all regression objectives.

Module Contents

Classes Summary

<i>RegressionObjective</i>

Base class for all regression objectives.

Contents

class evalml.objectives.regression_objective.**RegressionObjective**

Base class for all regression objectives.

Attributes

problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
----------------------	--

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>expected_range</i>	Returns the expected range of the objective, which is not necessarily the possible ranges.
<i>greater_is_better</i>	Returns a boolean determining if a greater score indicates better model performance.
<i>is_bounded_like_percentage</i>	Returns whether this objective is bounded between 0 and 1, inclusive.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>name</i>	Returns a name describing the objective.
<i>objective_function</i>	Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.
<i>perfect_score</i>	Returns the score obtained by evaluating this objective on a perfect model.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>score_needs_proba</i>	Returns a boolean determining if the score() method needs probability estimates.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property **expected_range** (*cls*)

Returns the expected range of the objective, which is not necessarily the possible ranges.

For example, our expected R2 range is from [-1, 1], although the actual range is (-inf, 1].

property greater_is_better (*cls*)

Returns a boolean determining if a greater score indicates better model performance.

property is_bounded_like_percentage (*cls*)

Returns whether this objective is bounded between 0 and 1, inclusive.

classmethod is_defined_for_problem_type (*cls, problem_type*)

Returns whether or not an objective is defined for a problem type.

property name (*cls*)

Returns a name describing the objective.

abstract classmethod objective_function (*cls, y_true, y_predicted, X=None, sample_weight=None*)

Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.

Args: *y_predicted* (pd.Series): Predicted values of length [n_samples] *y_true* (pd.Series): Actual class labels of length [n_samples] *X* (pd.DataFrame or np.ndarray): Extra data of shape [n_samples, n_features] necessary to calculate score *sample_weight* (pd.DataFrame or np.ndarray): Sample weights used in computing objective value result

Returns Numerical value used to calculate score

property perfect_score (*cls*)

Returns the score obtained by evaluating this objective on a perfect model.

property positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self, y_true, y_predicted, X=None, sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

property score_needs_proba (*cls*)

Returns a boolean determining if the score() method needs probability estimates.

This should be true for objectives which work with predicted probabilities, like log loss or AUC, and false for objectives which compare predicted class labels to the actual labels, like F1 or correlation.

validate_inputs (*self, y_true, y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].

- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

sensitivity_low_alert

Sensitivity at Low Alert Rates objective.

Module Contents

Classes Summary

<i>SensitivityLowAlert</i>	Create instance of SensitivityLowAlert.
----------------------------	---

Attributes Summary

<i>logger</i>

Contents

evalml.objectives.sensitivity_low_alert.**logger**

class evalml.objectives.sensitivity_low_alert.**SensitivityLowAlert** (*alert_rate=0.01*)
Create instance of SensitivityLowAlert.

Parameters **alert_rate** (*float*) – percentage of top scores to classify as high risk.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Sensitivity at Low Alert Rates
per-fect_score	1.0
prob-lem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Determine if an observation is high risk given an alert rate.

continues on next page

Table 204 – continued from previous page

<code>is_defined_for_problem_type</code>	Returns whether or not an objective is defined for a problem type.
<code>objective_function</code>	Calculate sensitivity across all predictions, using the top alert_rate percent of observations as the predicted positive class.
<code>optimize_threshold</code>	Learn a binary classification threshold which optimizes the current objective.
<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, ***kwargs*)

Determine if an observation is high risk given an alert rate.

Parameters

- **ypred_proba** (*pd.Series*) – Predicted probabilities.
- ****kwargs** – Additional arbitrary parameters.

Returns Whether or not an observation is high risk given an alert rate.

Return type *pd.Series*

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, ***kwargs*)

Calculate sensitivity across all predictions, using the top alert_rate percent of observations as the predicted positive class.

Parameters

- **y_true** (*pd.Series*) – True labels.
- **y_predicted** (*pd.Series*) – Predicted labels based on alert_rate.
- ****kwargs** – Additional arbitrary parameters.

Returns sensitivity using the observations with the top scores as the predicted positive class.

Return type float

optimize_threshold (*self, ypred_proba, y_true, X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame, optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self, y_true, y_predicted, X=None, sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame or np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame or np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validate inputs for scoring.

standard_metrics

Standard machine learning objective functions.

Module Contents

Classes Summary

<i>AccuracyBinary</i>	Accuracy score for binary classification.
<i>AccuracyMulticlass</i>	Accuracy score for multiclass classification.
<i>AUC</i>	AUC score for binary classification.
<i>AUCMacro</i>	AUC score for multiclass classification using macro averaging.
<i>AUCMicro</i>	AUC score for multiclass classification using micro averaging.
<i>AUCWeighted</i>	AUC Score for multiclass classification using weighted averaging.
<i>BalancedAccuracyBinary</i>	Balanced accuracy score for binary classification.
<i>BalancedAccuracyMulticlass</i>	Balanced accuracy score for multiclass classification.
<i>ExpVariance</i>	Explained variance score for regression.
<i>F1</i>	F1 score for binary classification.
<i>F1Macro</i>	F1 score for multiclass classification using macro averaging.
<i>F1Micro</i>	F1 score for multiclass classification using micro averaging.
<i>F1Weighted</i>	F1 score for multiclass classification using weighted averaging.
<i>Gini</i>	Gini coefficient for binary classification.
<i>LogLossBinary</i>	Log Loss for binary classification.
<i>LogLossMulticlass</i>	Log Loss for multiclass classification.
<i>MAE</i>	Mean absolute error for regression.
<i>MAPE</i>	Mean absolute percentage error for time series regression. Scaled by 100 to return a percentage.
<i>MaxError</i>	Maximum residual error for regression.
<i>MCCBinary</i>	Matthews correlation coefficient for binary classification.
<i>MCCMulticlass</i>	Matthews correlation coefficient for multiclass classification.
<i>MeanSquaredLogError</i>	Mean squared log error for regression.
<i>MedianAE</i>	Median absolute error for regression.
<i>MSE</i>	Mean squared error for regression.
<i>Precision</i>	Precision score for binary classification.
<i>PrecisionMacro</i>	Precision score for multiclass classification using macro-averaging.
<i>PrecisionMicro</i>	Precision score for multiclass classification using micro averaging.
<i>PrecisionWeighted</i>	Precision score for multiclass classification using weighted averaging.
<i>R2</i>	Coefficient of determination for regression.
<i>Recall</i>	Recall score for binary classification.
<i>RecallMacro</i>	Recall score for multiclass classification using macro averaging.
<i>RecallMicro</i>	Recall score for multiclass classification using micro averaging.

continues on next page

Table 205 – continued from previous page

<i>RecallWeighted</i>	Recall score for multiclass classification using weighted averaging.
<i>RootMeanSquaredError</i>	Root mean squared error for regression.
<i>RootMeanSquaredLogError</i>	Root mean squared log error for regression.

Contents

class evalml.objectives.standard_metrics.**AccuracyBinary**

Accuracy score for binary classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Accuracy Binary
perfect_score	1.0
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for accuracy score for binary classification.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validate inputs for scoring.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property can_optimize_threshold (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod is_defined_for_problem_type (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for accuracy score for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]

- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)
Validate inputs for scoring.

class evalml.objectives.standard_metrics.**AccuracyMulticlass**
Accuracy score for multiclass classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Accuracy Multiclass
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for accuracy score for multiclass classification.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls, score, baseline_score*)
Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod `is_defined_for_problem_type(cls, problem_type)`

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for accuracy score for multiclass classification.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class `evalml.objectives.standard_metrics.AUC`

AUC score for binary classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	AUC
perfect_score	1.0
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

[`calculate_percent_difference`](#)

Calculate the percent difference between scores.

continues on next page

Table 208 – continued from previous page

<code>can_optimize_threshold</code>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<code>decision_function</code>	Apply a learned threshold to predicted probabilities to get predicted classes.
<code>is_defined_for_problem_type</code>	Returns whether or not an objective is defined for a problem type.
<code>objective_function</code>	Objective function for AUC score for binary classification.
<code>optimize_threshold</code>	Learn a binary classification threshold which optimizes the current objective.
<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type `float`

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type `bool`

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod `is_defined_for_problem_type(cls, problem_type)`

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for AUC score for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

class `evalml.objectives.standard_metrics.AUCMacro`

AUC score for multiclass classification using macro averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	AUC Macro
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<code>calculate_percent_difference</code>	Calculate the percent difference between scores.
<code>is_defined_for_problem_type</code>	Returns whether or not an objective is defined for a problem type.
<code>objective_function</code>	Objective function for AUC score for multiclass classification using macro-averaging.
<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for AUC score for multiclass classification using macro-averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.**AUCMicro**

AUC score for multiclass classification using micro averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	AUC Micro
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for AUC score for multiclass classification using micro-averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod **is_defined_for_problem_type** (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for AUC score for multiclass classification using micro-averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises ValueError – If the inputs are malformed.

class evalml.objectives.standard_metrics.**AUCWeighted**

AUC Score for multiclass classification using weighted averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	AUC Weighted
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for AUC Score for multiclass classification using weighted averaging.

continues on next page

Table 211 – continued from previous page

<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type `float`

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for AUC Score for multiclass classification using weighted averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns `score`

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.BalancedAccuracyBinary

Balanced accuracy score for binary classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Balanced Accuracy Binary
per-fect_score	1.0
prob-lem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for accuracy score for balanced accuracy for binary classification.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validate inputs for scoring.

classmethod *calculate_percent_difference* (cls, score, baseline_score)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property *can_optimize_threshold* (cls)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod is_defined_for_problem_type (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for accuracy score for balanced accuracy for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

class evalml.objectives.standard_metrics.**BalancedAccuracyMulticlass**

Balanced accuracy score for multiclass classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Balanced Accuracy Multiclass
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for accuracy score for balanced accuracy for multiclass classification.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod **is_defined_for_problem_type** (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for accuracy score for balanced accuracy for multiclass classification.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.**ExpVariance**

Explained variance score for regression.

Attributes

ex-pected_range	None
greater_is_better	True
is_bounded_like_percentage	False
name	ExpVariance
per-fect_score	1.0
prob-lem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_problem	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for explained variance score for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.

continues on next page

Table 214 – continued from previous page

<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type `float`

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for explained variance score for regression.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns `score`

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.F1

F1 score for binary classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	F1
per-fect_score	1.0
prob-lem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for F1 score for binary classification.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validate inputs for scoring.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property **can_optimize_threshold** (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod is_defined_for_problem_type (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for F1 score for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

class evalml.objectives.standard_metrics.**F1Macro**

F1 score for multiclass classification using macro averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	F1 Macro
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for F1 score for multiclass classification using macro averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod **is_defined_for_problem_type** (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for F1 score for multiclass classification using macro averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self, y_true, y_predicted, X=None, sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.**F1Micro**

F1 score for multiclass classification using micro averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	F1 Micro
per-fect_score	1.0
prob-lem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for F1 score for multiclass classification.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.

continues on next page

Table 217 – continued from previous page

<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type `float`

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for F1 score for multiclass classification.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns `score`

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.F1Weighted

F1 score for multiclass classification using weighted averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	F1 Weighted
per-fect_score	1.0
prob-lem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for F1 score for multiclass classification using weighted averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod **is_defined_for_problem_type** (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for F1 score for multiclass classification using weighted averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.**Gini**

Gini coefficient for binary classification.

Attributes

ex-pected_range	None
greater_is_better	True
is_bounded_like_percentage	False
name	Gini
per-fect_score	1.0
prob-lem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for Gini coefficient for binary classification.

continues on next page

Table 219 – continued from previous page

<code>optimize_threshold</code>	Learn a binary classification threshold which optimizes the current objective.
<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for Gini coefficient for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame, optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self, y_true, y_predicted, X=None, sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame or np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame or np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validate inputs for scoring.

class evalml.objectives.standard_metrics.**LogLossBinary**

Log Loss for binary classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	False
is_bounded_like_percentage	False
name	Log Loss Binary
per-fect_score	0.0
prob-lem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.

continues on next page

Table 220 – continued from previous page

<code>is_defined_for_problem_type</code>	Returns whether or not an objective is defined for a problem type.
<code>objective_function</code>	Objective function for log loss for binary classification.
<code>optimize_threshold</code>	Learn a binary classification threshold which optimizes the current objective.
<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type `float`

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type `bool`

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for log loss for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

class evalml.objectives.standard_metrics.**LogLossMulticlass**

Log Loss for multiclass classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	False
is_bounded_like_percentage	False
name	Log Loss Multiclass
per-fect_score	0.0
prob-lem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
---	--

continues on next page

Table 221 – continued from previous page

<code>is_defined_for_problem_type</code>	Returns whether or not an objective is defined for a problem type.
<code>objective_function</code>	Objective function for log loss for multiclass classification.
<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type `float`

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for log loss for multiclass classification.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns `score`

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.**MAE**

Mean absolute error for regression.

Attributes

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	True
name	MAE
per-fect_score	0.0
prob-lem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_proba	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for mean absolute error for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod **is_defined_for_problem_type** (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for mean absolute error for regression.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises ValueError – If the inputs are malformed.

class evalml.objectives.standard_metrics.**MAPE**

Mean absolute percentage error for time series regression. Scaled by 100 to return a percentage.

Only valid for nonzero inputs. Otherwise, will throw a ValueError.

Attributes

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	False
name	Mean Absolute Percentage Error
perfect_score	0.0
problem_types	[ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_problem	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.

continues on next page

Table 223 – continued from previous page

<i>objective_function</i>	Objective function for mean absolute percentage error for time series regression.
<i>positive_only</i>	If True, this objective is only valid for positive data.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type `float`

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for mean absolute percentage error for time series regression.

positive_only (*self*)

If True, this objective is only valid for positive data.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns `score`

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises `ValueError` – If the inputs are malformed.

class evalml.objectives.standard_metrics.**MaxError**
Maximum residual error for regression.

Attributes

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	False
name	MaxError
perfect_score	0.0
problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_positive	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for maximum residual error for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)
Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod **is_defined_for_problem_type** (*cls*, *problem_type*)
Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)
Objective function for maximum residual error for regression.

positive_only (*cls*)
If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [*n_samples*]
- **y_true** (*pd.Series*) – Actual class labels of length [*n_samples*]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [*n_samples*, *n_features*] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [*n_samples*].
- **y_true** (*pd.Series*) – Actual class labels of length [*n_samples*].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.**MCCBinary**

Matthews correlation coefficient for binary classification.

Attributes

ex-pected_range	None
greater_is_better	True
is_bounded_like_percentage	False
name	MCC Binary
per-fect_score	1.0
prob-lem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for Matthews correlation coefficient for binary classification.

continues on next page

Table 225 – continued from previous page

<code>optimize_threshold</code>	Learn a binary classification threshold which optimizes the current objective.
<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for Matthews correlation coefficient for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame, optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self, y_true, y_predicted, X=None, sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame or np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame or np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validate inputs for scoring.

class evalml.objectives.standard_metrics.**MCCMulticlass**

Matthews correlation coefficient for multiclass classification.

Attributes

ex-pected_range	None
greater_is_better	True
is_bounded_like_percentage	False
name	MCC Multiclass
per-fect_score	1.0
prob-lem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for Matthews correlation coefficient for multiclass classification.

continues on next page

Table 226 – continued from previous page

<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod calculate_percent_difference (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod is_defined_for_problem_type (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for Matthews correlation coefficient for multiclass classification.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises ValueError – If the inputs are malformed.

class evalml.objectives.standard_metrics.**MeanSquaredLogError**

Mean squared log error for regression.

Only valid for nonnegative inputs. Otherwise, will throw a ValueError.

Attributes

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	True
name	Mean Squared Log Error
perfect_score	0.0
problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_positive	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for mean squared log error for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod **is_defined_for_problem_type** (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for mean squared log error for regression.

positive_only (*self*)

If True, this objective is only valid for positive data.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.**MedianAE**

Median absolute error for regression.

Attributes

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	False
name	MedianAE
per-fect_score	0.0
prob-lem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_proba	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for median absolute error for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.

continues on next page

Table 228 – continued from previous page

<i>validate_inputs</i>	Validates the input based on a few simple checks.
classmethod calculate_percent_difference (<i>cls, score, baseline_score</i>) Calculate the percent difference between scores.	
Parameters <ul style="list-style-type: none"> • score (<i>float</i>) – A score. Output of the score method of this objective. • baseline_score (<i>float</i>) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator. 	
Returns <p>The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.</p>	
Return type <i>float</i>	
classmethod is_defined_for_problem_type (<i>cls, problem_type</i>) Returns whether or not an objective is defined for a problem type.	
objective_function (<i>self, y_true, y_predicted, X=None, sample_weight=None</i>) Objective function for median absolute error for regression.	
positive_only (<i>cls</i>) If True, this objective is only valid for positive data. Defaults to False.	
score (<i>self, y_true, y_predicted, X=None, sample_weight=None</i>) Returns a numerical score indicating performance based on the differences between the predicted and actual values.	
Parameters <ul style="list-style-type: none"> • y_predicted (<i>pd.Series</i>) – Predicted values of length [n_samples] • y_true (<i>pd.Series</i>) – Actual class labels of length [n_samples] • X (<i>pd.DataFrame or np.ndarray</i>) – Extra data of shape [n_samples, n_features] necessary to calculate score • sample_weight (<i>pd.DataFrame or np.ndarray</i>) – Sample weights used in computing objective value result 	
Returns <i>score</i>	
validate_inputs (<i>self, y_true, y_predicted</i>) Validates the input based on a few simple checks.	
Parameters <ul style="list-style-type: none"> • y_predicted (<i>pd.Series, or pd.DataFrame</i>) – Predicted values of length [n_samples]. • y_true (<i>pd.Series</i>) – Actual class labels of length [n_samples]. 	
Raises ValueError – If the inputs are malformed.	
class evalml.objectives.standard_metrics. MSE Mean squared error for regression.	
Attributes	

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	False
name	MSE
perfect_score	0.0
problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_positive	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for mean squared error for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for mean squared error for regression.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **x** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.**Precision**

Precision score for binary classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Precision
perfect_score	1.0
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for precision score for binary classification.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.

continues on next page

Table 230 – continued from previous page

<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type `float`

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type `bool`

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for precision score for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.

- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

class evalml.objectives.standard_metrics.**PrecisionMacro**

Precision score for multiclass classification using macro-averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Precision Macro
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for precision score for multiclass classification using macro-averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.

continues on next page

Table 231 – continued from previous page

<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type `float`

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for precision score for multiclass classification using macro-averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns `score`

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.PrecisionMicro

Precision score for multiclass classification using micro averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Precision Micro
per-fect_score	1.0
prob-lem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for precision score for binary classification using micro-averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod *calculate_percent_difference* (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod *is_defined_for_problem_type* (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for precision score for binary classification using micro-averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.**PrecisionWeighted**

Precision score for multiclass classification using weighted averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Precision Weighted
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for precision score for multiclass classification using weighted averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.

continues on next page

Table 233 – continued from previous page

<code>validate_inputs</code>	Validates the input based on a few simple checks.
<p>classmethod <code>calculate_percent_difference</code> (<i>cls</i>, <i>score</i>, <i>baseline_score</i>)</p> <p>Calculate the percent difference between scores.</p> <p>Parameters</p> <ul style="list-style-type: none"> • <code>score</code> (<i>float</i>) – A score. Output of the score method of this objective. • <code>baseline_score</code> (<i>float</i>) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator. <p>Returns</p> <p>The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.</p> <p>Return type <i>float</i></p>	
<p>classmethod <code>is_defined_for_problem_type</code> (<i>cls</i>, <i>problem_type</i>)</p> <p>Returns whether or not an objective is defined for a problem type.</p>	
<p>objective_function (<i>self</i>, <i>y_true</i>, <i>y_predicted</i>, <i>X=None</i>, <i>sample_weight=None</i>)</p> <p>Objective function for precision score for multiclass classification using weighted averaging.</p>	
<p>positive_only (<i>cls</i>)</p> <p>If True, this objective is only valid for positive data. Defaults to False.</p>	
<p>score (<i>self</i>, <i>y_true</i>, <i>y_predicted</i>, <i>X=None</i>, <i>sample_weight=None</i>)</p> <p>Returns a numerical score indicating performance based on the differences between the predicted and actual values.</p> <p>Parameters</p> <ul style="list-style-type: none"> • <code>y_predicted</code> (<i>pd.Series</i>) – Predicted values of length [n_samples] • <code>y_true</code> (<i>pd.Series</i>) – Actual class labels of length [n_samples] • <code>X</code> (<i>pd.DataFrame</i> or <i>np.ndarray</i>) – Extra data of shape [n_samples, n_features] necessary to calculate score • <code>sample_weight</code> (<i>pd.DataFrame</i> or <i>np.ndarray</i>) – Sample weights used in computing objective value result <p>Returns <i>score</i></p>	
<p><code>validate_inputs</code> (<i>self</i>, <i>y_true</i>, <i>y_predicted</i>)</p> <p>Validates the input based on a few simple checks.</p> <p>Parameters</p> <ul style="list-style-type: none"> • <code>y_predicted</code> (<i>pd.Series</i>, or <i>pd.DataFrame</i>) – Predicted values of length [n_samples]. • <code>y_true</code> (<i>pd.Series</i>) – Actual class labels of length [n_samples]. <p>Raises <code>ValueError</code> – If the inputs are malformed.</p>	
<p>class <code>evalml.objectives.standard_metrics.R2</code></p> <p>Coefficient of determination for regression.</p> <p>Attributes</p>	

ex-pected_range	None
greater_is_better	True
is_bounded_like_percentage	False
name	R2
perfect_score	1
problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_problem	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for coefficient of determination for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for coefficient of determination for regression.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **x** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.**Recall**

Recall score for binary classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Recall
perfect_score	1.0
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for recall score for binary classification.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.

continues on next page

Table 235 – continued from previous page

<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for recall score for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.

- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

class evalml.objectives.standard_metrics.**RecallMacro**

Recall score for multiclass classification using macro averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Recall Macro
per-fect_score	1.0
prob-lem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for recall score for multiclass classification using macro-averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.

continues on next page

Table 236 – continued from previous page

<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type `float`

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for recall score for multiclass classification using macro-averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns `score`

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.**RecallMicro**

Recall score for multiclass classification using micro averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Recall Micro
per-fect_score	1.0
prob-lem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_positive	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for recall score for multiclass classification using micro-averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod **is_defined_for_problem_type** (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for recall score for multiclass classification using micro-averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.**RecallWeighted**

Recall score for multiclass classification using weighted averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Recall Weighted
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for recall score for multiclass classification using weighted averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.

continues on next page

Table 238 – continued from previous page

<i>validate_inputs</i>	Validates the input based on a few simple checks.
classmethod calculate_percent_difference (<i>cls, score, baseline_score</i>) Calculate the percent difference between scores.	
Parameters <ul style="list-style-type: none"> • score (<i>float</i>) – A score. Output of the score method of this objective. • baseline_score (<i>float</i>) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator. 	
Returns <p>The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.</p>	
Return type <i>float</i>	
classmethod is_defined_for_problem_type (<i>cls, problem_type</i>) Returns whether or not an objective is defined for a problem type.	
objective_function (<i>self, y_true, y_predicted, X=None, sample_weight=None</i>) Objective function for recall score for multiclass classification using weighted averaging.	
positive_only (<i>cls</i>) If True, this objective is only valid for positive data. Defaults to False.	
score (<i>self, y_true, y_predicted, X=None, sample_weight=None</i>) Returns a numerical score indicating performance based on the differences between the predicted and actual values.	
Parameters <ul style="list-style-type: none"> • y_predicted (<i>pd.Series</i>) – Predicted values of length [n_samples] • y_true (<i>pd.Series</i>) – Actual class labels of length [n_samples] • X (<i>pd.DataFrame or np.ndarray</i>) – Extra data of shape [n_samples, n_features] necessary to calculate score • sample_weight (<i>pd.DataFrame or np.ndarray</i>) – Sample weights used in computing objective value result 	
Returns <i>score</i>	
validate_inputs (<i>self, y_true, y_predicted</i>) Validates the input based on a few simple checks.	
Parameters <ul style="list-style-type: none"> • y_predicted (<i>pd.Series, or pd.DataFrame</i>) – Predicted values of length [n_samples]. • y_true (<i>pd.Series</i>) – Actual class labels of length [n_samples]. 	
Raises ValueError – If the inputs are malformed.	
class evalml.objectives.standard_metrics. RootMeanSquaredError Root mean squared error for regression.	
Attributes	

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	False
name	Root Mean Squared Error
perfect_score	0.0
problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_problem	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for root mean squared error for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for root mean squared error for regression.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **x** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.standard_metrics.**RootMeanSquaredLogError**

Root mean squared log error for regression.

Only valid for nonnegative inputs. Otherwise, will throw a ValueError.

Attributes

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	False
name	Root Mean Squared Log Error
perfect_score	0.0
problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_positive	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for root mean squared log error for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls, score, baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod is_defined_for_problem_type (*cls, problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self, y_true, y_predicted, X=None, sample_weight=None*)

Objective function for root mean squared log error for regression.

positive_only (*self*)

If True, this objective is only valid for positive data.

score (*self, y_true, y_predicted, X=None, sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame or np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame or np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series, or pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises ValueError – If the inputs are malformed.

time_series_regression_objective

Base class for all time series regression objectives.

Module Contents

Classes Summary

<i>TimeSeriesRegressionObjective</i>	Base class for all time series regression objectives.
--------------------------------------	---

Contents

class evalml.objectives.time_series_regression_objective.**TimeSeriesRegressionObjective**
Base class for all time series regression objectives.

Attributes

problem_types	[ProblemTypes.TIME_SERIES_REGRESSION]
----------------------	---------------------------------------

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>expected_range</i>	Returns the expected range of the objective, which is not necessarily the possible ranges.
<i>greater_is_better</i>	Returns a boolean determining if a greater score indicates better model performance.
<i>is_bounded_like_percentage</i>	Returns whether this objective is bounded between 0 and 1, inclusive.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>name</i>	Returns a name describing the objective.
<i>objective_function</i>	Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.
<i>perfect_score</i>	Returns the score obtained by evaluating this objective on a perfect model.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>score_needs_proba</i>	Returns a boolean determining if the score() method needs probability estimates.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property expected_range (*cls*)

Returns the expected range of the objective, which is not necessarily the possible ranges.

For example, our expected R2 range is from [-1, 1], although the actual range is (-inf, 1].

property greater_is_better (*cls*)

Returns a boolean determining if a greater score indicates better model performance.

property is_bounded_like_percentage (*cls*)

Returns whether this objective is bounded between 0 and 1, inclusive.

classmethod is_defined_for_problem_type (*cls, problem_type*)

Returns whether or not an objective is defined for a problem type.

property name (*cls*)

Returns a name describing the objective.

abstract classmethod objective_function (*cls, y_true, y_predicted, X=None, sample_weight=None*)

Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.

Args: *y_predicted* (pd.Series): Predicted values of length [n_samples] *y_true* (pd.Series): Actual class labels of length [n_samples] *X* (pd.DataFrame or np.ndarray): Extra data of shape [n_samples, n_features] necessary to calculate score *sample_weight* (pd.DataFrame or np.ndarray): Sample weights used in computing objective value result

Returns Numerical value used to calculate score

property perfect_score (*cls*)

Returns the score obtained by evaluating this objective on a perfect model.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self, y_true, y_predicted, X=None, sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

property score_needs_proba (*cls*)

Returns a boolean determining if the score() method needs probability estimates.

This should be true for objectives which work with predicted probabilities, like log loss or AUC, and false for objectives which compare predicted class labels to the actual labels, like F1 or correlation.

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

utils

Utility methods for EvalML objectives.

Module Contents

Functions

<code>get_all_objective_names</code>	Get a list of the names of all objectives.
<code>get_core_objective_names</code>	Get a list of all valid core objectives.
<code>get_core_objectives</code>	Returns all core objective instances associated with the given problem type.
<code>get_non_core_objectives</code>	Get non-core objective classes.
<code>get_objective</code>	Returns the Objective class corresponding to a given objective name.

Contents

`evalml.objectives.utils.get_all_objective_names()`

Get a list of the names of all objectives.

Returns Objective names

Return type list (str)

`evalml.objectives.utils.get_core_objective_names()`

Get a list of all valid core objectives.

Returns Objective names.

Return type list[str]

`evalml.objectives.utils.get_core_objectives(problem_type)`

Returns all core objective instances associated with the given problem type.

Core objectives are designed to work out-of-the-box for any dataset.

Parameters **problem_type** (*str/ProblemTypes*) – Type of problem

Returns List of ObjectiveBase instances


```
evalml.objectives.utils.get_non_core_objectives()
```

Get non-core objective classes.

Non-core objectives are objectives that are domain-specific. Users typically need to configure these objectives before using them in AutoMLSearch.

Returns List of ObjectiveBase classes

```
evalml.objectives.utils.get_objective(objective, return_instance=False, **kwargs)
```

Returns the Objective class corresponding to a given objective name.

Parameters

- **objective** (*str* or *ObjectiveBase*) – Name or instance of the objective class.
- **return_instance** (*bool*) – Whether to return an instance of the objective. This only applies if objective is of type *str*. Note that the instance will be initialized with default arguments.
- **kwargs** (*Any*) – Any keyword arguments to pass into the objective. Only used when *return_instance=True*.

Returns ObjectiveBase if the parameter objective is of type ObjectiveBase. If objective is instead a valid objective name, function will return the class corresponding to that name. If *return_instance* is True, an instance of that objective will be returned.

Raises

- **TypeError** – If objective is None.
- **TypeError** – If objective is not a string and not an instance of ObjectiveBase.
- **ObjectiveNotFoundError** – If input objective is not a valid objective.
- **ObjectiveCreationError** – If objective cannot be created properly.

Package Contents

Classes Summary

<i>AccuracyBinary</i>	Accuracy score for binary classification.
<i>AccuracyMulticlass</i>	Accuracy score for multiclass classification.
<i>AUC</i>	AUC score for binary classification.
<i>AUCMacro</i>	AUC score for multiclass classification using macro averaging.
<i>AUCMicro</i>	AUC score for multiclass classification using micro averaging.
<i>AUCWeighted</i>	AUC Score for multiclass classification using weighted averaging.
<i>BalancedAccuracyBinary</i>	Balanced accuracy score for binary classification.
<i>BalancedAccuracyMulticlass</i>	Balanced accuracy score for multiclass classification.
<i>BinaryClassificationObjective</i>	Base class for all binary classification objectives.

continues on next page

Table 244 – continued from previous page

<i>CostBenefitMatrix</i>	Score using a cost-benefit matrix. Scores quantify the benefits of a given value, so greater numeric scores represents a better score. Costs and scores can be negative, indicating that a value is not beneficial. For example, in the case of monetary profit, a negative cost and/or score represents loss of cash flow.
<i>ExpVariance</i>	Explained variance score for regression.
<i>F1</i>	F1 score for binary classification.
<i>F1Macro</i>	F1 score for multiclass classification using macro averaging.
<i>F1Micro</i>	F1 score for multiclass classification using micro averaging.
<i>F1Weighted</i>	F1 score for multiclass classification using weighted averaging.
<i>FraudCost</i>	Score the percentage of money lost of the total transaction amount process due to fraud.
<i>Gini</i>	Gini coefficient for binary classification.
<i>LeadScoring</i>	Lead scoring.
<i>LogLossBinary</i>	Log Loss for binary classification.
<i>LogLossMulticlass</i>	Log Loss for multiclass classification.
<i>MAE</i>	Mean absolute error for regression.
<i>MAPE</i>	Mean absolute percentage error for time series regression. Scaled by 100 to return a percentage.
<i>MaxError</i>	Maximum residual error for regression.
<i>MCCBinary</i>	Matthews correlation coefficient for binary classification.
<i>MCCMulticlass</i>	Matthews correlation coefficient for multiclass classification.
<i>MeanSquaredLogError</i>	Mean squared log error for regression.
<i>MedianAE</i>	Median absolute error for regression.
<i>MSE</i>	Mean squared error for regression.
<i>MulticlassClassificationObjective</i>	Base class for all multiclass classification objectives.
<i>ObjectiveBase</i>	Base class for all objectives.
<i>Precision</i>	Precision score for binary classification.
<i>PrecisionMacro</i>	Precision score for multiclass classification using macro-averaging.
<i>PrecisionMicro</i>	Precision score for multiclass classification using micro averaging.
<i>PrecisionWeighted</i>	Precision score for multiclass classification using weighted averaging.
<i>R2</i>	Coefficient of determination for regression.
<i>Recall</i>	Recall score for binary classification.
<i>RecallMacro</i>	Recall score for multiclass classification using macro averaging.
<i>RecallMicro</i>	Recall score for multiclass classification using micro averaging.
<i>RecallWeighted</i>	Recall score for multiclass classification using weighted averaging.
<i>RegressionObjective</i>	Base class for all regression objectives.
<i>RootMeanSquaredError</i>	Root mean squared error for regression.
<i>RootMeanSquaredLogError</i>	Root mean squared log error for regression.

continues on next page

Table 244 – continued from previous page

<i>SensitivityLowAlert</i>	Create instance of SensitivityLowAlert.
----------------------------	---

Functions

<i>get_all_objective_names</i>	Get a list of the names of all objectives.
<i>get_core_objective_names</i>	Get a list of all valid core objectives.
<i>get_core_objectives</i>	Returns all core objective instances associated with the given problem type.
<i>get_non_core_objectives</i>	Get non-core objective classes.
<i>get_objective</i>	Returns the Objective class corresponding to a given objective name.

Contents

class evalml.objectives.**AccuracyBinary**

Accuracy score for binary classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Accuracy Binary
perfect_score	1.0
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_positive	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for accuracy score for binary classification.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.

continues on next page

Table 246 – continued from previous page

validate_inputs

Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type `float`**property** `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.**Return type** `bool`**decision_function** (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns `predictions`**classmethod** `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for accuracy score for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises `RuntimeError` – If objective cannot be optimized.

`positive_only` (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

`score` (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **`y_predicted`** (*pd.Series*) – Predicted values of length [n_samples]
- **`y_true`** (*pd.Series*) – Actual class labels of length [n_samples]
- **`X`** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **`sample_weight`** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

`validate_inputs` (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

class evalml.objectives.**`AccuracyMulticlass`**

Accuracy score for multiclass classification.

Attributes

<code>expected_range</code>	[0, 1]
<code>greater_is_better</code>	True
<code>is_bounded_like_percentage</code>	True
<code>name</code>	Accuracy Multiclass
<code>perfect_score</code>	1.0
<code>problem_types</code>	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
<code>score_needs_proba</code>	False

Methods

<code>calculate_percent_difference</code>	Calculate the percent difference between scores.
<code>is_defined_for_problem_type</code>	Returns whether or not an objective is defined for a problem type.
<code>objective_function</code>	Objective function for accuracy score for multiclass classification.
<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validates the input based on a few simple checks.

classmethod **`calculate_percent_difference`** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod **is_defined_for_problem_type** (*cls, problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self, y_true, y_predicted, X=None, sample_weight=None*)

Objective function for accuracy score for multiclass classification.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self, y_true, y_predicted, X=None, sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame or np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame or np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series, or pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises ValueError – If the inputs are malformed.

class evalml.objectives.**AUC**

AUC score for binary classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	AUC
perfect_score	1.0
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for AUC score for binary classification.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod is_defined_for_problem_type (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for AUC score for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

class evalml.objectives.AUCMacro

AUC score for multiclass classification using macro averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	AUC Macro
per-fect_score	1.0
prob-lem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for AUC score for multiclass classification using macro-averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod **is_defined_for_problem_type** (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for AUC score for multiclass classification using macro-averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.**AUCMicro**

AUC score for multiclass classification using micro averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	AUC Micro
per-fect_score	1.0
prob-lem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for AUC score for multiclass classification using micro-averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.

continues on next page

Table 250 – continued from previous page

<code>validate_inputs</code>	Validates the input based on a few simple checks.
<p>classmethod <code>calculate_percent_difference</code> (<i>cls</i>, <i>score</i>, <i>baseline_score</i>)</p> <p>Calculate the percent difference between scores.</p> <p>Parameters</p> <ul style="list-style-type: none"> • score (<i>float</i>) – A score. Output of the score method of this objective. • baseline_score (<i>float</i>) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator. <p>Returns</p> <p>The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.</p> <p>Return type <code>float</code></p>	
<p>classmethod <code>is_defined_for_problem_type</code> (<i>cls</i>, <i>problem_type</i>)</p> <p>Returns whether or not an objective is defined for a problem type.</p>	
<p>objective_function (<i>self</i>, <i>y_true</i>, <i>y_predicted</i>, <i>X=None</i>, <i>sample_weight=None</i>)</p> <p>Objective function for AUC score for multiclass classification using micro-averaging.</p>	
<p>positive_only (<i>cls</i>)</p> <p>If True, this objective is only valid for positive data. Defaults to False.</p>	
<p>score (<i>self</i>, <i>y_true</i>, <i>y_predicted</i>, <i>X=None</i>, <i>sample_weight=None</i>)</p> <p>Returns a numerical score indicating performance based on the differences between the predicted and actual values.</p> <p>Parameters</p> <ul style="list-style-type: none"> • y_predicted (<i>pd.Series</i>) – Predicted values of length [n_samples] • y_true (<i>pd.Series</i>) – Actual class labels of length [n_samples] • X (<i>pd.DataFrame</i> or <i>np.ndarray</i>) – Extra data of shape [n_samples, n_features] necessary to calculate score • sample_weight (<i>pd.DataFrame</i> or <i>np.ndarray</i>) – Sample weights used in computing objective value result <p>Returns <code>score</code></p>	
<p>validate_inputs (<i>self</i>, <i>y_true</i>, <i>y_predicted</i>)</p> <p>Validates the input based on a few simple checks.</p> <p>Parameters</p> <ul style="list-style-type: none"> • y_predicted (<i>pd.Series</i>, or <i>pd.DataFrame</i>) – Predicted values of length [n_samples]. • y_true (<i>pd.Series</i>) – Actual class labels of length [n_samples]. <p>Raises ValueError – If the inputs are malformed.</p>	
<p>class <code>evalml.objectives.AUCWeighted</code></p> <p>AUC Score for multiclass classification using weighted averaging.</p> <p>Attributes</p>	

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	AUC Weighted
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for AUC Score for multiclass classification using weighted averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for AUC Score for multiclass classification using weighted averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **x** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.BalancedAccuracyBinary

Balanced accuracy score for binary classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Balanced Accuracy Binary
perfect_score	1.0
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for accuracy score for balanced accuracy for binary classification.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.

continues on next page

Table 252 – continued from previous page

<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for accuracy score for balanced accuracy for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.

- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

class evalml.objectives.**BalancedAccuracyMulticlass**

Balanced accuracy score for multiclass classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Balanced Accuracy Multiclass
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for accuracy score for balanced accuracy for multiclass classification.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.

continues on next page

Table 253 – continued from previous page

<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type `float`

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for accuracy score for balanced accuracy for multiclass classification.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns `score`

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.BinaryClassificationObjective

Base class for all binary classification objectives.

Attributes

problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
----------------------	--

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>expected_range</i>	Returns the expected range of the objective, which is not necessarily the possible ranges.
<i>greater_is_better</i>	Returns a boolean determining if a greater score indicates better model performance.
<i>is_bounded_like_percentage</i>	Returns whether this objective is bounded between 0 and 1, inclusive.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>name</i>	Returns a name describing the objective.
<i>objective_function</i>	Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>perfect_score</i>	Returns the score obtained by evaluating this objective on a perfect model.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>score_needs_proba</i>	Returns a boolean determining if the score() method needs probability estimates.
<i>validate_inputs</i>	Validate inputs for scoring.

classmethod *calculate_percent_difference* (cls, score, baseline_score)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property can_optimize_threshold (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

property expected_range (*cls*)

Returns the expected range of the objective, which is not necessarily the possible ranges.

For example, our expected R2 range is from [-1, 1], although the actual range is (-inf, 1].

property greater_is_better (*cls*)

Returns a boolean determining if a greater score indicates better model performance.

property is_bounded_like_percentage (*cls*)

Returns whether this objective is bounded between 0 and 1, inclusive.

classmethod is_defined_for_problem_type (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

property name (*cls*)

Returns a name describing the objective.

abstract classmethod objective_function (*cls*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.

Args: *y_predicted* (*pd.Series*): Predicted values of length [*n_samples*] *y_true* (*pd.Series*): Actual class labels of length [*n_samples*] *X* (*pd.DataFrame* or *np.ndarray*): Extra data of shape [*n_samples*, *n_features*] necessary to calculate score *sample_weight* (*pd.DataFrame* or *np.ndarray*): Sample weights used in computing objective value result

Returns Numerical value used to calculate score

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.

- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

property perfect_score (*cls*)

Returns the score obtained by evaluating this objective on a perfect model.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

property score_needs_proba (*cls*)

Returns a boolean determining if the score() method needs probability estimates.

This should be true for objectives which work with predicted probabilities, like log loss or AUC, and false for objectives which compare predicted class labels to the actual labels, like F1 or correlation.

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

class evalml.objectives.**CostBenefitMatrix** (*true_positive*, *true_negative*, *false_positive*, *false_negative*)

Score using a cost-benefit matrix. Scores quantify the benefits of a given value, so greater numeric scores represents a better score. Costs and scores can be negative, indicating that a value is not beneficial. For example, in the case of monetary profit, a negative cost and/or score represents loss of cash flow.

Parameters

- **true_positive** (*float*) – Cost associated with true positive predictions.
- **true_negative** (*float*) – Cost associated with true negative predictions.
- **false_positive** (*float*) – Cost associated with false positive predictions.
- **false_negative** (*float*) – Cost associated with false negative predictions.

Attributes

ex-pected_range	None
greater_is_better	True
is_bounded_like_percentage	False
name	Cost Benefit Matrix
perfect_score	None
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Calculates cost-benefit of the using the predicted and true values.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod is_defined_for_problem_type (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Calculates cost-benefit of the using the predicted and true values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted labels.
- **y_true** (*pd.Series*) – True labels.
- **X** (*pd.DataFrame*) – Ignored.
- **sample_weight** (*pd.DataFrame*) – Ignored.

Returns Cost-benefit matrix score

Return type float

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]

- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)
Validate inputs for scoring.

class evalml.objectives.**ExpVariance**
Explained variance score for regression.

Attributes

ex-pected_range	None
greater_is_better	True
is_bounded_like_percentage	False
name	ExpVariance
per-fect_score	1.0
prob-lem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_positive	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for explained variance score for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)
Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod `is_defined_for_problem_type(cls, problem_type)`

Returns whether or not an objective is defined for a problem type.

objective_function (`self, y_true, y_predicted, X=None, sample_weight=None`)

Objective function for explained variance score for regression.

positive_only (`cls`)

If True, this objective is only valid for positive data. Defaults to False.

score (`self, y_true, y_predicted, X=None, sample_weight=None`)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (`pd.Series`) – Predicted values of length [n_samples]
- **y_true** (`pd.Series`) – Actual class labels of length [n_samples]
- **X** (`pd.DataFrame` or `np.ndarray`) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (`pd.DataFrame` or `np.ndarray`) – Sample weights used in computing objective value result

Returns score

validate_inputs (`self, y_true, y_predicted`)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (`pd.Series`, or `pd.DataFrame`) – Predicted values of length [n_samples].
- **y_true** (`pd.Series`) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class `evalml.objectives.F1`

F1 score for binary classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	F1
per-fect_score	1.0
prob-lem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	False

Methods

<code>calculate_percent_difference</code>	Calculate the percent difference between scores.
<code>can_optimize_threshold</code>	Returns a boolean determining if we can optimize the binary classification objective threshold.

continues on next page

Table 257 – continued from previous page

<code>decision_function</code>	Apply a learned threshold to predicted probabilities to get predicted classes.
<code>is_defined_for_problem_type</code>	Returns whether or not an objective is defined for a problem type.
<code>objective_function</code>	Objective function for F1 score for binary classification.
<code>optimize_threshold</code>	Learn a binary classification threshold which optimizes the current objective.
<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type `float`

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type `bool`

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for F1 score for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

class evalml.objectives.**F1Macro**

F1 score for multiclass classification using macro averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	F1 Macro
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<code>calculate_percent_difference</code>	Calculate the percent difference between scores.
<code>is_defined_for_problem_type</code>	Returns whether or not an objective is defined for a problem type.
<code>objective_function</code>	Objective function for F1 score for multiclass classification using macro averaging.
<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for F1 score for multiclass classification using macro averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.F1Micro

F1 score for multiclass classification using micro averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	F1 Micro
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for F1 score for multiclass classification.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod **is_defined_for_problem_type** (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for F1 score for multiclass classification.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.**F1Weighted**

F1 score for multiclass classification using weighted averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	F1 Weighted
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for F1 score for multiclass classification using weighted averaging.

continues on next page

Table 260 – continued from previous page

<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type `float`

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for F1 score for multiclass classification using weighted averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns `score`

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises `ValueError` – If the inputs are malformed.

```
class evalml.objectives.FraudCost (retry_percentage=0.5, interchange_fee=0.02,
                                     fraud_payout_percentage=1.0, amount_col='amount')
Score the percentage of money lost of the total transaction amount process due to fraud.
```

Parameters

- **retry_percentage** (*float*) – What percentage of customers that will retry a transaction if it is declined. Between 0 and 1. Defaults to 0.5.
- **interchange_fee** (*float*) – How much of each successful transaction you pay. Between 0 and 1. Defaults to 0.02.
- **fraud_payout_percentage** (*float*) – Percentage of fraud you will not be able to collect. Between 0 and 1. Defaults to 1.0.
- **amount_col** (*str*) – Name of column in data that contains the amount. Defaults to “amount”.

Attributes

expected_range	None
greater_is_better	False
is_bounded_like_percentage	True
name	Fraud Cost
perfect_score	0.0
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_positive	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Calculate amount lost to fraud per transaction given predictions, true values, and dataframe with transaction amount.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validate inputs for scoring.

```
classmethod calculate_percent_difference (cls, score, baseline_score)
```

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property can_optimize_threshold (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod is_defined_for_problem_type (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X*, *sample_weight=None*)

Calculate amount lost to fraud per transaction given predictions, true values, and dataframe with transaction amount.

Parameters

- **y_predicted** (*pd.Series*) – Predicted fraud labels.
- **y_true** (*pd.Series*) – True fraud labels.
- **X** (*pd.DataFrame*) – Data with transaction amounts.
- **sample_weight** (*pd.DataFrame*) – Ignored.

Returns Amount lost to fraud per transaction.

Return type float

Raises ValueError – If amount_col is not a valid column in the input data.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **y_pred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame, optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self, y_true, y_predicted, X=None, sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame or np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame or np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validate inputs for scoring.

`evalml.objectives.get_all_objective_names()`

Get a list of the names of all objectives.

Returns Objective names

Return type list (str)

`evalml.objectives.get_core_objective_names()`

Get a list of all valid core objectives.

Returns Objective names.

Return type list[str]

`evalml.objectives.get_core_objectives(problem_type)`

Returns all core objective instances associated with the given problem type.

Core objectives are designed to work out-of-the-box for any dataset.

Parameters **problem_type** (*str/ProblemTypes*) – Type of problem

Returns List of ObjectiveBase instances

`evalml.objectives.get_non_core_objectives()`

Get non-core objective classes.

Non-core objectives are objectives that are domain-specific. Users typically need to configure these objectives before using them in AutoMLSearch.

Returns List of ObjectiveBase classes

`evalml.objectives.get_objective(objective, return_instance=False, **kwargs)`

Returns the Objective class corresponding to a given objective name.

Parameters

- **objective** (*str* or *ObjectiveBase*) – Name or instance of the objective class.
- **return_instance** (*bool*) – Whether to return an instance of the objective. This only applies if objective is of type *str*. Note that the instance will be initialized with default arguments.
- **kwargs** (*Any*) – Any keyword arguments to pass into the objective. Only used when `return_instance=True`.

Returns *ObjectiveBase* if the parameter objective is of type *ObjectiveBase*. If objective is instead a valid objective name, function will return the class corresponding to that name. If `return_instance` is *True*, an instance of that objective will be returned.

Raises

- **TypeError** – If objective is *None*.
- **TypeError** – If objective is not a string and not an instance of *ObjectiveBase*.
- **ObjectiveNotFoundError** – If input objective is not a valid objective.
- **ObjectiveCreationError** – If objective cannot be created properly.

class `evalml.objectives.Gini`

Gini coefficient for binary classification.

Attributes

expected_range	None
greater_is_better	True
is_bounded_like_percentage	False
name	Gini
perfect_score	1.0
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

<code>calculate_percent_difference</code>	Calculate the percent difference between scores.
<code>can_optimize_threshold</code>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<code>decision_function</code>	Apply a learned threshold to predicted probabilities to get predicted classes.
<code>is_defined_for_problem_type</code>	Returns whether or not an objective is defined for a problem type.
<code>objective_function</code>	Objective function for Gini coefficient for binary classification.
<code>optimize_threshold</code>	Learn a binary classification threshold which optimizes the current objective.

continues on next page

Table 262 – continued from previous page

<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for Gini coefficient for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities

- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

class evalml.objectives.**LeadScoring** (*true_positives=1*, *false_positives=-1*)

Lead scoring.

Parameters

- **true_positives** (*int*) – Reward for a true positive. Defaults to 1.
- **false_positives** (*int*) – Cost for a false positive. Should be negative. Defaults to -1.

Attributes

ex-pected_range	None
greater_is_better	True
is_bounded_like_percentage	False
name	Lead Scoring
perfect_score	None
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.

continues on next page

Table 263 – continued from previous page

<code>decision_function</code>	Apply a learned threshold to predicted probabilities to get predicted classes.
<code>is_defined_for_problem_type</code>	Returns whether or not an objective is defined for a problem type.
<code>objective_function</code>	Calculate the profit per lead.
<code>optimize_threshold</code>	Learn a binary classification threshold which optimizes the current objective.
<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type `float`

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type `bool`

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)
Calculate the profit per lead.

Parameters

- **y_predicted** (*pd.Series*) – Predicted labels
- **y_true** (*pd.Series*) – True labels
- **X** (*pd.DataFrame*) – Ignored.
- **sample_weight** (*pd.DataFrame*) – Ignored.

Returns Profit per lead

Return type float

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)
Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)
If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)
Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)
Validate inputs for scoring.

class evalml.objectives.**LogLossBinary**
Log Loss for binary classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	False
is_bounded_like_percentage	True
name	Log Loss Binary
perfect_score	0.0
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for log loss for binary classification.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod is_defined_for_problem_type (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for log loss for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

class evalml.objectives.**LogLossMulticlass**

Log Loss for multiclass classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	False
is_bounded_like_percentage	True
name	Log Loss Multiclass
per-fect_score	0.0
prob-lem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for log loss for multiclass classification.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod **is_defined_for_problem_type** (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for log loss for multiclass classification.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.**MAE**

Mean absolute error for regression.

Attributes

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	True
name	MAE
perfect_score	0.0
problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_problem	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for mean absolute error for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.

continues on next page

Table 266 – continued from previous page

<code>validate_inputs</code>	Validates the input based on a few simple checks.
classmethod <code>calculate_percent_difference</code> (<i>cls, score, baseline_score</i>) Calculate the percent difference between scores.	
Parameters <ul style="list-style-type: none"> • <code>score</code> (<i>float</i>) – A score. Output of the score method of this objective. • <code>baseline_score</code> (<i>float</i>) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator. 	
Returns The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.	
Return type <i>float</i>	
classmethod <code>is_defined_for_problem_type</code> (<i>cls, problem_type</i>) Returns whether or not an objective is defined for a problem type.	
objective_function (<i>self, y_true, y_predicted, X=None, sample_weight=None</i>) Objective function for mean absolute error for regression.	
positive_only (<i>cls</i>) If True, this objective is only valid for positive data. Defaults to False.	
score (<i>self, y_true, y_predicted, X=None, sample_weight=None</i>) Returns a numerical score indicating performance based on the differences between the predicted and actual values.	
Parameters <ul style="list-style-type: none"> • <code>y_predicted</code> (<i>pd.Series</i>) – Predicted values of length [n_samples] • <code>y_true</code> (<i>pd.Series</i>) – Actual class labels of length [n_samples] • <code>X</code> (<i>pd.DataFrame or np.ndarray</i>) – Extra data of shape [n_samples, n_features] necessary to calculate score • <code>sample_weight</code> (<i>pd.DataFrame or np.ndarray</i>) – Sample weights used in computing objective value result 	
Returns <i>score</i>	
<code>validate_inputs</code> (<i>self, y_true, y_predicted</i>) Validates the input based on a few simple checks.	
Parameters <ul style="list-style-type: none"> • <code>y_predicted</code> (<i>pd.Series, or pd.DataFrame</i>) – Predicted values of length [n_samples]. • <code>y_true</code> (<i>pd.Series</i>) – Actual class labels of length [n_samples]. 	
Raises <code>ValueError</code> – If the inputs are malformed.	
class <code>evalml.objectives.MAPE</code> Mean absolute percentage error for time series regression. Scaled by 100 to return a percentage. Only valid for nonzero inputs. Otherwise, will throw a <code>ValueError</code> .	
Attributes	

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	True
name	Mean Absolute Percentage Error
perfect_score	0.0
problem_types	[ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_problem	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for mean absolute percentage error for time series regression.
<i>positive_only</i>	If True, this objective is only valid for positive data.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)
Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)
Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)
Objective function for mean absolute percentage error for time series regression.

positive_only (*self*)
If True, this objective is only valid for positive data.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)
Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]

- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.**MaxError**

Maximum residual error for regression.

Attributes

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	False
name	MaxError
per-fect_score	0.0
prob-lem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_proba	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for maximum residual error for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls, score, baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.

- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod is_defined_for_problem_type (*cls, problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self, y_true, y_predicted, X=None, sample_weight=None*)

Objective function for maximum residual error for regression.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self, y_true, y_predicted, X=None, sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series, or pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises ValueError – If the inputs are malformed.

class evalml.objectives.MCCBinary

Matthews correlation coefficient for binary classification.

Attributes

ex-pected_range	None
greater_is_better	True
is_bounded_like_percentage	False
name	MCC Binary
per-fect_score	1.0
prob-lem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for Matthews correlation coefficient for binary classification.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod is_defined_for_problem_type (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for Matthews correlation coefficient for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

class evalml.objectives.MCCMulticlass

Matthews correlation coefficient for multiclass classification.

Attributes

ex-pected_range	None
greater_is_better	True
is_bounded_like_percentage	False
name	MCC Multiclass
per-fect_score	1.0
prob-lem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_positive	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for Matthews correlation coefficient for multiclass classification.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for Matthews correlation coefficient for multiclass classification.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.**MeanSquaredLogError**

Mean squared log error for regression.

Only valid for nonnegative inputs. Otherwise, will throw a ValueError.

Attributes

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	False
name	Mean Squared Log Error
perfect_score	0.0
problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_problem	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for mean squared log error for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.

continues on next page

Table 271 – continued from previous page

<code>validate_inputs</code>	Validates the input based on a few simple checks.
<p>classmethod <code>calculate_percent_difference</code> (<i>cls</i>, <i>score</i>, <i>baseline_score</i>)</p> <p>Calculate the percent difference between scores.</p> <p>Parameters</p> <ul style="list-style-type: none"> • score (<i>float</i>) – A score. Output of the score method of this objective. • baseline_score (<i>float</i>) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator. <p>Returns</p> <p>The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.</p> <p>Return type <code>float</code></p>	
<p>classmethod <code>is_defined_for_problem_type</code> (<i>cls</i>, <i>problem_type</i>)</p> <p>Returns whether or not an objective is defined for a problem type.</p>	
<p>objective_function (<i>self</i>, <i>y_true</i>, <i>y_predicted</i>, <i>X=None</i>, <i>sample_weight=None</i>)</p> <p>Objective function for mean squared log error for regression.</p>	
<p>positive_only (<i>self</i>)</p> <p>If True, this objective is only valid for positive data.</p>	
<p>score (<i>self</i>, <i>y_true</i>, <i>y_predicted</i>, <i>X=None</i>, <i>sample_weight=None</i>)</p> <p>Returns a numerical score indicating performance based on the differences between the predicted and actual values.</p> <p>Parameters</p> <ul style="list-style-type: none"> • y_predicted (<i>pd.Series</i>) – Predicted values of length [n_samples] • y_true (<i>pd.Series</i>) – Actual class labels of length [n_samples] • X (<i>pd.DataFrame</i> or <i>np.ndarray</i>) – Extra data of shape [n_samples, n_features] necessary to calculate score • sample_weight (<i>pd.DataFrame</i> or <i>np.ndarray</i>) – Sample weights used in computing objective value result <p>Returns <code>score</code></p>	
<p>validate_inputs (<i>self</i>, <i>y_true</i>, <i>y_predicted</i>)</p> <p>Validates the input based on a few simple checks.</p> <p>Parameters</p> <ul style="list-style-type: none"> • y_predicted (<i>pd.Series</i>, or <i>pd.DataFrame</i>) – Predicted values of length [n_samples]. • y_true (<i>pd.Series</i>) – Actual class labels of length [n_samples]. <p>Raises ValueError – If the inputs are malformed.</p>	
<p>class <code>evalml.objectives.MedianAE</code></p> <p>Median absolute error for regression.</p> <p>Attributes</p>	

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	False
name	MedianAE
perfect_score	0.0
problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_problem	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for median absolute error for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for median absolute error for regression.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **x** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.**MSE**

Mean squared error for regression.

Attributes

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	False
name	MSE
per-fect_score	0.0
prob-lem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_problem	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for mean squared error for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls, score, baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod is_defined_for_problem_type (*cls, problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self, y_true, y_predicted, X=None, sample_weight=None*)

Objective function for mean squared error for regression.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self, y_true, y_predicted, X=None, sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame or np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame or np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series, or pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises ValueError – If the inputs are malformed.

class evalml.objectives.MulticlassClassificationObjective

Base class for all multiclass classification objectives.

Attributes

problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
----------------------	--

Methods

<code>calculate_percent_difference</code>	Calculate the percent difference between scores.
<code>expected_range</code>	Returns the expected range of the objective, which is not necessarily the possible ranges.
<code>greater_is_better</code>	Returns a boolean determining if a greater score indicates better model performance.
<code>is_bounded_like_percentage</code>	Returns whether this objective is bounded between 0 and 1, inclusive.
<code>is_defined_for_problem_type</code>	Returns whether or not an objective is defined for a problem type.
<code>name</code>	Returns a name describing the objective.
<code>objective_function</code>	Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.
<code>perfect_score</code>	Returns the score obtained by evaluating this objective on a perfect model.
<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>score_needs_proba</code>	Returns a boolean determining if the score() method needs probability estimates.
<code>validate_inputs</code>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `expected_range` (*cls*)

Returns the expected range of the objective, which is not necessarily the possible ranges.

For example, our expected R2 range is from [-1, 1], although the actual range is (-inf, 1].

property `greater_is_better` (*cls*)

Returns a boolean determining if a greater score indicates better model performance.

property `is_bounded_like_percentage` (*cls*)

Returns whether this objective is bounded between 0 and 1, inclusive.

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

property `name` (*cls*)

Returns a name describing the objective.

abstract classmethod objective_function (*cls*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.

Args: *y_predicted* (pd.Series): Predicted values of length [n_samples] *y_true* (pd.Series): Actual class labels of length [n_samples] *X* (pd.DataFrame or np.ndarray): Extra data of shape [n_samples, n_features] necessary to calculate score *sample_weight* (pd.DataFrame or np.ndarray): Sample weights used in computing objective value result

Returns Numerical value used to calculate score

property perfect_score (*cls*)

Returns the score obtained by evaluating this objective on a perfect model.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

property score_needs_proba (*cls*)

Returns a boolean determining if the score() method needs probability estimates.

This should be true for objectives which work with predicted probabilities, like log loss or AUC, and false for objectives which compare predicted class labels to the actual labels, like F1 or correlation.

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises ValueError – If the inputs are malformed.

class evalml.objectives.ObjectiveBase

Base class for all objectives.

Attributes

problem_types	None
----------------------	------

Methods

<code>calculate_percent_difference</code>	Calculate the percent difference between scores.
<code>expected_range</code>	Returns the expected range of the objective, which is not necessarily the possible ranges.
<code>greater_is_better</code>	Returns a boolean determining if a greater score indicates better model performance.
<code>is_bounded_like_percentage</code>	Returns whether this objective is bounded between 0 and 1, inclusive.
<code>is_defined_for_problem_type</code>	Returns whether or not an objective is defined for a problem type.
<code>name</code>	Returns a name describing the objective.
<code>objective_function</code>	Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.
<code>perfect_score</code>	Returns the score obtained by evaluating this objective on a perfect model.
<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>score_needs_proba</code>	Returns a boolean determining if the score() method needs probability estimates.
<code>validate_inputs</code>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `expected_range` (*cls*)

Returns the expected range of the objective, which is not necessarily the possible ranges.

For example, our expected R2 range is from [-1, 1], although the actual range is (-inf, 1].

property `greater_is_better` (*cls*)

Returns a boolean determining if a greater score indicates better model performance.

property `is_bounded_like_percentage` (*cls*)

Returns whether this objective is bounded between 0 and 1, inclusive.

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

property `name` (*cls*)

Returns a name describing the objective.

abstract classmethod objective_function (*cls*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.

Args: *y_predicted* (*pd.Series*): Predicted values of length [*n_samples*] *y_true* (*pd.Series*): Actual class labels of length [*n_samples*] *X* (*pd.DataFrame* or *np.ndarray*): Extra data of shape [*n_samples*, *n_features*] necessary to calculate score *sample_weight* (*pd.DataFrame* or *np.ndarray*): Sample weights used in computing objective value result

Returns Numerical value used to calculate score

property perfect_score (*cls*)

Returns the score obtained by evaluating this objective on a perfect model.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [*n_samples*]
- **y_true** (*pd.Series*) – Actual class labels of length [*n_samples*]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [*n_samples*, *n_features*] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

property score_needs_proba (*cls*)

Returns a boolean determining if the score() method needs probability estimates.

This should be true for objectives which work with predicted probabilities, like log loss or AUC, and false for objectives which compare predicted class labels to the actual labels, like F1 or correlation.

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [*n_samples*].
- **y_true** (*pd.Series*) – Actual class labels of length [*n_samples*].

Raises ValueError – If the inputs are malformed.

class evalml.objectives.Precision

Precision score for binary classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Precision
perfect_score	1.0
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for precision score for binary classification.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod is_defined_for_problem_type (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for precision score for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

class evalml.objectives.PrecisionMacro

Precision score for multiclass classification using macro-averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Precision Macro
per-fect_score	1.0
prob-lem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for precision score for multiclass classification using macro-averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod **is_defined_for_problem_type** (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for precision score for multiclass classification using macro-averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.**PrecisionMicro**

Precision score for multiclass classification using micro averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Precision Micro
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for precision score for binary classification using micro-averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.

continues on next page

Table 278 – continued from previous page

<code>validate_inputs</code>	Validates the input based on a few simple checks.
classmethod <code>calculate_percent_difference</code> (<i>cls, score, baseline_score</i>) Calculate the percent difference between scores.	
Parameters <ul style="list-style-type: none"> • score (<i>float</i>) – A score. Output of the score method of this objective. • baseline_score (<i>float</i>) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator. 	
Returns <p>The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.</p>	
Return type <i>float</i>	
classmethod <code>is_defined_for_problem_type</code> (<i>cls, problem_type</i>) Returns whether or not an objective is defined for a problem type.	
objective_function (<i>self, y_true, y_predicted, X=None, sample_weight=None</i>) Objective function for precision score for binary classification using micro-averaging.	
positive_only (<i>cls</i>) If True, this objective is only valid for positive data. Defaults to False.	
score (<i>self, y_true, y_predicted, X=None, sample_weight=None</i>) Returns a numerical score indicating performance based on the differences between the predicted and actual values.	
Parameters <ul style="list-style-type: none"> • y_predicted (<i>pd.Series</i>) – Predicted values of length [n_samples] • y_true (<i>pd.Series</i>) – Actual class labels of length [n_samples] • X (<i>pd.DataFrame or np.ndarray</i>) – Extra data of shape [n_samples, n_features] necessary to calculate score • sample_weight (<i>pd.DataFrame or np.ndarray</i>) – Sample weights used in computing objective value result 	
Returns <i>score</i>	
<code>validate_inputs</code> (<i>self, y_true, y_predicted</i>) Validates the input based on a few simple checks.	
Parameters <ul style="list-style-type: none"> • y_predicted (<i>pd.Series, or pd.DataFrame</i>) – Predicted values of length [n_samples]. • y_true (<i>pd.Series</i>) – Actual class labels of length [n_samples]. 	
Raises ValueError – If the inputs are malformed.	
class <code>evalml.objectives.PrecisionWeighted</code> Precision score for multiclass classification using weighted averaging.	
Attributes	

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Precision Weighted
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for precision score for multiclass classification using weighted averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for precision score for multiclass classification using weighted averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **x** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.**R2**

Coefficient of determination for regression.

Attributes

ex-pected_range	None
greater_is_better	True
is_bounded_like_percentage	False
name	R2
perfect_score	1
problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_problem	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for coefficient of determination for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls, score, baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod is_defined_for_problem_type (*cls, problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self, y_true, y_predicted, X=None, sample_weight=None*)

Objective function for coefficient of determination for regression.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self, y_true, y_predicted, X=None, sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame or np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame or np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series, or pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises ValueError – If the inputs are malformed.

class evalml.objectives.Recall

Recall score for binary classification.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Recall
perfect_score	1.0
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Apply a learned threshold to predicted probabilities to get predicted classes.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for recall score for binary classification.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, *threshold=0.5*, *X=None*)

Apply a learned threshold to predicted probabilities to get predicted classes.

Parameters

- **ypred_proba** (*pd.Series*, *np.ndarray*) – The classifier’s predicted probabilities
- **threshold** (*float*, *optional*) – Threshold used to make a prediction. Defaults to 0.5.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns predictions

classmethod is_defined_for_problem_type (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for recall score for binary classification.

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

class evalml.objectives.RecallMacro

Recall score for multiclass classification using macro averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Recall Macro
per-fect_score	1.0
prob-lem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for recall score for multiclass classification using macro-averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod **is_defined_for_problem_type** (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for recall score for multiclass classification using macro-averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.**RecallMicro**

Recall score for multiclass classification using micro averaging.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Recall Micro
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_proba	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for recall score for multiclass classification using micro-averaging.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.

continues on next page

Table 283 – continued from previous page

<code>validate_inputs</code>	Validates the input based on a few simple checks.
<p>classmethod <code>calculate_percent_difference</code> (<i>cls</i>, <i>score</i>, <i>baseline_score</i>)</p> <p>Calculate the percent difference between scores.</p> <p>Parameters</p> <ul style="list-style-type: none"> • score (<i>float</i>) – A score. Output of the score method of this objective. • baseline_score (<i>float</i>) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator. <p>Returns</p> <p>The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.</p> <p>Return type <code>float</code></p>	
<p>classmethod <code>is_defined_for_problem_type</code> (<i>cls</i>, <i>problem_type</i>)</p> <p>Returns whether or not an objective is defined for a problem type.</p>	
<p>objective_function (<i>self</i>, <i>y_true</i>, <i>y_predicted</i>, <i>X=None</i>, <i>sample_weight=None</i>)</p> <p>Objective function for recall score for multiclass classification using micro-averaging.</p>	
<p>positive_only (<i>cls</i>)</p> <p>If True, this objective is only valid for positive data. Defaults to False.</p>	
<p>score (<i>self</i>, <i>y_true</i>, <i>y_predicted</i>, <i>X=None</i>, <i>sample_weight=None</i>)</p> <p>Returns a numerical score indicating performance based on the differences between the predicted and actual values.</p> <p>Parameters</p> <ul style="list-style-type: none"> • y_predicted (<i>pd.Series</i>) – Predicted values of length [n_samples] • y_true (<i>pd.Series</i>) – Actual class labels of length [n_samples] • X (<i>pd.DataFrame</i> or <i>np.ndarray</i>) – Extra data of shape [n_samples, n_features] necessary to calculate score • sample_weight (<i>pd.DataFrame</i> or <i>np.ndarray</i>) – Sample weights used in computing objective value result <p>Returns <code>score</code></p>	
<p>validate_inputs (<i>self</i>, <i>y_true</i>, <i>y_predicted</i>)</p> <p>Validates the input based on a few simple checks.</p> <p>Parameters</p> <ul style="list-style-type: none"> • y_predicted (<i>pd.Series</i>, or <i>pd.DataFrame</i>) – Predicted values of length [n_samples]. • y_true (<i>pd.Series</i>) – Actual class labels of length [n_samples]. <p>Raises ValueError – If the inputs are malformed.</p>	
<p>class <code>evalml.objectives.RecallWeighted</code></p> <p>Recall score for multiclass classification using weighted averaging.</p> <p>Attributes</p>	

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like_percentage	True
name	Recall Weighted
perfect_score	1.0
problem_types	[ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_MULTICLASS]
score_needs_problem	True

Methods

<code>calculate_percent_difference</code>	Calculate the percent difference between scores.
<code>is_defined_for_problem_type</code>	Returns whether or not an objective is defined for a problem type.
<code>objective_function</code>	Objective function for recall score for multiclass classification using weighted averaging.
<code>positive_only</code>	If True, this objective is only valid for positive data. Defaults to False.
<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Objective function for recall score for multiclass classification using weighted averaging.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **x** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.RegressionObjective

Base class for all regression objectives.

Attributes

problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
----------------------	--

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>expected_range</i>	Returns the expected range of the objective, which is not necessarily the possible ranges.
<i>greater_is_better</i>	Returns a boolean determining if a greater score indicates better model performance.
<i>is_bounded_like_percentage</i>	Returns whether this objective is bounded between 0 and 1, inclusive.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>name</i>	Returns a name describing the objective.
<i>objective_function</i>	Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.
<i>perfect_score</i>	Returns the score obtained by evaluating this objective on a perfect model.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>score_needs_proba</i>	Returns a boolean determining if the score() method needs probability estimates.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type `float`

property `expected_range` (*cls*)

Returns the expected range of the objective, which is not necessarily the possible ranges.

For example, our expected R2 range is from [-1, 1], although the actual range is (-inf, 1].

property `greater_is_better` (*cls*)

Returns a boolean determining if a greater score indicates better model performance.

property `is_bounded_like_percentage` (*cls*)

Returns whether this objective is bounded between 0 and 1, inclusive.

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

property `name` (*cls*)

Returns a name describing the objective.

abstract classmethod `objective_function` (*cls*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Computes the relative value of the provided predictions compared to the actual labels, according a specified metric.

Args: *y_predicted* (*pd.Series*): Predicted values of length [*n_samples*] *y_true* (*pd.Series*): Actual class labels of length [*n_samples*] *X* (*pd.DataFrame* or *np.ndarray*): Extra data of shape [*n_samples*, *n_features*] necessary to calculate score *sample_weight* (*pd.DataFrame* or *np.ndarray*): Sample weights used in computing objective value result

Returns Numerical value used to calculate score

property `perfect_score` (*cls*)

Returns the score obtained by evaluating this objective on a perfect model.

property `positive_only` (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [*n_samples*]
- **y_true** (*pd.Series*) – Actual class labels of length [*n_samples*]

- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

property score_needs_proba (*cls*)

Returns a boolean determining if the score() method needs probability estimates.

This should be true for objectives which work with predicted probabilities, like log loss or AUC, and false for objectives which compare predicted class labels to the actual labels, like F1 or correlation.

validate_inputs (*self, y_true, y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.**RootMeanSquaredError**

Root mean squared error for regression.

Attributes

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	False
name	Root Mean Squared Error
perfect_score	0.0
problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_proba	False

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for root mean squared error for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls, score, baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod **is_defined_for_problem_type** (*cls, problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self, y_true, y_predicted, X=None, sample_weight=None*)

Objective function for root mean squared error for regression.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self, y_true, y_predicted, X=None, sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame or np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame or np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series, or pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises ValueError – If the inputs are malformed.

class evalml.objectives.**RootMeanSquaredLogError**

Root mean squared log error for regression.

Only valid for nonnegative inputs. Otherwise, will throw a ValueError.

Attributes

ex-pected_range	None
greater_is_better	False
is_bounded_like_percentage	False
name	Root Mean Squared Log Error
per-fect_score	0.0
prob-lem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION]
score_needs_problem	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Objective function for root mean squared log error for regression.
<i>positive_only</i>	If True, this objective is only valid for positive data.
<i>score</i>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<i>validate_inputs</i>	Validates the input based on a few simple checks.

classmethod **calculate_percent_difference** (*cls*, *score*, *baseline_score*)
Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

classmethod **is_defined_for_problem_type** (*cls*, *problem_type*)
Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)
Objective function for root mean squared log error for regression.

positive_only (*self*)
If True, this objective is only valid for positive data.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)
Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]

- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self, y_true, y_predicted*)

Validates the input based on a few simple checks.

Parameters

- **y_predicted** (*pd.Series*, or *pd.DataFrame*) – Predicted values of length [n_samples].
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples].

Raises **ValueError** – If the inputs are malformed.

class evalml.objectives.**SensitivityLowAlert** (*alert_rate=0.01*)

Create instance of SensitivityLowAlert.

Parameters **alert_rate** (*float*) – percentage of top scores to classify as high risk.

Attributes

ex-pected_range	[0, 1]
greater_is_better	True
is_bounded_like	percentage
name	Sensitivity at Low Alert Rates
perfect_score	1.0
problem_types	[ProblemTypes.BINARY, ProblemTypes.TIME_SERIES_BINARY]
score_needs_positive	True

Methods

<i>calculate_percent_difference</i>	Calculate the percent difference between scores.
<i>can_optimize_threshold</i>	Returns a boolean determining if we can optimize the binary classification objective threshold.
<i>decision_function</i>	Determine if an observation is high risk given an alert rate.
<i>is_defined_for_problem_type</i>	Returns whether or not an objective is defined for a problem type.
<i>objective_function</i>	Calculate sensitivity across all predictions, using the top alert_rate percent of observations as the predicted positive class.
<i>optimize_threshold</i>	Learn a binary classification threshold which optimizes the current objective.
<i>positive_only</i>	If True, this objective is only valid for positive data. Defaults to False.

continues on next page

Table 288 – continued from previous page

<code>score</code>	Returns a numerical score indicating performance based on the differences between the predicted and actual values.
<code>validate_inputs</code>	Validate inputs for scoring.

classmethod `calculate_percent_difference` (*cls*, *score*, *baseline_score*)

Calculate the percent difference between scores.

Parameters

- **score** (*float*) – A score. Output of the score method of this objective.
- **baseline_score** (*float*) – A score. Output of the score method of this objective. In practice, this is the score achieved on this objective with a baseline estimator.

Returns

The percent difference between the scores. Note that for objectives that can be interpreted as percentages, this will be the difference between the reference score and score. For all other objectives, the difference will be normalized by the reference score.

Return type float

property `can_optimize_threshold` (*cls*)

Returns a boolean determining if we can optimize the binary classification objective threshold.

This will be false for any objective that works directly with predicted probabilities, like log loss and AUC. Otherwise, it will be true.

Returns Whether or not an objective can be optimized.

Return type bool

decision_function (*self*, *ypred_proba*, ***kwargs*)

Determine if an observation is high risk given an alert rate.

Parameters

- **ypred_proba** (*pd.Series*) – Predicted probabilities.
- ****kwargs** – Additional arbitrary parameters.

Returns Whether or not an observation is high risk given an alert rate.

Return type *pd.Series*

classmethod `is_defined_for_problem_type` (*cls*, *problem_type*)

Returns whether or not an objective is defined for a problem type.

objective_function (*self*, *y_true*, *y_predicted*, ***kwargs*)

Calculate sensitivity across all predictions, using the top *alert_rate* percent of observations as the predicted positive class.

Parameters

- **y_true** (*pd.Series*) – True labels.
- **y_predicted** (*pd.Series*) – Predicted labels based on *alert_rate*.
- ****kwargs** – Additional arbitrary parameters.

Returns sensitivity using the observations with the top scores as the predicted positive class.

Return type float

optimize_threshold (*self*, *ypred_proba*, *y_true*, *X=None*)

Learn a binary classification threshold which optimizes the current objective.

Parameters

- **ypred_proba** (*pd.Series*) – The classifier’s predicted probabilities
- **y_true** (*pd.Series*) – The ground truth for the predictions.
- **X** (*pd.DataFrame*, *optional*) – Any extra columns that are needed from training data.

Returns Optimal threshold for this objective.

Raises **RuntimeError** – If objective cannot be optimized.

positive_only (*cls*)

If True, this objective is only valid for positive data. Defaults to False.

score (*self*, *y_true*, *y_predicted*, *X=None*, *sample_weight=None*)

Returns a numerical score indicating performance based on the differences between the predicted and actual values.

Parameters

- **y_predicted** (*pd.Series*) – Predicted values of length [n_samples]
- **y_true** (*pd.Series*) – Actual class labels of length [n_samples]
- **X** (*pd.DataFrame* or *np.ndarray*) – Extra data of shape [n_samples, n_features] necessary to calculate score
- **sample_weight** (*pd.DataFrame* or *np.ndarray*) – Sample weights used in computing objective value result

Returns score

validate_inputs (*self*, *y_true*, *y_predicted*)

Validate inputs for scoring.

Pipelines

EvalML pipelines.

Subpackages

components

EvalML component classes.

Subpackages

ensemble

Ensemble components.

Submodules

stacked_ensemble_base

Stacked Ensemble Base.

Module Contents

Classes Summary

<i>StackedEnsembleBase</i>	Stacked Ensemble Base Class.
----------------------------	------------------------------

Contents

class evalml.pipelines.components.ensemble.stacked_ensemble_base.**StackedEnsembleBase** (*final_estimator*, *n_jobs*=1, *random_seed*=0, ***kwargs*)

Stacked Ensemble Base Class.

Parameters

- **final_estimator** (*Estimator or subclass*) – The estimator used to combine the base estimators.
- **n_jobs** (*int or None*) – Integer describing level of parallelism used for pipelines. None and 1 are equivalent. If set to -1, all CPUs are used. For n_jobs greater than -1, (n_cpus + 1 + n_jobs) are used. Defaults to -1. - Note: there could be some multi-process errors thrown for values of *n_jobs* != 1. If this is the case, please use *n_jobs* = 1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

model_family	ModelFamily.ENSEMBLE
modifies_features	True
modifies_target	False
predict_uses_y	False
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for stacked ensemble classes.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>name</i>	Returns string name of this component.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.
<i>supported_problem_types</i>	Problem types this estimator supports.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for stacked ensemble classes.

Returns default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property `feature_importance` (*self*)

Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns *self*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

property supported_problem_types (*cls*)
 Problem types this estimator supports.

stacked_ensemble_classifier

Stacked Ensemble Classifier.

Module Contents

Classes Summary

<i>StackedEnsembleClassifier</i>	Stacked Ensemble Classifier.
----------------------------------	------------------------------

Contents

class evalml.pipelines.components.ensemble.stacked_ensemble_classifier.**StackedEnsembleClass**

Stacked Ensemble Classifier.

Parameters

- **final_estimator** (*Estimator or subclass*) – The classifier used to combine the base estimators. If None, uses ElasticNetClassifier.
- **n_jobs** (*int or None*) – Integer describing level of parallelism used for pipelines. None and 1 are equivalent. If set to -1, all CPUs are used. For n_jobs below -1, (n_cpus + 1 + n_jobs) are used. Defaults to -1. - Note: there could be some multi-process errors thrown for values of *n_jobs* != 1. If this is the case, please use *n_jobs* = 1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.ENSEMBLE
modifies_features	True
modifies_target	False
name	Stacked Ensemble Classifier
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
train-only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for stacked ensemble classes.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for stacked ensemble classes.

Returns default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

stacked_ensemble_regressor

Stacked Ensemble Regressor.

Module Contents

Classes Summary

<i>StackedEnsembleRegressor</i>	Stacked Ensemble Regressor.
---------------------------------	-----------------------------

Contents

class evalml.pipelines.components.ensemble.stacked_ensemble_regressor.**StackedEnsembleRegressor**

Stacked Ensemble Regressor.

Parameters

- **final_estimator** (*Estimator or subclass*) – The regressor used to combine the base estimators. If None, uses ElasticNetRegressor.
- **n_jobs** (*int or None*) – Integer describing level of parallelism used for pipelines. None and 1 are equivalent. If set to -1, all CPUs are used. For n_jobs greater than -1, (n_cpus + 1 + n_jobs) are used. Defaults to -1. - Note: there could be some multi-process errors thrown for values of *n_jobs* $\neq 1$. If this is the case, please use *n_jobs* = 1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.ENSEMBLE
modifies_features	True
modifies_target	False
name	Stacked Ensemble Regressor
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
train-only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for stacked ensemble classes.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for stacked ensemble classes.

Returns default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

Package Contents

Classes Summary

<i>StackedEnsembleBase</i>	Stacked Ensemble Base Class.
<i>StackedEnsembleClassifier</i>	Stacked Ensemble Classifier.
<i>StackedEnsembleRegressor</i>	Stacked Ensemble Regressor.

Contents

class evalml.pipelines.components.ensemble.**StackedEnsembleBase** (*final_estimator=None, n_jobs=- 1, random_seed=0, **kwargs*)

Stacked Ensemble Base Class.

Parameters

- **final_estimator** (*Estimator or subclass*) – The estimator used to combine the base estimators.
- **n_jobs** (*int or None*) – Integer describing level of parallelism used for pipelines. None and 1 are equivalent. If set to -1, all CPUs are used. For *n_jobs* greater than -1, (*n_cpus* + 1 + *n_jobs*) are used. Defaults to -1. - Note: there could be some multi-process errors thrown for values of *n_jobs* != 1. If this is the case, please use *n_jobs* = 1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

model_family	ModelFamily.ENSEMBLE
modifies_features	True
modifies_target	False
predict_uses_y	False
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for stacked ensemble classes.
<i>describe</i>	Describe a component and its parameters.

continues on next page

Table 296 – continued from previous page

<i>feature_importance</i>	Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>name</i>	Returns string name of this component.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.
<i>supported_problem_types</i>	Problem types this estimator supports.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for stacked ensemble classes.

Returns default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

property supported_problem_types (*cls*)

Problem types this estimator supports.

```
class evalml.pipelines.components.ensemble.StackedEnsembleClassifier (final_estimator=None,  
                                                                    n_jobs=-  
                                                                    1, ran-  
                                                                    dom_seed=0,  
                                                                    **kwargs)
```

Stacked Ensemble Classifier.

Parameters

- **final_estimator** (*Estimator or subclass*) – The classifier used to combine the base estimators. If None, uses ElasticNetClassifier.
- **n_jobs** (*int or None*) – Integer describing level of parallelism used for pipelines. None and 1 are equivalent. If set to -1, all CPUs are used. For n_jobs below -1, (n_cpus + 1 + n_jobs) are used. Defaults to -1. - Note: there could be some multi-process errors thrown for values of *n_jobs* != 1. If this is the case, please use *n_jobs* = 1.

- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.ENSEMBLE
modifies_features	True
modifies_target	False
name	Stacked Ensemble Classifier
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for stacked ensemble classes.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for stacked ensemble classes.

Returns default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.ensemble.StackedEnsembleRegressor (final_estimator=None,  
                                                                    n_jobs=-  
                                                                    1, random  
                                                                    seed=0,  
                                                                    **kwargs)
```

Stacked Ensemble Regressor.

Parameters

- **final_estimator** (*Estimator or subclass*) – The regressor used to combine the base estimators. If *None*, uses *ElasticNetRegressor*.
- **n_jobs** (*int or None*) – Integer describing level of parallelism used for pipelines. *None* and *1* are equivalent. If set to *-1*, all CPUs are used. For *n_jobs* greater than *-1*, (*n_cpus + 1 + n_jobs*) are used. Defaults to *-1*. - Note: there could be some multi-process errors thrown for values of *n_jobs != 1*. If this is the case, please use *n_jobs = 1*.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to *0*.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.ENSEMBLE
modifies_features	True
modifies_target	False
name	Stacked Ensemble Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for stacked ensemble classes.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.

continues on next page

Table 298 – continued from previous page

<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for stacked ensemble classes.

Returns default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

estimators

EvalML estimator components.

Subpackages

classifiers

Classification model components.

Submodules

baseline_classifier

Baseline classifier.

Module Contents

Classes Summary

<i>BaselineClassifier</i>	Classifier that predicts using the specified strategy.
---------------------------	--

Contents

class evalml.pipelines.components.estimators.classifiers.baseline_classifier.**BaselineClassifier**

Classifier that predicts using the specified strategy.

This is useful as a simple baseline classifier to compare with other classifiers.

Parameters

- **strategy** (*str*) – Method used to predict. Valid options are “mode”, “random” and “random_weighted”. Defaults to “mode”.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.BASELINE
modifies_features	True
modifies_target	False
name	Baseline Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS]
training_only	False

Methods

<i>classes_</i>	Returns class labels. Will return None before fitting.
<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature. Since baseline classifiers do not use input features to calculate predictions, returns an array of zeroes.
<i>fit</i>	Fits baseline classifier component to data.

continues on next page

Table 300 – continued from previous page

<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using the baseline classification strategy.
<code>predict_proba</code>	Make prediction probabilities using the baseline classification strategy.
<code>save</code>	Saves component at file path.

property classes_ (*self*)

Returns class labels. Will return None before fitting.

Returns Class names

Return type list[str] or list(float)

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that Component.default_parameters == Component().parameters.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature. Since baseline classifiers do not use input features to calculate predictions, returns an array of zeroes.

Returns An array of zeroes

Return type np.ndarray (float)

fit (*self*, *X*, *y=None*)

Fits baseline classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns `self`

Raises `ValueError` – If `y` is `None`.

static load (*file_path*)

Loads component at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns `ComponentBase` object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using the baseline classification strategy.

Parameters `X` (*pd.DataFrame*) – Data of shape `[n_samples, n_features]`.

Returns Predicted values.

Return type `pd.Series`

predict_proba (*self*, *X*)

Make prediction probabilities using the baseline classification strategy.

Parameters `X` (*pd.DataFrame*) – Data of shape `[n_samples, n_features]`.

Returns Predicted probability values.

Return type `pd.DataFrame`

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

catboost_classifier

CatBoost Classifier, a classifier that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.

Module Contents

Classes Summary

<i>CatBoostClassifier</i>	CatBoost Classifier, a classifier that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.
---------------------------	---

Contents

class evalml.pipelines.components.estimators.classifiers.catboost_classifier.CatBoostClasss

CatBoost Classifier, a classifier that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.

For more information, check out <https://catboost.ai/>

Parameters

- **n_estimators** (*float*) – The maximum number of trees to build. Defaults to 10.
- **eta** (*float*) – The learning rate. Defaults to 0.03.
- **max_depth** (*int*) – The maximum tree depth for base learners. Defaults to 6.
- **bootstrap_type** (*string*) – Defines the method for sampling the weights of objects. Available methods are ‘Bayesian’, ‘Bernoulli’, ‘MVS’. Defaults to None.
- **silent** (*boolean*) – Whether to use the “silent” logging mode. Defaults to True.
- **allow_writing_files** (*boolean*) – Whether to allow writing snapshot files while training. Defaults to False.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(4, 100), “eta”: Real(0.000001, 1), “max_depth”: Integer(4, 10), }
model_family	ModelFamily.CATBOOST
modifies_features	True
modifies_target	False
name	CatBoost Classifier
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance of fitted CatBoost classifier.
<i>fit</i>	Fits CatBoost classifier component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using the fitted CatBoost classifier.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted CatBoost classifier.

fit (*self, X, y=None*)

Fits CatBoost classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using the fitted CatBoost classifier.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.DataFrame

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

decision_tree_classifier

Decision Tree Classifier.

Module Contents

Classes Summary

*DecisionTreeClassifier*Decision Tree Classifier.

Contents

class evalml.pipelines.components.estimators.classifiers.decision_tree_classifier.**DecisionTreeClassifier**

Decision Tree Classifier.

Parameters

- **criterion** (*{ "gini", "entropy" }*) – The function to measure the quality of a split. Supported criteria are “gini” for the Gini impurity and “entropy” for the information gain. Defaults to “gini”.
- **max_features** (*int, float or { "auto", "sqrt", "log2" }*) – The number of features to consider when looking for the best split:
 - If int, then consider max_features features at each split.
 - If float, then max_features is a fraction and int(max_features * n_features) features are considered at each split.
 - If “auto”, then max_features=sqrt(n_features).
 - If “sqrt”, then max_features=sqrt(n_features).
 - If “log2”, then max_features=log2(n_features).
 - If None, then max_features = n_features.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than max_features features. Defaults to “auto”.

- **max_depth** (*int*) – The maximum depth of the tree. Defaults to 6.
- **min_samples_split** (*int or float*) – The minimum number of samples required to split an internal node:
 - If int, then consider min_samples_split as the minimum number.
 - If float, then min_samples_split is a fraction and ceil(min_samples_split * n_samples) are the minimum number of samples for each split.

Defaults to 2.

- **min_weight_fraction_leaf** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “criterion”: [“gini”, “entropy”], “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10), }
model_family	ModelFamily.DECISION_TREE
modifies_features	True
modifies_target	False
name	Decision Tree Classifier
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

elasticnet_classifier

Elastic Net Classifier. Uses Logistic Regression with elasticnet penalty as the base estimator.

Module Contents

Classes Summary

<i>ElasticNetClassifier</i>	Elastic Net Classifier. Uses Logistic Regression with elasticnet penalty as the base estimator.
-----------------------------	---

Contents

class evalml.pipelines.components.estimators.classifiers.elasticnet_classifier.**ElasticNetC**

Elastic Net Classifier. Uses Logistic Regression with elasticnet penalty as the base estimator.

Parameters

- **penalty** (*{ "l1", "l2", "elasticnet", "none" }*) – The norm used in penalization. Defaults to “elasticnet”.
- **C** (*float*) – Inverse of regularization strength. Must be a positive float. Defaults to 1.0.
- **l1_ratio** (*float*) – The mixing parameter, with $0 \leq \text{l1_ratio} \leq 1$. Only used if `penalty='elasticnet'`. Setting `l1_ratio=0` is equivalent to using `penalty='l2'`, while setting `l1_ratio=1` is equivalent to using `penalty='l1'`. For $0 < \text{l1_ratio} < 1$, the penalty is a combination of L1 and L2. Defaults to 0.15.

- **multi_class** (`{"auto", "ovr", "multinomial"}`) – If the option chosen is “ovr”, then a binary problem is fit for each label. For “multinomial” the loss minimised is the multinomial loss fit across the entire probability distribution, even when the data is binary. “multinomial” is unavailable when solver=“liblinear”. “auto” selects “ovr” if the data is binary, or if solver=“liblinear”, and otherwise selects “multinomial”. Defaults to “auto”.
- **solver** (`{"newton-cg", "lbfgs", "liblinear", "sag", "saga"}`) – Algorithm to use in the optimization problem. For small datasets, “liblinear” is a good choice, whereas “sag” and “saga” are faster for large ones. For multiclass problems, only “newton-cg”, “sag”, “saga” and “lbfgs” handle multinomial loss; “liblinear” is limited to one-versus-rest schemes.
 - “newton-cg”, “lbfgs”, “sag” and “saga” handle L2 or no penalty
 - “liblinear” and “saga” also handle L1 penalty
 - “saga” also supports “elasticnet” penalty
 - “liblinear” does not support setting penalty=’none’
 Defaults to “saga”.
- **n_jobs** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “C”: Real(0.01, 10), “l1_ratio”: Real(0, 1)}
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Elastic Net Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Feature importance for fitted ElasticNet classifier.
<code>fit</code>	Fits ElasticNet classifier component to data.
<code>load</code>	Loads component at file path.

continues on next page

Table 306 – continued from previous page

<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted ElasticNet classifier.

fit (*self*, *X*, *y*)

Fits ElasticNet classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

et_classifier

Extra Trees Classifier.

Module Contents

Classes Summary

ExtraTreesClassifier

Extra Trees Classifier.

Contents

`class evalml.pipelines.components.estimators.classifiers.et_classifier.ExtraTreesClassifier`

Extra Trees Classifier.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_features** (*int, float or {"auto", "sqrt", "log2"}*) – The number of features to consider when looking for the best split:
 - If *int*, then consider *max_features* features at each split.
 - If *float*, then *max_features* is a fraction and $\text{int}(\text{max_features} * \text{n_features})$ features are considered at each split.
 - If “auto”, then $\text{max_features} = \sqrt{\text{n_features}}$.
 - If “sqrt”, then $\text{max_features} = \sqrt{\text{n_features}}$.
 - If “log2”, then $\text{max_features} = \log_2(\text{n_features})$.
 - If *None*, then $\text{max_features} = \text{n_features}$.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than *max_features* features. Defaults to “auto”.

- **max_depth** (*int*) – The maximum depth of the tree. Defaults to 6.
- **min_samples_split** (*int or float*) – The minimum number of samples required to split an internal node:
 - If *int*, then consider *min_samples_split* as the minimum number.
 - If *float*, then *min_samples_split* is a fraction and $\text{ceil}(\text{min_samples_split} * \text{n_samples})$ are the minimum number of samples for each split.
- **to_2**. (*Defaults*) –
- **min_weight_fraction_leaf** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(10, 1000), “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10),}
model_family	ModelFamily.EXTRA_TREES
modifies_features	True
modifies_target	False
name	Extra Trees Classifier
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

`save` (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **`file_path`** (*str*) – Location to save file.
- **`pickle_protocol`** (*int*) – The pickle data stream format.

kneighbors_classifier

K-Nearest Neighbors Classifier.

Module Contents

Classes Summary

KNeighborsClassifier

K-Nearest Neighbors Classifier.

Contents

class evalml.pipelines.components.estimators.classifiers.kneighbors_classifier.**KNeighborsC**

K-Nearest Neighbors Classifier.

Parameters

- **`n_neighbors`** (*int*) – Number of neighbors to use by default. Defaults to 5.
- **`weights`** (*{ 'uniform', 'distance' } or callable*) – Weight function used in prediction. Can be:
 - ‘uniform’ : uniform weights. All points in each neighborhood are weighted equally.
 - ‘distance’ : weight points by the inverse of their distance. in this case, closer neighbors of a query point will have a greater influence than neighbors which are further away.
 - [callable] : a user-defined function which accepts an array of distances, and returns an array of the same shape containing the weights.

Defaults to “uniform”.

- **`algorithm`** (*{ 'auto', 'ball_tree', 'kd_tree', 'brute' }*) – Algorithm used to compute the nearest neighbors:

- ‘ball_tree’ will use BallTree
- ‘kd_tree’ will use KDTree
- ‘brute’ will use a brute-force search.

‘auto’ will attempt to decide the most appropriate algorithm based on the values passed to fit method. Defaults to “auto”. Note: fitting on sparse input will override the setting of this parameter, using brute force.

- **leaf_size** (*int*) – Leaf size passed to BallTree or KDTree. This can affect the speed of the construction and query, as well as the memory required to store the tree. The optimal value depends on the nature of the problem. Defaults to 30.
- **p** (*int*) – Power parameter for the Minkowski metric. When $p = 1$, this is equivalent to using manhattan_distance (l1), and euclidean_distance (l2) for $p = 2$. For arbitrary p , minkowski_distance (l_p) is used. Defaults to 2.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_neighbors”: Integer(2, 12), “weights”: [“uniform”, “distance”], “algorithm”: [“auto”, “ball_tree”, “kd_tree”, “brute”], “leaf_size”: Integer(10, 30), “p”: Integer(1, 5),}
model_family	ModelFamily.K_NEIGHBORS
modifies_features	True
modifies_target	False
name	KNN Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns array of 0’s matching the input number of features as feature_importance is not defined for KNN classifiers.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.

continues on next page

Table 310 – continued from previous page

<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns array of 0's matching the input number of features as `feature_importance` is not defined for KNN classifiers.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [`n_samples`, `n_features`].
- **y** (*pd.Series*, *optional*) – The target training data of length [`n_samples`].

Returns *self*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

lightgbm_classifier

LightGBM Classifier.

Module Contents

Classes Summary

LightGBMClassifier

LightGBM Classifier.

Contents

`class evalml.pipelines.components.estimators.classifiers.lightgbm_classifier.LightGBMClassifier`

LightGBM Classifier.

Parameters

- **boosting_type** (*string*) – Type of boosting to use. Defaults to “gbdt”. - ‘gbdt’ uses traditional Gradient Boosting Decision Tree - “dart”, uses Dropouts meet Multiple Additive Regression Trees - “goss”, uses Gradient-based One-Side Sampling - “rf”, uses Random Forest
- **learning_rate** (*float*) – Boosting learning rate. Defaults to 0.1.
- **n_estimators** (*int*) – Number of boosted trees to fit. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners, <=0 means no limit. Defaults to 0.
- **num_leaves** (*int*) – Maximum tree leaves for base learners. Defaults to 31.
- **min_child_samples** (*int*) – Minimum number of data needed in a child (leaf). Defaults to 20.
- **bagging_fraction** (*float*) – LightGBM will randomly select a subset of features on each iteration (tree) without resampling if this is smaller than 1.0. For example, if set to 0.8, LightGBM will select 80% of features before training each tree. This can be used to speed up training and deal with overfitting. Defaults to 0.9.
- **bagging_freq** (*int*) – Frequency for bagging. 0 means bagging is disabled. k means perform bagging at every k iteration. Every k-th iteration, LightGBM will randomly select bagging_fraction * 100 % of the data to use for the next k iterations. Defaults to 0.
- **n_jobs** (*int or None*) – Number of threads to run in parallel. -1 uses all threads. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "learning_rate": Real(0.000001, 1), "boosting_type": ["gbdt", "dart", "goss", "rf"], "n_estimators": Integer(10, 100), "max_depth": Integer(0, 10), "num_leaves": Integer(2, 100), "min_child_samples": Integer(1, 100), "bagging_fraction": Real(0.000001, 1), "bagging_freq": Integer(0, 1),}
model_family	ModelFamily.LIGHTGBM
modifies_features	True
modifies_target	False
name	LightGBM Classifier
pre-dict_uses_y	False
SEED_MAX	SEED_BOUNDS.max_bound
SEED_MIN	0
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits LightGBM classifier component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using the fitted LightGBM classifier.
<i>predict_proba</i>	Make prediction probabilities using the fitted LightGBM classifier.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self, X, y=None*)

Fits LightGBM classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using the fitted LightGBM classifier.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.DataFrame

predict_proba (*self, X*)

Make prediction probabilities using the fitted LightGBM classifier.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted probability values.

Return type pd.DataFrame

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

logistic_regression_classifier

Logistic Regression Classifier.

Module Contents

Classes Summary

<i>LogisticRegressionClassifier</i>	Logistic Regression Classifier.
-------------------------------------	---------------------------------

Contents

class evalml.pipelines.components.estimators.classifiers.logistic_regression_classifier.**Log**

Logistic Regression Classifier.

Parameters

- **penalty** (*{ "l1", "l2", "elasticnet", "none" }*) – The norm used in penalization. Defaults to “l2”.
- **C** (*float*) – Inverse of regularization strength. Must be a positive float. Defaults to 1.0.
- **multi_class** (*{ "auto", "ovr", "multinomial" }*) – If the option chosen is “ovr”, then a binary problem is fit for each label. For “multinomial” the loss minimised is the multinomial loss fit across the entire probability distribution, even when the data is binary. “multinomial” is unavailable when solver=“liblinear”. “auto” selects “ovr” if the data is binary, or if solver=“liblinear”, and otherwise selects “multinomial”. Defaults to “auto”.
- **solver** (*{ "newton-cg", "lbfgs", "liblinear", "sag", "saga" }*) – Algorithm to use in the optimization problem. For small datasets, “liblinear” is a good choice, whereas “sag” and “saga” are faster for large ones. For multiclass problems, only “newton-cg”, “sag”, “saga” and “lbfgs” handle multinomial loss; “liblinear” is limited to one-versus-rest schemes.
 - “newton-cg”, “lbfgs”, “sag” and “saga” handle L2 or no penalty
 - “liblinear” and “saga” also handle L1 penalty

- "saga" also supports "elasticnet" penalty
- "liblinear" does not support setting penalty='none'

Defaults to "lbfgs".

- **n_jobs** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "penalty": ["l2"], "C": Real(0.01, 10), }
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Logistic Regression Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance for fitted logistic regression classifier.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted logistic regression classifier.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict` method or a `component_obj` that implements `predict`.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type `pd.Series`

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

rf_classifier

Random Forest Classifier.

Module Contents

Classes Summary

RandomForestClassifier

Random Forest Classifier.

Contents

class `evalml.pipelines.components.estimators.classifiers.rf_classifier.RandomForestClassifier`

Random Forest Classifier.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(10, 1000), “max_depth”: Integer(1, 10), }
model_family	ModelFamily.RANDOM_FOREST
modifies_features	True
modifies_target	False
name	Random Forest Classifier
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

`save` (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **`file_path`** (*str*) – Location to save file.
- **`pickle_protocol`** (*int*) – The pickle data stream format.

svm_classifier

Support Vector Machine Classifier.

Module Contents

Classes Summary

<i>SVMClassifier</i>	Support Vector Machine Classifier.
----------------------	------------------------------------

Contents

class evalml.pipelines.components.estimators.classifiers.svm_classifier.**SVMClassifier** (*C=1.0*

ker-
nel='r
gamma
prob-
a-
bil-
ity=Tr
ran-
dom_s
***kwa*

Support Vector Machine Classifier.

Parameters

- **`C`** (*float*) – The regularization parameter. The strength of the regularization is inversely proportional to C. Must be strictly positive. The penalty is a squared l2 penalty. Defaults to 1.0.
- **`kernel`** (*{ "poly", "rbf", "sigmoid" }*) – Specifies the kernel type to be used in the algorithm. Defaults to “rbf”.
- **`gamma`** (*{ "scale", "auto" } or float*) – Kernel coefficient for “rbf”, “poly” and “sigmoid”. Defaults to “auto”. - If gamma=’scale’ is passed then it uses $1 / (n_features * X.var())$ as value of gamma - If “auto” (default), uses $1 / n_features$
- **`probability`** (*boolean*) – Whether to enable probability estimates. Defaults to True.
- **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “C”: Real(0, 10), “kernel”: [“poly”, “rbf”, “sigmoid”], “gamma”: [“scale”, “auto”], }
model_family	ModelFamily.SVM
modifies_features	True
modifies_target	False
name	SVM Classifier
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance only works with linear kernels.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance only works with linear kernels.

If the kernel isn't linear, we return a numpy array of zeros.

Returns Feature importance of fitted SVM classifier or a numpy array of zeroes if the kernel is not linear.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

xgboost_classifier

XGBoost Classifier.

Module Contents

Classes Summary

<i>XGBoostClassifier</i>	XGBoost Classifier.
--	---------------------

Contents

class evalml.pipelines.components.estimators.classifiers.xgboost_classifier.XGBoostClassifier

XGBoost Classifier.

Parameters

- **eta** (*float*) – Boosting learning rate. Defaults to 0.1.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **min_child_weight** (*float*) – Minimum sum of instance weight (hessian) needed in a child. Defaults to 1.0
- **n_estimators** (*int*) – Number of gradient boosted trees. Equivalent to number of boosting rounds. Defaults to 100.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.
- **n_jobs** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to 12.

Attributes

hyper-parameter_ranges	{ "eta": Real(0.000001, 1), "max_depth": Integer(1, 10), "min_child_weight": Real(1, 10), "n_estimators": Integer(1, 1000), }
model_family	ModelFamily.XGBOOST
modifies_features	True
modifies_target	False
name	XGBoost Classifier
pre-dict_uses_y	False
SEED_MAX	None
SEED_MIN	None
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance of fitted XGBoost classifier.
<i>fit</i>	Fits XGBoost classifier component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using the fitted XGBoost classifier.
<i>predict_proba</i>	Make predictions using the fitted CatBoost classifier.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted XGBoost classifier.

fit (*self, X, y=None*)

Fits XGBoost classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using the fitted XGBoost classifier.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.DataFrame

predict_proba (*self, X*)

Make predictions using the fitted CatBoost classifier.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.DataFrame

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

Package Contents

Classes Summary

<i>BaselineClassifier</i>	Classifier that predicts using the specified strategy.
<i>CatBoostClassifier</i>	CatBoost Classifier, a classifier that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.
<i>DecisionTreeClassifier</i>	Decision Tree Classifier.
<i>ElasticNetClassifier</i>	Elastic Net Classifier. Uses Logistic Regression with elasticnet penalty as the base estimator.
<i>ExtraTreesClassifier</i>	Extra Trees Classifier.
<i>KNeighborsClassifier</i>	K-Nearest Neighbors Classifier.
<i>LightGBMClassifier</i>	LightGBM Classifier.
<i>LogisticRegressionClassifier</i>	Logistic Regression Classifier.
<i>RandomForestClassifier</i>	Random Forest Classifier.
<i>SVMClassifier</i>	Support Vector Machine Classifier.
<i>XGBoostClassifier</i>	XGBoost Classifier.

Contents

```
class evalml.pipelines.components.estimators.classifiers.BaselineClassifier(strategy='mode',
                                                                           ran-
                                                                           dom_seed=0,
                                                                           **kwargs)
```

Classifier that predicts using the specified strategy.

This is useful as a simple baseline classifier to compare with other classifiers.

Parameters

- **strategy** (*str*) – Method used to predict. Valid options are “mode”, “random” and “random_weighted”. Defaults to “mode”.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.BASELINE
modifies_features	True
modifies_target	False
name	Baseline Classifier
predict Uses y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS]
training_only	False

Methods

<code>classes_</code>	Returns class labels. Will return None before fitting.
<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature. Since baseline classifiers do not use input features to calculate predictions, returns an array of zeroes.
<code>fit</code>	Fits baseline classifier component to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using the baseline classification strategy.
<code>predict_proba</code>	Make prediction probabilities using the baseline classification strategy.
<code>save</code>	Saves component at file path.

property classes_ (self)

Returns class labels. Will return None before fitting.

Returns Class names

Return type list[str] or list(float)

clone (self)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (cls)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (self, print_name=False, return_dict=False)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property `feature_importance` (*self*)

Returns importance associated with each feature. Since baseline classifiers do not use input features to calculate predictions, returns an array of zeroes.

Returns An array of zeroes

Return type `np.ndarray` (`float`)

fit (*self*, *X*, *y=None*)

Fits baseline classifier component to data.

Parameters

- **X** (`pd.DataFrame`) – The input training data of shape `[n_samples, n_features]`.
- **y** (`pd.Series`) – The target training data of length `[n_samples]`.

Returns *self*

Raises **ValueError** – If *y* is `None`.

static `load` (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns `ComponentBase` object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property `parameters` (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using the baseline classification strategy.

Parameters **X** (`pd.DataFrame`) – Data of shape `[n_samples, n_features]`.

Returns Predicted values.

Return type `pd.Series`

predict_proba (*self*, *X*)

Make prediction probabilities using the baseline classification strategy.

Parameters **X** (`pd.DataFrame`) – Data of shape `[n_samples, n_features]`.

Returns Predicted probability values.

Return type `pd.DataFrame`

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```

class evalml.pipelines.components.estimators.classifiers.CatBoostClassifier (n_estimators=10,
                                                                              eta=0.03,
                                                                              max_depth=6,
                                                                              boot-
                                                                              strap_type=None,
                                                                              silent=True,
                                                                              al-
                                                                              low_writing_files=False,
                                                                              ran-
                                                                              dom_seed=0,
                                                                              n_jobs=-
                                                                              1,
                                                                              **kwargs)

```

CatBoost Classifier, a classifier that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.

For more information, check out <https://catboost.ai/>

Parameters

- **n_estimators** (*float*) – The maximum number of trees to build. Defaults to 10.
- **eta** (*float*) – The learning rate. Defaults to 0.03.
- **max_depth** (*int*) – The maximum tree depth for base learners. Defaults to 6.
- **bootstrap_type** (*string*) – Defines the method for sampling the weights of objects. Available methods are ‘Bayesian’, ‘Bernoulli’, ‘MVS’. Defaults to None.
- **silent** (*boolean*) – Whether to use the “silent” logging mode. Defaults to True.
- **allow_writing_files** (*boolean*) – Whether to allow writing snapshot files while training. Defaults to False.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(4, 100), “eta”: Real(0.000001, 1), “max_depth”: Integer(4, 10), }
model_family	ModelFamily.CATBOOST
modifies_features	True
modifies_target	False
name	CatBoost Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Feature importance of fitted CatBoost classifier.
<code>fit</code>	Fits CatBoost classifier component to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using the fitted CatBoost classifier.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted CatBoost classifier.

fit (*self*, *X*, *y=None*)

Fits CatBoost classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using the fitted CatBoost classifier.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.DataFrame*

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.classifiers.DecisionTreeClassifier (criterion='gini',
max_features=1.0,
max_depth=6,
min_samples_split=10,
min_weight_fraction=0.05,
random_state=None,
seed=None,
**kwargs)
```

Decision Tree Classifier.

Parameters

- **criterion** (*{ "gini", "entropy" }*) – The function to measure the quality of a split. Supported criteria are “gini” for the Gini impurity and “entropy” for the information gain. Defaults to “gini”.
- **max_features** (*int, float or { "auto", "sqrt", "log2" }*) – The number of features to consider when looking for the best split:
 - If int, then consider max_features features at each split.
 - If float, then max_features is a fraction and int(max_features * n_features) features are considered at each split.

- If “auto”, then `max_features=sqrt(n_features)`.
- If “sqrt”, then `max_features=sqrt(n_features)`.
- If “log2”, then `max_features=log2(n_features)`.
- If None, then `max_features = n_features`.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than `max_features` features. Defaults to “auto”.

- **`max_depth`** (*int*) – The maximum depth of the tree. Defaults to 6.
- **`min_samples_split`** (*int or float*) – The minimum number of samples required to split an internal node:
 - If int, then consider `min_samples_split` as the minimum number.
 - If float, then `min_samples_split` is a fraction and `ceil(min_samples_split * n_samples)` are the minimum number of samples for each split.
 Defaults to 2.
- **`min_weight_fraction_leaf`** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “criterion”: [“gini”, “entropy”], “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10), }
model_family	ModelFamily.DECISION_TREE
modifies_features	True
modifies_target	False
name	Decision Tree Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.

continues on next page

Table 324 – continued from previous page

<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.classifiers.ElasticNetClassifier (penalty='elasticnet',  
                                                                    C=1.0,  
                                                                    l1_ratio=0.15,  
                                                                    multi_class='auto',  
                                                                    solver='saga',  
                                                                    n_jobs=-  
                                                                    1,  
                                                                    ran-  
                                                                    dom_seed=0,  
                                                                    **kwargs)
```

Elastic Net Classifier. Uses Logistic Regression with elasticnet penalty as the base estimator.

Parameters

- **penalty** (*{ "l1", "l2", "elasticnet", "none" }*) – The norm used in penalization. Defaults to “elasticnet”.
- **C** (*float*) – Inverse of regularization strength. Must be a positive float. Defaults to 1.0.

- **l1_ratio** (*float*) – The mixing parameter, with $0 \leq \text{l1_ratio} \leq 1$. Only used if `penalty='elasticnet'`. Setting `l1_ratio=0` is equivalent to using `penalty='l2'`, while setting `l1_ratio=1` is equivalent to using `penalty='l1'`. For $0 < \text{l1_ratio} < 1$, the penalty is a combination of L1 and L2. Defaults to 0.15.
- **multi_class** (*{ "auto", "ovr", "multinomial" }*) – If the option chosen is “ovr”, then a binary problem is fit for each label. For “multinomial” the loss minimised is the multinomial loss fit across the entire probability distribution, even when the data is binary. “multinomial” is unavailable when `solver='liblinear'`. “auto” selects “ovr” if the data is binary, or if `solver='liblinear'`, and otherwise selects “multinomial”. Defaults to “auto”.
- **solver** (*{ "newton-cg", "lbfgs", "liblinear", "sag", "saga" }*) – Algorithm to use in the optimization problem. For small datasets, “liblinear” is a good choice, whereas “sag” and “saga” are faster for large ones. For multiclass problems, only “newton-cg”, “sag”, “saga” and “lbfgs” handle multinomial loss; “liblinear” is limited to one-versus-rest schemes.
 - “newton-cg”, “lbfgs”, “sag” and “saga” handle L2 or no penalty
 - “liblinear” and “saga” also handle L1 penalty
 - “saga” also supports “elasticnet” penalty
 - “liblinear” does not support setting `penalty='none'`
 Defaults to “saga”.
- **n_jobs** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “C”: Real(0.01, 10), “l1_ratio”: Real(0, 1)}
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Elastic Net Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Feature importance for fitted ElasticNet classifier.

continues on next page

Table 325 – continued from previous page

<i>fit</i>	Fits ElasticNet classifier component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted ElasticNet classifier.

fit (*self*, *X*, *y*)

Fits ElasticNet classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.classifiers.ExtraTreesClassifier (n_estimators=100,
max_features='auto',
max_depth=6,
min_samples_split=2,
min_weight_fraction=0.01,
n_jobs=-1,
random_state=None,
**kwargs)
```

Extra Trees Classifier.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_features** (*int, float or {"auto", "sqrt", "log2"}*) – The number of features to consider when looking for the best split:
 - If int, then consider max_features features at each split.
 - If float, then max_features is a fraction and int(max_features * n_features) features are considered at each split.
 - If “auto”, then max_features=sqrt(n_features).

- If “sqrt”, then `max_features=sqrt(n_features)`.
- If “log2”, then `max_features=log2(n_features)`.
- If None, then `max_features = n_features`.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than `max_features` features. Defaults to “auto”.

- **`max_depth`** (*int*) – The maximum depth of the tree. Defaults to 6.
- **`min_samples_split`** (*int or float*) – The minimum number of samples required to split an internal node:
 - If int, then consider `min_samples_split` as the minimum number.
 - If float, then `min_samples_split` is a fraction and `ceil(min_samples_split * n_samples)` are the minimum number of samples for each split.
- **`to 2.`** (*Defaults*) –
- **`min_weight_fraction_leaf`** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **`n_jobs`** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(10, 1000), “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10), }
model_family	ModelFamily.EXTRA_TREES
modifies_features	True
modifies_target	False
name	Extra Trees Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.

continues on next page

Table 326 – continued from previous page

<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.classifiers.KNeighborsClassifier (n_neighbors=5,  
                                                                    weights='uniform',  
                                                                    al-  
                                                                    go-  
                                                                    rithm='auto',  
                                                                    leaf_size=30,  
                                                                    p=2,  
                                                                    ran-  
                                                                    dom_seed=0,  
                                                                    **kwargs)
```

K-Nearest Neighbors Classifier.

Parameters

- **n_neighbors** (*int*) – Number of neighbors to use by default. Defaults to 5.
- **weights** ({ *'uniform'*, *'distance'* } or *callable*) – Weight function used in prediction. Can be:
 - *'uniform'* : uniform weights. All points in each neighborhood are weighted equally.

- ‘distance’ : weight points by the inverse of their distance. in this case, closer neighbors of a query point will have a greater influence than neighbors which are further away.
- [callable] : a user-defined function which accepts an array of distances, and returns an array of the same shape containing the weights.

Defaults to “uniform”.

- **algorithm** ({‘auto’, ‘ball_tree’, ‘kd_tree’, ‘brute’}) – Algorithm used to compute the nearest neighbors:
 - ‘ball_tree’ will use BallTree
 - ‘kd_tree’ will use KDTree
 - ‘brute’ will use a brute-force search.

‘auto’ will attempt to decide the most appropriate algorithm based on the values passed to fit method. Defaults to “auto”. Note: fitting on sparse input will override the setting of this parameter, using brute force.
- **leaf_size** (*int*) – Leaf size passed to BallTree or KDTree. This can affect the speed of the construction and query, as well as the memory required to store the tree. The optimal value depends on the nature of the problem. Defaults to 30.
- **p** (*int*) – Power parameter for the Minkowski metric. When $p = 1$, this is equivalent to using `manhattan_distance` (l1), and `euclidean_distance` (l2) for $p = 2$. For arbitrary p , `minkowski_distance` (l_p) is used. Defaults to 2.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_neighbors”: Integer(2, 12), “weights”: [“uniform”, “distance”], “algorithm”: [“auto”, “ball_tree”, “kd_tree”, “brute”], “leaf_size”: Integer(10, 30), “p”: Integer(1, 5), }
model_family	ModelFamily.K_NEIGHBORS
modifies_features	True
modifies_target	False
name	KNN Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.

continues on next page

Table 327 – continued from previous page

<i>feature_importance</i>	Returns array of 0's matching the input number of features as feature_importance is not defined for KNN classifiers.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns array of 0's matching the input number of features as feature_importance is not defined for KNN classifiers.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.classifiers.LightGBMClassifier (boosting_type='gbdt',
                                                                              learning_rate=0.1,
                                                                              n_estimators=100,
                                                                              max_depth=0,
                                                                              num_leaves=31,
                                                                              min_child_samples=20,
                                                                              bagging_fraction=0.9,
                                                                              bagging_freq=0,
                                                                              n_jobs=-1,
                                                                              random_state=None,
                                                                              seed=None,
                                                                              **kwargs)
```

LightGBM Classifier.

Parameters

- **boosting_type** (*string*) – Type of boosting to use. Defaults to “gbdt”. - ‘gbdt’ uses traditional Gradient Boosting Decision Tree - “dart”, uses Dropouts meet Multiple Additive Regression Trees - “goss”, uses Gradient-based One-Side Sampling - “rf”, uses Random Forest
- **learning_rate** (*float*) – Boosting learning rate. Defaults to 0.1.
- **n_estimators** (*int*) – Number of boosted trees to fit. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners, ≤ 0 means no limit. Defaults to 0.
- **num_leaves** (*int*) – Maximum tree leaves for base learners. Defaults to 31.
- **min_child_samples** (*int*) – Minimum number of data needed in a child (leaf). Defaults to 20.
- **bagging_fraction** (*float*) – LightGBM will randomly select a subset of features on each iteration (tree) without resampling if this is smaller than 1.0. For example, if set to 0.8, LightGBM will select 80% of features before training each tree. This can be used to speed up training and deal with overfitting. Defaults to 0.9.
- **bagging_freq** (*int*) – Frequency for bagging. 0 means bagging is disabled. k means perform bagging at every k iteration. Every k-th iteration, LightGBM will randomly select $\text{bagging_fraction} * 100 \%$ of the data to use for the next k iterations. Defaults to 0.
- **n_jobs** (*int or None*) – Number of threads to run in parallel. -1 uses all threads. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “learning_rate”: Real(0.000001, 1), “boosting_type”: [“gbdt”, “dart”, “goss”, “rf”], “n_estimators”: Integer(10, 100), “max_depth”: Integer(0, 10), “num_leaves”: Integer(2, 100), “min_child_samples”: Integer(1, 100), “bagging_fraction”: Real(0.000001, 1), “bagging_freq”: Integer(0, 1),}
model_family	ModelFamily.LIGHTGBM
modifies_features	True
modifies_target	False
name	LightGBM Classifier
predict_uses_y	False
SEED_MAX	SEED_BOUNDS.max_bound
SEED_MIN	0
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits LightGBM classifier component to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using the fitted LightGBM classifier.
<code>predict_proba</code>	Make prediction probabilities using the fitted LightGBM classifier.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits LightGBM classifier component to data.

Parameters

- **x** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using the fitted LightGBM classifier.

Parameters **x** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.DataFrame

predict_proba (*self, X*)

Make prediction probabilities using the fitted LightGBM classifier.

Parameters **x** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted probability values.

Return type pd.DataFrame

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.components.estimators.classifiers.**LogisticRegressionClassifier** (*penalty='l2', C=1.0, multi_class='ovr', solver='lbfgs', n_jobs=-1, random_state=None, **kwargs*)

Logistic Regression Classifier.

Parameters

- **penalty** (`{"l1", "l2", "elasticnet", "none"}`) – The norm used in penalization. Defaults to “l2”.
- **C** (`float`) – Inverse of regularization strength. Must be a positive float. Defaults to 1.0.
- **multi_class** (`{"auto", "ovr", "multinomial"}`) – If the option chosen is “ovr”, then a binary problem is fit for each label. For “multinomial” the loss minimised is the multinomial loss fit across the entire probability distribution, even when the data is binary. “multinomial” is unavailable when solver=“liblinear”. “auto” selects “ovr” if the data is binary, or if solver=“liblinear”, and otherwise selects “multinomial”. Defaults to “auto”.
- **solver** (`{"newton-cg", "lbfgs", "liblinear", "sag", "saga"}`) – Algorithm to use in the optimization problem. For small datasets, “liblinear” is a good choice, whereas “sag” and “saga” are faster for large ones. For multiclass problems, only “newton-cg”, “sag”, “saga” and “lbfgs” handle multinomial loss; “liblinear” is limited to one-versus-rest schemes.
 - “newton-cg”, “lbfgs”, “sag” and “saga” handle L2 or no penalty
 - “liblinear” and “saga” also handle L1 penalty
 - “saga” also supports “elasticnet” penalty
 - “liblinear” does not support setting penalty=’none’
 Defaults to “lbfgs”.
- **n_jobs** (`int`) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to -1.
- **random_seed** (`int`) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “penalty”: [“l2”], “C”: Real(0.01, 10), }
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Logistic Regression Classifier
predict Uses y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.

continues on next page

Table 329 – continued from previous page

<i>feature_importance</i>	Feature importance for fitted logistic regression classifier.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted logistic regression classifier.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.classifiers.RandomForestClassifier (n_estimators=1,
                                                                    max_depth=6,
                                                                    n_jobs=-1,
                                                                    1,
                                                                    ran-
                                                                    dom_seed=0,
                                                                    **kwargs)
```

Random Forest Classifier.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **n_jobs** (*int* or *None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "n_estimators": Integer(10, 1000), "max_depth": Integer(1, 10), }
model_family	ModelFamily.RANDOM_FOREST
modifies_features	True
modifies_target	False
name	Random Forest Classifier
pre_dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

`save` (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **`file_path`** (*str*) – Location to save file.
- **`pickle_protocol`** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.classifiers.SVMClassifier (C=1.0,
                                                                    kernel='rbf',
                                                                    gamma='auto',
                                                                    probability=True,
                                                                    random_seed=0,
                                                                    **kwargs)
```

Support Vector Machine Classifier.

Parameters

- **`C`** (*float*) – The regularization parameter. The strength of the regularization is inversely proportional to C. Must be strictly positive. The penalty is a squared l2 penalty. Defaults to 1.0.
- **`kernel`** (*{ "poly", "rbf", "sigmoid" }*) – Specifies the kernel type to be used in the algorithm. Defaults to “rbf”.
- **`gamma`** (*{ "scale", "auto" } or float*) – Kernel coefficient for “rbf”, “poly” and “sigmoid”. Defaults to “auto”. - If gamma=’scale’ is passed then it uses 1 / (n_features * X.var()) as value of gamma - If “auto” (default), uses 1 / n_features
- **`probability`** (*boolean*) – Whether to enable probability estimates. Defaults to True.
- **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “C”: Real(0, 10), “kernel”: [“poly”, “rbf”, “sigmoid”], “gamma”: [“scale”, “auto”], }
model_family	ModelFamily.SVM
modifies_features	True
modifies_target	False
name	SVM Classifier
predict Uses y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Feature importance only works with linear kernels.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance only works with linear kernels.

If the kernel isn't linear, we return a numpy array of zeros.

Returns Feature importance of fitted SVM classifier or a numpy array of zeroes if the kernel is not linear.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns `self`

static load (*file_path*)

Loads component at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters `X` (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type `pd.Series`

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters `X` (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type `pd.Series`

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.classifiers.XGBoostClassifier (eta=0.1,  
                                                                    max_depth=6,  
                                                                    min_child_weight=1,  
                                                                    n_estimators=100,  
                                                                    ran-  
                                                                    dom_seed=0,  
                                                                    eval_metric='logloss',  
                                                                    n_jobs=12,  
                                                                    **kwargs)
```

XGBoost Classifier.

Parameters

- **eta** (*float*) – Boosting learning rate. Defaults to 0.1.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **min_child_weight** (*float*) – Minimum sum of instance weight (hessian) needed in a child. Defaults to 1.0
- **n_estimators** (*int*) – Number of gradient boosted trees. Equivalent to number of boosting rounds. Defaults to 100.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.
- **n_jobs** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to 12.

Attributes

hyper-parameter_ranges	{ "eta": Real(0.000001, 1), "max_depth": Integer(1, 10), "min_child_weight": Real(1, 10), "n_estimators": Integer(1, 1000), }
model_family	ModelFamily.XGBOOST
modifies_features	True
modifies_target	False
name	XGBoost Classifier
predict_uses_y	False
SEED_MAX	None
SEED_MIN	None
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance of fitted XGBoost classifier.
<i>fit</i>	Fits XGBoost classifier component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using the fitted XGBoost classifier.
<i>predict_proba</i>	Make predictions using the fitted CatBoost classifier.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted XGBoost classifier.

fit (*self*, *X*, *y=None*)

Fits XGBoost classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns *self*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using the fitted XGBoost classifier.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.DataFrame*

predict_proba (*self*, *X*)

Make predictions using the fitted CatBoost classifier.

Parameters **x** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.DataFrame*

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

regressors

Regression model components.

Submodules

arima_regressor

Autoregressive Integrated Moving Average Model. The three parameters (p, d, q) are the AR order, the degree of differencing, and the MA order. More information here: https://www.statsmodels.org/devel/generated/statsmodels.tsa.arima_model.ARIMA.html.

Module Contents

Classes Summary

ARIMAREgressor

Autoregressive Integrated Moving Average Model. The three parameters (p, d, q) are the AR order, the degree of differencing, and the MA order. More information here: https://www.statsmodels.org/devel/generated/statsmodels.tsa.arima_model.ARIMA.html.

Contents

class evalml.pipelines.components.estimators.regressors.arima_regressor.**ARIMAREgressor** (*date_index*, *trend*, *start_index*, *d*=0, *start_q*, *max_p*, *max_d*, *max_q*, *seasonal*, *n_jobs*, *random_seed*)

Autoregressive Integrated Moving Average Model. The three parameters (p, d, q) are the AR order, the degree of differencing, and the MA order. More information here: https://www.statsmodels.org/devel/generated/statsmodels.tsa.arima_model.ARIMA.html.

Currently ARIMAREgressor isn't supported via conda install. It's recommended that it be installed via PyPI.

Parameters

- **date_index** (*str*) – Specifies the name of the column in X that provides the datetime objects. Defaults to None.
- **trend** (*str*) – Controls the deterministic trend. Options are ['n', 'c', 't', 'ct'] where 'c' is a constant term, 't' indicates a linear trend, and 'ct' is both. Can also be an iterable when defining a polynomial, such as [1, 1, 0, 1].
- **start_p** (*int*) – Minimum Autoregressive order. Defaults to 2.
- **d** (*int*) – Minimum Differencing degree. Defaults to 0.
- **start_q** (*int*) – Minimum Moving Average order. Defaults to 2.
- **max_p** (*int*) – Maximum Autoregressive order. Defaults to 5.
- **max_d** (*int*) – Maximum Differencing degree. Defaults to 2.
- **max_q** (*int*) – Maximum Moving Average order. Defaults to 5.
- **seasonal** (*boolean*) – Whether to fit a seasonal model to ARIMA. Defaults to True.
- **n_jobs** (*int or None*) – Non-negative integer describing level of parallelism used for pipelines. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "start_p": Integer(1, 3), "d": Integer(0, 2), "start_q": Integer(1, 3), "max_p": Integer(3, 10), "max_d": Integer(2, 5), "max_q": Integer(3, 10), "seasonal": [True, False], }
model_family	ModelFamily.ARIMA
modifies_features	True
modifies_target	False
name	ARIMA Regressor
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.TIME_SERIES_REGRESSION]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns array of 0's with a length of 1 as feature_importance is not defined for ARIMA regressor.
<i>fit</i>	Fits ARIMA regressor to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted ARIMA regressor.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns array of 0's with a length of 1 as feature_importance is not defined for ARIMA regressor.

fit (*self, X, y=None*)

Fits ARIMA regressor to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If X was passed to *fit* but not passed in *predict*.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X, y=None*)

Make predictions using fitted ARIMA regressor.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – Target data.

Returns Predicted values.

Return type pd.Series

Raises **ValueError** – If X was passed to *fit* but not passed in *predict*.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

baseline_regressor

Baseline regressor that uses a simple strategy to make predictions. This is useful as a simple baseline regressor to compare with other regressors.

Module Contents

Classes Summary

BaselineRegressor

Baseline regressor that uses a simple strategy to make predictions. This is useful as a simple baseline regressor to compare with other regressors.

Contents

class evalml.pipelines.components.estimators.regressors.baseline_regressor.**BaselineRegressor**

Baseline regressor that uses a simple strategy to make predictions. This is useful as a simple baseline regressor to compare with other regressors.

Parameters

- **strategy** (*str*) – Method used to predict. Valid options are “mean”, “median”. Defaults to “mean”.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.BASELINE
modifies_features	True
modifies_target	False
name	Baseline Regressor
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature. Since baseline regressors do not use input features to calculate predictions, returns an array of zeroes.
<i>fit</i>	Fits baseline regression component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using the baseline regression strategy.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature. Since baseline regressors do not use input features to calculate predictions, returns an array of zeroes.

Returns An array of zeroes.

Return type np.ndarray (float)

fit (*self, X, y=None*)

Fits baseline regression component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If input y is None.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using the baseline regression strategy.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

catboost_regressor

CatBoost Regressor, a regressor that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.

Module Contents

Classes Summary

<i>CatBoostRegressor</i>	CatBoost Regressor, a regressor that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.
--------------------------	---

Contents

class evalml.pipelines.components.estimators.regressors.catboost_regressor.CatBoostRegressor

CatBoost Regressor, a regressor that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.

For more information, check out <https://catboost.ai/>

Parameters

- **n_estimators** (*float*) – The maximum number of trees to build. Defaults to 10.
- **eta** (*float*) – The learning rate. Defaults to 0.03.
- **max_depth** (*int*) – The maximum tree depth for base learners. Defaults to 6.
- **bootstrap_type** (*string*) – Defines the method for sampling the weights of objects. Available methods are ‘Bayesian’, ‘Bernoulli’, ‘MVS’. Defaults to None.
- **silent** (*boolean*) – Whether to use the “silent” logging mode. Defaults to True.

- **allow_writing_files** (*boolean*) – Whether to allow writing snapshot files while training. Defaults to False.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(4, 100), “eta”: Real(0.000001, 1), “max_depth”: Integer(4, 10), }
model_family	ModelFamily.CATBOOST
modifies_features	True
modifies_target	False
name	CatBoost Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance of fitted CatBoost regressor.
<i>fit</i>	Fits CatBoost regressor component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted CatBoost regressor.

fit (*self*, *X*, *y=None*)

Fits CatBoost regressor component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

`save` (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **`file_path`** (*str*) – Location to save file.
- **`pickle_protocol`** (*int*) – The pickle data stream format.

decision_tree_regressor

Decision Tree Regressor.

Module Contents

Classes Summary

<i>DecisionTreeRegressor</i>	Decision Tree Regressor.
------------------------------	--------------------------

Contents

class evalml.pipelines.components.estimators.regressors.decision_tree_regressor.**DecisionTreeRegressor**

Decision Tree Regressor.

Parameters

- **`criterion`** (*{ "mse", "friedman_mse", "mae", "poisson" }*) – The function to measure the quality of a split. Supported criteria are:
 - “mse” for the mean squared error, which is equal to variance reduction as feature selection criterion and minimizes the L2 loss using the mean of each terminal node
 - “friedman_mse”, which uses mean squared error with Friedman’s improvement score for potential splits
 - “mae” for the mean absolute error, which minimizes the L1 loss using the median of each terminal node,
 - “poisson” which uses reduction in Poisson deviance to find splits.
- **`max_features`** (*int, float or { "auto", "sqrt", "log2" }*) – The number of features to consider when looking for the best split:
 - If int, then consider `max_features` features at each split.

- If float, then `max_features` is a fraction and `int(max_features * n_features)` features are considered at each split.
- If “auto”, then `max_features=sqrt(n_features)`.
- If “sqrt”, then `max_features=sqrt(n_features)`.
- If “log2”, then `max_features=log2(n_features)`.
- If None, then `max_features = n_features`.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than `max_features` features.

- **`max_depth`** (*int*) – The maximum depth of the tree. Defaults to 6.
- **`min_samples_split`** (*int or float*) – The minimum number of samples required to split an internal node:
 - If int, then consider `min_samples_split` as the minimum number.
 - If float, then `min_samples_split` is a fraction and `ceil(min_samples_split * n_samples)` are the minimum number of samples for each split.

Defaults to 2.

- **`min_weight_fraction_leaf`** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “criterion”: [“mse”, “friedman_mse”, “mae”], “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10), }
model_family	ModelFamily.DECISION_TREE
modifies_features	True
modifies_target	False
name	Decision Tree Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.

continues on next page

Table 340 – continued from previous page

<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

elasticnet_regressor

Elastic Net Regressor.

Module Contents

Classes Summary

ElasticNetRegressor

Elastic Net Regressor.

Contents

`class evalml.pipelines.components.estimators.regressors.elasticnet_regressor.ElasticNetRegressor`

Elastic Net Regressor.

Parameters

- **alpha** (*float*) – Constant that multiplies the penalty terms. Defaults to 0.0001.
- **l1_ratio** (*float*) – The mixing parameter, with $0 \leq \text{l1_ratio} \leq 1$. Only used if `penalty='elasticnet'`. Setting `l1_ratio=0` is equivalent to using `penalty='l2'`, while setting `l1_ratio=1` is equivalent to using `penalty='l1'`. For $0 < \text{l1_ratio} < 1$, the penalty is a combination of L1 and L2. Defaults to 0.15.
- **max_iter** (*int*) – The maximum number of iterations. Defaults to 1000.
- **normalize** (*boolean*) – If True, the regressors will be normalized before regression by subtracting the mean and dividing by the l2-norm. Defaults to False.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "alpha": Real(0, 1), "l1_ratio": Real(0, 1), }
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Elastic Net Regressor
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Feature importance for fitted ElasticNet regressor.
<code>fit</code>	Fits estimator to data.

continues on next page

Table 342 – continued from previous page

<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted ElasticNet regressor.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

et_regressor

Extra Trees Regressor.

Module Contents

Classes Summary

ExtraTreesRegressor

Extra Trees Regressor.

Contents

`class evalml.pipelines.components.estimators.regressors.et_regressor.ExtraTreesRegressor` (*n_*

m
m
m
m
n_

I,
ra
de

Extra Trees Regressor.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_features** (*int, float or {"auto", "sqrt", "log2"}*) – The number of features to consider when looking for the best split:
 - If *int*, then consider *max_features* features at each split.
 - If *float*, then *max_features* is a fraction and $\text{int}(\text{max_features} * \text{n_features})$ features are considered at each split.
 - If “auto”, then $\text{max_features} = \sqrt{\text{n_features}}$.
 - If “sqrt”, then $\text{max_features} = \sqrt{\text{n_features}}$.
 - If “log2”, then $\text{max_features} = \log_2(\text{n_features})$.
 - If *None*, then $\text{max_features} = \text{n_features}$.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than *max_features* features. Defaults to “auto”.

- **max_depth** (*int*) – The maximum depth of the tree. Defaults to 6.
- **min_samples_split** (*int or float*) – The minimum number of samples required to split an internal node:
 - If *int*, then consider *min_samples_split* as the minimum number.
 - If *float*, then *min_samples_split* is a fraction and $\text{ceil}(\text{min_samples_split} * \text{n_samples})$ are the minimum number of samples for each split.
- **to 2.** (*Defaults*) –
- **min_weight_fraction_leaf** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(10, 1000), “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10), }
model_family	ModelFamily.EXTRA_TREES
modifies_features	True
modifies_target	False
name	Extra Trees Regressor
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

`save` (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **`file_path`** (*str*) – Location to save file.
- **`pickle_protocol`** (*int*) – The pickle data stream format.

lightgbm_regressor

LightGBM Regressor.

Module Contents

Classes Summary

<i>LightGBMRegressor</i>	LightGBM Regressor.
--------------------------	---------------------

Contents

`class` evalml.pipelines.components.estimators.regressors.lightgbm_regressor.**LightGBMRegressor**

LightGBM Regressor.

Parameters

- **`boosting_type`** (*string*) – Type of boosting to use. Defaults to “gbdt”. - ‘gbdt’ uses traditional Gradient Boosting Decision Tree - “dart”, uses Dropouts meet Multiple Additive Regression Trees - “goss”, uses Gradient-based One-Side Sampling - “rf”, uses Random Forest
- **`learning_rate`** (*float*) – Boosting learning rate. Defaults to 0.1.
- **`n_estimators`** (*int*) – Number of boosted trees to fit. Defaults to 100.

- **max_depth** (*int*) – Maximum tree depth for base learners, ≤ 0 means no limit. Defaults to 0.
- **num_leaves** (*int*) – Maximum tree leaves for base learners. Defaults to 31.
- **min_child_samples** (*int*) – Minimum number of data needed in a child (leaf). Defaults to 20.
- **bagging_fraction** (*float*) – LightGBM will randomly select a subset of features on each iteration (tree) without resampling if this is smaller than 1.0. For example, if set to 0.8, LightGBM will select 80% of features before training each tree. This can be used to speed up training and deal with overfitting. Defaults to 0.9.
- **bagging_freq** (*int*) – Frequency for bagging. 0 means bagging is disabled. k means perform bagging at every k iteration. Every k-th iteration, LightGBM will randomly select $\text{bagging_fraction} * 100 \%$ of the data to use for the next k iterations. Defaults to 0.
- **n_jobs** (*int or None*) – Number of threads to run in parallel. -1 uses all threads. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "learning_rate": Real(0.000001, 1), "boosting_type": ["gbdt", "dart", "goss", "rf"], "n_estimators": Integer(10, 100), "max_depth": Integer(0, 10), "num_leaves": Integer(2, 100), "min_child_samples": Integer(1, 100), "bagging_fraction": Real(0.000001, 1), "bagging_freq": Integer(0, 1), }
model_family	ModelFamily.LIGHTGBM
modifies_features	True
modifies_target	False
name	LightGBM Regressor
predict_uses_y	False
SEED_MAX	SEED_BOUNDS.max_bound
SEED_MIN	0
supported_problem_types	[ProblemTypes.REGRESSION]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits LightGBM regressor to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

continues on next page

Table 346 – continued from previous page

<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted LightGBM regressor.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a `feature_importance` method or a `component_obj` that implements `feature_importance`.

fit (*self*, *X*, *y=None*)

Fits LightGBM regressor to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*) – The target training data of length `[n_samples]`.

Returns *self*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using fitted LightGBM regressor.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

linear_regressor

Linear Regressor.

Module Contents

Classes Summary

LinearRegressor

Linear Regressor.

Contents

class evalml.pipelines.components.estimators.regressors.linear_regressor.**LinearRegressor** (fit

Linear Regressor.

Parameters

- **fit_intercept** (*boolean*) – Whether to calculate the intercept for this model. If set to False, no intercept will be used in calculations (i.e. data is expected to be centered). Defaults to True.
- **normalize** (*boolean*) – If True, the regressors will be normalized before regression by subtracting the mean and dividing by the l2-norm. This parameter is ignored when fit_intercept is set to False. Defaults to False.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all threads. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “fit_intercept”: [True, False], “normalize”: [True, False]}
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Linear Regressor
predict Uses y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance for fitted linear regressor.
<i>fit</i>	Fits estimator to data.

continues on next page

Table 348 – continued from previous page

<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted linear regressor.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

prophet_regressor

Prophet is a procedure for forecasting time series data based on an additive model where non-linear trends are fit with yearly, weekly, and daily seasonality, plus holiday effects. It works best with time series that have strong seasonal effects and several seasons of historical data. Prophet is robust to missing data and shifts in the trend, and typically handles outliers well.

Module Contents

Classes Summary

ProphetRegressor

Prophet is a procedure for forecasting time series data based on an additive model where non-linear trends are fit with yearly, weekly, and daily seasonality, plus holiday effects. It works best with time series that have strong seasonal effects and several seasons of historical data. Prophet is robust to missing data and shifts in the trend, and typically handles outliers well.

Contents

class evalml.pipelines.components.estimators.regressors.prophet_regressor.**ProphetRegressor**

Prophet is a procedure for forecasting time series data based on an additive model where non-linear trends are fit with yearly, weekly, and daily seasonality, plus holiday effects. It works best with time series that have strong seasonal effects and several seasons of historical data. Prophet is robust to missing data and shifts in the trend, and typically handles outliers well.

More information here: <https://facebook.github.io/prophet/>

Attributes

hyper-parameter_ranges	{ "changepoint_prior_scale": Real(0.001, 0.5), "seasonality_prior_scale": Real(0.01, 10), "holidays_prior_scale": Real(0.01, 10), "seasonality_mode": ["additive", "multiplicative"], }
model_family	ModelFamily.PROPHET
modifies_features	True
modifies_target	False
name	Prophet Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.TIME_SERIES_REGRESSION]
training_only	False

Methods

<i>build_prophet_df</i>	Build the Prophet data to pass fit and predict on.
<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.

continues on next page

Table 350 – continued from previous page

<i>feature_importance</i>	Returns array of 0's with len(1) as feature_importance is not defined for Prophet regressor.
<i>fit</i>	Fits Prophet regressor component to data.
<i>get_params</i>	Get parameters for the Prophet regressor.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted Prophet regressor.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

static build_prophet_df (*X*, *y=None*, *date_column='ds'*)

Build the Prophet data to pass fit and predict on.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns array of 0's with len(1) as feature_importance is not defined for Prophet regressor.

fit (*self*, *X*, *y=None*)

Fits Prophet regressor component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

get_params (*self*)

Get parameters for the Prophet regressor.

static load (*file_path*)

Loads component at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*, *y=None*)

Make predictions using fitted Prophet regressor.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – Target data.

Returns Predicted values.

Return type *pd.Series*

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

rf_regressor

Random Forest Regressor.

Module Contents

Classes Summary

RandomForestRegressor

Random Forest Regressor.

Contents

class evalml.pipelines.components.estimators.regressors.rf_regressor.**RandomForestRegressor**

Random Forest Regressor.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(10, 1000), “max_depth”: Integer(1, 32), }
model_family	ModelFamily.RANDOM_FOREST
modifies_features	True
modifies_target	False
name	Random Forest Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.

continues on next page

Table 352 – continued from previous page

<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a `feature_importance` method or a `component_obj` that implements `feature_importance`.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

svm_regressor

Support Vector Machine Regressor.

Module Contents

Classes Summary

SVMRegressor
Support Vector Machine Regressor.

Contents

```
class evalml.pipelines.components.estimators.regressors.svm_regressor.SVMRegressor (C=1.0,  
kernel='rbf',  
gamma='auto',  
random_seed=None,  
**kwargs)
```

Support Vector Machine Regressor.

Parameters

- **C** (*float*) – The regularization parameter. The strength of the regularization is inversely proportional to C. Must be strictly positive. The penalty is a squared l2 penalty. Defaults to 1.0.
- **kernel** (*{ "poly", "rbf", "sigmoid" }*) – Specifies the kernel type to be used in the algorithm. Defaults to “rbf”.
- **gamma** (*{ "scale", "auto" } or float*) – Kernel coefficient for “rbf”, “poly” and “sigmoid”. Defaults to “auto”. - If gamma=’scale’ is passed then it uses 1 / (n_features * X.var()) as value of gamma - If “auto” (default), uses 1 / n_features
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “C”: Real(0, 10), “kernel”: [“poly”, “rbf”, “sigmoid”], “gamma”: [“scale”, “auto”], }
model_family	ModelFamily.SVM
modifies_features	True
modifies_target	False
name	SVM Regressor
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Feature importance of fitted SVM regressor.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted SVM regresor.

Only works with linear kernels. If the kernel isn't linear, we return a numpy array of zeros.

Returns The feature importance of the fitted SVM regressor, or an array of zeroes if the kernel is not linear.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

time_series_baseline_estimator

Time series estimator that predicts using the naive forecasting approach.

Module Contents

Classes Summary

<i>TimeSeriesBaselineEstimator</i>	Time series estimator that predicts using the naive forecasting approach.
------------------------------------	---

Contents

class evalml.pipelines.components.estimators.regressors.time_series_baseline_estimator.**Time**

Time series estimator that predicts using the naive forecasting approach.

This is useful as a simple baseline estimator for time series problems.

Parameters

- **gap** (*int*) – Gap between prediction date and target date and must be a positive integer. If gap is 0, target date will be shifted ahead by 1 time period. Defaults to 1.
- **forecast_horizon** (*int*) – Number of time steps the model is expected to predict.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.BASELINE
modifies_features	True
modifies_target	False
name	Time Series Baseline Estimator
predict_uses_y	False
supported_problem_types	[ProblemTypes.TIME_SERIES_REGRESSION, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.

continues on next page

Table 356 – continued from previous page

<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits time series baseline estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using fitted time series baseline estimator.
<code>predict_proba</code>	Make prediction probabilities using fitted time series baseline estimator.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Since baseline estimators do not use input features to calculate predictions, returns an array of zeroes.

Returns An array of zeroes.

Return type `np.ndarray` (`float`)

fit (*self*, *X*, *y=None*)

Fits time series baseline estimator to data.

Parameters

- **X** (`pd.DataFrame`) – The input training data of shape `[n_samples, n_features]`.
- **y** (`pd.Series`) – The target training data of length `[n_samples]`.

Returns `self`

Raises **ValueError** – If input `y` is `None`.

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using fitted time series baseline estimator.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **ValueError** – If input y is None.

predict_proba (*self*, *X*)

Make prediction probabilities using fitted time series baseline estimator.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted probability values.

Return type *pd.DataFrame*

Raises **ValueError** – If input y is None.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

xgboost_regressor

XGBoost Regressor.

Module Contents

Classes Summary

*XGBoostRegressor*XGBoost Regressor.

Contents

class evalml.pipelines.components.estimators.regressors.xgboost_regressor.XGBoostRegressor

XGBoost Regressor.

Parameters

- **eta** (*float*) – Boosting learning rate. Defaults to 0.1.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **min_child_weight** (*float*) – Minimum sum of instance weight (hessian) needed in a child. Defaults to 1.0
- **n_estimators** (*int*) – Number of gradient boosted trees. Equivalent to number of boosting rounds. Defaults to 100.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.
- **n_jobs** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to 12.

Attributes

hyper-parameter_ranges	{ “eta”: Real(0.000001, 1), “max_depth”: Integer(1, 20), “min_child_weight”: Real(1, 10), “n_estimators”: Integer(1, 1000), }
model_family	ModelFamily.XGBOOST
modifies_features	True
modifies_target	False
name	XGBoost Regressor
predict_uses_y	False
SEED_MAX	None
SEED_MIN	None
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Feature importance of fitted XGBoost regressor.
<code>fit</code>	Fits XGBoost regressor component to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using fitted XGBoost regressor.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted XGBoost regressor.

fit (*self*, *X*, *y=None*)

Fits XGBoost regressor component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using fitted XGBoost regressor.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

Package Contents

Classes Summary

<i>ARIMAREgressor</i>	Autoregressive Integrated Moving Average Model. The three parameters (p, d, q) are the AR order, the degree of differencing, and the MA order. More information here: https://www.statsmodels.org/devel/generated/statsmodels.tsa.arima_model.ARIMA.html .
<i>BaselineRegressor</i>	Baseline regressor that uses a simple strategy to make predictions. This is useful as a simple baseline regressor to compare with other regressors.
<i>CatBoostRegressor</i>	CatBoost Regressor, a regressor that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.

continues on next page

Table 359 – continued from previous page

<i>DecisionTreeRegressor</i>	Decision Tree Regressor.
<i>ElasticNetRegressor</i>	Elastic Net Regressor.
<i>ExtraTreesRegressor</i>	Extra Trees Regressor.
<i>LightGBMRegressor</i>	LightGBM Regressor.
<i>LinearRegressor</i>	Linear Regressor.
<i>ProphetRegressor</i>	Prophet is a procedure for forecasting time series data based on an additive model where non-linear trends are fit with yearly, weekly, and daily seasonality, plus holiday effects. It works best with time series that have strong seasonal effects and several seasons of historical data. Prophet is robust to missing data and shifts in the trend, and typically handles outliers well.
<i>RandomForestRegressor</i>	Random Forest Regressor.
<i>SVMRegressor</i>	Support Vector Machine Regressor.
<i>TimeSeriesBaselineEstimator</i>	Time series estimator that predicts using the naive forecasting approach.
<i>XGBoostRegressor</i>	XGBoost Regressor.

Contents

```
class evalml.pipelines.components.estimators.regressors.ARIMAREgressor (date_index=None,
                                                                    trend=None,
                                                                    start_p=2,
                                                                    d=0,
                                                                    start_q=2,
                                                                    max_p=5,
                                                                    max_d=2,
                                                                    max_q=5,
                                                                    seasonal=True,
                                                                    n_jobs=-1,
                                                                    random_seed=0,
                                                                    **kwargs)
```

Autoregressive Integrated Moving Average Model. The three parameters (p, d, q) are the AR order, the degree of differencing, and the MA order. More information here: https://www.statsmodels.org/devel/generated/statsmodels.tsa.arima_model.ARIMA.html.

Currently ARIMAREgressor isn't supported via conda install. It's recommended that it be installed via PyPI.

Parameters

- **date_index** (*str*) – Specifies the name of the column in X that provides the datetime objects. Defaults to None.
- **trend** (*str*) – Controls the deterministic trend. Options are ['n', 'c', 't', 'ct'] where 'c' is a constant term, 't' indicates a linear trend, and 'ct' is both. Can also be an iterable when defining a polynomial, such as [1, 1, 0, 1].
- **start_p** (*int*) – Minimum Autoregressive order. Defaults to 2.
- **d** (*int*) – Minimum Differencing degree. Defaults to 0.
- **start_q** (*int*) – Minimum Moving Average order. Defaults to 2.

- **max_p** (*int*) – Maximum Autoregressive order. Defaults to 5.
- **max_d** (*int*) – Maximum Differencing degree. Defaults to 2.
- **max_q** (*int*) – Maximum Moving Average order. Defaults to 5.
- **seasonal** (*boolean*) – Whether to fit a seasonal model to ARIMA. Defaults to True.
- **n_jobs** (*int or None*) – Non-negative integer describing level of parallelism used for pipelines. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "start_p": Integer(1, 3), "d": Integer(0, 2), "start_q": Integer(1, 3), "max_p": Integer(3, 10), "max_d": Integer(2, 5), "max_q": Integer(3, 10), "seasonal": [True, False], }
model_family	ModelFamily.ARIMA
modifies_features	True
modifies_target	False
name	ARIMA Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.TIME_SERIES_REGRESSION]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns array of 0's with a length of 1 as feature_importance is not defined for ARIMA regressor.
<i>fit</i>	Fits ARIMA regressor to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted ARIMA regressor.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if *return_dict* is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns array of 0's with a length of 1 as *feature_importance* is not defined for ARIMA regressor.

fit (*self*, *X*, *y=None*)

Fits ARIMA regressor to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If *X* was passed to *fit* but not passed in *predict*.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling *predict*, *predict_proba*, *transform*, or *feature_importances*.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*, *y=None*)

Make predictions using fitted ARIMA regressor.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – Target data.

Returns Predicted values.

Return type pd.Series

Raises `ValueError` – If `X` was passed to *fit* but not passed in *predict*.

`predict_proba` (*self*, *X*)

Make probability estimates for labels.

Parameters **`X`** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

`save` (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **`file_path`** (*str*) – Location to save file.
- **`pickle_protocol`** (*int*) – The pickle data stream format.

`class evalml.pipelines.components.estimators.regressors.BaselineRegressor` (*strategy='mean', random_seed=0, **kwargs*)

Baseline regressor that uses a simple strategy to make predictions. This is useful as a simple baseline regressor to compare with other regressors.

Parameters

- **`strategy`** (*str*) – Method used to predict. Valid options are “mean”, “median”. Defaults to “mean”.
- **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.BASELINE
modifies_features	True
modifies_target	False
name	Baseline Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

clone

Constructs a new component with the same parameters and random state.

continues on next page

Table 361 – continued from previous page

<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature. Since baseline regressors do not use input features to calculate predictions, returns an array of zeroes.
<code>fit</code>	Fits baseline regression component to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using the baseline regression strategy.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature. Since baseline regressors do not use input features to calculate predictions, returns an array of zeroes.

Returns An array of zeroes.

Return type np.ndarray (float)

fit (*self*, *X*, *y=None*)

Fits baseline regression component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns `self`

Raises **ValueError** – If input `y` is `None`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using the baseline regression strategy.

Parameters **X** (*pd.DataFrame*) – Data of shape `[n_samples, n_features]`.

Returns Predicted values.

Return type `pd.Series`

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type `pd.Series`

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```

class evalml.pipelines.components.estimators.regressors.CatBoostRegressor (n_estimators=10,
                                                                           eta=0.03,
                                                                           max_depth=6,
                                                                           boot-
                                                                           strap_type=None,
                                                                           silent=False,
                                                                           al-
                                                                           low_writing_files=False,
                                                                           ran-
                                                                           dom_seed=0,
                                                                           n_jobs=-
                                                                           1,
                                                                           **kwargs)

```

CatBoost Regressor, a regressor that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.

For more information, check out <https://catboost.ai/>

Parameters

- **n_estimators** (*float*) – The maximum number of trees to build. Defaults to 10.
- **eta** (*float*) – The learning rate. Defaults to 0.03.
- **max_depth** (*int*) – The maximum tree depth for base learners. Defaults to 6.
- **bootstrap_type** (*string*) – Defines the method for sampling the weights of objects. Available methods are ‘Bayesian’, ‘Bernoulli’, ‘MVS’. Defaults to None.
- **silent** (*boolean*) – Whether to use the “silent” logging mode. Defaults to True.
- **allow_writing_files** (*boolean*) – Whether to allow writing snapshot files while training. Defaults to False.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(4, 100), “eta”: Real(0.000001, 1), “max_depth”: Integer(4, 10), }
model_family	ModelFamily.CATBOOST
modifies_features	True
modifies_target	False
name	CatBoost Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Feature importance of fitted CatBoost regressor.
<code>fit</code>	Fits CatBoost regressor component to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted CatBoost regressor.

fit (*self*, *X*, *y=None*)

Fits CatBoost regressor component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.regressors.DecisionTreeRegressor (criterion='mse',
max_features='auto',
max_depth=6,
min_samples_split=10,
min_weight_fraction=0.01,
random_state=None,
seed=0,
**kwargs)
```

Decision Tree Regressor.

Parameters

- **criterion** ({*"mse"*, *"friedman_mse"*, *"mae"*, *"poisson"*}) – The function to measure the quality of a split. Supported criteria are:
 - *"mse"* for the mean squared error, which is equal to variance reduction as feature selection criterion and minimizes the L2 loss using the mean of each terminal node
 - *"friedman_mse"*, which uses mean squared error with Friedman’s improvement score for potential splits

- “mae” for the mean absolute error, which minimizes the L1 loss using the median of each terminal node,
- “poisson” which uses reduction in Poisson deviance to find splits.
- **max_features** (*int, float or {"auto", "sqrt", "log2"}*) – The number of features to consider when looking for the best split:
 - If *int*, then consider `max_features` features at each split.
 - If *float*, then `max_features` is a fraction and `int(max_features * n_features)` features are considered at each split.
 - If “auto”, then `max_features=sqrt(n_features)`.
 - If “sqrt”, then `max_features=sqrt(n_features)`.
 - If “log2”, then `max_features=log2(n_features)`.
 - If *None*, then `max_features = n_features`.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than `max_features` features.

- **max_depth** (*int*) – The maximum depth of the tree. Defaults to 6.
- **min_samples_split** (*int or float*) – The minimum number of samples required to split an internal node:
 - If *int*, then consider `min_samples_split` as the minimum number.
 - If *float*, then `min_samples_split` is a fraction and `ceil(min_samples_split * n_samples)` are the minimum number of samples for each split.

Defaults to 2.

- **min_weight_fraction_leaf** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “criterion”: [“mse”, “friedman_mse”, “mae”], “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10), }
model_family	ModelFamily.DECISION_TREE
modifies_features	True
modifies_target	False
name	Decision Tree Regressor
predict Uses y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.regressors.ElasticNetRegressor (alpha=0.0001,  
                                                                    l1_ratio=0.15,  
                                                                    max_iter=1000,  
                                                                    nor-  
                                                                    mal-  
                                                                    ize=False,  
                                                                    ran-  
                                                                    dom_seed=0,  
                                                                    **kwargs)
```

Elastic Net Regressor.

Parameters

- **alpha** (*float*) – Constant that multiplies the penalty terms. Defaults to 0.0001.
- **l1_ratio** (*float*) – The mixing parameter, with $0 \leq \text{l1_ratio} \leq 1$. Only used if `penalty='elasticnet'`. Setting `l1_ratio=0` is equivalent to using `penalty='l2'`, while setting `l1_ratio=1` is equivalent to using `penalty='l1'`. For $0 < \text{l1_ratio} < 1$, the penalty is a combination of L1 and L2. Defaults to 0.15.
- **max_iter** (*int*) – The maximum number of iterations. Defaults to 1000.
- **normalize** (*boolean*) – If True, the regressors will be normalized before regression by subtracting the mean and dividing by the l2-norm. Defaults to False.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "alpha": Real(0, 1), "l1_ratio": Real(0, 1), }
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Elastic Net Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance for fitted ElasticNet regressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted ElasticNet regressor.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict` method or a `component_obj` that implements `predict`.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.regressors.ExtraTreesRegressor (n_estimators=100,
                                                                              max_features='auto',
                                                                              max_depth=6,
                                                                              min_samples_split=2,
                                                                              min_weight_fraction_
                                                                              n_jobs=-
                                                                              1,
                                                                              ran-
                                                                              dom_seed=0,
                                                                              **kwargs)
```

Extra Trees Regressor.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_features** (*int, float or {"auto", "sqrt", "log2"}*) – The number of features to consider when looking for the best split:
 - If *int*, then consider `max_features` features at each split.
 - If *float*, then `max_features` is a fraction and `int(max_features * n_features)` features are considered at each split.
 - If “auto”, then `max_features=sqrt(n_features)`.
 - If “sqrt”, then `max_features=sqrt(n_features)`.
 - If “log2”, then `max_features=log2(n_features)`.
 - If *None*, then `max_features = n_features`.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than `max_features` features. Defaults to “auto”.

- **max_depth** (*int*) – The maximum depth of the tree. Defaults to 6.
- **min_samples_split** (*int or float*) – The minimum number of samples required to split an internal node:
 - If *int*, then consider `min_samples_split` as the minimum number.
 - If *float*, then `min_samples_split` is a fraction and `ceil(min_samples_split * n_samples)` are the minimum number of samples for each split.
- **to 2.** (*Defaults*) –

- **min_weight_fraction_leaf** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(10, 1000), “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10),}
model_family	ModelFamily.EXTRA_TREES
modifies_features	True
modifies_target	False
name	Extra Trees Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.regressors.LightGBMRegressor (boosting_type='gbdt',  
                                                                    learn-  
                                                                    ing_rate=0.1,  
                                                                    n_estimators=20,  
                                                                    max_depth=0,  
                                                                    num_leaves=31,  
                                                                    min_child_samples=20,  
                                                                    bag-  
                                                                    ging_fraction=0.9,  
                                                                    bag-  
                                                                    ging_freq=0,  
                                                                    n_jobs=-  
  
                                                                    1,  
                                                                    ran-  
                                                                    dom_seed=0,  
                                                                    **kwargs)
```

LightGBM Regressor.

Parameters

- **boosting_type** (*string*) – Type of boosting to use. Defaults to “gbdt”. - ‘gbdt’ uses traditional Gradient Boosting Decision Tree - “dart”, uses Dropouts meet Multiple Additive Regression Trees - “goss”, uses Gradient-based One-Side Sampling - “rf”, uses Random Forest
- **learning_rate** (*float*) – Boosting learning rate. Defaults to 0.1.
- **n_estimators** (*int*) – Number of boosted trees to fit. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners, <=0 means no limit. Defaults to 0.
- **num_leaves** (*int*) – Maximum tree leaves for base learners. Defaults to 31.
- **min_child_samples** (*int*) – Minimum number of data needed in a child (leaf). Defaults to 20.
- **bagging_fraction** (*float*) – LightGBM will randomly select a subset of features on each iteration (tree) without resampling if this is smaller than 1.0. For example, if set to 0.8, LightGBM will select 80% of features before training each tree. This can be used to speed up training and deal with overfitting. Defaults to 0.9.

- **bagging_freq** (*int*) – Frequency for bagging. 0 means bagging is disabled. k means perform bagging at every k iteration. Every k-th iteration, LightGBM will randomly select `bagging_fraction * 100 %` of the data to use for the next k iterations. Defaults to 0.
- **n_jobs** (*int or None*) – Number of threads to run in parallel. -1 uses all threads. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "learning_rate": Real(0.000001, 1), "boosting_type": ["gbdt", "dart", "goss", "rf"], "n_estimators": Integer(10, 100), "max_depth": Integer(0, 10), "num_leaves": Integer(2, 100), "min_child_samples": Integer(1, 100), "bagging_fraction": Real(0.000001, 1), "bagging_freq": Integer(0, 1), }
model_family	ModelFamily.LIGHTGBM
modifies_features	True
modifies_target	False
name	LightGBM Regressor
predict_uses_y	False
SEED_MAX	SEED_BOUNDS.max_bound
SEED_MIN	0
supported_problem_types	[ProblemTypes.REGRESSION]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits LightGBM regressor to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted LightGBM regressor.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a `feature_importance` method or a `component_obj` that implements `feature_importance`.

fit (*self*, *X*, *y=None*)

Fits LightGBM regressor to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*) – The target training data of length `[n_samples]`.

Returns *self*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using fitted LightGBM regressor.

Parameters **X** (*pd.DataFrame*) – Data of shape `[n_samples, n_features]`.

Returns Predicted values.

Return type pd.Series

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.regressors.LinearRegressor (fit_intercept=True,
                                                                    nor-
                                                                    mal-
                                                                    ize=False,
                                                                    n_jobs=-
                                                                    1,
                                                                    ran-
                                                                    dom_seed=0,
                                                                    **kwargs)
```

Linear Regressor.

Parameters

- **fit_intercept** (*boolean*) – Whether to calculate the intercept for this model. If set to `False`, no intercept will be used in calculations (i.e. data is expected to be centered). Defaults to `True`.
- **normalize** (*boolean*) – If `True`, the regressors will be normalized before regression by subtracting the mean and dividing by the l2-norm. This parameter is ignored when `fit_intercept` is set to `False`. Defaults to `False`.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. `-1` uses all threads. Defaults to `-1`.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to `0`.

Attributes

hyper-parameter_ranges	{ “fit_intercept”: [True, False], “normalize”: [True, False]}
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Linear Regressor
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance for fitted linear regressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted linear regressor.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.regressors.ProphetRegressor (date_index=None,
                                                                    change-
                                                                    point_prior_scale=0.05,
                                                                    sea-
                                                                    son-
                                                                    al-
                                                                    ity_prior_scale=10,
                                                                    hol-
                                                                    i-
                                                                    days_prior_scale=10,
                                                                    sea-
                                                                    son-
                                                                    al-
                                                                    ity_mode='additive',
                                                                    ran-
                                                                    dom_seed=0,
                                                                    stan_backend='CMDSTAN'
                                                                    **kwargs)
```

Prophet is a procedure for forecasting time series data based on an additive model where non-linear trends are fit with yearly, weekly, and daily seasonality, plus holiday effects. It works best with time series that have strong seasonal effects and several seasons of historical data. Prophet is robust to missing data and shifts in the trend, and typically handles outliers well.

More information here: <https://facebook.github.io/prophet/>

Attributes

hyper-parameter_ranges	{ "changepoint_prior_scale": Real(0.001, 0.5), "seasonality_prior_scale": Real(0.01, 10), "holidays_prior_scale": Real(0.01, 10), "seasonality_mode": ["additive", "multiplicative"], }
model_family	ModelFamily.PROPHET
modifies_features	True
modifies_target	False
name	Prophet Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.TIME_SERIES_REGRESSION]
training_only	False

Methods

<i>build_prophet_df</i>	Build the Prophet data to pass fit and predict on.
<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.

continues on next page

Table 368 – continued from previous page

<i>feature_importance</i>	Returns array of 0's with len(1) as feature_importance is not defined for Prophet regressor.
<i>fit</i>	Fits Prophet regressor component to data.
<i>get_params</i>	Get parameters for the Prophet regressor.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted Prophet regressor.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

static build_prophet_df (*X*, *y=None*, *date_column='ds'*)

Build the Prophet data to pass fit and predict on.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns array of 0's with len(1) as feature_importance is not defined for Prophet regressor.

fit (*self*, *X*, *y=None*)

Fits Prophet regressor component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

get_params (*self*)

Get parameters for the Prophet regressor.

static load (*file_path*)

Loads component at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*, *y=None*)

Make predictions using fitted Prophet regressor.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – Target data.

Returns Predicted values.

Return type *pd.Series*

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.regressors.RandomForestRegressor (n_estimators=100,
                                                                    max_depth=6,
                                                                    n_jobs=-1,
                                                                    1,
                                                                    ran-
                                                                    dom_seed=0,
                                                                    **kwargs)
```

Random Forest Regressor.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **n_jobs** (*int* or *None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.

- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(10, 1000), “max_depth”: Integer(1, 32), }
model_family	ModelFamily.RANDOM_FOREST
modifies_features	True
modifies_target	False
name	Random Forest Regressor
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.regressors.SVMRegressor (C=1.0,
                                                                    ker-
                                                                    nel='rbf',
                                                                    gamma='auto',
                                                                    ran-
                                                                    dom_seed=0,
                                                                    **kwargs)
```

Support Vector Machine Regressor.

Parameters

- **C** (*float*) – The regularization parameter. The strength of the regularization is inversely proportional to C. Must be strictly positive. The penalty is a squared l2 penalty. Defaults to 1.0.
- **kernel** (*{ "poly", "rbf", "sigmoid" }*) – Specifies the kernel type to be used in the algorithm. Defaults to “rbf”.
- **gamma** (*{ "scale", "auto" } or float*) – Kernel coefficient for “rbf”, “poly” and “sigmoid”. Defaults to “auto”. - If `gamma='scale'` is passed then it uses `1 / (n_features * X.var())` as value of gamma - If “auto” (default), uses `1 / n_features`
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “C”: Real(0, 10), “kernel”: [“poly”, “rbf”, “sigmoid”], “gamma”: [“scale”, “auto”], }
model_family	ModelFamily.SVM
modifies_features	True
modifies_target	False
name	SVM Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Feature importance of fitted SVM regressor.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted SVM regressor.

Only works with linear kernels. If the kernel isn't linear, we return a numpy array of zeros.

Returns The feature importance of the fitted SVM regressor, or an array of zeroes if the kernel is not linear.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.components.estimators.regressors.**TimeSeriesBaselineEstimator** (*gap=1*, *forecast_horizon*, *random_seed*, ***kwargs*)

Time series estimator that predicts using the naive forecasting approach.

This is useful as a simple baseline estimator for time series problems.

Parameters

- **gap** (*int*) – Gap between prediction date and target date and must be a positive integer. If gap is 0, target date will be shifted ahead by 1 time period. Defaults to 1.
- **forecast_horizon** (*int*) – Number of time steps the model is expected to predict.

- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.BASELINE
modifies_features	True
modifies_target	False
name	Time Series Baseline Estimator
predict_uses_y	False
supported_problem_types	[ProblemTypes.TIME_SERIES_REGRESSION, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits time series baseline estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted time series baseline estimator.
<i>predict_proba</i>	Make prediction probabilities using fitted time series baseline estimator.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Since baseline estimators do not use input features to calculate predictions, returns an array of zeroes.

Returns An array of zeroes.

Return type np.ndarray (float)

fit (*self*, *X*, *y=None*)

Fits time series baseline estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If input y is None.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using fitted time series baseline estimator.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **ValueError** – If input y is None.

predict_proba (*self*, *X*)

Make prediction probabilities using fitted time series baseline estimator.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted probability values.

Return type `pd.DataFrame`

Raises **ValueError** – If input `y` is `None`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.regressors.XGBoostRegressor(eta=0.1,  
                                                                    max_depth=6,  
                                                                    min_child_weight=1,  
                                                                    n_estimators=100,  
                                                                    ran-  
                                                                    dom_seed=0,  
                                                                    n_jobs=12,  
                                                                    **kwargs)
```

XGBoost Regressor.

Parameters

- **eta** (*float*) – Boosting learning rate. Defaults to 0.1.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **min_child_weight** (*float*) – Minimum sum of instance weight (hessian) needed in a child. Defaults to 1.0
- **n_estimators** (*int*) – Number of gradient boosted trees. Equivalent to number of boosting rounds. Defaults to 100.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.
- **n_jobs** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to 12.

Attributes

hyper-parameter_ranges	{ "eta": Real(0.000001, 1), "max_depth": Integer(1, 20), "min_child_weight": Real(1, 10), "n_estimators": Integer(1, 1000), }
model_family	ModelFamily.XGBOOST
modifies_features	True
modifies_target	False
name	XGBoost Regressor
predict_uses_y	False
SEED_MAX	None
SEED_MIN	None
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Feature importance of fitted XGBoost regressor.
<code>fit</code>	Fits XGBoost regressor component to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using fitted XGBoost regressor.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted XGBoost regressor.

fit (*self*, *X*, *y=None*)

Fits XGBoost regressor component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using fitted XGBoost regressor.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

Submodules

estimator

A component that fits and predicts given data.

Module Contents

Classes Summary

<i>Estimator</i>	A component that fits and predicts given data.
------------------	--

Contents

class evalml.pipelines.components.estimators.estimator.**Estimator** (*parameters=None, component_obj=None, random_seed=0, **kwargs*)

A component that fits and predicts given data.

To implement a new Estimator, define your own class which is a subclass of Estimator, including a name and a list of acceptable ranges for any parameters to be tuned during the automl search (hyperparameters). Define an `__init__` method which sets up any necessary state and objects. Make sure your `__init__` only uses standard keyword arguments and calls `super().__init__()` with a parameters dict. You may also override the `fit`, `transform`, `fit_transform` and other methods in this class if appropriate.

To see some examples, check out the definitions of any Estimator component subclass.

Parameters

- **parameters** (*dict*) – Dictionary of parameters for the component. Defaults to None.
- **component_obj** (*obj*) – Third-party objects useful in component implementation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

model_family	ModelFamily.NONE
modifies_features	True
modifies_target	False
predict_uses_y	False
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.

continues on next page

Table 374 – continued from previous page

<code>load</code>	Loads component at file path.
<code>model_family</code>	ModelFamily.NONE
<code>name</code>	Returns string name of this component.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.
<code>supported_problem_types</code>	Problem types this estimator supports.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

property model_family (*cls*)

Returns ModelFamily of this component.

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

property supported_problem_types (*cls*)

Problem types this estimator supports.

Package Contents

Classes Summary

<i>ARIMAREgressor</i>	Autoregressive Integrated Moving Average Model. The three parameters (p, d, q) are the AR order, the degree of differencing, and the MA order. More information here: https://www.statsmodels.org/devel/generated/statsmodels.tsa.arima_model.ARIMA.html .
<i>BaselineClassifier</i>	Classifier that predicts using the specified strategy.
<i>BaselineRegressor</i>	Baseline regressor that uses a simple strategy to make predictions. This is useful as a simple baseline regressor to compare with other regressors.
<i>CatBoostClassifier</i>	CatBoost Classifier, a classifier that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.
<i>CatBoostRegressor</i>	CatBoost Regressor, a regressor that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.
<i>DecisionTreeClassifier</i>	Decision Tree Classifier.
<i>DecisionTreeRegressor</i>	Decision Tree Regressor.
<i>ElasticNetClassifier</i>	Elastic Net Classifier. Uses Logistic Regression with elasticnet penalty as the base estimator.
<i>ElasticNetRegressor</i>	Elastic Net Regressor.
<i>Estimator</i>	A component that fits and predicts given data.
<i>ExtraTreesClassifier</i>	Extra Trees Classifier.
<i>ExtraTreesRegressor</i>	Extra Trees Regressor.
<i>KNeighborsClassifier</i>	K-Nearest Neighbors Classifier.
<i>LightGBMClassifier</i>	LightGBM Classifier.
<i>LightGBMRegressor</i>	LightGBM Regressor.
<i>LinearRegressor</i>	Linear Regressor.
<i>LogisticRegressionClassifier</i>	Logistic Regression Classifier.
<i>ProphetRegressor</i>	Prophet is a procedure for forecasting time series data based on an additive model where non-linear trends are fit with yearly, weekly, and daily seasonality, plus holiday effects. It works best with time series that have strong seasonal effects and several seasons of historical data. Prophet is robust to missing data and shifts in the trend, and typically handles outliers well.
<i>RandomForestClassifier</i>	Random Forest Classifier.
<i>RandomForestRegressor</i>	Random Forest Regressor.
<i>SVMClassifier</i>	Support Vector Machine Classifier.
<i>SVMRegressor</i>	Support Vector Machine Regressor.
<i>TimeSeriesBaselineEstimator</i>	Time series estimator that predicts using the naive forecasting approach.
<i>XGBoostClassifier</i>	XGBoost Classifier.
<i>XGBoostRegressor</i>	XGBoost Regressor.

Contents

```
class evalml.pipelines.components.estimators.ARIMAREgressor (date_index=None,
                                                            trend=None,
                                                            start_p=2,
                                                            d=0, start_q=2,
                                                            max_p=5, max_d=2,
                                                            max_q=5, seasonal=True,
                                                            n_jobs=-1, random_seed=0,
                                                            **kwargs)
```

Autoregressive Integrated Moving Average Model. The three parameters (p, d, q) are the AR order, the degree of differencing, and the MA order. More information here: https://www.statsmodels.org/devel/generated/statsmodels.tsa.arima_model.ARIMA.html.

Currently ARIMAREgressor isn't supported via conda install. It's recommended that it be installed via PyPI.

Parameters

- **date_index** (*str*) – Specifies the name of the column in X that provides the datetime objects. Defaults to None.
- **trend** (*str*) – Controls the deterministic trend. Options are ['n', 'c', 't', 'ct'] where 'c' is a constant term, 't' indicates a linear trend, and 'ct' is both. Can also be an iterable when defining a polynomial, such as [1, 1, 0, 1].
- **start_p** (*int*) – Minimum Autoregressive order. Defaults to 2.
- **d** (*int*) – Minimum Differencing degree. Defaults to 0.
- **start_q** (*int*) – Minimum Moving Average order. Defaults to 2.
- **max_p** (*int*) – Maximum Autoregressive order. Defaults to 5.
- **max_d** (*int*) – Maximum Differencing degree. Defaults to 2.
- **max_q** (*int*) – Maximum Moving Average order. Defaults to 5.
- **seasonal** (*boolean*) – Whether to fit a seasonal model to ARIMA. Defaults to True.
- **n_jobs** (*int or None*) – Non-negative integer describing level of parallelism used for pipelines. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "start_p": Integer(1, 3), "d": Integer(0, 2), "start_q": Integer(1, 3), "max_p": Integer(3, 10), "max_d": Integer(2, 5), "max_q": Integer(3, 10), "seasonal": [True, False], }
model_family	ModelFamily.ARIMA
modifies_features	True
modifies_target	False
name	ARIMA Regressor
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.TIME_SERIES_REGRESSION]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns array of 0's with a length of 1 as feature_importance is not defined for ARIMA regressor.
<i>fit</i>	Fits ARIMA regressor to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted ARIMA regressor.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns array of 0's with a length of 1 as feature_importance is not defined for ARIMA regressor.

fit (*self, X, y=None*)

Fits ARIMA regressor to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If X was passed to *fit* but not passed in *predict*.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X, y=None*)

Make predictions using fitted ARIMA regressor.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – Target data.

Returns Predicted values.

Return type pd.Series

Raises **ValueError** – If X was passed to *fit* but not passed in *predict*.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.components.estimators.**BaselineClassifier** (*strategy*='mode',
random_seed=0,
***kwargs*)

Classifier that predicts using the specified strategy.

This is useful as a simple baseline classifier to compare with other classifiers.

Parameters

- **strategy** (*str*) – Method used to predict. Valid options are “mode”, “random” and “random_weighted”. Defaults to “mode”.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.BASELINE
modifies_features	True
modifies_target	False
name	Baseline Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS]
training_only	False

Methods

<i>classes_</i>	Returns class labels. Will return None before fitting.
<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature. Since baseline classifiers do not use input features to calculate predictions, returns an array of zeroes.
<i>fit</i>	Fits baseline classifier component to data.
<i>load</i>	Loads component at file path.

continues on next page

Table 377 – continued from previous page

<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using the baseline classification strategy.
<i>predict_proba</i>	Make prediction probabilities using the baseline classification strategy.
<i>save</i>	Saves component at file path.

property classes_(*self*)

Returns class labels. Will return None before fitting.

Returns Class names

Return type list[str] or list(float)

clone(*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters(*cls*)

Returns the default parameters for this component.

Our convention is that Component.default_parameters == Component().parameters.

Returns Default parameters for this component.

Return type dict

describe(*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance(*self*)

Returns importance associated with each feature. Since baseline classifiers do not use input features to calculate predictions, returns an array of zeroes.

Returns An array of zeroes

Return type np.ndarray (float)

fit(*self*, *X*, *y=None*)

Fits baseline classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

hyper-parameter_ranges	{}
model_family	ModelFamily.BASELINE
modifies_features	True
modifies_target	False
name	Baseline Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature. Since baseline regressors do not use input features to calculate predictions, returns an array of zeroes.
<i>fit</i>	Fits baseline regression component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using the baseline regression strategy.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature. Since baseline regressors do not use input features to calculate predictions, returns an array of zeroes.

Returns An array of zeroes.

Return type np.ndarray (float)

fit (*self, X, y=None*)

Fits baseline regression component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If input y is None.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using the baseline regression strategy.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.CatBoostClassifier (n_estimators=10,
                                                                eta=0.03,
                                                                max_depth=6,
                                                                boot-
                                                                strap_type=None,
                                                                silent=True,
                                                                al-
                                                                low_writing_files=False,
                                                                ran-
                                                                dom_seed=0,
                                                                n_jobs=-1,
                                                                **kwargs)
```

CatBoost Classifier, a classifier that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.

For more information, check out <https://catboost.ai/>

Parameters

- **n_estimators** (*float*) – The maximum number of trees to build. Defaults to 10.
- **eta** (*float*) – The learning rate. Defaults to 0.03.
- **max_depth** (*int*) – The maximum tree depth for base learners. Defaults to 6.
- **bootstrap_type** (*string*) – Defines the method for sampling the weights of objects. Available methods are ‘Bayesian’, ‘Bernoulli’, ‘MVS’. Defaults to None.
- **silent** (*boolean*) – Whether to use the “silent” logging mode. Defaults to True.
- **allow_writing_files** (*boolean*) – Whether to allow writing snapshot files while training. Defaults to False.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(4, 100), “eta”: Real(0.000001, 1), “max_depth”: Integer(4, 10), }
model_family	ModelFamily.CATBOOST
modifies_features	True
modifies_target	False
name	CatBoost Classifier
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance of fitted CatBoost classifier.
<i>fit</i>	Fits CatBoost classifier component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using the fitted CatBoost classifier.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted CatBoost classifier.

fit (*self, X, y=None*)

Fits CatBoost classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using the fitted CatBoost classifier.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.DataFrame

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```

class evalml.pipelines.components.estimators.CatBoostRegressor (n_estimators=10,
                                                                eta=0.03,
                                                                max_depth=6,
                                                                boot-
                                                                strap_type=None,
                                                                silent=False, al-
                                                                low_writing_files=False,
                                                                ran-
                                                                dom_seed=0,
                                                                n_jobs=-1,
                                                                **kwargs)

```

CatBoost Regressor, a regressor that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.

For more information, check out <https://catboost.ai/>

Parameters

- **n_estimators** (*float*) – The maximum number of trees to build. Defaults to 10.
- **eta** (*float*) – The learning rate. Defaults to 0.03.
- **max_depth** (*int*) – The maximum tree depth for base learners. Defaults to 6.
- **bootstrap_type** (*string*) – Defines the method for sampling the weights of objects. Available methods are ‘Bayesian’, ‘Bernoulli’, ‘MVS’. Defaults to None.
- **silent** (*boolean*) – Whether to use the “silent” logging mode. Defaults to True.
- **allow_writing_files** (*boolean*) – Whether to allow writing snapshot files while training. Defaults to False.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(4, 100), “eta”: Real(0.000001, 1), “max_depth”: Integer(4, 10), }
model_family	ModelFamily.CATBOOST
modifies_features	True
modifies_target	False
name	CatBoost Regressor
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Feature importance of fitted CatBoost regressor.
<code>fit</code>	Fits CatBoost regressor component to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted CatBoost regressor.

fit (*self*, *X*, *y=None*)

Fits CatBoost regressor component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.DecisionTreeClassifier (criterion='gini',
                                                                    max_features='auto',
                                                                    max_depth=6,
                                                                    min_samples_split=2,
                                                                    min_weight_fraction_leaf=0.0,
                                                                    random_seed=0,
                                                                    **kwargs)
```

Decision Tree Classifier.

Parameters

- **criterion** (*{ "gini", "entropy" }*) – The function to measure the quality of a split. Supported criteria are “gini” for the Gini impurity and “entropy” for the information gain. Defaults to “gini”.
- **max_features** (*int, float or { "auto", "sqrt", "log2" }*) – The number of features to consider when looking for the best split:
 - If int, then consider max_features features at each split.

- If float, then `max_features` is a fraction and `int(max_features * n_features)` features are considered at each split.
- If “auto”, then `max_features=sqrt(n_features)`.
- If “sqrt”, then `max_features=sqrt(n_features)`.
- If “log2”, then `max_features=log2(n_features)`.
- If None, then `max_features = n_features`.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than `max_features` features. Defaults to “auto”.

- **`max_depth`** (*int*) – The maximum depth of the tree. Defaults to 6.
 - **`min_samples_split`** (*int or float*) – The minimum number of samples required to split an internal node:
 - If int, then consider `min_samples_split` as the minimum number.
 - If float, then `min_samples_split` is a fraction and `ceil(min_samples_split * n_samples)` are the minimum number of samples for each split.
- Defaults to 2.
- **`min_weight_fraction_leaf`** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
 - **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “criterion”: [“gini”, “entropy”], “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10), }
model_family	ModelFamily.DECISION_TREE
modifies_features	True
modifies_target	False
name	Decision Tree Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits estimator to data.

continues on next page

Table 381 – continued from previous page

<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type `np.ndarray`

Raises **MethodPropertyNotFoundError** – If estimator does not have a `feature_importance` method or a `component_obj` that implements `feature_importance`.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns *self*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.DecisionTreeRegressor (criterion='mse',
                                                                    max_features='auto',
                                                                    max_depth=6,
                                                                    min_samples_split=2,
                                                                    min_weight_fraction_leaf=0.0,
                                                                    random_state=None,
                                                                    seed=0,
                                                                    **kwargs)
```

Decision Tree Regressor.

Parameters

- **criterion** ({*"mse"*, *"friedman_mse"*, *"mae"*, *"poisson"*}) – The function to measure the quality of a split. Supported criteria are:
 - *"mse"* for the mean squared error, which is equal to variance reduction as feature selection criterion and minimizes the L2 loss using the mean of each terminal node
 - *"friedman_mse"*, which uses mean squared error with Friedman’s improvement score for potential splits

- “mae” for the mean absolute error, which minimizes the L1 loss using the median of each terminal node,
- “poisson” which uses reduction in Poisson deviance to find splits.
- **max_features** (*int, float or {"auto", "sqrt", "log2"}*) – The number of features to consider when looking for the best split:
 - If *int*, then consider max_features features at each split.
 - If *float*, then max_features is a fraction and $\text{int}(\text{max_features} * \text{n_features})$ features are considered at each split.
 - If “auto”, then $\text{max_features} = \text{sqrt}(\text{n_features})$.
 - If “sqrt”, then $\text{max_features} = \text{sqrt}(\text{n_features})$.
 - If “log2”, then $\text{max_features} = \log_2(\text{n_features})$.
 - If *None*, then $\text{max_features} = \text{n_features}$.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than max_features features.

- **max_depth** (*int*) – The maximum depth of the tree. Defaults to 6.
- **min_samples_split** (*int or float*) – The minimum number of samples required to split an internal node:
 - If *int*, then consider min_samples_split as the minimum number.
 - If *float*, then min_samples_split is a fraction and $\text{ceil}(\text{min_samples_split} * \text{n_samples})$ are the minimum number of samples for each split.

Defaults to 2.

- **min_weight_fraction_leaf** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “criterion”: [“mse”, “friedman_mse”, “mae”], “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10), }
model_family	ModelFamily.DECISION_TREE
modifies_features	True
modifies_target	False
name	Decision Tree Regressor
predict Uses y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.ElasticNetClassifier (penalty='elasticnet',  
                                                                C=1.0,  
                                                                l1_ratio=0.15,  
                                                                multi_class='auto',  
                                                                solver='saga',  
                                                                n_jobs=-  
                                                                1,      ran-  
                                                                dom_seed=0,  
                                                                **kwargs)
```

Elastic Net Classifier. Uses Logistic Regression with elasticnet penalty as the base estimator.

Parameters

- **penalty** (`{"l1", "l2", "elasticnet", "none"}`) – The norm used in penalization. Defaults to “elasticnet”.
- **C** (`float`) – Inverse of regularization strength. Must be a positive float. Defaults to 1.0.
- **l1_ratio** (`float`) – The mixing parameter, with $0 \leq \text{l1_ratio} \leq 1$. Only used if `penalty='elasticnet'`. Setting `l1_ratio=0` is equivalent to using `penalty='l2'`, while setting `l1_ratio=1` is equivalent to using `penalty='l1'`. For $0 < \text{l1_ratio} < 1$, the penalty is a combination of L1 and L2. Defaults to 0.15.
- **multi_class** (`{"auto", "ovr", "multinomial"}`) – If the option chosen is “ovr”, then a binary problem is fit for each label. For “multinomial” the loss minimised is the multinomial loss fit across the entire probability distribution, even when the data is binary. “multinomial” is unavailable when `solver='liblinear'`. “auto” selects “ovr” if the data is binary, or if `solver='liblinear'`, and otherwise selects “multinomial”. Defaults to “auto”.
- **solver** (`{"newton-cg", "lbfgs", "liblinear", "sag", "saga"}`) – Algorithm to use in the optimization problem. For small datasets, “liblinear” is a good choice, whereas “sag” and “saga” are faster for large ones. For multiclass problems, only “newton-cg”, “sag”, “saga” and “lbfgs” handle multinomial loss; “liblinear” is limited to one-versus-rest schemes.
 - “newton-cg”, “lbfgs”, “sag” and “saga” handle L2 or no penalty
 - “liblinear” and “saga” also handle L1 penalty
 - “saga” also supports “elasticnet” penalty
 - “liblinear” does not support setting `penalty='none'`
 Defaults to “saga”.
- **n_jobs** (`int`) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to -1.
- **random_seed** (`int`) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “C”: Real(0.01, 10), “l1_ratio”: Real(0, 1)}
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Elastic Net Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Feature importance for fitted ElasticNet classifier.
<code>fit</code>	Fits ElasticNet classifier component to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted ElasticNet classifier.

fit (*self*, *X*, *y*)

Fits ElasticNet classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.ElasticNetRegressor(alpha=0.0001,
                                                                l1_ratio=0.15,
                                                                max_iter=1000,
                                                                normal-
                                                                ize=False,
                                                                ran-
                                                                dom_seed=0,
                                                                **kwargs)
```

Elastic Net Regressor.

Parameters

- **alpha** (*float*) – Constant that multiplies the penalty terms. Defaults to 0.0001.
- **l1_ratio** (*float*) – The mixing parameter, with $0 \leq \text{l1_ratio} \leq 1$. Only used if `penalty='elasticnet'`. Setting `l1_ratio=0` is equivalent to using `penalty='l2'`, while setting `l1_ratio=1` is equivalent to using `penalty='l1'`. For $0 < \text{l1_ratio} < 1$, the penalty is a combination of L1 and L2. Defaults to 0.15.
- **max_iter** (*int*) – The maximum number of iterations. Defaults to 1000.

- **normalize** (*boolean*) – If True, the regressors will be normalized before regression by subtracting the mean and dividing by the l2-norm. Defaults to False.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “alpha”: Real(0, 1), “l1_ratio”: Real(0, 1), }
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Elastic Net Regressor
predict Uses y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance for fitted ElasticNet regressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted ElasticNet regressor.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.components.estimators.**Estimator** (*parameters*=*None*, *component_obj*=*None*, *random_seed*=*0*, ***kwargs*)

A component that fits and predicts given data.

To implement a new Estimator, define your own class which is a subclass of Estimator, including a name and a list of acceptable ranges for any parameters to be tuned during the automl search (hyperparameters). Define an `__init__` method which sets up any necessary state and objects. Make sure your `__init__` only uses standard keyword arguments and calls `super().__init__()` with a parameters dict. You may also override the `fit`, `transform`, `fit_transform` and other methods in this class if appropriate.

To see some examples, check out the definitions of any Estimator component subclass.

Parameters

- **parameters** (*dict*) – Dictionary of parameters for the component. Defaults to None.
- **component_obj** (*obj*) – Third-party objects useful in component implementation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

model_family	ModelFamily.NONE
modifies_features	True
modifies_target	False
pre-dict_uses_y	False
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>model_family</i>	ModelFamily.NONE
<i>name</i>	Returns string name of this component.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

continues on next page

Table 385 – continued from previous page

<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.
<i>supported_problem_types</i>	Problem types this estimator supports.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type `np.ndarray`

Raises **MethodPropertyNotFoundError** – If estimator does not have a `feature_importance` method or a `component_obj` that implements `feature_importance`.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns *self*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns `ComponentBase` object

property model_family (*cls*)

Returns `ModelFamily` of this component.

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

property supported_problem_types (*cls*)

Problem types this estimator supports.

```
class evalml.pipelines.components.estimators.ExtraTreesClassifier (n_estimators=100,
                                                                    max_features='auto',
                                                                    max_depth=6,
                                                                    min_samples_split=2,
                                                                    min_weight_fraction_leaf=0.0,
                                                                    n_jobs=-
                                                                    1,      ran-
                                                                    dom_seed=0,
                                                                    **kwargs)
```

Extra Trees Classifier.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.

- **max_features** (*int, float or {"auto", "sqrt", "log2"}*) – The number of features to consider when looking for the best split:
 - If *int*, then consider `max_features` features at each split.
 - If *float*, then `max_features` is a fraction and `int(max_features * n_features)` features are considered at each split.
 - If “auto”, then `max_features=sqrt(n_features)`.
 - If “sqrt”, then `max_features=sqrt(n_features)`.
 - If “log2”, then `max_features=log2(n_features)`.
 - If *None*, then `max_features = n_features`.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than `max_features` features. Defaults to “auto”.

- **max_depth** (*int*) – The maximum depth of the tree. Defaults to 6.
- **min_samples_split** (*int or float*) – The minimum number of samples required to split an internal node:
 - If *int*, then consider `min_samples_split` as the minimum number.
 - If *float*, then `min_samples_split` is a fraction and `ceil(min_samples_split * n_samples)` are the minimum number of samples for each split.
- **to 2.** (*Defaults*) –
- **min_weight_fraction_leaf** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(10, 1000), “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10), }
model_family	ModelFamily.EXTRA_TREES
modifies_features	True
modifies_target	False
name	Extra Trees Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a `feature_importance` method or a `component_obj` that implements `feature_importance`.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.ExtraTreesRegressor (n_estimators=100,
                                                                max_features='auto',
                                                                max_depth=6,
                                                                min_samples_split=2,
                                                                min_weight_fraction_leaf=0.0,
                                                                n_jobs=-
                                                                1,
                                                                ran-
                                                                dom_seed=0,
                                                                **kwargs)
```

Extra Trees Regressor.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_features** (*int, float or {"auto", "sqrt", "log2"}*) – The number of features to consider when looking for the best split:
 - If *int*, then consider `max_features` features at each split.
 - If *float*, then `max_features` is a fraction and `int(max_features * n_features)` features are considered at each split.
 - If “auto”, then `max_features=sqrt(n_features)`.
 - If “sqrt”, then `max_features=sqrt(n_features)`.
 - If “log2”, then `max_features=log2(n_features)`.
 - If *None*, then `max_features = n_features`.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than `max_features` features. Defaults to “auto”.
- **max_depth** (*int*) – The maximum depth of the tree. Defaults to 6.
- **min_samples_split** (*int or float*) – The minimum number of samples required to split an internal node:
 - If *int*, then consider `min_samples_split` as the minimum number.
 - If *float*, then `min_samples_split` is a fraction and `ceil(min_samples_split * n_samples)` are the minimum number of samples for each split.
- **to 2.** (*Defaults*) –
- **min_weight_fraction_leaf** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(10, 1000), “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10), }
model_family	ModelFamily.EXTRA_TREES
modifies_features	True
modifies_target	False
name	Extra Trees Regressor
predict Uses y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.KNeighborsClassifier (n_neighbors=5,
                                                                weights='uniform',
                                                                algo-
                                                                rithm='auto',
                                                                leaf_size=30,
                                                                p=2, ran-
                                                                dom_seed=0,
                                                                **kwargs)
```

K-Nearest Neighbors Classifier.

Parameters

- **n_neighbors** (*int*) – Number of neighbors to use by default. Defaults to 5.

- **weights** ({ 'uniform', 'distance' } or callable) – Weight function used in prediction. Can be:
 - 'uniform' : uniform weights. All points in each neighborhood are weighted equally.
 - 'distance' : weight points by the inverse of their distance. in this case, closer neighbors of a query point will have a greater influence than neighbors which are further away.
 - [callable] : a user-defined function which accepts an array of distances, and returns an array of the same shape containing the weights.
 Defaults to “uniform”.
- **algorithm** ({ 'auto', 'ball_tree', 'kd_tree', 'brute' }) – Algorithm used to compute the nearest neighbors:
 - 'ball_tree' will use BallTree
 - 'kd_tree' will use KDTree
 - 'brute' will use a brute-force search.
 'auto' will attempt to decide the most appropriate algorithm based on the values passed to fit method. Defaults to “auto”. Note: fitting on sparse input will override the setting of this parameter, using brute force.
- **leaf_size** (int) – Leaf size passed to BallTree or KDTree. This can affect the speed of the construction and query, as well as the memory required to store the tree. The optimal value depends on the nature of the problem. Defaults to 30.
- **p** (int) – Power parameter for the Minkowski metric. When $p = 1$, this is equivalent to using `manhattan_distance` (l1), and `euclidean_distance` (l2) for $p = 2$. For arbitrary p , `minkowski_distance (l_p)` is used. Defaults to 2.
- **random_seed** (int) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "n_neighbors": Integer(2, 12), "weights": ["uniform", "distance"], "algorithm": ["auto", "ball_tree", "kd_tree", "brute"], "leaf_size": Integer(10, 30), "p": Integer(1, 5), }
model_family	ModelFamily.K_NEIGHBORS
modifies_features	True
modifies_target	False
name	KNN Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
--------------------	---

continues on next page

Table 388 – continued from previous page

<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns array of 0's matching the input number of features as <code>feature_importance</code> is not defined for KNN classifiers.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns array of 0's matching the input number of features as `feature_importance` is not defined for KNN classifiers.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.LightGBMClassifier (boosting_type='gbdt',
                                                                learn-
                                                                ing_rate=0.1,
                                                                n_estimators=100,
                                                                max_depth=0,
                                                                num_leaves=31,
                                                                min_child_samples=20,
                                                                bag-
                                                                ging_fraction=0.9,
                                                                bag-
                                                                ging_freq=0,
                                                                n_jobs=-
                                                                1,          ran-
                                                                dom_seed=0,
                                                                **kwargs)
```

LightGBM Classifier.

Parameters

- **boosting_type** (*string*) – Type of boosting to use. Defaults to “gbdt”. - ‘gbdt’ uses traditional Gradient Boosting Decision Tree - “dart”, uses Dropouts meet Multiple Additive Regression Trees - “goss”, uses Gradient-based One-Side Sampling - “rf”, uses Random Forest
- **learning_rate** (*float*) – Boosting learning rate. Defaults to 0.1.
- **n_estimators** (*int*) – Number of boosted trees to fit. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners, <=0 means no limit. Defaults to 0.
- **num_leaves** (*int*) – Maximum tree leaves for base learners. Defaults to 31.
- **min_child_samples** (*int*) – Minimum number of data needed in a child (leaf). Defaults to 20.
- **bagging_fraction** (*float*) – LightGBM will randomly select a subset of features on each iteration (tree) without resampling if this is smaller than 1.0. For example, if set to 0.8, LightGBM will select 80% of features before training each tree. This can be used to speed up training and deal with overfitting. Defaults to 0.9.
- **bagging_freq** (*int*) – Frequency for bagging. 0 means bagging is disabled. k means perform bagging at every k iteration. Every k-th iteration, LightGBM will randomly select bagging_fraction * 100 % of the data to use for the next k iterations. Defaults to 0.
- **n_jobs** (*int or None*) – Number of threads to run in parallel. -1 uses all threads. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “learning_rate”: Real(0.000001, 1), “boosting_type”: [“gbdt”, “dart”, “goss”, “rf”], “n_estimators”: Integer(10, 100), “max_depth”: Integer(0, 10), “num_leaves”: Integer(2, 100), “min_child_samples”: Integer(1, 100), “bagging_fraction”: Real(0.000001, 1), “bagging_freq”: Integer(0, 1),}
model_family	ModelFamily.LIGHTGBM
modifies_features	True
modifies_target	False
name	LightGBM Classifier
predict_uses_y	False
SEED_MAX	SEED_BOUNDS.max_bound
SEED_MIN	0
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits LightGBM classifier component to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using the fitted LightGBM classifier.
<code>predict_proba</code>	Make prediction probabilities using the fitted LightGBM classifier.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits LightGBM classifier component to data.

Parameters

- **x** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using the fitted LightGBM classifier.

Parameters **x** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.DataFrame

predict_proba (*self, X*)

Make prediction probabilities using the fitted LightGBM classifier.

Parameters **x** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted probability values.

Return type pd.DataFrame

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.LightGBMRegressor (boosting_type='gbdt',  
                                                             learn-  
                                                             ing_rate=0.1,  
                                                             n_estimators=20,  
                                                             max_depth=0,  
                                                             num_leaves=31,  
                                                             min_child_samples=20,  
                                                             bag-  
                                                             ging_fraction=0.9,  
                                                             bag-  
                                                             ging_freq=0,  
                                                             n_jobs=- 1, ran-  
                                                             dom_seed=0,  
                                                             **kwargs)
```

LightGBM Regressor.

Parameters

- **boosting_type** (*string*) – Type of boosting to use. Defaults to “gbdt”. - ‘gbdt’ uses traditional Gradient Boosting Decision Tree - “dart”, uses Dropouts meet Multiple Additive Regression Trees - “goss”, uses Gradient-based One-Side Sampling - “rf”, uses Random Forest
- **learning_rate** (*float*) – Boosting learning rate. Defaults to 0.1.
- **n_estimators** (*int*) – Number of boosted trees to fit. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners, ≤ 0 means no limit. Defaults to 0.
- **num_leaves** (*int*) – Maximum tree leaves for base learners. Defaults to 31.
- **min_child_samples** (*int*) – Minimum number of data needed in a child (leaf). Defaults to 20.
- **bagging_fraction** (*float*) – LightGBM will randomly select a subset of features on each iteration (tree) without resampling if this is smaller than 1.0. For example, if set to 0.8, LightGBM will select 80% of features before training each tree. This can be used to speed up training and deal with overfitting. Defaults to 0.9.
- **bagging_freq** (*int*) – Frequency for bagging. 0 means bagging is disabled. k means perform bagging at every k iteration. Every k-th iteration, LightGBM will randomly select $\text{bagging_fraction} * 100\%$ of the data to use for the next k iterations. Defaults to 0.
- **n_jobs** (*int or None*) – Number of threads to run in parallel. -1 uses all threads. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “learning_rate”: Real(0.000001, 1), “boosting_type”: [“gbdt”, “dart”, “goss”, “rf”], “n_estimators”: Integer(10, 100), “max_depth”: Integer(0, 10), “num_leaves”: Integer(2, 100), “min_child_samples”: Integer(1, 100), “bagging_fraction”: Real(0.000001, 1), “bagging_freq”: Integer(0, 1),}
model_family	ModelFamily.LIGHTGBM
modifies_features	True
modifies_target	False
name	LightGBM Regressor
predict_uses_y	False
SEED_MAX	SEED_BOUNDS.max_bound
SEED_MIN	0
supported_problem_types	[ProblemTypes.REGRESSION]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits LightGBM regressor to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using fitted LightGBM regressor.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a `feature_importance` method or a `component_obj` that implements `feature_importance`.

fit (*self*, *X*, *y=None*)

Fits LightGBM regressor to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using fitted LightGBM regressor.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.LinearRegressor (fit_intercept=True,
                                                             normalize=False,
                                                             n_jobs=-1, random_seed=0,
                                                             **kwargs)
```

Linear Regressor.

Parameters

- **fit_intercept** (*boolean*) – Whether to calculate the intercept for this model. If set to False, no intercept will be used in calculations (i.e. data is expected to be centered). Defaults to True.
- **normalize** (*boolean*) – If True, the regressors will be normalized before regression by subtracting the mean and dividing by the l2-norm. This parameter is ignored when fit_intercept is set to False. Defaults to False.

- **n_jobs** (*int* or *None*) – Number of jobs to run in parallel. -1 uses all threads. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "fit_intercept": [True, False], "normalize": [True, False]}
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Linear Regressor
pre_dict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance for fitted linear regressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted linear regressor.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.LogisticRegressionClassifier (penalty='l2',  
                                                                    C=1.0,  
                                                                    multi_class='auto',  
                                                                    solver='lbfgs',  
                                                                    n_jobs=-1,  
                                                                    random_seed=0,  
                                                                    **kwargs)
```

Logistic Regression Classifier.

Parameters

- **penalty** (*{ "l1", "l2", "elasticnet", "none" }*) – The norm used in penalization. Defaults to “l2”.
- **C** (*float*) – Inverse of regularization strength. Must be a positive float. Defaults to 1.0.
- **multi_class** (*{ "auto", "ovr", "multinomial" }*) – If the option chosen is “ovr”, then a binary problem is fit for each label. For “multinomial” the loss minimised is the multinomial loss fit across the entire probability distribution, even when the data is binary. “multinomial” is unavailable when *solver*=“liblinear”. “auto” selects “ovr” if the data is binary, or if *solver*=“liblinear”, and otherwise selects “multinomial”. Defaults to “auto”.
- **solver** (*{ "newton-cg", "lbfgs", "liblinear", "sag", "saga" }*) – Algorithm to use in the optimization problem. For small datasets, “liblinear” is a good choice, whereas “sag” and “saga” are faster for large ones. For multiclass problems, only “newton-cg”, “sag”, “saga” and “lbfgs” handle multinomial loss; “liblinear” is limited to one-versus-rest schemes.
 - “newton-cg”, “lbfgs”, “sag” and “saga” handle L2 or no penalty
 - “liblinear” and “saga” also handle L1 penalty
 - “saga” also supports “elasticnet” penalty
 - “liblinear” does not support setting *penalty*=‘none’Defaults to “lbfgs”.
- **n_jobs** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "penalty": ["l2"], "C": Real(0.01, 10), }
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Logistic Regression Classifier
pre_dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance for fitted logistic regression classifier.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted logistic regression classifier.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.ProphetRegressor (date_index=None,
                                                             change-
point_prior_scale=0.05,
seasonal-
ity_prior_scale=10,
holi-
days_prior_scale=10,
seasonal-
ity_mode='additive',
random_seed=0,
stan_backend='CMDSTANPY',
**kwargs)
```

Prophet is a procedure for forecasting time series data based on an additive model where non-linear trends are fit with yearly, weekly, and daily seasonality, plus holiday effects. It works best with time series that have strong seasonal effects and several seasons of historical data. Prophet is robust to missing data and shifts in the trend, and typically handles outliers well.

More information here: <https://facebook.github.io/prophet/>

Attributes

hyper-parameter_ranges	{ "changepoint_prior_scale": Real(0.001, 0.5), "seasonality_prior_scale": Real(0.01, 10), "holidays_prior_scale": Real(0.01, 10), "seasonality_mode": ["additive", "multiplicative"], }
model_family	ModelFamily.PROPHET
modifies_features	True
modifies_target	False
name	Prophet Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.TIME_SERIES_REGRESSION]
training_only	False

Methods

<i>build_prophet_df</i>	Build the Prophet data to pass fit and predict on.
<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns array of 0's with len(1) as feature_importance is not defined for Prophet regressor.
<i>fit</i>	Fits Prophet regressor component to data.
<i>get_params</i>	Get parameters for the Prophet regressor.
<i>load</i>	Loads component at file path.

continues on next page

Table 393 – continued from previous page

<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using fitted Prophet regressor.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

static build_prophet_df (*X*, *y=None*, *date_column='ds'*)

Build the Prophet data to pass fit and predict on.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns array of 0's with len(1) as feature_importance is not defined for Prophet regressor.

fit (*self*, *X*, *y=None*)

Fits Prophet regressor component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

get_params (*self*)

Get parameters for the Prophet regressor.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*, *y=None*)

Make predictions using fitted Prophet regressor.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – Target data.

Returns Predicted values.

Return type *pd.Series*

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.RandomForestClassifier (n_estimators=100,
                                                                    max_depth=6,
                                                                    n_jobs=-1,
                                                                    random_seed=0,
                                                                    **kwargs)
```

Random Forest Classifier.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **n_jobs** (*int* or *None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(10, 1000), “max_depth”: Integer(1, 10), }
model_family	ModelFamily.RANDOM_FOREST
modifies_features	True
modifies_target	False
name	Random Forest Classifier
pre_dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.RandomForestRegressor (n_estimators=100,
                                                                    max_depth=6,
                                                                    n_jobs=-1,
                                                                    random_seed=0,
                                                                    **kwargs)
```

Random Forest Regressor.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(10, 1000), “max_depth”: Integer(1, 32), }
model_family	ModelFamily.RANDOM_FOREST
modifies_features	True
modifies_target	False
name	Random Forest Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.

continues on next page

Table 395 – continued from previous page

<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.SVMClassifier (C=1.0, kernel='rbf',  
                                                         gamma='auto',  
                                                         probability=True,  
                                                         random_seed=0,  
                                                         **kwargs)
```

Support Vector Machine Classifier.

Parameters

- **C** (*float*) – The regularization parameter. The strength of the regularization is inversely proportional to C. Must be strictly positive. The penalty is a squared l2 penalty. Defaults to 1.0.
- **kernel** (*{ "poly", "rbf", "sigmoid" }*) – Specifies the kernel type to be used in the algorithm. Defaults to “rbf”.
- **gamma** (*{ "scale", "auto" } or float*) – Kernel coefficient for “rbf”, “poly” and “sigmoid”. Defaults to “auto”. - If gamma=’scale’ is passed then it uses 1 / (n_features * X.var()) as value of gamma - If “auto” (default), uses 1 / n_features

- **probability** (*boolean*) – Whether to enable probability estimates. Defaults to True.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "C": Real(0, 10), "kernel": ["poly", "rbf", "sigmoid"], "gamma": ["scale", "auto"], }
model_family	ModelFamily.SVM
modifies_features	True
modifies_target	False
name	SVM Classifier
pre_dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance only works with linear kernels.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance only works with linear kernels.

If the kernel isn't linear, we return a numpy array of zeros.

Returns Feature importance of fitted SVM classifier or a numpy array of zeroes if the kernel is not linear.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

`save` (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **`file_path`** (*str*) – Location to save file.
- **`pickle_protocol`** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.SVMRegressor (C=1.0, kernel='rbf',  
                                                    gamma='auto',  
                                                    random_seed=0,  
                                                    **kwargs)
```

Support Vector Machine Regressor.

Parameters

- **`C`** (*float*) – The regularization parameter. The strength of the regularization is inversely proportional to C. Must be strictly positive. The penalty is a squared l2 penalty. Defaults to 1.0.
- **`kernel`** ({*"poly"*, *"rbf"*, *"sigmoid"*}) – Specifies the kernel type to be used in the algorithm. Defaults to “rbf”.
- **`gamma`** ({*"scale"*, *"auto"*} or *float*) – Kernel coefficient for “rbf”, “poly” and “sigmoid”. Defaults to “auto”. - If `gamma='scale'` is passed then it uses `1 / (n_features * X.var())` as value of gamma - If “auto” (default), uses `1 / n_features`
- **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “C”: Real(0, 10), “kernel”: [“poly”, “rbf”, “sigmoid”], “gamma”: [“scale”, “auto”], }
model_family	ModelFamily.SVM
modifies_features	True
modifies_target	False
name	SVM Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.

continues on next page

Table 397 – continued from previous page

<code>feature_importance</code>	Feature importance of fitted SVM regresor.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or dict

property feature_importance (*self*)

Feature importance of fitted SVM regresor.

Only works with linear kernels. If the kernel isn't linear, we return a numpy array of zeros.

Returns The feature importance of the fitted SVM regressor, or an array of zeroes if the kernel is not linear.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns `self`

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.TimeSeriesBaselineEstimator (gap=1,
                                                                    fore-
                                                                    cast_horizon=1,
                                                                    ran-
                                                                    dom_seed=0,
                                                                    **kwargs)
```

Time series estimator that predicts using the naive forecasting approach.

This is useful as a simple baseline estimator for time series problems.

Parameters

- **gap** (*int*) – Gap between prediction date and target date and must be a positive integer. If gap is 0, target date will be shifted ahead by 1 time period. Defaults to 1.
- **forecast_horizon** (*int*) – Number of time steps the model is expected to predict.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.BASELINE
modifies_features	True
modifies_target	False
name	Time Series Baseline Estimator
pre_dict_uses_y	False
supported_problem_types	[ProblemTypes.TIME_SERIES_REGRESSION, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits time series baseline estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted time series baseline estimator.
<i>predict_proba</i>	Make prediction probabilities using fitted time series baseline estimator.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Since baseline estimators do not use input features to calculate predictions, returns an array of zeroes.

Returns An array of zeroes.

Return type np.ndarray (float)

fit (*self, X, y=None*)

Fits time series baseline estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If input y is None.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using fitted time series baseline estimator.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **ValueError** – If input y is None.

predict_proba (*self, X*)

Make prediction probabilities using fitted time series baseline estimator.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted probability values.

Return type pd.DataFrame

Raises `ValueError` – If input `y` is `None`.

`save` (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **`file_path`** (*str*) – Location to save file.
- **`pickle_protocol`** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.XGBoostClassifier(eta=0.1,
                                                             max_depth=6,
                                                             min_child_weight=1,
                                                             n_estimators=100,
                                                             ran-
                                                             dom_seed=0,
                                                             eval_metric='logloss',
                                                             n_jobs=12,
                                                             **kwargs)
```

XGBoost Classifier.

Parameters

- **`eta`** (*float*) – Boosting learning rate. Defaults to 0.1.
- **`max_depth`** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **`min_child_weight`** (*float*) – Minimum sum of instance weight (hessian) needed in a child. Defaults to 1.0
- **`n_estimators`** (*int*) – Number of gradient boosted trees. Equivalent to number of boosting rounds. Defaults to 100.
- **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.
- **`n_jobs`** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to 12.

Attributes

hyper-parameter_ranges	{ "eta": Real(0.000001, 1), "max_depth": Integer(1, 10), "min_child_weight": Real(1, 10), "n_estimators": Integer(1, 1000), }
model_family	ModelFamily.XGBOOST
modifies_features	True
modifies_target	False
name	XGBoost Classifier
pre-dict_uses_y	False
SEED_MAX	None
SEED_MIN	None
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance of fitted XGBoost classifier.
<i>fit</i>	Fits XGBoost classifier component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using the fitted XGBoost classifier.
<i>predict_proba</i>	Make predictions using the fitted CatBoost classifier.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted XGBoost classifier.

fit (*self*, *X*, *y=None*)

Fits XGBoost classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using the fitted XGBoost classifier.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.DataFrame

predict_proba (*self*, *X*)

Make predictions using the fitted CatBoost classifier.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.DataFrame

save (*self*, *file_path*, *pickle_protocol*=cloudpickle.DEFAULT_PROTOCOL)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.estimators.XGBoostRegressor (eta=0.1,  
                                                             max_depth=6,  
                                                             min_child_weight=1,  
                                                             n_estimators=100,  
                                                             random_seed=0,  
                                                             n_jobs=12,  
                                                             **kwargs)
```

XGBoost Regressor.

Parameters

- **eta** (*float*) – Boosting learning rate. Defaults to 0.1.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **min_child_weight** (*float*) – Minimum sum of instance weight (hessian) needed in a child. Defaults to 1.0
- **n_estimators** (*int*) – Number of gradient boosted trees. Equivalent to number of boosting rounds. Defaults to 100.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.
- **n_jobs** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to 12.

Attributes

hyper-parameter_ranges	{ "eta": Real(0.000001, 1), "max_depth": Integer(1, 20), "min_child_weight": Real(1, 10), "n_estimators": Integer(1, 1000), }
model_family	ModelFamily.XGBOOST
modifies_features	True
modifies_target	False
name	XGBoost Regressor
predict_uses_y	False
SEED_MAX	None
SEED_MIN	None
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance of fitted XGBoost regressor.
<i>fit</i>	Fits XGBoost regressor component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted XGBoost regressor.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted XGBoost regressor.

fit (*self, X, y=None*)

Fits XGBoost regressor component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using fitted XGBoost regressor.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.

- `pickle_protocol` (*int*) – The pickle data stream format.

transformers

Components that transform data.

Subpackages

dimensionality_reduction

Transformers that reduce the dimensionality of the input data.

Submodules

lda

Component that reduces the number of features by using Linear Discriminant Analysis.

Module Contents

Classes Summary

<i>LinearDiscriminantAnalysis</i>	Reduces the number of features by using Linear Discriminant Analysis.
-----------------------------------	---

Contents

class evalml.pipelines.components.transformers.dimensionality_reduction.lda.**LinearDiscriminantAnalysis**

Reduces the number of features by using Linear Discriminant Analysis.

Parameters

- **n_components** (*int*) – The number of features to maintain after computation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Linear Discriminant Analysis Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the LDA component.
<i>fit_transform</i>	Fit and transform data using the LDA component.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transform data using the fitted LDA component.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits the LDA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns *self***Raises** **ValueError** – If input data is not all numeric.**fit_transform** (*self, X, y=None*)

Fit and transform data using the LDA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.**Return type** *pd.DataFrame***Raises** **ValueError** – If input data is not all numeric.**static load** (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.**Returns** ComponentBase object**needs_fitting** (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.**property parameters** (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transform data using the fitted LDA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.**Return type** *pd.DataFrame***Raises** **ValueError** – If input data is not all numeric.

pca

Component that reduces the number of features by using Principal Component Analysis (PCA).

Module Contents

Classes Summary

<i>PCA</i>	Reduces the number of features by using Principal Component Analysis (PCA).
------------	---

Contents

class evalml.pipelines.components.transformers.dimensionality_reduction.pca.**PCA**(*variance=0.95*, *n_components=None*, *random_seed=0*, ***kwargs*)

Reduces the number of features by using Principal Component Analysis (PCA).

Parameters

- **variance** (*float*) – The percentage of the original data variance that should be preserved when reducing the number of features. Defaults to 0.95.
- **n_components** (*int*) – The number of features to maintain after computing SVD. Defaults to None, but will override variance variable if set.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	Real(0.25, 1)}:type: {“variance”
modifies_features	True
modifies_target	False
name	PCA Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the PCA component.
<i>fit_transform</i>	Fit and transform data using the PCA component.

continues on next page

Table 404 – continued from previous page

<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transform data using fitted PCA component.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the PCA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If input data is not all numeric.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the PCA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type pd.DataFrame

Raises **ValueError** – If input data is not all numeric.

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=cloudpickle.DEFAULT_PROTOCOL)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=None)

Transform data using fitted PCA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type pd.DataFrame

Raises **ValueError** – If input data is not all numeric.

Package Contents

Classes Summary

<i>LinearDiscriminantAnalysis</i>	Reduces the number of features by using Linear Discriminant Analysis.
<i>PCA</i>	Reduces the number of features by using Principal Component Analysis (PCA).

Contents

class evalml.pipelines.components.transformers.dimensionality_reduction.**LinearDiscriminant**

Reduces the number of features by using Linear Discriminant Analysis.

Parameters

- **n_components** (*int*) – The number of features to maintain after computation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Linear Discriminant Analysis Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the LDA component.
<i>fit_transform</i>	Fit and transform data using the LDA component.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transform data using the fitted LDA component.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits the LDA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If input data is not all numeric.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the LDA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type pd.DataFrame

Raises **ValueError** – If input data is not all numeric.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.

- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transform data using the fitted LDA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

Raises **ValueError** – If input data is not all numeric.

class evalml.pipelines.components.transformers.dimensionality_reduction.**PCA** (*variance=0.95, n_components=None, random_seed=0, **kwargs*)

Reduces the number of features by using Principal Component Analysis (PCA).

Parameters

- **variance** (*float*) – The percentage of the original data variance that should be preserved when reducing the number of features. Defaults to 0.95.
- **n_components** (*int*) – The number of features to maintain after computing SVD. Defaults to None, but will override variance variable if set.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	Real(0.25, 1)}:type: {"variance"}
modifies_features	True
modifies_target	False
name	PCA Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the PCA component.
<i>fit_transform</i>	Fit and transform data using the PCA component.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

continues on next page

Table 407 – continued from previous page

<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transform data using fitted PCA component.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the PCA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns *self*

Raises **ValueError** – If input data is not all numeric.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the PCA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns Transformed data.

Return type *pd.DataFrame*

Raises **ValueError** – If input data is not all numeric.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=cloudpickle.DEFAULT_PROTOCOL)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=None)

Transform data using fitted PCA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type pd.DataFrame

Raises **ValueError** – If input data is not all numeric.

encoders

Components used to encode the input data.

Submodules

label_encoder

A transformer that encodes target labels using values between 0 and num_classes - 1.

Module Contents

Classes Summary

LabelEncoder

A transformer that encodes target labels using values between 0 and num_classes - 1.

Contents

class evalml.pipelines.components.transformers.encoders.label_encoder.**LabelEncoder** (*random_seed*, *num_classes*, *random_state*, *verbose*, *train_only*, ***kwargs*)

A transformer that encodes target labels using values between 0 and num_classes - 1.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0. Ignored.

Attributes

hyper-parameter_ranges	{}
modifies_features	False
modifies_target	True
name	Label Encoder
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the label encoder.
<i>fit_transform</i>	Fit and transform data using the label encoder.
<i>inverse_transform</i>	Decodes the target data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transform the target using the fitted label encoder.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that Component.default_parameters == Component().parameters.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits the label encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]. Ignored.
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If input y is None.

fit_transform (*self*, *X*, *y*)

Fit and transform data using the label encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns The original features and an encoded version of the target.

Return type pd.DataFrame, pd.Series

inverse_transform (*self*, *y*)

Decodes the target data.

Parameters **y** (*pd.Series*) – Target data.

Returns The decoded version of the target.

Return type pd.Series

Raises **ValueError** – If input y is None.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)
Transform the target using the fitted label encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]. Ignored.
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns The original features and an encoded version of the target.

Return type *pd.DataFrame*, *pd.Series*

Raises **ValueError** – If input *y* is *None*.

onehot_encoder

A transformer that encodes categorical features in a one-hot numeric array.

Module Contents

Classes Summary

<i>OneHotEncoder</i>	A transformer that encodes categorical features in a one-hot numeric array.
<i>OneHotEncoderMeta</i>	A version of the ComponentBaseMeta class which includes validation on an additional one-hot-encoder-specific method <i>categories</i> .

Contents

class evalml.pipelines.components.transformers.encoders.onehot_encoder.**OneHotEncoder** (*top_n=1*, *features_to_encode=None*, *categories=None*, *drop='if_full'*, *handle_unknown='ignore'*, *handle_missing='impute'*, *random_seed=None*, ***kwargs*)

A transformer that encodes categorical features in a one-hot numeric array.

Parameters

- **top_n** (*int*) – Number of categories per column to encode. If *None*, all categories will be encoded. Otherwise, the *n* most frequent will be encoded and all others will be dropped. Defaults to 10.
- **features_to_encode** (*list[str]*) – List of columns to encode. All other columns will remain untouched. If *None*, all appropriate columns will be encoded. Defaults to *None*.
- **categories** (*list*) – A two dimensional list of categories, where *categories[i]* is a list of the categories for the column at index *i*. This can also be *None*, or “auto” if *top_n* is not *None*. Defaults to *None*.
- **drop** (*string, list*) – Method (“first” or “if_binary”) to use to drop one category per feature. Can also be a list specifying which categories to drop for each feature. Defaults to ‘if_binary’.
- **handle_unknown** (*string*) – Whether to ignore or error for unknown categories for a feature encountered during *fit* or *transform*. If either *top_n* or *categories* is used to limit the number of categories per column, this must be “ignore”. Defaults to “ignore”.
- **handle_missing** (*string*) – Options for how to handle missing (NaN) values encountered during *fit* or *transform*. If this is set to “as_category” and NaN values are within the *n* most frequent, “nan” values will be encoded as their own column. If this is set to “error”, any missing values encountered will raise an error. Defaults to “error”.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	One Hot Encoder
training_only	False

Methods

<i>categories</i>	Returns a list of the unique categories to be encoded for the particular feature, in order.
<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the one-hot encoder component.
<i>fit_transform</i>	Fits on X and transforms X.
<i>get_feature_names</i>	Return feature names for the categorical features after fitting.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

continues on next page

Table 411 – continued from previous page

<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	One-hot encode the input data.

categories (*self*, *feature_name*)

Returns a list of the unique categories to be encoded for the particular feature, in order.

Parameters **feature_name** (*str*) – The name of any feature provided to one-hot encoder during fit.

Returns The unique categories, in the same dtype as they were provided during fit.

Return type np.ndarray

Raises **ValueError** – If feature was not provided to one-hot encoder as a training feature.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the one-hot encoder component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If encoding a column failed.

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type `pd.DataFrame`

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

get_feature_names (*self*)

Return feature names for the categorical features after fitting.

Feature names are formatted as {column name}_{category name}. In the event of a duplicate name, an integer will be added at the end of the feature name to distinguish it.

For example, consider a dataframe with a column called “A” and category “x_y” and another column called “A_x” with “y”. In this example, the feature names would be “A_x_y” and “A_x_y_1”.

Returns The feature names after encoding, provided in the same order as `input_features`.

Return type `np.ndarray`

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns `ComponentBase` object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

One-hot encode the input data.

Parameters

- **X** (*pd.DataFrame*) – Features to one-hot encode.
- **y** (*pd.Series*) – Ignored.

Returns Transformed data, where each categorical feature has been encoded into numerical columns using one-hot encoding.

Return type `pd.DataFrame`

class `evalml.pipelines.components.transformers.encoders.onehot_encoder.OneHotEncoderMeta`

A version of the `ComponentBaseMeta` class which includes validation on an additional one-hot-encoder-specific method *categories*.

Attributes

FIT_METHODS	['fit', 'fit_transform']
METHODS_TO_CHECK	None
PROPERTIES_TO_CHECK	['feature_importance']

Methods

<code>check_for_fit</code>	<code>check_for_fit</code> wraps a method that validates if <code>self.is_fitted</code> is <code>True</code> .
<code>register</code>	Register a virtual subclass of an ABC.
<code>set_fit</code>	Wrapper for the fit method.

classmethod `check_for_fit` (*cls*, *method*)

`check_for_fit` wraps a method that validates if `self.is_fitted` is `True`.

It raises an exception if `False` and calls and returns the wrapped method if `True`.

Parameters `method` (*callable*) – Method to wrap.

Returns The wrapped method.

Raises `ComponentNotYetFittedError` – If component is not yet fitted.

register (*cls*, *subclass*)

Register a virtual subclass of an ABC.

Returns the subclass, to allow usage as a class decorator.

classmethod `set_fit` (*cls*, *method*)

Wrapper for the fit method.

target_encoder

A transformer that encodes categorical features into target encodings.

Module Contents

Classes Summary

<code>TargetEncoder</code>	A transformer that encodes categorical features into target encodings.
----------------------------	--

Contents

class evalml.pipelines.components.transformers.encoders.target_encoder.**TargetEncoder** (*cols=None, smoothing=1.0, handle_unknown='value', handle_missing='value', random_seed=None, **kwargs*)

A transformer that encodes categorical features into target encodings.

Parameters

- **cols** (*list*) – Columns to encode. If None, all string columns will be encoded, otherwise only the columns provided will be encoded. Defaults to None
- **smoothing** (*float*) – The smoothing factor to apply. The larger this value is, the more influence the expected target value has on the resulting target encodings. Must be strictly larger than 0. Defaults to 1.0
- **handle_unknown** (*string*) – Determines how to handle unknown categories for a feature encountered. Options are ‘value’, ‘error’, and ‘return_nan’. Defaults to ‘value’, which replaces with the target mean
- **handle_missing** (*string*) – Determines how to handle missing values encountered during *fit* or *transform*. Options are ‘value’, ‘error’, and ‘return_nan’. Defaults to ‘value’, which replaces with the target mean
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Target Encoder
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the target encoder.
<i>fit_transform</i>	Fit and transform data using the target encoder.

continues on next page

Table 414 – continued from previous page

<code>get_feature_names</code>	Return feature names for the input features after fitting.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transform data using the fitted target encoder.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or dict

fit (*self*, *X*, *y*)

Fits the target encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns `self`

fit_transform (*self*, *X*, *y*)

Fit and transform data using the target encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns Transformed data.

Return type `pd.DataFrame`

get_feature_names (*self*)

Return feature names for the input features after fitting.

Returns The feature names after encoding.

Return type np.array

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transform data using the fitted target encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type pd.DataFrame

Package Contents

Classes Summary

<i>LabelEncoder</i>	A transformer that encodes target labels using values between 0 and num_classes - 1.
<i>OneHotEncoder</i>	A transformer that encodes categorical features in a one-hot numeric array.
<i>TargetEncoder</i>	A transformer that encodes categorical features into target encodings.

Contents

class evalml.pipelines.components.transformers.encoders.**LabelEncoder** (*random_seed=0*,
***kwargs*)

A transformer that encodes target labels using values between 0 and num_classes - 1.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0. Ignored.

Attributes

hyper-parameter_ranges	{}
modifies_features	False
modifies_target	True
name	Label Encoder
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the label encoder.
<i>fit_transform</i>	Fit and transform data using the label encoder.
<i>inverse_transform</i>	Decodes the target data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transform the target using the fitted label encoder.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that Component.default_parameters == Component().parameters.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits the label encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]. Ignored.
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If input y is None.

fit_transform (*self*, *X*, *y*)

Fit and transform data using the label encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns The original features and an encoded version of the target.

Return type pd.DataFrame, pd.Series

inverse_transform (*self*, *y*)

Decodes the target data.

Parameters **y** (*pd.Series*) – Target data.

Returns The decoded version of the target.

Return type pd.Series

Raises **ValueError** – If input y is None.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transform the target using the fitted label encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]. Ignored.
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns The original features and an encoded version of the target.

Return type *pd.DataFrame*, *pd.Series*

Raises **ValueError** – If input *y* is *None*.

```
class evalml.pipelines.components.transformers.encoders.OneHotEncoder (top_n=10,  
                                                                    fea-  
                                                                    tures_to_encode=None,  
                                                                    cate-  
                                                                    gories=None,  
                                                                    drop='if_binary',  
                                                                    han-  
                                                                    dle_unknown='ignore',  
                                                                    han-  
                                                                    dle_missing='error',  
                                                                    ran-  
                                                                    dom_seed=0,  
                                                                    **kwargs)
```

A transformer that encodes categorical features in a one-hot numeric array.

Parameters

- **top_n** (*int*) – Number of categories per column to encode. If *None*, all categories will be encoded. Otherwise, the *n* most frequent will be encoded and all others will be dropped. Defaults to 10.
- **features_to_encode** (*list[str]*) – List of columns to encode. All other columns will remain untouched. If *None*, all appropriate columns will be encoded. Defaults to *None*.
- **categories** (*list*) – A two dimensional list of categories, where *categories[i]* is a list of the categories for the column at index *i*. This can also be *None*, or “auto” if *top_n* is not *None*. Defaults to *None*.
- **drop** (*string*, *list*) – Method (“first” or “if_binary”) to use to drop one category per feature. Can also be a list specifying which categories to drop for each feature. Defaults to “if_binary”.
- **handle_unknown** (*string*) – Whether to ignore or error for unknown categories for a feature encountered during *fit* or *transform*. If either *top_n* or *categories* is used to limit the number of categories per column, this must be “ignore”. Defaults to “ignore”.
- **handle_missing** (*string*) – Options for how to handle missing (NaN) values encountered during *fit* or *transform*. If this is set to “as_category” and NaN values are within the *n* most frequent, “nan” values will be encoded as their own column. If this is set to “error”, any missing values encountered will raise an error. Defaults to “error”.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	One Hot Encoder
training_only	False

Methods

<i>categories</i>	Returns a list of the unique categories to be encoded for the particular feature, in order.
<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the one-hot encoder component.
<i>fit_transform</i>	Fits on X and transforms X.
<i>get_feature_names</i>	Return feature names for the categorical features after fitting.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	One-hot encode the input data.

categories (*self*, *feature_name*)

Returns a list of the unique categories to be encoded for the particular feature, in order.

Parameters **feature_name** (*str*) – The name of any feature provided to one-hot encoder during fit.

Returns The unique categories, in the same dtype as they were provided during fit.

Return type np.ndarray

Raises **ValueError** – If feature was not provided to one-hot encoder as a training feature.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the one-hot encoder component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If encoding a column failed.

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

get_feature_names (*self*)

Return feature names for the categorical features after fitting.

Feature names are formatted as {column name}_{category name}. In the event of a duplicate name, an integer will be added at the end of the feature name to distinguish it.

For example, consider a dataframe with a column called "A" and category "x_y" and another column called "A_x" with "y". In this example, the feature names would be "A_x_y" and "A_x_y_1".

Returns The feature names after encoding, provided in the same order as input_features.

Return type np.ndarray

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=*None*)

One-hot encode the input data.

Parameters

- **X** (*pd.DataFrame*) – Features to one-hot encode.
- **y** (*pd.Series*) – Ignored.

Returns Transformed data, where each categorical feature has been encoded into numerical columns using one-hot encoding.

Return type *pd.DataFrame*

```
class evalml.pipelines.components.transformers.encoders.TargetEncoder (cols=None,
                                                                    smooth-
                                                                    ing=1.0,
                                                                    han-
                                                                    dle_unknown='value',
                                                                    han-
                                                                    dle_missing='value',
                                                                    ran-
                                                                    dom_seed=0,
                                                                    **kwargs)
```

A transformer that encodes categorical features into target encodings.

Parameters

- **cols** (*list*) – Columns to encode. If None, all string columns will be encoded, otherwise only the columns provided will be encoded. Defaults to None
- **smoothing** (*float*) – The smoothing factor to apply. The larger this value is, the more influence the expected target value has on the resulting target encodings. Must be strictly larger than 0. Defaults to 1.0
- **handle_unknown** (*string*) – Determines how to handle unknown categories for a feature encountered. Options are 'value', 'error', and 'return_nan'. Defaults to 'value', which replaces with the target mean
- **handle_missing** (*string*) – Determines how to handle missing values encountered during *fit* or *transform*. Options are 'value', 'error', and 'return_nan'. Defaults to 'value', which replaces with the target mean
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	<code>{}</code>
modifies_features	<code>True</code>
modifies_target	<code>False</code>
name	Target Encoder
training_only	<code>False</code>

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits the target encoder.
<code>fit_transform</code>	Fit and transform data using the target encoder.
<code>get_feature_names</code>	Return feature names for the input features after fitting.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transform data using the fitted target encoder.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format `{"name": name, "parameters": parameters}`

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or dict

fit (*self*, *X*, *y*)

Fits the target encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns *self*

fit_transform (*self*, *X*, *y*)

Fit and transform data using the target encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

get_feature_names (*self*)

Return feature names for the input features after fitting.

Returns The feature names after encoding.

Return type *np.array*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transform data using the fitted target encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type `pd.DataFrame`

feature_selection

Components that select features.

Submodules

feature_selector

Component that selects top features based on importance weights.

Module Contents

Classes Summary

<i>FeatureSelector</i>	Selects top features based on importance weights.
------------------------	---

Contents

class `evalml.pipelines.components.transformers.feature_selection.feature_selector.FeatureSelector`

Selects top features based on importance weights.

Parameters

- **parameters** (*dict*) – Dictionary of parameters for the component. Defaults to None.
- **component_obj** (*obj*) – Third-party objects useful in component implementation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

modi- fies_features	True
modi- fies_target	False
train- ing_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fit and transform data using the feature selector.
<code>get_names</code>	Get names of selected features.
<code>load</code>	Loads component at file path.
<code>name</code>	Returns string name of this component.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an <code>MethodPropertyNotFoundError</code> exception.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

Raises `MethodPropertyNotFoundError` – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the feature selector.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

get_names (*self*)

Get names of selected features.

Returns List of the names of features selected.

Return type *list[str]*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an *MethodPropertyNotFoundError* exception.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data. Ignored.

Returns Transformed X

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If feature selector does not have a transform method or a component_obj that implements transform

rf_classifier_feature_selector

Component that selects top features based on importance weights using a Random Forest classifier.

Module Contents

Classes Summary

<i>RFClassifierSelectFromModel</i>	Selects top features based on importance weights using a Random Forest classifier.
------------------------------------	--

Contents

class evalml.pipelines.components.transformers.feature_selection.rf_classifier_feature_sel

Selects top features based on importance weights using a Random Forest classifier.

Parameters

- **number_features** (*int*) – The maximum number of features to select. If both percent_features and number_features are specified, take the greater number of features. Defaults to 0.5. Defaults to None.
- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **percent_features** (*float*) – Percentage of features to use. If both percent_features and number_features are specified, take the greater number of features. Defaults to 0.5.
- **threshold** (*string or float*) – The threshold value to use for feature selection. Features whose importance is greater or equal are kept while the others are discarded. If “median”, then the threshold value is the median of the feature importances. A scaling factor (e.g., “1.25*mean”) may also be used. Defaults to -np.inf.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “percent_features”: Real(0.01, 1), “threshold”: [“mean”, -np.inf], }
modifies_features	True
modifies_target	False
name	RF Classifier Select From Model
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fit and transform data using the feature selector.
<i>get_names</i>	Get names of selected features.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an MethodPropertyNotFoundError exception.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {“name”: name, “parameters”: parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns *self*

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the feature selector.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

get_names (*self*)

Get names of selected features.

Returns List of the names of features selected.

Return type *list[str]*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an MethodPropertyNotFoundError exception.

Parameters

- **x** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data. Ignored.

Returns Transformed X

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If feature selector does not have a transform method or a *component_obj* that implements transform

rf_regressor_feature_selector

Component that selects top features based on importance weights using a Random Forest regressor.

Module Contents

Classes Summary

<i>RFRegressorSelectFromModel</i>	Selects top features based on importance weights using a Random Forest regressor.
-----------------------------------	---

Contents

class evalml.pipelines.components.transformers.feature_selection.rf_regressor_feature_selector

Selects top features based on importance weights using a Random Forest regressor.

Parameters

- **number_features** (*int*) – The maximum number of features to select. If both *percent_features* and *number_features* are specified, take the greater number of features. Defaults to 0.5. Defaults to None.
- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **percent_features** (*float*) – Percentage of features to use. If both *percent_features* and *number_features* are specified, take the greater number of features. Defaults to 0.5.
- **threshold** (*string or float*) – The threshold value to use for feature selection. Features whose importance is greater or equal are kept while the others are discarded. If

“median”, then the threshold value is the median of the feature importances. A scaling factor (e.g., “1.25*mean”) may also be used. Defaults to `-np.inf`.

- **n_jobs** (*int* or *None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “percent_features”: Real(0.01, 1), “threshold”: [“mean”, -np.inf], }
modifies_features	True
modifies_target	False
name	RF Regressor Select From Model
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fit and transform data using the feature selector.
<i>get_names</i>	Get names of selected features.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an <code>MethodPropertyNotFoundError</code> exception.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the feature selector.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type pd.DataFrame

get_names (*self*)

Get names of selected features.

Returns List of the names of features selected.

Return type list[str]

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an `MethodPropertyNotFoundError` exception.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data. Ignored.

Returns Transformed X

Return type `pd.DataFrame`

Raises **MethodPropertyNotFoundError** – If feature selector does not have a transform method or a component_obj that implements transform

Package Contents**Classes Summary**

<i>FeatureSelector</i>	Selects top features based on importance weights.
<i>RFClassifierSelectFromModel</i>	Selects top features based on importance weights using a Random Forest classifier.
<i>RFRegressorSelectFromModel</i>	Selects top features based on importance weights using a Random Forest regressor.

Contents

```
class evalml.pipelines.components.transformers.feature_selection.FeatureSelector (parameters=None,
                                     component_obj=None,
                                     random_seed=0,
                                     **kwargs)
```

Selects top features based on importance weights.

Parameters

- **parameters** (*dict*) – Dictionary of parameters for the component. Defaults to None.
- **component_obj** (*obj*) – Third-party objects useful in component implementation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

modi- fies_features	True
modi- fies_target	False
train- ing_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fit and transform data using the feature selector.
<i>get_names</i>	Get names of selected features.
<i>load</i>	Loads component at file path.
<i>name</i>	Returns string name of this component.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an <code>MethodPropertyNotFoundError</code> exception.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns *self*

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the feature selector.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

get_names (*self*)

Get names of selected features.

Returns List of the names of features selected.

Return type *list[str]*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns *True*.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an *MethodPropertyNotFoundError* exception.

Parameters

- **x** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data. Ignored.

Returns Transformed X**Return type** *pd.DataFrame***Raises** **MethodPropertyNotFoundError** – If feature selector does not have a transform method or a component_obj that implements transform

```
class evalml.pipelines.components.transformers.feature_selection.RFClassifierSelectFromModel
```

Selects top features based on importance weights using a Random Forest classifier.

Parameters

- **number_features** (*int*) – The maximum number of features to select. If both percent_features and number_features are specified, take the greater number of features. Defaults to 0.5. Defaults to None.
- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **percent_features** (*float*) – Percentage of features to use. If both percent_features and number_features are specified, take the greater number of features. Defaults to 0.5.
- **threshold** (*string or float*) – The threshold value to use for feature selection. Features whose importance is greater or equal are kept while the others are discarded. If “median”, then the threshold value is the median of the feature importances. A scaling factor (e.g., “1.25*mean”) may also be used. Defaults to -np.inf.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “percent_features”: Real(0.01, 1), “threshold”: [“mean”, -np.inf], }
modifies_features	True
modifies_target	False
name	RF Classifier Select From Model
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fit and transform data using the feature selector.
<i>get_names</i>	Get names of selected features.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an MethodPropertyNotFoundError exception.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {“name”: name, “parameters”: parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns *self*

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the feature selector.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

get_names (*self*)

Get names of selected features.

Returns List of the names of features selected.

Return type *list[str]*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an MethodPropertyNotFoundError exception.

Parameters

- **x** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series, optional*) – Target data. Ignored.

Returns Transformed X

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If feature selector does not have a transform method or a component_obj that implements transform

class evalml.pipelines.components.transformers.feature_selection.**RFRegressorSelectFromModel**

Selects top features based on importance weights using a Random Forest regressor.

Parameters

- **number_features** (*int*) – The maximum number of features to select. If both percent_features and number_features are specified, take the greater number of features. Defaults to 0.5. Defaults to None.
- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **percent_features** (*float*) – Percentage of features to use. If both percent_features and number_features are specified, take the greater number of features. Defaults to 0.5.
- **threshold** (*string or float*) – The threshold value to use for feature selection. Features whose importance is greater or equal are kept while the others are discarded. If “median”, then the threshold value is the median of the feature importances. A scaling factor (e.g., “1.25*mean”) may also be used. Defaults to -np.inf.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “percent_features”: Real(0.01, 1), “threshold”: [“mean”, -np.inf], }
modifies_features	True
modifies_target	False
name	RF Regressor Select From Model
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fit and transform data using the feature selector.
<i>get_names</i>	Get names of selected features.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an MethodPropertyNotFoundError exception.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {“name”: name, “parameters”: parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns *self*

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the feature selector.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

get_names (*self*)

Get names of selected features.

Returns List of the names of features selected.

Return type *list[str]*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an MethodPropertyNotFoundError exception.

Parameters

- **x** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data. Ignored.

Returns Transformed X

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If feature selector does not have a transform method or a *component_obj* that implements transform

imputers

Components that impute missing values in the input data.

Submodules

imputer

Component that imputes missing data according to a specified imputation strategy.

Module Contents

Classes Summary

<i>Imputer</i>	Imputes missing data according to a specified imputation strategy.
----------------	--

Contents

class evalml.pipelines.components.transformers.imputers.imputer.**Imputer** (*categorical_impute_strategy*,
categorical_fill_value=None,
numeric_impute_strategy='most_frequent',
numeric_fill_value=None,
random_seed=0,
***kwargs*)

Imputes missing data according to a specified imputation strategy.

Parameters

- **categorical_impute_strategy** (*string*) – Impute strategy to use for string, object, boolean, categorical dtypes. Valid values include “most_frequent” and “constant”.
- **numeric_impute_strategy** (*string*) – Impute strategy to use for numeric columns. Valid values include “mean”, “median”, “most_frequent”, and “constant”.

- **categorical_fill_value** (*string*) – When `categorical_impute_strategy == “constant”`, `fill_value` is used to replace missing data. The default value of `None` will fill with the string “missing_value”.
- **numeric_fill_value** (*int*, *float*) – When `numeric_impute_strategy == “constant”`, `fill_value` is used to replace missing data. The default value of `None` will fill with 0.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “categorical_impute_strategy”: [“most_frequent”], “numeric_impute_strategy”: [“mean”, “median”, “most_frequent”], }
modifies_features	True
modifies_target	False
name	Imputer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits imputer to data. ‘None’ values are converted to <code>np.nan</code> before imputation and are treated as the same.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by imputing missing values. ‘None’ values are converted to <code>np.nan</code> before imputation and are treated as the same.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits imputer to data. 'None' values are converted to np.nan before imputation and are treated as the same.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data *X* by imputing missing values. ‘None’ values are converted to np.nan before imputation and are treated as the same.

Parameters

- **X** (*pd.DataFrame*) – Data to transform
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed *X*

Return type *pd.DataFrame*

per_column_imputer

Component that imputes missing data according to a specified imputation strategy per column.

Module Contents

Classes Summary

<i>PerColumnImputer</i>	Imputes missing data according to a specified imputation strategy per column.
-------------------------	---

Contents

class evalml.pipelines.components.transformers.imputers.per_column_imputer.**PerColumnImputer**

Imputes missing data according to a specified imputation strategy per column.

Parameters

- **impute_strategies** (*dict*) – Column and {“impute_strategy”: strategy, “fill_value”:value} pairings. Valid values for impute strategy include “mean”, “median”, “most_frequent”, “constant” for numerical data, and “most_frequent”, “constant” for object data types. Defaults to None, which uses “most_frequent” for all columns. When impute_strategy == “constant”, fill_value is used to replace missing data. When None, uses 0 when imputing numerical data and “missing_value” for strings or object data types.
- **default_impute_strategy** (*str*) – Impute strategy to fall back on when none is provided for a certain column. Valid values include “mean”, “median”, “most_frequent”, “constant” for numerical data, and “most_frequent”, “constant” for object data types. Defaults to “most_frequent”.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Per Column Imputer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits imputers on input data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input data by imputing missing values.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits imputers on input data.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features] to fit.
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]. Ignored.

Returns self**fit_transform** (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.**Return type** *pd.DataFrame***Raises** **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.**static load** (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.**Returns** ComponentBase object**needs_fitting** (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.**property parameters** (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms input data by imputing missing values.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features] to transform.
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]. Ignored.

Returns Transformed X**Return type** *pd.DataFrame*

simple_imputer

Component that imputes missing data according to a specified imputation strategy.

Module Contents

Classes Summary

<i>SimpleImputer</i>	Imputes missing data according to a specified imputation strategy.
----------------------	--

Contents

`class evalml.pipelines.components.transformers.imputers.simple_imputer.SimpleImputer` (*impute_*
fill_value
ran-
dom_see
***kwargs*

Imputes missing data according to a specified imputation strategy.

Parameters

- **impute_strategy** (*string*) – Impute strategy to use. Valid values include “mean”, “median”, “most_frequent”, “constant” for numerical data, and “most_frequent”, “constant” for object data types.
- **fill_value** (*string*) – When `impute_strategy == “constant”`, `fill_value` is used to replace missing data. Defaults to 0 when imputing numerical data and “missing_value” for strings or object data types.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “impute_strategy”: [“mean”, “median”, “most_frequent”]}
modifies_features	True
modifies_target	False
name	Simple Imputer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.

continues on next page

Table 434 – continued from previous page

<i>fit</i>	Fits imputer to data. ‘None’ values are converted to np.nan before imputation and are treated as the same.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input by imputing missing values. ‘None’ and np.nan values are treated as the same.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {“name”: name, “parameters”: parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits imputer to data. ‘None’ values are converted to np.nan before imputation and are treated as the same.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – the input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – the target training data of length [n_samples]

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform
- **y** (*pd.Series*, *optional*) – Target data.

Returns Transformed X

Return type `pd.DataFrame`

static load (*file_path*)

Loads component at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns `ComponentBase` object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms input by imputing missing values. ‘None’ and `np.nan` values are treated as the same.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed X

Return type `pd.DataFrame`

target_imputer

Component that imputes missing target data according to a specified imputation strategy.

Module Contents

Classes Summary

<code>TargetImputer</code>	Imputes missing target data according to a specified imputation strategy.
<code>TargetImputerMeta</code>	A version of the <code>ComponentBaseMeta</code> class which handles when input features is <code>None</code> .

Contents

class evalml.pipelines.components.transformers.imputers.target_imputer.**TargetImputer** (*impute_*
fill_value
ran-
dom_se-
***kwargs*

Imputes missing target data according to a specified imputation strategy.

Parameters

- **impute_strategy** (*string*) – Impute strategy to use. Valid values include “mean”, “median”, “most_frequent”, “constant” for numerical data, and “most_frequent”, “constant” for object data types. Defaults to “most_frequent”.
- **fill_value** (*string*) – When impute_strategy == “constant”, fill_value is used to replace missing data. Defaults to None which uses 0 when imputing numerical data and “missing_value” for strings or object data types.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “impute_strategy”: [“mean”, “median”, “most_frequent”]}
modifies_features	False
modifies_target	True
name	Target Imputer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits imputer to target data. ‘None’ values are converted to np.nan before imputation and are treated as the same.
<i>fit_transform</i>	Fits on and transforms the input target data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input target data by imputing missing values. ‘None’ and np.nan values are treated as the same.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits imputer to target data. 'None' values are converted to np.nan before imputation and are treated as the same.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features]. Ignored.
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

Raises **TypeError** – If target is filled with all null values.

fit_transform (*self*, *X*, *y*)

Fits on and transforms the input target data.

Parameters

- **X** (*pd.DataFrame*) – Features. Ignored.
- **y** (*pd.Series*) – Target data to impute.

Returns The original X, transformed y

Return type (pd.DataFrame, pd.Series)

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*)

Transforms input target data by imputing missing values. ‘None’ and np.nan values are treated as the same.

Parameters

- **X** (*pd.DataFrame*) – Features. Ignored.
- **y** (*pd.Series*) – Target data to impute.

Returns The original X, transformed y

Return type (pd.DataFrame, pd.Series)

class evalml.pipelines.components.transformers.imputers.target_imputer.**TargetImputerMeta**

A version of the ComponentBaseMeta class which handles when input features is None.

Attributes

FIT_METHODS	['fit', 'fit_transform']
METHODS_TO_CHECK	['predict', 'predict_proba', 'transform', 'inverse_transform']
PROPERTIES_TO_CHECK	['feature_importance']

Methods

<i>check_for_fit</i>	<i>check_for_fit</i> wraps a method that validates if <i>self.is_fitted</i> is True.
<i>register</i>	Register a virtual subclass of an ABC.
<i>set_fit</i>	Wrapper for the fit method.

classmethod **check_for_fit** (*cls*, *method*)

check_for_fit wraps a method that validates if *self.is_fitted* is True.

Parameters **method** (*callable*) – Method to wrap.

Raises **ComponentNotYetFittedError** – If component is not fitted.

Returns The wrapped input method.

register (*cls*, *subclass*)

Register a virtual subclass of an ABC.

Returns the subclass, to allow usage as a class decorator.

classmethod **set_fit** (*cls*, *method*)

Wrapper for the fit method.

Package Contents

Classes Summary

<i>Imputer</i>	Imputes missing data according to a specified imputation strategy.
<i>PerColumnImputer</i>	Imputes missing data according to a specified imputation strategy per column.
<i>SimpleImputer</i>	Imputes missing data according to a specified imputation strategy.
<i>TargetImputer</i>	Imputes missing target data according to a specified imputation strategy.

Contents

class evalml.pipelines.components.transformers.imputers.**Imputer** (*categorical_impute_strategy='most_frequent', categorical_fill_value=None, numeric_impute_strategy='mean', numeric_fill_value=None, random_seed=0, **kwargs*)

Imputes missing data according to a specified imputation strategy.

Parameters

- **categorical_impute_strategy** (*string*) – Impute strategy to use for string, object, boolean, categorical dtypes. Valid values include “most_frequent” and “constant”.
- **numeric_impute_strategy** (*string*) – Impute strategy to use for numeric columns. Valid values include “mean”, “median”, “most_frequent”, and “constant”.
- **categorical_fill_value** (*string*) – When categorical_impute_strategy == “constant”, fill_value is used to replace missing data. The default value of None will fill with the string “missing_value”.
- **numeric_fill_value** (*int, float*) – When numeric_impute_strategy == “constant”, fill_value is used to replace missing data. The default value of None will fill with 0.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "categorical_impute_strategy": ["most_frequent"], "numeric_impute_strategy": ["mean", "median", "most_frequent"], }
modifies_features	True
modifies_target	False
name	Imputer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits imputer to data. 'None' values are converted to np.nan before imputation and are treated as the same.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by imputing missing values. 'None' values are converted to np.nan before imputation and are treated as the same.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if *return_dict* is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits imputer to data. 'None' values are converted to np.nan before imputation and are treated as the same.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns *self*

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data X by imputing missing values. 'None' values are converted to np.nan before imputation and are treated as the same.

Parameters

- **X** (*pd.DataFrame*) – Data to transform
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed X

Return type `pd.DataFrame`

```
class evalml.pipelines.components.transformers.imputers.PerColumnImputer (impute_strategies=None,
                                                                    de-
                                                                    fault_impute_strategy='m
                                                                    ran-
                                                                    dom_seed=0,
                                                                    **kwargs)
```

Imputes missing data according to a specified imputation strategy per column.

Parameters

- **impute_strategies** (*dict*) – Column and {"impute_strategy": strategy, "fill_value":value} pairings. Valid values for impute strategy include "mean", "median", "most_frequent", "constant" for numerical data, and "most_frequent", "constant" for object data types. Defaults to None, which uses "most_frequent" for all columns. When impute_strategy == "constant", fill_value is used to replace missing data. When None, uses 0 when imputing numerical data and "missing_value" for strings or object data types.
- **default_impute_strategy** (*str*) – Impute strategy to fall back on when none is provided for a certain column. Valid values include "mean", "median", "most_frequent", "constant" for numerical data, and "most_frequent", "constant" for object data types. Defaults to "most_frequent".
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Per Column Imputer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits imputers on input data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input data by imputing missing values.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits imputers on input data.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape `[n_samples, n_features]` to fit.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`. Ignored.

Returns *self*

fit_transform (*self*, *X*, *y=None*)

Fits on *X* and transforms *X*.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed *X*.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms input data by imputing missing values.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features] to transform.
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]. Ignored.

Returns Transformed X

Return type *pd.DataFrame*

```
class evalml.pipelines.components.transformers.imputers.SimpleImputer (impute_strategy='most_frequent',  
                                                                    fill_value=None,  
                                                                    random_seed=0,  
                                                                    **kwargs)
```

Imputes missing data according to a specified imputation strategy.

Parameters

- **impute_strategy** (*string*) – Impute strategy to use. Valid values include “mean”, “median”, “most_frequent”, “constant” for numerical data, and “most_frequent”, “constant” for object data types.
- **fill_value** (*string*) – When *impute_strategy* == “constant”, *fill_value* is used to replace missing data. Defaults to 0 when imputing numerical data and “missing_value” for strings or object data types.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “impute_strategy”: [“mean”, “median”, “most_frequent”]}
modifies_features	True
modifies_target	False
name	Simple Imputer
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits imputer to data. 'None' values are converted to np.nan before imputation and are treated as the same.
<code>fit_transform</code>	Fits on X and transforms X.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms input by imputing missing values. 'None' and np.nan values are treated as the same.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits imputer to data. 'None' values are converted to np.nan before imputation and are treated as the same.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – the input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – the target training data of length [n_samples]

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **x** (*pd.DataFrame*) – Data to fit and transform
- **y** (*pd.Series, optional*) – Target data.

Returns Transformed X

Return type *pd.DataFrame*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transforms input by imputing missing values. ‘None’ and np.nan values are treated as the same.

Parameters

- **x** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series, optional*) – Ignored.

Returns Transformed X

Return type *pd.DataFrame*

```
class evalml.pipelines.components.transformers.imputers.TargetImputer (impute_strategy='most_frequent',  
                                                                    fill_value=None,  
                                                                    random_seed=0,  
                                                                    **kwargs)
```

Imputes missing target data according to a specified imputation strategy.

Parameters

- **impute_strategy** (*string*) – Impute strategy to use. Valid values include “mean”, “median”, “most_frequent”, “constant” for numerical data, and “most_frequent”, “constant” for object data types. Defaults to “most_frequent”.
- **fill_value** (*string*) – When impute_strategy == “constant”, fill_value is used to replace missing data. Defaults to None which uses 0 when imputing numerical data and “missing_value” for strings or object data types.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "impute_strategy": ["mean", "median", "most_frequent"] }
modifies_features	False
modifies_target	True
name	Target Imputer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits imputer to target data. 'None' values are converted to np.nan before imputation and are treated as the same.
<i>fit_transform</i>	Fits on and transforms the input target data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input target data by imputing missing values. 'None' and np.nan values are treated as the same.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {“name”: name, “parameters”: parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or `dict`

fit (*self*, *X*, *y*)

Fits imputer to target data. ‘None’ values are converted to `np.nan` before imputation and are treated as the same.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape `[n_samples, n_features]`. Ignored.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns *self*

Raises **TypeError** – If target is filled with all null values.

fit_transform (*self*, *X*, *y*)

Fits on and transforms the input target data.

Parameters

- **X** (*pd.DataFrame*) – Features. Ignored.
- **y** (*pd.Series*) – Target data to impute.

Returns The original *X*, transformed *y*

Return type (*pd.DataFrame*, *pd.Series*)

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*)

Transforms input target data by imputing missing values. ‘None’ and `np.nan` values are treated as the same.

Parameters

- **X** (*pd.DataFrame*) – Features. Ignored.
- **y** (*pd.Series*) – Target data to impute.

Returns The original X, transformed y

Return type (pd.DataFrame, pd.Series)

preprocessing

Preprocessing transformer components.

Submodules

datetime_featurizer

Transformer that can automatically extract features from datetime columns.

Module Contents

Classes Summary

DateTimeFeaturizer

Transformer that can automatically extract features from datetime columns.

Contents

class evalml.pipelines.components.transformers.preprocessing.datetime_featurizer.**DateTimeFeaturizer**

Transformer that can automatically extract features from datetime columns.

Parameters

- **features_to_extract** (*list*) – List of features to extract. Valid options include “year”, “month”, “day_of_week”, “hour”. Defaults to None.
- **encode_as_categories** (*bool*) – Whether day-of-week and month features should be encoded as pandas “category” dtype. This allows OneHotEncoders to encode these features. Defaults to False.
- **date_index** (*str*) – Name of the column containing the datetime information used to order the data. Ignored.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	DateTime Featurization Component
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fit the datetime featurizer component.
<i>fit_transform</i>	Fits on X and transforms X.
<i>get_feature_names</i>	Gets the categories of each datetime feature.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by creating new features using existing DateTime columns, and then dropping those DateTime columns.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fit the datetime featurizer component.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series*, *optional*) – Target data. Ignored.

Returns *self*

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a *component_obj* that implements transform.

get_feature_names (*self*)

Gets the categories of each datetime feature.

Returns

Dictionary, where each key-value pair is a column name and a dictionary mapping the unique feature values to their integer encoding.

Return type dict

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data *X* by creating new features using existing DateTime columns, and then dropping those DateTime columns.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed *X*

Return type *pd.DataFrame*

delayed_feature_transformer

Transformer that delays input features and target variable for time series problems.

Module Contents

Classes Summary

<i>DelayedFeatureTransformer</i>	Transformer that delays input features and target variable for time series problems.
----------------------------------	--

Contents

class evalml.pipelines.components.transformers.preprocessing.delayed_feature_transformer.D

Transformer that delays input features and target variable for time series problems.

Parameters

- **date_index** (*str*) – Name of the column containing the datetime information used to order the data. Ignored.
- **max_delay** (*int*) – Maximum number of time units to delay each feature. Defaults to 2.
- **forecast_horizon** (*int*) – The number of time periods the pipeline is expected to forecast.
- **delay_features** (*bool*) – Whether to delay the input features. Defaults to True.
- **delay_target** (*bool*) – Whether to delay the target. Defaults to True.

- **gap** (*int*) – The number of time units between when the features are collected and when the target is collected. For example, if you are predicting the next time step’s target, gap=1. This is only needed because when gap=0, we need to be sure to start the lagging of the target variable at 1. Defaults to 1.
- **random_seed** (*int*) – Seed for the random number generator. This transformer performs the same regardless of the random seed provided.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Delayed Feature Transformer
needs_fitting	False
target_colname_prefix	target_delay_{ }
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the DelayFeatureTransformer.
<i>fit_transform</i>	Fit the component and transform the input data.
<i>load</i>	Loads component at file path.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Computes the delayed features for all features in X and y.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self, X, y=None*)

Fits the DelayFeatureTransformer.

Parameters

- **X** (*pd.DataFrame or np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series, optional*) – The target training data of length [n_samples]

Returns self

fit_transform (*self, X, y*)

Fit the component and transform the input data.

Parameters

- **X** (*pd.DataFrame or None*) – Data to transform. None is expected when only the target variable is being used.
- **y** (*pd.Series, or None*) – Target.

Returns Transformed X.

Return type pd.DataFrame

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Computes the delayed features for all features in X and y.

For each feature in X, it will add a column to the output dataframe for each delay in the (inclusive) range [1, max_delay]. The values of each delayed feature are simply the original feature shifted forward in time by the delay amount. For example, a delay of 3 units means that the feature value at row n will be taken from the n-3rd row of that feature

If y is not None, it will also compute the delayed values for the target variable.

Parameters

- **x** (*pd.DataFrame* or *None*) – Data to transform. *None* is expected when only the target variable is being used.
- **y** (*pd.Series*, or *None*) – Target.

Returns Transformed X.
Return type *pd.DataFrame*

drop_null_columns

Transformer to drop features whose percentage of NaN values exceeds a specified threshold.

Module Contents

Classes Summary

<i>DropNullColumns</i>	Transformer to drop features whose percentage of NaN values exceeds a specified threshold.
------------------------	--

Contents

class evalml.pipelines.components.transformers.preprocessing.drop_null_columns.**DropNullColumns**

Transformer to drop features whose percentage of NaN values exceeds a specified threshold.

Parameters

- **pct_null_threshold** (*float*) – The percentage of NaN values in an input feature to drop. Must be a value between [0, 1] inclusive. If equal to 0.0, will drop columns with any null values. If equal to 1.0, will drop columns with all null values. Defaults to 0.95.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Drop Null Columns Transformer
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fits on X and transforms X.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms data X by dropping columns that exceed the threshold of null values.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.

- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data *X* by dropping columns that exceed the threshold of null values.

Parameters

- **x** (*pd.DataFrame*) – Data to transform
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed X

Return type *pd.DataFrame*

drop_rows_transformer

Transformer to drop rows specified by row indices.

Module Contents

Classes Summary

<i>DropRowsTransformer</i>	Transformer to drop rows specified by row indices.
----------------------------	--

Contents

class evalml.pipelines.components.transformers.preprocessing.drop_rows_transformer.**DropRowsTransformer**

Transformer to drop rows specified by row indices.

Parameters

- **indices_to_drop** (*list*) – List of indices to drop in the input data. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Is not used by this component. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	True
name	Drop Rows Transformer
training_only	True

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data using fitted component.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns *self*

Raises **ValueError** – If indices to drop do not exist in input features or target.

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

```
save (self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL)
```

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data using fitted component.

Parameters

- **X** (*pd.DataFrame*) – Features.
- **y** (*pd.Series*, *optional*) – Target data.

Returns Data with row indices dropped.

Return type (pd.DataFrame, pd.Series)

featuretools

Featuretools DFS component that generates features for the input features.

Module Contents

Classes Summary

<i>DFSTransformer</i>	Featuretools DFS component that generates features for the input features.
-----------------------	--

Contents

```
class evalml.pipelines.components.transformers.preprocessing.featuretools.DFSTransformer(in
```

Featuretools DFS component that generates features for the input features.

Parameters

- **index** (*string*) – The name of the column that contains the indices. If no column with this name exists, then `featuretools.EntitySet()` creates a column with this name to serve as the index column. Defaults to 'index'.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	<code>{}</code>
modifies_features	True
modifies_target	False
name	DFS Transformer
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits the DFSTransformer Transformer component.
<code>fit_transform</code>	Fits on X and transforms X.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Computes the feature matrix for the input X using featuretools' dfs algorithm.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the DFSTransformer Transformer component.

Parameters

- **X** (*pd.DataFrame*, *np.array*) – The input data to transform, of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns *self*

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Computes the feature matrix for the input X using featuretools' dfs algorithm.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data to transform. Has shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Feature matrix

Return type *pd.DataFrame*

log_transformer

Component that applies a log transformation to the target data.

Module Contents

Classes Summary

<i>LogTransformer</i>	Applies a log transformation to the target data.
-----------------------	--

Contents

class evalml.pipelines.components.transformers.preprocessing.log_transformer.LogTransformer

Applies a log transformation to the target data.

Attributes

hyper-parameter_ranges	{}
modifies_features	False
modifies_target	True
name	Log Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the LogTransformer.
<i>fit_transform</i>	Log transforms the target variable.
<i>inverse_transform</i>	Apply exponential to target data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Log transforms the target variable.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the LogTransformer.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Ignored.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns self

fit_transform (*self*, *X*, *y=None*)

Log transforms the target variable.

Parameters

- **X** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target variable to log transform.

Returns

The input features are returned without modification. The target variable `y` is log transformed.

Return type tuple of `pd.DataFrame`, `pd.Series`

inverse_transform (*self*, *y*)

Apply exponential to target data.

Parameters **y** (*pd.Series*) – Target variable.

Returns Target with exponential applied.

Return type `pd.Series`

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Log transforms the target variable.

Parameters

- **X** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target data to log transform.

Returns

The input features are returned without modification. The target variable y is log transformed.

Return type tuple of pd.DataFrame, pd.Series

lsa

Transformer to calculate the Latent Semantic Analysis Values of text input.

Module Contents

Classes Summary

<i>LSA</i>	Transformer to calculate the Latent Semantic Analysis Values of text input.
------------	---

Contents

class evalml.pipelines.components.transformers.preprocessing.lsa.**LSA** (*random_seed=0*, ***kwargs*)

Transformer to calculate the Latent Semantic Analysis Values of text input.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	LSA Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the input data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by applying the LSA pipeline.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the input data.

Parameters

- **x** (*pd.DataFrame*) – The data to transform.
- **y** (*pd.Series, optional*) – Ignored.

Returns self**fit_transform** (*self, X, y=None*)

Fits on X and transforms X.

Parameters

- **x** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.**Return type** *pd.DataFrame***Raises** **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.**static load** (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.**Returns** ComponentBase object**needs_fitting** (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.**property parameters** (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transforms data X by applying the LSA pipeline.

Parameters

- **x** (*pd.DataFrame*) – The data to transform.
- **y** (*pd.Series, optional*) – Ignored.

Returns**Transformed X. The original column is removed and replaced with two columns of the format** *LSA(original_column_name)[feature_number]*, where *feature_number* is 0 or 1.**Return type** *pd.DataFrame*

polynomial_detrender

Component that removes trends from time series by fitting a polynomial to the data.

Module Contents

Classes Summary

<i>PolynomialDetrender</i>	Removes trends from time series by fitting a polynomial to the data.
----------------------------	--

Contents

class evalml.pipelines.components.transformers.preprocessing.polynomial_detrender.**Polynomial**

Removes trends from time series by fitting a polynomial to the data.

Parameters

- **degree** (*int*) – Degree for the polynomial. If 1, linear model is fit to the data. If 2, quadratic model is fit, etc. Defaults to 1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “degree”: Integer(1, 3)}
modifies_features	False
modifies_target	True
name	Polynomial Detrender
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the PolynomialDetrender.
<i>fit_transform</i>	Removes fitted trend from target variable.
<i>inverse_transform</i>	Adds back fitted trend to target variable.
<i>load</i>	Loads component at file path.

continues on next page

Table 458 – continued from previous page

<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Removes fitted trend from target variable.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the PolynomialDetrender.

Parameters

- **X** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target variable to detrend.

Returns self

Raises **ValueError** – If `y` is None.

fit_transform (*self*, *X*, *y=None*)

Removes fitted trend from target variable.

Parameters

- **X** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target variable to detrend.

Returns

The first element are the input features returned without modification. The second element is the target variable `y` with the fitted trend removed.

Return type tuple of `pd.DataFrame`, `pd.Series`

inverse_transform (*self*, *y*)

Adds back fitted trend to target variable.

Parameters *y* (*pd.Series*) – Target variable.

Returns

The first element are the input features returned without modification. The second element is the target variable *y* with the trend added back.

Return type tuple of *pd.DataFrame*, *pd.Series*

Raises **ValueError** – If *y* is *None*.

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling *predict*, *predict_proba*, *transform*, or *feature_importances*.

This can be overridden to *False* for components that do not need to be fit or whose fit methods do nothing.

Returns *True*.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Removes fitted trend from target variable.

Parameters

- **X** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target variable to detrend.

Returns

The input features are returned without modification. The target variable *y* is detrended

Return type tuple of *pd.DataFrame*, *pd.Series*

text_featurizer

Transformer that can automatically featurize text columns using featuretools' nlp_primitives.

Module Contents

Classes Summary

<i>TextFeaturizer</i>	Transformer that can automatically featurize text columns using featuretools' nlp_primitives.
-----------------------	---

Contents

class evalml.pipelines.components.transformers.preprocessing.text_featurizer.**TextFeaturizer**

Transformer that can automatically featurize text columns using featuretools' nlp_primitives.

Since models cannot handle non-numeric data, any text must be broken down into features that provide useful information about that text. This component splits each text column into several informative features: Diversity Score, Mean Characters per Word, Polarity Score, and LSA (Latent Semantic Analysis). Calling transform on this component will replace any text columns in the given dataset with these numeric columns.

Parameters `random_seed` (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-param-eter_ranges	{}
modi-fies_features	True
modi-fies_target	False
name	Text Featurization Component
train-ing_only	False

Methods

<i>clone</i>	Constructs a new component with the same param-eters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fit-ting before calling predict, predict_proba, transform, or feature_importances.

continues on next page

Table 460 – continued from previous page

<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by creating new features using existing text columns.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*) – The target training data of length [n_samples]

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data X by creating new features using existing text columns.

Parameters

- **X** (*pd.DataFrame*) – The data to transform.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed X

Return type pd.DataFrame

text_transformer

Base class for all transformers working with text features.

Module Contents

Classes Summary

<i>TextTransformer</i>	Base class for all transformers working with text features.
------------------------	---

Contents

class evalml.pipelines.components.transformers.preprocessing.text_transformer.**TextTransformer**

Base class for all transformers working with text features.

Parameters

- **component_obj** (*obj*) – Third-party objects useful in component implementation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

modifies_features	True
modifies_target	False
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>name</i>	Returns string name of this component.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self, X, y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series, optional*) – The target training data of length [n_samples]

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self, X, y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

abstract transform (*self, X, y=None*)

Transforms data X.

Parameters

- **x** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series, optional*) – Target data.

Returns Transformed X

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

transform_primitive_components

Components that extract features from the input data.

Module Contents

Classes Summary

<i>EmailFeaturizer</i>	Transformer that can automatically extract features from emails.
<i>URLFeaturizer</i>	Transformer that can automatically extract features from URL.

Contents

class evalml.pipelines.components.transformers.preprocessing.transform_primitive_components

Transformer that can automatically extract features from emails.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Email Featurizer
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fits on X and transforms X.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms data X.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transforms data X.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series, optional*) – Target data.

Returns Transformed X

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

class evalml.pipelines.components.transformers.preprocessing.transform_primitive_components

Transformer that can automatically extract features from URL.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	URL Featurizer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **x** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series, optional*) – The target training data of length [n_samples]

Returns self**Raises** **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.**fit_transform** (*self, X, y=None*)

Fits on X and transforms X.

Parameters

- **x** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.**Return type** pd.DataFrame**Raises** **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.**static load** (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.**Returns** ComponentBase object**needs_fitting** (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.**property parameters** (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transforms data X.

Parameters

- **x** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series, optional*) – Target data.

Returns Transformed X**Return type** pd.DataFrame

Raises `MethodPropertyNotFoundError` – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

Package Contents

Classes Summary

<i><code>DateTimeFeaturizer</code></i>	Transformer that can automatically extract features from datetime columns.
<i><code>DelayedFeatureTransformer</code></i>	Transformer that delays input features and target variable for time series problems.
<i><code>DFSTransformer</code></i>	Featuretools DFS component that generates features for the input features.
<i><code>DropNullColumns</code></i>	Transformer to drop features whose percentage of NaN values exceeds a specified threshold.
<i><code>DropRowsTransformer</code></i>	Transformer to drop rows specified by row indices.
<i><code>EmailFeaturizer</code></i>	Transformer that can automatically extract features from emails.
<i><code>LogTransformer</code></i>	Applies a log transformation to the target data.
<i><code>LSA</code></i>	Transformer to calculate the Latent Semantic Analysis Values of text input.
<i><code>PolynomialDetrender</code></i>	Removes trends from time series by fitting a polynomial to the data.
<i><code>TextFeaturizer</code></i>	Transformer that can automatically featurize text columns using featuretools' <code>nlp_primitives</code> .
<i><code>TextTransformer</code></i>	Base class for all transformers working with text features.
<i><code>URLFeaturizer</code></i>	Transformer that can automatically extract features from URL.

Contents

```
class evalml.pipelines.components.transformers.preprocessing.DateTimeFeaturizer (features_to_ext  
en-  
code_as_catego  
date_index=No  
ran-  
dom_seed=0,  
**kwargs)
```

Transformer that can automatically extract features from datetime columns.

Parameters

- **`features_to_extract`** (*list*) – List of features to extract. Valid options include “year”, “month”, “day_of_week”, “hour”. Defaults to None.
- **`encode_as_categories`** (*bool*) – Whether day-of-week and month features should be encoded as pandas “category” dtype. This allows OneHotEncoders to encode these features. Defaults to False.
- **`date_index`** (*str*) – Name of the column containing the datetime information used to order the data. Ignored.

- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	DateTime Featurization Component
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fit the datetime featurizer component.
<i>fit_transform</i>	Fits on X and transforms X.
<i>get_feature_names</i>	Gets the categories of each datetime feature.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by creating new features using existing DateTime columns, and then dropping those DateTime columns.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self, X, y=None*)

Fit the datetime featurizer component.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series, optional*) – Target data. Ignored.

Returns self

fit_transform (*self, X, y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

get_feature_names (*self*)

Gets the categories of each datetime feature.

Returns

Dictionary, where each key-value pair is a column name and a dictionary mapping the unique feature values to their integer encoding.

Return type dict

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.

- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data *X* by creating new features using existing DateTime columns, and then dropping those DateTime columns.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed *X*

Return type *pd.DataFrame*

```
class evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer (date_
                                                                    max_
                                                                    gap=
                                                                    fore-
                                                                    cast_
                                                                    de-
                                                                    lay_f
                                                                    de-
                                                                    lay_t
                                                                    ran-
                                                                    dom_
                                                                    **kw)
```

Transformer that delays input features and target variable for time series problems.

Parameters

- **date_index** (*str*) – Name of the column containing the datetime information used to order the data. Ignored.
- **max_delay** (*int*) – Maximum number of time units to delay each feature. Defaults to 2.
- **forecast_horizon** (*int*) – The number of time periods the pipeline is expected to forecast.
- **delay_features** (*bool*) – Whether to delay the input features. Defaults to True.
- **delay_target** (*bool*) – Whether to delay the target. Defaults to True.
- **gap** (*int*) – The number of time units between when the features are collected and when the target is collected. For example, if you are predicting the next time step's target, *gap=1*. This is only needed because when *gap=0*, we need to be sure to start the lagging of the target variable at 1. Defaults to 1.
- **random_seed** (*int*) – Seed for the random number generator. This transformer performs the same regardless of the random seed provided.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Delayed Feature Transformer
needs_fitting	False
target_colname_prefix	target_delay_{ }
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the DelayFeatureTransformer.
<i>fit_transform</i>	Fit the component and transform the input data.
<i>load</i>	Loads component at file path.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Computes the delayed features for all features in X and y.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the DelayFeatureTransformer.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, optional) – The target training data of length [n_samples]

Returns *self*

fit_transform (*self*, *X*, *y*)

Fit the component and transform the input data.

Parameters

- **X** (*pd.DataFrame* or *None*) – Data to transform. *None* is expected when only the target variable is being used.
- **y** (*pd.Series*, or *None*) – Target.

Returns Transformed X.

Return type *pd.DataFrame*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Computes the delayed features for all features in X and y.

For each feature in X, it will add a column to the output dataframe for each delay in the (inclusive) range [1, max_delay]. The values of each delayed feature are simply the original feature shifted forward in time by the delay amount. For example, a delay of 3 units means that the feature value at row n will be taken from the n-3rd row of that feature

If y is not *None*, it will also compute the delayed values for the target variable.

Parameters

- **X** (*pd.DataFrame* or *None*) – Data to transform. *None* is expected when only the target variable is being used.
- **y** (*pd.Series*, or *None*) – Target.

Returns Transformed X.

Return type *pd.DataFrame*

```
class evalml.pipelines.components.transformers.preprocessing.DFSTransformer (index='index',  
                                                                    ran-  
                                                                    dom_seed=0,  
                                                                    **kwargs)
```

Featuretools DFS component that generates features for the input features.

Parameters

- **index** (*string*) – The name of the column that contains the indices. If no column with this name exists, then featuretools.EntitySet() creates a column with this name to serve as the index column. Defaults to 'index'.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	DFS Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the DFSTransformer Transformer component.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Computes the feature matrix for the input X using featuretools' dfs algorithm.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that Component.default_parameters == Component().parameters.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the DFSTransformer Transformer component.

Parameters

- **X** (*pd.DataFrame*, *np.array*) – The input data to transform, of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.

- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Computes the feature matrix for the input *X* using featuretools’ dfs algorithm.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data to transform. Has shape [*n_samples*, *n_features*]
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Feature matrix

Return type *pd.DataFrame*

class evalml.pipelines.components.transformers.preprocessing.**DropNullColumns** (*pct_null_threshold=*
ran-
dom_seed=0,
***kwargs*)

Transformer to drop features whose percentage of NaN values exceeds a specified threshold.

Parameters

- **pct_null_threshold** (*float*) – The percentage of NaN values in an input feature to drop. Must be a value between [0, 1] inclusive. If equal to 0.0, will drop columns with any null values. If equal to 1.0, will drop columns with all null values. Defaults to 0.95.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper- parame- ter_ranges	{}
modi- fies_features	True
modi- fies_target	False
name	Drop Null Columns Transformer
train- ing_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fits on <i>X</i> and transforms <i>X</i> .
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.

continues on next page

Table 470 – continued from previous page

<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms data X by dropping columns that exceed the threshold of null values.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns *self*

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data X by dropping columns that exceed the threshold of null values.

Parameters

- **X** (*pd.DataFrame*) – Data to transform
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed X

Return type pd.DataFrame

class evalml.pipelines.components.transformers.preprocessing.**DropRowsTransformer** (*indices_to_drop*, *random_seed=0*)

Transformer to drop rows specified by row indices.

Parameters

- **indices_to_drop** (*list*) – List of indices to drop in the input data. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Is not used by this component. Defaults to 0.

Attributes

hyper-parameter_ranges	{ }
modifies_features	True
modifies_target	True
name	Drop Rows Transformer
training_only	True

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fits on X and transforms X.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms data using fitted component.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If indices to drop do not exist in input features or target.

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.

- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data using fitted component.

Parameters

- **X** (*pd.DataFrame*) – Features.
- **y** (*pd.Series*, *optional*) – Target data.

Returns Data with row indices dropped.

Return type (*pd.DataFrame*, *pd.Series*)

class `evalml.pipelines.components.transformers.preprocessing.EmailFeaturizer` (*random_seed=0*,
***kwargs*)

Transformer that can automatically extract features from emails.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Email Featurizer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if *return_dict* is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series, optional*) – The target training data of length [n_samples]

Returns self**Raises** **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.**fit_transform** (*self, X, y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.**Return type** pd.DataFrame**Raises** **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.**static load** (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.**Returns** ComponentBase object**needs_fitting** (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.**property parameters** (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transforms data X.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series, optional*) – Target data.

Returns Transformed X**Return type** pd.DataFrame

Raises `MethodPropertyNotFoundError` – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

class `evalml.pipelines.components.transformers.preprocessing.LogTransformer` (*random_seed=0*)
Applies a log transformation to the target data.

Attributes

hyper-parameter_ranges	{}
modifies_features	False
modifies_target	True
name	Log Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the LogTransformer.
<i>fit_transform</i>	Log transforms the target variable.
<i>inverse_transform</i>	Apply exponential to target data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Log transforms the target variable.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self, X, y=None*)

Fits the LogTransformer.

Parameters

- **X** (*pd.DataFrame or np.ndarray*) – Ignored.
- **y** (*pd.Series, optional*) – Ignored.

Returns self

fit_transform (*self, X, y=None*)

Log transforms the target variable.

Parameters

- **X** (*pd.DataFrame, optional*) – Ignored.
- **y** (*pd.Series*) – Target variable to log transform.

Returns

The input features are returned without modification. The target variable y is log transformed.

Return type tuple of pd.DataFrame, pd.Series

inverse_transform (*self, y*)

Apply exponential to target data.

Parameters **y** (*pd.Series*) – Target variable.

Returns Target with exponential applied.

Return type pd.Series

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.

- `pickle_protocol` (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Log transforms the target variable.

Parameters

- **X** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target data to log transform.

Returns

The input features are returned without modification. The target variable *y* is log transformed.

Return type tuple of *pd.DataFrame*, *pd.Series*

class `evalml.pipelines.components.transformers.preprocessing.LSA` (*random_seed=0*,
***kwargs*)

Transformer to calculate the Latent Semantic Analysis Values of text input.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	LSA Transformer
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits the input data.
<code>fit_transform</code>	Fits on <i>X</i> and transforms <i>X</i> .
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms data <i>X</i> by applying the LSA pipeline.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the input data.

Parameters

- **X** (*pd.DataFrame*) – The data to transform.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=*None*)

Transforms data X by applying the LSA pipeline.

Parameters

- **X** (*pd.DataFrame*) – The data to transform.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns

Transformed X. The original column is removed and replaced with two columns of the format *LSA(original_column_name)[feature_number]*, where *feature_number* is 0 or 1.

Return type *pd.DataFrame*

class *evalml.pipelines.components.transformers.preprocessing.PolynomialDetrender* (*degree*=1, *random_seed*=0, ***kwargs*)

Removes trends from time series by fitting a polynomial to the data.

Parameters

- **degree** (*int*) – Degree for the polynomial. If 1, linear model is fit to the data. If 2, quadratic model is fit, etc. Defaults to 1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “degree”: Integer(1, 3)}
modifies_features	False
modifies_target	True
name	Polynomial Detrender
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the PolynomialDetrender.
<i>fit_transform</i>	Removes fitted trend from target variable.

continues on next page

Table 475 – continued from previous page

<code>inverse_transform</code>	Adds back fitted trend to target variable.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Removes fitted trend from target variable.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the PolynomialDetrender.

Parameters

- **X** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target variable to detrend.

Returns self

Raises **ValueError** – If y is None.

fit_transform (*self*, *X*, *y=None*)

Removes fitted trend from target variable.

Parameters

- **X** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target variable to detrend.

Returns

The first element are the input features returned without modification. The second element is the target variable y with the fitted trend removed.

Return type tuple of pd.DataFrame, pd.Series

inverse_transform (*self*, *y*)

Adds back fitted trend to target variable.

Parameters *y* (pd.Series) – Target variable.

Returns

The first element are the input features returned without modification. The second element is the target variable *y* with the trend added back.

Return type tuple of pd.DataFrame, pd.Series

Raises **ValueError** – If *y* is None.

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (str) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=cloudpickle.DEFAULT_PROTOCOL)

Saves component at file path.

Parameters

- **file_path** (str) – Location to save file.
- **pickle_protocol** (int) – The pickle data stream format.

transform (*self*, *X*, *y*=None)

Removes fitted trend from target variable.

Parameters

- **X** (pd.DataFrame, optional) – Ignored.
- **y** (pd.Series) – Target variable to detrend.

Returns

The input features are returned without modification. The target variable *y* is detrended

Return type tuple of pd.DataFrame, pd.Series

class evalml.pipelines.components.transformers.preprocessing.**TextFeaturizer** (*random_seed*=0, ***kwargs*)

Transformer that can automatically featurize text columns using featuretools' nlp_primitives.

Since models cannot handle non-numeric data, any text must be broken down into features that provide useful information about that text. This component splits each text column into several informative features: Diversity Score, Mean Characters per Word, Polarity Score, and LSA (Latent Semantic Analysis). Calling transform on this component will replace any text columns in the given dataset with these numeric columns.

Parameters `random_seed` (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Text Featurization Component
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fits on X and transforms X.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms data X by creating new features using existing text columns.

`clone` (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

`default_parameters` (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

`describe` (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*) – The target training data of length [n_samples]

Returns *self*

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data X by creating new features using existing text columns.

Parameters

- **X** (*pd.DataFrame*) – The data to transform.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed X

Return type `pd.DataFrame`

class `evalml.pipelines.components.transformers.preprocessing.TextTransformer` (*component_obj=None, random_seed=0, **kwargs*)

Base class for all transformers working with text features.

Parameters

- **component_obj** (*obj*) – Third-party objects useful in component implementation. Defaults to `None`.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

modifies_features	True
modifies_target	False
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fits on X and transforms X.
<code>load</code>	Loads component at file path.
<code>name</code>	Returns string name of this component.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms data X.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type `dict`

describe (*self, print_name=False, return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self, X, y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series, optional*) – The target training data of length [n_samples]

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self, X, y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.

- **pickle_protocol** (*int*) – The pickle data stream format.

abstract transform (*self*, *X*, *y=None*)

Transforms data *X*.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data.

Returns Transformed *X*

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

class evalml.pipelines.components.transformers.preprocessing.**URLFeaturizer** (*random_seed=0*,
***kwargs*)

Transformer that can automatically extract features from URL.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	URL Featurizer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fits on <i>X</i> and transforms <i>X</i> .
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data <i>X</i> .

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a `component_obj` that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a `component_obj` that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data X.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data.

Returns Transformed X

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a *component_obj* that implements transform.

samplers

Sampler components.

Submodules

base_sampler

Base Sampler component. Used as the base class of all sampler components.

Module Contents

Classes Summary

BaseSampler

Base Sampler component. Used as the base class of all sampler components.

Contents

class evalml.pipelines.components.transformers.samplers.base_sampler.**BaseSampler** (*parameters=None, component_obj=None, random_seed=0, **kwargs*)

Base Sampler component. Used as the base class of all sampler components.

Parameters

- **parameters** (*dict*) – Dictionary of parameters for the component. Defaults to None.
- **component_obj** (*obj*) – Third-party objects useful in component implementation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

modifies_features	True
modifies_target	True
training_only	True

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the sampler to the data.
<i>fit_transform</i>	Fit and transform data using the sampler component.
<i>load</i>	Loads component at file path.
<i>name</i>	Returns string name of this component.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms the input data by sampling the data.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits the sampler to the data.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series*) – Target.

Returns self

Raises **ValueError** – If y is None.

fit_transform (*self*, *X*, *y*)

Fit and transform data using the sampler component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type (pd.DataFrame, pd.Series)

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)
Transforms the input data by sampling the data.

Parameters

- **X** (*pd.DataFrame*) – Training features.
- **y** (*pd.Series*) – Target.

Returns Transformed features and target.

Return type *pd.DataFrame*, *pd.Series*

oversampler

SMOTE Oversampler component. Will automatically select whether to use SMOTE, SMOTEN, or SMOTENC based on inputs to the component.

Module Contents

Classes Summary

<i>Oversampler</i>	SMOTE Oversampler component. Will automatically select whether to use SMOTE, SMOTEN, or SMOTENC based on inputs to the component.
--------------------	---

Contents

class evalml.pipelines.components.transformers.samplers.oversampler.Oversampler (*sampling_ratio*, *sampling_ratio_dictionary*, *k_neighbors_default*, *n_jobs=-1*, *random_seed=0*, ***kwargs*)

SMOTE Oversampler component. Will automatically select whether to use SMOTE, SMOTEN, or SMOTENC based on inputs to the component.

Parameters

- **sampling_ratio** (*float*) – This is the goal ratio of the minority to majority class, with range (0, 1]. A value of 0.25 means we want a 1:4 ratio of the minority to majority class after oversampling. We will create the a sampling dictionary using this ratio, with the keys corresponding to the class and the values responding to the number of samples. Defaults to 0.25.

- **sampling_ratio_dict** (*dict*) – A dictionary specifying the desired balanced ratio for each target value. For instance, in a binary case where class 1 is the minority, we could specify: `sampling_ratio_dict={0: 0.5, 1: 1}`, which means we would undersample class 0 to have twice the number of samples as class 1 (minority:majority ratio = 0.5), and don't sample class 1. Overrides `sampling_ratio` if provided. Defaults to None.
- **k_neighbors_default** (*int*) – The number of nearest neighbors used to construct synthetic samples. This is the default value used, but the actual `k_neighbors` value might be smaller if there are less samples. Defaults to 5.
- **n_jobs** (*int*) – The number of CPU cores to use. Defaults to -1.
- **random_seed** (*int*) – The seed to use for random sampling. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	True
name	Oversampler
training_only	True

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits oversampler to data.
<code>fit_transform</code>	Fit and transform data using the sampler component.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms the input data by sampling the data.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits oversampler to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns *self*

fit_transform (*self*, *X*, *y*)

Fit and transform data using the sampler component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type (pd.DataFrame, pd.Series)

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms the input data by sampling the data.

Parameters

- **x** (*pd.DataFrame*) – Training features.
- **y** (*pd.Series*) – Target.

Returns Transformed features and target.

Return type *pd.DataFrame*, *pd.Series*

undersampler

An undersampling transformer to downsample the majority classes in the dataset.

Module Contents

Classes Summary

<i>Undersampler</i>	Initializes an undersampling transformer to downsample the majority classes in the dataset.
---------------------	---

Contents

class evalml.pipelines.components.transformers.samplers.undersampler.**Undersampler** (*sampling_ratio*, *sampling_ratio_dict*, *min_samples*, *min_percentage*, *random_seed*=0, ***kwargs*)

Initializes an undersampling transformer to downsample the majority classes in the dataset.

This component is only run during training and not during predict.

Parameters

- **sampling_ratio** (*float*) – The smallest minority:majority ratio that is accepted as ‘balanced’. For instance, a 1:4 ratio would be represented as 0.25, while a 1:1 ratio is 1.0. Must be between 0 and 1, inclusive. Defaults to 0.25.
- **sampling_ratio_dict** (*dict*) – A dictionary specifying the desired balanced ratio for each target value. For instance, in a binary case where class 1 is the minority, we could specify: *sampling_ratio_dict*={0: 0.5, 1: 1}, which means we would undersample class 0 to have twice the number of samples as class 1 (minority:majority ratio = 0.5), and don’t sample class 1. Overrides *sampling_ratio* if provided. Defaults to None.
- **min_samples** (*int*) – The minimum number of samples that we must have for any class, pre or post sampling. If a class must be downsampled, it will not be downsampled past this value. To determine severe imbalance, the minority class must occur less often than this and must have a class ratio below *min_percentage*. Must be greater than 0. Defaults to 100.
- **min_percentage** (*float*) – The minimum percentage of the minimum class to total dataset that we tolerate, as long as it is above *min_samples*. If *min_percentage* and

`min_samples` are not met, treat this as severely imbalanced, and we will not resample the data. Must be between 0 and 0.5, inclusive. Defaults to 0.1.

- **`random_seed`** (*int*) – The seed to use for random sampling. Defaults to 0.

Raises

- **`ValueError`** – If `sampling_ratio` is not in the range (0, 1].
- **`ValueError`** – If `min_sample` is not greater than 0.
- **`ValueError`** – If `min_percentage` is not between 0 and 0.5, inclusive.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	True
name	Undersampler
training_only	True

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the sampler to the data.
<i>fit_resample</i>	Resampling technique for this sampler.
<i>fit_transform</i>	Fit and transform data using the sampler component.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms the input data by sampling the data.

`clone` (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

`default_parameters` (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits the sampler to the data.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series*) – Target.

Returns self

Raises **ValueError** – If y is None.

fit_resample (*self*, *X*, *y*)

Resampling technique for this sampler.

Parameters

- **X** (*pd.DataFrame*) – Training data to fit and resample.
- **y** (*pd.Series*) – Training data targets to fit and resample.

Returns Indices to keep for training data.

Return type list

fit_transform (*self*, *X*, *y*)

Fit and transform data using the sampler component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type (pd.DataFrame, pd.Series)

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms the input data by sampling the data.

Parameters

- **X** (*pd.DataFrame*) – Training features.
- **y** (*pd.Series*) – Target.

Returns Transformed features and target.

Return type *pd.DataFrame*, *pd.Series*

Package Contents

Classes Summary

<i>Oversampler</i>	SMOTE Oversampler component. Will automatically select whether to use SMOTE, SMOTEN, or SMOTENC based on inputs to the component.
<i>Undersampler</i>	Initializes an undersampling transformer to downsample the majority classes in the dataset.

Contents

```
class evalml.pipelines.components.transformers.samplers.Oversampler (sampling_ratio=0.25,
                                                                    sampling_ratio_dict=None,
                                                                    k_neighbors_default=5,
                                                                    n_jobs=-1,
                                                                    random_seed=0,
                                                                    **kwargs)
```

SMOTE Oversampler component. Will automatically select whether to use SMOTE, SMOTEN, or SMOTENC based on inputs to the component.

Parameters

- **sampling_ratio** (*float*) – This is the goal ratio of the minority to majority class, with range (0, 1]. A value of 0.25 means we want a 1:4 ratio of the minority to majority class after oversampling. We will create the a sampling dictionary using this ratio, with the keys corresponding to the class and the values responding to the number of samples. Defaults to 0.25.
- **sampling_ratio_dict** (*dict*) – A dictionary specifying the desired balanced ratio

for each target value. For instance, in a binary case where class 1 is the minority, we could specify: `sampling_ratio_dict={0: 0.5, 1: 1}`, which means we would undersample class 0 to have twice the number of samples as class 1 (minority:majority ratio = 0.5), and don't sample class 1. Overrides `sampling_ratio` if provided. Defaults to None.

- **k_neighbors_default** (*int*) – The number of nearest neighbors used to construct synthetic samples. This is the default value used, but the actual `k_neighbors` value might be smaller if there are less samples. Defaults to 5.
- **n_jobs** (*int*) – The number of CPU cores to use. Defaults to -1.
- **random_seed** (*int*) – The seed to use for random sampling. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	True
name	Oversampler
training_only	True

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits oversampler to data.
<i>fit_transform</i>	Fit and transform data using the sampler component.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms the input data by sampling the data.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits oversampler to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

fit_transform (*self*, *X*, *y*)

Fit and transform data using the sampler component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type (pd.DataFrame, pd.Series)

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms the input data by sampling the data.

Parameters

- **X** (*pd.DataFrame*) – Training features.
- **y** (*pd.Series*) – Target.

Returns Transformed features and target.

Return type *pd.DataFrame*, *pd.Series*

```
class evalml.pipelines.components.transformers.samplers.Undersampler (sampling_ratio=0.25,  
                                                                    sam-  
                                                                    pling_ratio_dict=None,  
                                                                    min_samples=100,  
                                                                    min_percentage=0.1,  
                                                                    ran-  
                                                                    dom_seed=0,  
                                                                    **kwargs)
```

Initializes an undersampling transformer to downsample the majority classes in the dataset.

This component is only run during training and not during predict.

Parameters

- **sampling_ratio** (*float*) – The smallest minority:majority ratio that is accepted as ‘balanced’. For instance, a 1:4 ratio would be represented as 0.25, while a 1:1 ratio is 1.0. Must be between 0 and 1, inclusive. Defaults to 0.25.
- **sampling_ratio_dict** (*dict*) – A dictionary specifying the desired balanced ratio for each target value. For instance, in a binary case where class 1 is the minority, we could specify: *sampling_ratio_dict={0: 0.5, 1: 1}*, which means we would undersample class 0 to have twice the number of samples as class 1 (minority:majority ratio = 0.5), and don’t sample class 1. Overrides *sampling_ratio* if provided. Defaults to None.
- **min_samples** (*int*) – The minimum number of samples that we must have for any class, pre or post sampling. If a class must be downsampled, it will not be downsampled past this value. To determine severe imbalance, the minority class must occur less often than this and must have a class ratio below *min_percentage*. Must be greater than 0. Defaults to 100.
- **min_percentage** (*float*) – The minimum percentage of the minimum class to total dataset that we tolerate, as long as it is above *min_samples*. If *min_percentage* and *min_samples* are not met, treat this as severely imbalanced, and we will not resample the data. Must be between 0 and 0.5, inclusive. Defaults to 0.1.
- **random_seed** (*int*) – The seed to use for random sampling. Defaults to 0.

Raises

- **ValueError** – If *sampling_ratio* is not in the range (0, 1].
- **ValueError** – If *min_sample* is not greater than 0.
- **ValueError** – If *min_percentage* is not between 0 and 0.5, inclusive.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	True
name	Undersampler
training_only	True

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the sampler to the data.
<i>fit_resample</i>	Resampling technique for this sampler.
<i>fit_transform</i>	Fit and transform data using the sampler component.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms the input data by sampling the data.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits the sampler to the data.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series*) – Target.

Returns *self*

Raises **ValueError** – If *y* is None.

fit_resample (*self*, *X*, *y*)

Resampling technique for this sampler.

Parameters

- **X** (*pd.DataFrame*) – Training data to fit and resample.
- **y** (*pd.Series*) – Training data targets to fit and resample.

Returns Indices to keep for training data.

Return type list

fit_transform (*self*, *X*, *y*)

Fit and transform data using the sampler component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [*n_samples*, *n_features*].
- **y** (*pd.Series*, *optional*) – The target training data of length [*n_samples*].

Returns Transformed data.

Return type (*pd.DataFrame*, *pd.Series*)

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms the input data by sampling the data.

Parameters

- **X** (*pd.DataFrame*) – Training features.
- **y** (*pd.Series*) – Target.

Returns Transformed features and target.

Return type *pd.DataFrame*, *pd.Series*

scalers

Components that scale input data.

Submodules**standard_scaler**

A transformer that standardizes input features by removing the mean and scaling to unit variance.

Module Contents**Classes Summary**

StandardScaler

A transformer that standardizes input features by removing the mean and scaling to unit variance.

Contents

class evalml.pipelines.components.transformers.scalers.standard_scaler.**StandardScaler** (*random* ***kwargs*)

A transformer that standardizes input features by removing the mean and scaling to unit variance.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Standard Scaler
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fit and transform data using the standard scaler component.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transform data using the fitted standard scaler.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`

Returns `self`

Raises **MethodPropertyNotFoundError** – If component does not have a `fit` method or a `component_obj` that implements `fit`.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the standard scaler component.

Parameters

- **x** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transform data using the fitted standard scaler.

Parameters

- **x** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

Package Contents

Classes Summary

StandardScaler

A transformer that standardizes input features by removing the mean and scaling to unit variance.

Contents

class evalml.pipelines.components.transformers.scalers.**StandardScaler** (*random_seed=0*,
***kwargs*)

A transformer that standardizes input features by removing the mean and scaling to unit variance.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper- parame- ter_ranges	{}
modi- fies_features	True
modi- fies_target	False
name	Standard Scaler
train- ing_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fit and transform data using the standard scaler component.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transform data using the fitted standard scaler.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self, X, y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series, optional*) – The target training data of length [n_samples]

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self, X, y=None*)

Fit and transform data using the standard scaler component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type pd.DataFrame

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transform data using the fitted standard scaler.

Parameters

- **x** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type `pd.DataFrame`

Submodules

column_selectors

Initializes an transformer that selects specified columns in input data.

Module Contents

Classes Summary

<i>ColumnSelector</i>	Initializes an transformer that selects specified columns in input data.
<i>DropColumns</i>	Drops specified columns in input data.
<i>SelectByType</i>	Selects columns by specified Woodwork logical type or semantic tag in input data.
<i>SelectColumns</i>	Selects specified columns in input data.

Contents

class `evalml.pipelines.components.transformers.column_selectors.ColumnSelector` (*columns=None, random_seed=0, **kwargs*)

Initializes an transformer that selects specified columns in input data.

Parameters

- **columns** (*list(string)*) – List of column names, used to determine which columns to select.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

modifies_features	True
modifies_target	False
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits the transformer by checking if column names are present in the dataset.
<code>fit_transform</code>	Fits on X and transforms X.
<code>load</code>	Loads component at file path.
<code>name</code>	Returns string name of this component.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transform data using fitted column selector component.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the transformer by checking if column names are present in the dataset.

Parameters

- **X** (*pd.DataFrame*) – Data to check.
- **y** (*pd.Series*, *optional*) – Targets.

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **x** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transform data using fitted column selector component.

Parameters

- **x** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

class evalml.pipelines.components.transformers.column_selectors.**DropColumns** (*columns=None, random_seed=0, **kwargs*)

Drops specified columns in input data.

Parameters

- **columns** (*list(string)*) – List of column names, used to determine which columns to drop.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-param- eter_ranges	{}
modi- fies_features	True
modi- fies_target	False
name	Drop Columns Transformer
needs_fitting	False
train- ing_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the transformer by checking if column names are present in the dataset.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by dropping columns.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the transformer by checking if column names are present in the dataset.

Parameters

- **X** (*pd.DataFrame*) – Data to check.
- **y** (*pd.Series*, *optional*) – Targets.

Returns *self*

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data X by dropping columns.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Targets.

Returns Transformed X.

Return type *pd.DataFrame*

class evalml.pipelines.components.transformers.column_selectors.**SelectByType** (*column_types=None*,
random_seed=0,
***kwargs*)

Selects columns by specified Woodwork logical type or semantic tag in input data.

Parameters

- **column_types** (*string, ww.LogicalType, list(string), list(ww.LogicalType)*) – List of Woodwork types or tags, used to determine which columns to select.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Select Columns By Type Transformer
needs_fitting	False
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the transformer by checking if column names are present in the dataset.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by selecting columns.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self, print_name=False, return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or `dict`

fit (*self*, *X*, *y=None*)

Fits the transformer by checking if column names are present in the dataset.

Parameters

- **X** (*pd.DataFrame*) – Data to check.
- **y** (*pd.Series*, *optional*) – Targets.

Returns *self*

fit_transform (*self*, *X*, *y=None*)

Fits on *X* and transforms *X*.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed *X*.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data *X* by selecting columns.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Targets.

Returns Transformed *X*.

Return type *pd.DataFrame*

class `evalml.pipelines.components.transformers.column_selectors.SelectColumns` (*columns=None*,
random_seed=0,
***kwargs*)

Selects specified columns in input data.

Parameters

- **columns** (*list (string)*) – List of column names, used to determine which columns to select.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Select Columns Transformer
needs_fitting	False
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the transformer by checking if column names are present in the dataset.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by selecting columns.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self, X, y=None*)

Fits the transformer by checking if column names are present in the dataset.

Parameters

- **x** (*pd.DataFrame*) – Data to check.
- **y** (*pd.Series, optional*) – Targets.

Returns self

fit_transform (*self, X, y=None*)

Fits on X and transforms X.

Parameters

- **x** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transforms data X by selecting columns.

Parameters

- **x** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series, optional*) – Targets.

Returns Transformed X.

Return type pd.DataFrame

transformer

A component that may or may not need fitting that transforms data. These components are used before an estimator.

Module Contents

Classes Summary

Transformer

A component that may or may not need fitting that transforms data. These components are used before an estimator.

Contents

```
class evalml.pipelines.components.transformers.transformer.Transformer (parameters=None,
                                                                    com-
                                                                    po-
                                                                    nent_obj=None,
                                                                    ran-
                                                                    dom_seed=0,
                                                                    **kwargs)
```

A component that may or may not need fitting that transforms data. These components are used before an estimator.

To implement a new Transformer, define your own class which is a subclass of Transformer, including a name and a list of acceptable ranges for any parameters to be tuned during the automl search (hyperparameters). Define an `__init__` method which sets up any necessary state and objects. Make sure your `__init__` only uses standard keyword arguments and calls `super().__init__()` with a parameters dict. You may also override the `fit`, `transform`, `fit_transform` and other methods in this class if appropriate.

To see some examples, check out the definitions of any Transformer component.

Parameters

- **parameters** (*dict*) – Dictionary of parameters for the component. Defaults to None.
- **component_obj** (*obj*) – Third-party objects useful in component implementation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

modifies_features	True
modifies_target	False
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fits on X and transforms X.
<code>load</code>	Loads component at file path.
<code>name</code>	Returns string name of this component.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms data X.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a `component_obj` that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **x** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

abstract transform (*self, X, y=None*)

Transforms data X.

Parameters

- **x** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series, optional*) – Target data.

Returns Transformed X

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

Package Contents

Classes Summary

<i>DateTimeFeaturizer</i>	Transformer that can automatically extract features from datetime columns.
<i>DelayedFeatureTransformer</i>	Transformer that delays input features and target variable for time series problems.
<i>DFSTransformer</i>	Featuretools DFS component that generates features for the input features.
<i>DropColumns</i>	Drops specified columns in input data.
<i>DropNullColumns</i>	Transformer to drop features whose percentage of NaN values exceeds a specified threshold.
<i>DropRowsTransformer</i>	Transformer to drop rows specified by row indices.
<i>EmailFeaturizer</i>	Transformer that can automatically extract features from emails.
<i>FeatureSelector</i>	Selects top features based on importance weights.
<i>Imputer</i>	Imputes missing data according to a specified imputation strategy.
<i>LabelEncoder</i>	A transformer that encodes target labels using values between 0 and num_classes - 1.
<i>LinearDiscriminantAnalysis</i>	Reduces the number of features by using Linear Discriminant Analysis.
<i>LogTransformer</i>	Applies a log transformation to the target data.
<i>LSA</i>	Transformer to calculate the Latent Semantic Analysis Values of text input.
<i>OneHotEncoder</i>	A transformer that encodes categorical features in a one-hot numeric array.
<i>Oversampler</i>	SMOTE Oversampler component. Will automatically select whether to use SMOTE, SMOTEN, or SMOTENC based on inputs to the component.
<i>PCA</i>	Reduces the number of features by using Principal Component Analysis (PCA).
<i>PerColumnImputer</i>	Imputes missing data according to a specified imputation strategy per column.
<i>PolynomialDetrender</i>	Removes trends from time series by fitting a polynomial to the data.
<i>RFClassifierSelectFromModel</i>	Selects top features based on importance weights using a Random Forest classifier.
<i>RFRegressorSelectFromModel</i>	Selects top features based on importance weights using a Random Forest regressor.
<i>SelectByType</i>	Selects columns by specified Woodwork logical type or semantic tag in input data.
<i>SelectColumns</i>	Selects specified columns in input data.
<i>SimpleImputer</i>	Imputes missing data according to a specified imputation strategy.
<i>StandardScaler</i>	A transformer that standardizes input features by removing the mean and scaling to unit variance.
<i>TargetEncoder</i>	A transformer that encodes categorical features into target encodings.

continues on next page

Table 499 – continued from previous page

<i>TargetImputer</i>	Imputes missing target data according to a specified imputation strategy.
<i>TextFeaturizer</i>	Transformer that can automatically featurize text columns using featuretools’ nlp_primitives.
<i>Transformer</i>	A component that may or may not need fitting that transforms data. These components are used before an estimator.
<i>Undersampler</i>	Initializes an undersampling transformer to downsample the majority classes in the dataset.
<i>URLFeaturizer</i>	Transformer that can automatically extract features from URL.

Contents

class evalml.pipelines.components.transformers.**DateTimeFeaturizer** (*features_to_extract=None, encode_as_categories=False, date_index=None, random_seed=0, **kwargs*)

Transformer that can automatically extract features from datetime columns.

Parameters

- **features_to_extract** (*list*) – List of features to extract. Valid options include “year”, “month”, “day_of_week”, “hour”. Defaults to None.
- **encode_as_categories** (*bool*) – Whether day-of-week and month features should be encoded as pandas “category” dtype. This allows OneHotEncoders to encode these features. Defaults to False.
- **date_index** (*str*) – Name of the column containing the datetime information used to order the data. Ignored.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	DateTime Featurization Component
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fit the datetime featurizer component.
<code>fit_transform</code>	Fits on X and transforms X.
<code>get_feature_names</code>	Gets the categories of each datetime feature.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms data X by creating new features using existing DateTime columns, and then dropping those DateTime columns.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fit the datetime featurizer component.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series*, *optional*) – Target data. Ignored.

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **x** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

get_feature_names (*self*)

Gets the categories of each datetime feature.

Returns

Dictionary, where each key-value pair is a column name and a dictionary mapping the unique feature values to their integer encoding.

Return type dict

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transforms data X by creating new features using existing DateTime columns, and then dropping those DateTime columns.

Parameters

- **x** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series, optional*) – Ignored.

Returns Transformed X

Return type *pd.DataFrame*

```

class evalml.pipelines.components.transformers.DelayedFeatureTransformer (date_index=None,
                                                                    max_delay=2,
                                                                    gap=0,
                                                                    fore-
                                                                    cast_horizon=1,
                                                                    de-
                                                                    lay_features=True,
                                                                    de-
                                                                    lay_target=True,
                                                                    ran-
                                                                    dom_seed=0,
                                                                    **kwargs)

```

Transformer that delays input features and target variable for time series problems.

Parameters

- **date_index** (*str*) – Name of the column containing the datetime information used to order the data. Ignored.
- **max_delay** (*int*) – Maximum number of time units to delay each feature. Defaults to 2.
- **forecast_horizon** (*int*) – The number of time periods the pipeline is expected to forecast.
- **delay_features** (*bool*) – Whether to delay the input features. Defaults to True.
- **delay_target** (*bool*) – Whether to delay the target. Defaults to True.
- **gap** (*int*) – The number of time units between when the features are collected and when the target is collected. For example, if you are predicting the next time step's target, gap=1. This is only needed because when gap=0, we need to be sure to start the lagging of the target variable at 1. Defaults to 1.
- **random_seed** (*int*) – Seed for the random number generator. This transformer performs the same regardless of the random seed provided.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Delayed Feature Transformer
needs_fitting	False
target_colname_prefix	target_delay_{ }
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.

continues on next page

Table 501 – continued from previous page

<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the DelayFeatureTransformer.
<i>fit_transform</i>	Fit the component and transform the input data.
<i>load</i>	Loads component at file path.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Computes the delayed features for all features in X and y.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the DelayFeatureTransformer.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns *self*

fit_transform (*self*, *X*, *y*)

Fit the component and transform the input data.

Parameters

- **X** (*pd.DataFrame* or *None*) – Data to transform. None is expected when only the target variable is being used.
- **y** (*pd.Series*, or *None*) – Target.

Returns Transformed X.

Return type *pd.DataFrame*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Computes the delayed features for all features in X and y.

For each feature in X, it will add a column to the output dataframe for each delay in the (inclusive) range [1, max_delay]. The values of each delayed feature are simply the original feature shifted forward in time by the delay amount. For example, a delay of 3 units means that the feature value at row n will be taken from the n-3rd row of that feature

If y is not None, it will also compute the delayed values for the target variable.

Parameters

- **X** (*pd.DataFrame* or *None*) – Data to transform. None is expected when only the target variable is being used.
- **y** (*pd.Series*, or *None*) – Target.

Returns Transformed X.

Return type *pd.DataFrame*

class evalml.pipelines.components.transformers.**DFSTransformer** (*index='index'*,
random_seed=0,
***kwargs*)

Featuretools DFS component that generates features for the input features.

Parameters

- **index** (*string*) – The name of the column that contains the indices. If no column with this name exists, then featuretools.EntitySet() creates a column with this name to serve as the index column. Defaults to 'index'.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	DFS Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the DFSTransformer Transformer component.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Computes the feature matrix for the input X using featuretools' dfs algorithm.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the DFSTransformer Transformer component.

Parameters

- **X** (*pd.DataFrame*, *np.array*) – The input data to transform, of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns *self*

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Computes the feature matrix for the input X using featuretools' dfs algorithm.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data to transform. Has shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Feature matrix

Return type *pd.DataFrame*

```
class evalml.pipelines.components.transformers.DropColumns (columns=None,  
                                                         random_seed=0,  
                                                         **kwargs)
```

Drops specified columns in input data.

Parameters

- **columns** (*list(string)*) – List of column names, used to determine which columns to drop.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Drop Columns Transformer
needs_fitting	False
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the transformer by checking if column names are present in the dataset.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by dropping columns.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the transformer by checking if column names are present in the dataset.

Parameters

- **X** (*pd.DataFrame*) – Data to check.
- **y** (*pd.Series*, *optional*) – Targets.

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data X by dropping columns.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Targets.

Returns Transformed X.

Return type pd.DataFrame

```
class evalml.pipelines.components.transformers.DropNullColumns (pct_null_threshold=1.0,  
                                                             ran-  
                                                             dom_seed=0,  
                                                             **kwargs)
```

Transformer to drop features whose percentage of NaN values exceeds a specified threshold.

Parameters

- **pct_null_threshold** (*float*) – The percentage of NaN values in an input feature to drop. Must be a value between [0, 1] inclusive. If equal to 0.0, will drop columns with any null values. If equal to 1.0, will drop columns with all null values. Defaults to 0.95.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Drop Null Columns Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by dropping columns that exceed the threshold of null values.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.

- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data *X* by dropping columns that exceed the threshold of null values.

Parameters

- **X** (*pd.DataFrame*) – Data to transform
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed *X*

Return type *pd.DataFrame*

class evalml.pipelines.components.transformers.**DropRowsTransformer** (*indices_to_drop=None*,
random_seed=0)

Transformer to drop rows specified by row indices.

Parameters

- **indices_to_drop** (*list*) – List of indices to drop in the input data. Defaults to *None*.
- **random_seed** (*int*) – Seed for the random number generator. Is not used by this component. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	True
name	Drop Rows Transformer
training_only	True

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fits on <i>X</i> and transforms <i>X</i> .
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling <i>predict</i> , <i>predict_proba</i> , <i>transform</i> , or <i>feature_importances</i> .
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data using fitted component.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns *self*

Raises **ValueError** – If indices to drop do not exist in input features or target.

fit_transform (*self*, *X*, *y=None*)

Fits on *X* and transforms *X*.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed *X*.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data using fitted component.

Parameters

- **X** (*pd.DataFrame*) – Features.
- **y** (*pd.Series*, *optional*) – Target data.

Returns Data with row indices dropped.

Return type (*pd.DataFrame*, *pd.Series*)

class evalml.pipelines.components.transformers.**EmailFeaturizer** (*random_seed=0*,
***kwargs*)

Transformer that can automatically extract features from emails.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Email Featurizer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

continues on next page

Table 506 – continued from previous page

<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`

Returns `self`

Raises **MethodPropertyNotFoundError** – If component does not have a `fit` method or a `component_obj` that implements `fit`.

fit_transform (*self*, *X*, *y=None*)

Fits on `X` and transforms `X`.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed `X`.

Return type `pd.DataFrame`

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data X.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data.

Returns Transformed X

Return type `pd.DataFrame`

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a `component_obj` that implements transform.

```
class evalml.pipelines.components.transformers.FeatureSelector (parameters=None,
                                                             component_obj=None,
                                                             random_seed=0,
                                                             **kwargs)
```

Selects top features based on importance weights.

Parameters

- **parameters** (*dict*) – Dictionary of parameters for the component. Defaults to None.
- **component_obj** (*obj*) – Third-party objects useful in component implementation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

modifies_features	True
modifies_target	False
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fit and transform data using the feature selector.
<code>get_names</code>	Get names of selected features.
<code>load</code>	Loads component at file path.
<code>name</code>	Returns string name of this component.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an <code>MethodPropertyNotFoundError</code> exception.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`

Returns self

Raises `MethodPropertyNotFoundError` – If component does not have a fit method or a `component_obj` that implements fit.

`fit_transform` (*self*, *X*, *y=None*)

Fit and transform data using the feature selector.

Parameters

- **`X`** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **`y`** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

`get_names` (*self*)

Get names of selected features.

Returns List of the names of features selected.

Return type *list[str]*

`static load` (*file_path*)

Loads component at file path.

Parameters **`file_path`** (*str*) – Location to load file.

Returns *ComponentBase* object

`property name` (*cls*)

Returns string name of this component.

`needs_fitting` (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

`property parameters` (*self*)

Returns the parameters which were used to initialize the component.

`save` (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **`file_path`** (*str*) – Location to save file.
- **`pickle_protocol`** (*int*) – The pickle data stream format.

`transform` (*self*, *X*, *y=None*)

Transforms input data by selecting features. If the `component_obj` does not have a `transform` method, will raise an `MethodPropertyNotFoundError` exception.

Parameters

- **`X`** (*pd.DataFrame*) – Data to transform.
- **`y`** (*pd.Series*, *optional*) – Target data. Ignored.

Returns Transformed X

Return type *pd.DataFrame*

Raises `MethodPropertyNotFoundError` – If feature selector does not have a transform method or a `component_obj` that implements transform

```
class evalml.pipelines.components.transformers.Imputer (categorical_impute_strategy='most_frequent',  
                                                    categori-  
                                                    cal_fill_value=None,    nu-  
                                                    meric_impute_strategy='mean',  
                                                    numeric_fill_value=None,  
                                                    random_seed=0, **kwargs)
```

Imputes missing data according to a specified imputation strategy.

Parameters

- **`categorical_impute_strategy`** (*string*) – Impute strategy to use for string, object, boolean, categorical dtypes. Valid values include “most_frequent” and “constant”.
- **`numeric_impute_strategy`** (*string*) – Impute strategy to use for numeric columns. Valid values include “mean”, “median”, “most_frequent”, and “constant”.
- **`categorical_fill_value`** (*string*) – When `categorical_impute_strategy == “constant”`, `fill_value` is used to replace missing data. The default value of `None` will fill with the string “missing_value”.
- **`numeric_fill_value`** (*int, float*) – When `numeric_impute_strategy == “constant”`, `fill_value` is used to replace missing data. The default value of `None` will fill with 0.
- **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “categorical_impute_strategy”: [“most_frequent”], “numeric_impute_strategy”: [“mean”, “median”, “most_frequent”], }
modifies_features	True
modifies_target	False
name	Imputer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits imputer to data. ‘None’ values are converted to np.nan before imputation and are treated as the same.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

continues on next page

Table 508 – continued from previous page

<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by imputing missing values. ‘None’ values are converted to np.nan before imputation and are treated as the same.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {“name”: name, “parameters”: parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits imputer to data. ‘None’ values are converted to np.nan before imputation and are treated as the same.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a `component_obj` that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=*None*)

Transforms data X by imputing missing values. ‘None’ values are converted to np.nan before imputation and are treated as the same.

Parameters

- **X** (*pd.DataFrame*) – Data to transform
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed X

Return type pd.DataFrame

class evalml.pipelines.components.transformers.**LabelEncoder** (*random_seed*=0,
***kwargs*)

A transformer that encodes target labels using values between 0 and num_classes - 1.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0. Ignored.

Attributes

hyper-parameter_ranges	{}
modifies_features	False
modifies_target	True
name	Label Encoder
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits the label encoder.
<code>fit_transform</code>	Fit and transform data using the label encoder.
<code>inverse_transform</code>	Decodes the target data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transform the target using the fitted label encoder.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits the label encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]. Ignored.
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If input *y* is None.

fit_transform (*self*, *X*, *y*)

Fit and transform data using the label encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns The original features and an encoded version of the target.

Return type *pd.DataFrame*, *pd.Series*

inverse_transform (*self*, *y*)

Decodes the target data.

Parameters **y** (*pd.Series*) – Target data.

Returns The decoded version of the target.

Return type *pd.Series*

Raises **ValueError** – If input *y* is *None*.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling *predict*, *predict_proba*, *transform*, or *feature_importances*.

This can be overridden to *False* for components that do not need to be fit or whose fit methods do nothing.

Returns *True*.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transform the target using the fitted label encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]. Ignored.
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns The original features and an encoded version of the target.

Return type *pd.DataFrame*, *pd.Series*

Raises **ValueError** – If input *y* is *None*.

class *evalml.pipelines.components.transformers.LinearDiscriminantAnalysis* (*n_components=None*,
ran-
dom_seed=0,
***kwargs*)

Reduces the number of features by using Linear Discriminant Analysis.

Parameters

- **n_components** (*int*) – The number of features to maintain after computation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Linear Discriminant Analysis Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the LDA component.
<i>fit_transform</i>	Fit and transform data using the LDA component.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transform data using the fitted LDA component.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or `dict`

fit (*self*, *X*, *y*)

Fits the LDA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series, optional*) – The target training data of length `[n_samples]`.

Returns `self`

Raises **ValueError** – If input data is not all numeric.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the LDA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series, optional*) – The target training data of length `[n_samples]`.

Returns Transformed data.

Return type `pd.DataFrame`

Raises **ValueError** – If input data is not all numeric.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns `ComponentBase` object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transform data using the fitted LDA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series, optional*) – The target training data of length `[n_samples]`.

Returns Transformed data.

Return type `pd.DataFrame`

Raises **ValueError** – If input data is not all numeric.

class `evalml.pipelines.components.transformers.LogTransformer` (*random_seed=0*)
 Applies a log transformation to the target data.

Attributes

hyper-parameter_ranges	<code>{}</code>
modifies_features	<code>False</code>
modifies_target	<code>True</code>
name	Log Transformer
training_only	<code>False</code>

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits the LogTransformer.
<code>fit_transform</code>	Log transforms the target variable.
<code>inverse_transform</code>	Apply exponential to target data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Log transforms the target variable.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type `dict`

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self, X, y=None*)

Fits the LogTransformer.

Parameters

- **X** (*pd.DataFrame or np.ndarray*) – Ignored.
- **y** (*pd.Series, optional*) – Ignored.

Returns self

fit_transform (*self, X, y=None*)

Log transforms the target variable.

Parameters

- **X** (*pd.DataFrame, optional*) – Ignored.
- **y** (*pd.Series*) – Target variable to log transform.

Returns

The input features are returned without modification. The target variable y is log transformed.

Return type tuple of pd.DataFrame, pd.Series

inverse_transform (*self, y*)

Apply exponential to target data.

Parameters **y** (*pd.Series*) – Target variable.

Returns Target with exponential applied.

Return type pd.Series

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.

- `pickle_protocol` (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Log transforms the target variable.

Parameters

- **X** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target data to log transform.

Returns

The input features are returned without modification. The target variable *y* is log transformed.

Return type tuple of *pd.DataFrame*, *pd.Series*

class `evalml.pipelines.components.transformers.LSA` (*random_seed=0*, ***kwargs*)

Transformer to calculate the Latent Semantic Analysis Values of text input.

Parameters `random_seed` (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	LSA Transformer
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits the input data.
<code>fit_transform</code>	Fits on <i>X</i> and transforms <i>X</i> .
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms data <i>X</i> by applying the LSA pipeline.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the input data.

Parameters

- **X** (*pd.DataFrame*) – The data to transform.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=*None*)

Transforms data *X* by applying the LSA pipeline.

Parameters

- **X** (*pd.DataFrame*) – The data to transform.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns

Transformed X. The original column is removed and replaced with two columns of the format *LSA(original_column_name)[feature_number]*, where *feature_number* is 0 or 1.

Return type *pd.DataFrame*

```
class evalml.pipelines.components.transformers.OneHotEncoder (top_n=10, fea-  

tures_to_encode=None,  

categories=None,  

drop='if_binary',  

han-  

dle_unknown='ignore',  

han-  

dle_missing='error',  

random_seed=0,  

**kwargs)
```

A transformer that encodes categorical features in a one-hot numeric array.

Parameters

- **top_n** (*int*) – Number of categories per column to encode. If *None*, all categories will be encoded. Otherwise, the *n* most frequent will be encoded and all others will be dropped. Defaults to 10.
- **features_to_encode** (*list[str]*) – List of columns to encode. All other columns will remain untouched. If *None*, all appropriate columns will be encoded. Defaults to *None*.
- **categories** (*list*) – A two dimensional list of categories, where *categories[i]* is a list of the categories for the column at index *i*. This can also be *None*, or “auto” if *top_n* is not *None*. Defaults to *None*.
- **drop** (*string*, *list*) – Method (“first” or “if_binary”) to use to drop one category per feature. Can also be a list specifying which categories to drop for each feature. Defaults to “if_binary”.
- **handle_unknown** (*string*) – Whether to ignore or error for unknown categories for a feature encountered during *fit* or *transform*. If either *top_n* or *categories* is used to limit the number of categories per column, this must be “ignore”. Defaults to “ignore”.
- **handle_missing** (*string*) – Options for how to handle missing (NaN) values encountered during *fit* or *transform*. If this is set to “as_category” and NaN values are within the *n* most frequent, “nan” values will be encoded as their own column. If this is set to “error”, any missing values encountered will raise an error. Defaults to “error”.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	One Hot Encoder
training_only	False

Methods

<i>categories</i>	Returns a list of the unique categories to be encoded for the particular feature, in order.
<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the one-hot encoder component.
<i>fit_transform</i>	Fits on X and transforms X.
<i>get_feature_names</i>	Return feature names for the categorical features after fitting.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	One-hot encode the input data.

categories (*self*, *feature_name*)

Returns a list of the unique categories to be encoded for the particular feature, in order.

Parameters **feature_name** (*str*) – The name of any feature provided to one-hot encoder during fit.

Returns The unique categories, in the same dtype as they were provided during fit.

Return type np.ndarray

Raises **ValueError** – If feature was not provided to one-hot encoder as a training feature.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the one-hot encoder component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If encoding a column failed.

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

get_feature_names (*self*)

Return feature names for the categorical features after fitting.

Feature names are formatted as {column name}_{category name}. In the event of a duplicate name, an integer will be added at the end of the feature name to distinguish it.

For example, consider a dataframe with a column called "A" and category "x_y" and another column called "A_x" with "y". In this example, the feature names would be "A_x_y" and "A_x_y_1".

Returns The feature names after encoding, provided in the same order as input_features.

Return type np.ndarray

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

One-hot encode the input data.

Parameters

- **X** (*pd.DataFrame*) – Features to one-hot encode.
- **y** (*pd.Series*) – Ignored.

Returns Transformed data, where each categorical feature has been encoded into numerical columns using one-hot encoding.

Return type *pd.DataFrame*

```
class evalml.pipelines.components.transformers.Oversampler (sampling_ratio=0.25,  
                                                         sam-  
                                                         pling_ratio_dict=None,  
                                                         k_neighbors_default=5,  
                                                         n_jobs=- 1,  ran-  
                                                         dom_seed=0,  
                                                         **kwargs)
```

SMOTE Oversampler component. Will automatically select whether to use SMOTE, SMOTEN, or SMOTENC based on inputs to the component.

Parameters

- **sampling_ratio** (*float*) – This is the goal ratio of the minority to majority class, with range (0, 1]. A value of 0.25 means we want a 1:4 ratio of the minority to majority class after oversampling. We will create the a sampling dictionary using this ratio, with the keys corresponding to the class and the values responding to the number of samples. Defaults to 0.25.
- **sampling_ratio_dict** (*dict*) – A dictionary specifying the desired balanced ratio for each target value. For instance, in a binary case where class 1 is the minority, we could specify: *sampling_ratio_dict*={0: 0.5, 1: 1}, which means we would undersample class 0 to have twice the number of samples as class 1 (minority:majority ratio = 0.5), and don't sample class 1. Overrides *sampling_ratio* if provided. Defaults to None.
- **k_neighbors_default** (*int*) – The number of nearest neighbors used to construct synthetic samples. This is the default value used, but the actual *k_neighbors* value might be smaller if there are less samples. Defaults to 5.
- **n_jobs** (*int*) – The number of CPU cores to use. Defaults to -1.
- **random_seed** (*int*) – The seed to use for random sampling. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	True
name	Oversampler
training_only	True

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits oversampler to data.
<i>fit_transform</i>	Fit and transform data using the sampler component.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms the input data by sampling the data.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if *return_dict* is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits oversampler to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self**fit_transform** (*self, X, y*)

Fit and transform data using the sampler component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.**Return type** (pd.DataFrame, pd.Series)**static load** (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.**Returns** ComponentBase object**needs_fitting** (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.**property parameters** (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transforms the input data by sampling the data.

Parameters

- **X** (*pd.DataFrame*) – Training features.
- **y** (*pd.Series*) – Target.

Returns Transformed features and target.**Return type** pd.DataFrame, pd.Series

```
class evalml.pipelines.components.transformers.PCA (variance=0.95,  
                                                    n_components=None,           ran-  
                                                    dom_seed=0, **kwargs)
```

Reduces the number of features by using Principal Component Analysis (PCA).

Parameters

- **variance** (*float*) – The percentage of the original data variance that should be preserved when reducing the number of features. Defaults to 0.95.
- **n_components** (*int*) – The number of features to maintain after computing SVD. Defaults to None, but will override variance variable if set.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	Real(0.25, 1)}:type: {"variance"}
modifies_features	True
modifies_target	False
name	PCA Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the PCA component.
<i>fit_transform</i>	Fit and transform data using the PCA component.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transform data using fitted PCA component.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self, X, y=None*)

Fits the PCA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If input data is not all numeric.

fit_transform (*self, X, y=None*)

Fit and transform data using the PCA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type pd.DataFrame

Raises **ValueError** – If input data is not all numeric.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transform data using fitted PCA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].

- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type `pd.DataFrame`

Raises **ValueError** – If input data is not all numeric.

```
class evalml.pipelines.components.transformers.PerColumnImputer (impute_strategies=None,  
                                                                de-  
                                                                fault_impute_strategy='most_frequent',  
                                                                ran-  
                                                                dom_seed=0,  
                                                                **kwargs)
```

Imputes missing data according to a specified imputation strategy per column.

Parameters

- **impute_strategies** (*dict*) – Column and {"impute_strategy": strategy, "fill_value": value} pairings. Valid values for impute strategy include "mean", "median", "most_frequent", "constant" for numerical data, and "most_frequent", "constant" for object data types. Defaults to None, which uses "most_frequent" for all columns. When `impute_strategy == "constant"`, `fill_value` is used to replace missing data. When None, uses 0 when imputing numerical data and "missing_value" for strings or object data types.
- **default_impute_strategy** (*str*) – Impute strategy to fall back on when none is provided for a certain column. Valid values include "mean", "median", "most_frequent", "constant" for numerical data, and "most_frequent", "constant" for object data types. Defaults to "most_frequent".
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Per Column Imputer
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits imputers on input data.
<code>fit_transform</code>	Fits on X and transforms X.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

continues on next page

Table 516 – continued from previous page

<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input data by imputing missing values.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits imputers on input data.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape `[n_samples, n_features]` to fit.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`. Ignored.

Returns *self*

fit_transform (*self*, *X*, *y=None*)

Fits on *X* and transforms *X*.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed *X*.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=cloudpickle.DEFAULT_PROTOCOL)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=None)

Transforms input data by imputing missing values.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features] to transform.
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]. Ignored.

Returns Transformed X

Return type pd.DataFrame

```
class evalml.pipelines.components.transformers.PolynomialDetrender (degree=1,
                                                                    ran-
                                                                    dom_seed=0,
                                                                    **kwargs)
```

Removes trends from time series by fitting a polynomial to the data.

Parameters

- **degree** (*int*) – Degree for the polynomial. If 1, linear model is fit to the data. If 2, quadratic model is fit, etc. Defaults to 1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "degree": Integer(1, 3)}
modifies_features	False
modifies_target	True
name	Polynomial Detrender
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits the PolynomialDetrender.
<code>fit_transform</code>	Removes fitted trend from target variable.
<code>inverse_transform</code>	Adds back fitted trend to target variable.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Removes fitted trend from target variable.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the PolynomialDetrender.

Parameters

- **X** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target variable to detrend.

Returns self

Raises **ValueError** – If `y` is `None`.

fit_transform (*self*, *X*, *y=None*)

Removes fitted trend from target variable.

Parameters

- **x** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target variable to detrend.

Returns

The first element are the input features returned without modification. The second element is the target variable y with the fitted trend removed.

Return type tuple of *pd.DataFrame*, *pd.Series*

inverse_transform (*self*, *y*)

Adds back fitted trend to target variable.

Parameters **y** (*pd.Series*) – Target variable.

Returns

The first element are the input features returned without modification. The second element is the target variable y with the trend added back.

Return type tuple of *pd.DataFrame*, *pd.Series*

Raises **ValueError** – If y is None.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Removes fitted trend from target variable.

Parameters

- **x** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target variable to detrend.

Returns

The input features are returned without modification. The target variable y is detrended

Return type tuple of *pd.DataFrame*, *pd.Series*

```

class evalml.pipelines.components.transformers.RFClassifierSelectFromModel (number_features=None,
                                                                    n_estimators=10,
                                                                    max_depth=None,
                                                                    percent_features=0.5,
                                                                    threshold=-
                                                                    np.inf,
                                                                    n_jobs=-
                                                                    1,
                                                                    random_seed=0,
                                                                    **kwargs)

```

Selects top features based on importance weights using a Random Forest classifier.

Parameters

- **number_features** (*int*) – The maximum number of features to select. If both percent_features and number_features are specified, take the greater number of features. Defaults to 0.5. Defaults to None.
- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **percent_features** (*float*) – Percentage of features to use. If both percent_features and number_features are specified, take the greater number of features. Defaults to 0.5.
- **threshold** (*string or float*) – The threshold value to use for feature selection. Features whose importance is greater or equal are kept while the others are discarded. If “median”, then the threshold value is the median of the feature importances. A scaling factor (e.g., “1.25*mean”) may also be used. Defaults to -np.inf.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “percent_features”: Real(0.01, 1), “threshold”: [“mean”, -np.inf], }
modifies_features	True
modifies_target	False
name	RF Classifier Select From Model
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.

continues on next page

Table 518 – continued from previous page

<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fit and transform data using the feature selector.
<code>get_names</code>	Get names of selected features.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an <code>MethodPropertyNotFoundError</code> exception.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the feature selector.

Parameters

- **x** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type `pd.DataFrame`

get_names (*self*)

Get names of selected features.

Returns List of the names of features selected.

Return type `list[str]`

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns `ComponentBase` object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transforms input data by selecting features. If the `component_obj` does not have a `transform` method, will raise an `MethodPropertyNotFoundError` exception.

Parameters

- **x** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series, optional*) – Target data. Ignored.

Returns Transformed X

Return type `pd.DataFrame`

Raises **MethodPropertyNotFoundError** – If feature selector does not have a `transform` method or a `component_obj` that implements `transform`


```

class evalml.pipelines.components.transformers.RFRegressorSelectFromModel (number_features=None,
                                                                    n_estimators=10,
                                                                    max_depth=None,
                                                                    per-
                                                                    cent_features=0.5,
                                                                    threshold=-

                                                                    np.inf,
                                                                    n_jobs=-

                                                                    1,
                                                                    ran-
                                                                    dom_seed=0,
                                                                    **kwargs)

```

Selects top features based on importance weights using a Random Forest regressor.

Parameters

- **number_features** (*int*) – The maximum number of features to select. If both percent_features and number_features are specified, take the greater number of features. Defaults to 0.5. Defaults to None.
- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **percent_features** (*float*) – Percentage of features to use. If both percent_features and number_features are specified, take the greater number of features. Defaults to 0.5.
- **threshold** (*string or float*) – The threshold value to use for feature selection. Features whose importance is greater or equal are kept while the others are discarded. If “median”, then the threshold value is the median of the feature importances. A scaling factor (e.g., “1.25*mean”) may also be used. Defaults to -np.inf.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “percent_features”: Real(0.01, 1), “threshold”: [“mean”, -np.inf], }
modifies_features	True
modifies_target	False
name	RF Regressor Select From Model
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.

continues on next page

Table 519 – continued from previous page

<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fit and transform data using the feature selector.
<code>get_names</code>	Get names of selected features.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an <code>MethodPropertyNotFoundError</code> exception.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the feature selector.

Parameters

- **x** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

get_names (*self*)

Get names of selected features.

Returns List of the names of features selected.

Return type *list[str]*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an *MethodPropertyNotFoundError* exception.

Parameters

- **x** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series, optional*) – Target data. Ignored.

Returns Transformed X

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If feature selector does not have a transform method or a component_obj that implements transform

class evalml.pipelines.components.transformers.**SelectByType** (*column_types=None, random_seed=0, **kwargs*)

Selects columns by specified Woodwork logical type or semantic tag in input data.

Parameters

- **column_types** (*string, ww.LogicalType, list(string), list(ww.LogicalType)*) – List of Woodwork types or tags, used to determine which columns to select.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Select Columns By Type Transformer
needs_fitting	False
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the transformer by checking if column names are present in the dataset.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by selecting columns.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self, print_name=False, return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or `dict`

fit (*self*, *X*, *y=None*)

Fits the transformer by checking if column names are present in the dataset.

Parameters

- **X** (*pd.DataFrame*) – Data to check.
- **y** (*pd.Series*, *optional*) – Targets.

Returns *self*

fit_transform (*self*, *X*, *y=None*)

Fits on *X* and transforms *X*.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed *X*.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data *X* by selecting columns.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Targets.

Returns Transformed *X*.

Return type *pd.DataFrame*

class `evalml.pipelines.components.transformers.SelectColumns` (*columns=None*,
random_seed=0,
***kwargs*)

Selects specified columns in input data.

Parameters

- **columns** (*list(string)*) – List of column names, used to determine which columns to select.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-param-eter_ranges	{}
modi-fies_features	True
modi-fies_target	False
name	Select Columns Transformer
needs_fitting	False
train-ing_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the transformer by checking if column names are present in the dataset.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by selecting columns.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or `dict`

fit (*self*, *X*, *y=None*)

Fits the transformer by checking if column names are present in the dataset.

Parameters

- **X** (*pd.DataFrame*) – Data to check.
- **y** (*pd.Series*, *optional*) – Targets.

Returns *self*

fit_transform (*self*, *X*, *y=None*)

Fits on *X* and transforms *X*.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed *X*.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data *X* by selecting columns.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Targets.

Returns Transformed *X*.

Return type *pd.DataFrame*

```
class evalml.pipelines.components.transformers.SimpleImputer (impute_strategy='most_frequent',  
                                                         fill_value=None,  
                                                         random_seed=0,  
                                                         **kwargs)
```

Imputes missing data according to a specified imputation strategy.

Parameters

- **impute_strategy** (*string*) – Impute strategy to use. Valid values include “mean”, “median”, “most_frequent”, “constant” for numerical data, and “most_frequent”, “constant” for object data types.
- **fill_value** (*string*) – When impute_strategy == “constant”, fill_value is used to replace missing data. Defaults to 0 when imputing numerical data and “missing_value” for strings or object data types.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “impute_strategy”: [“mean”, “median”, “most_frequent”]}
modifies_features	True
modifies_target	False
name	Simple Imputer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits imputer to data. ‘None’ values are converted to np.nan before imputation and are treated as the same.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input by imputing missing values. ‘None’ and np.nan values are treated as the same.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits imputer to data. 'None' values are converted to np.nan before imputation and are treated as the same.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – the input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – the target training data of length [n_samples]

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform
- **y** (*pd.Series*, *optional*) – Target data.

Returns Transformed X

Return type pd.DataFrame

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms input by imputing missing values. 'None' and np.nan values are treated as the same.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed X**Return type** *pd.DataFrame*

class evalml.pipelines.components.transformers.**StandardScaler** (*random_seed=0*,
***kwards*)

A transformer that standardizes input features by removing the mean and scaling to unit variance.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Standard Scaler
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fit and transform data using the standard scaler component.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transform data using the fitted standard scaler.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the standard scaler component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type pd.DataFrame

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.

- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transform data using the fitted standard scaler.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

```
class evalml.pipelines.components.transformers.TargetEncoder (cols=None,
                                                             smooth-
                                                             ing=1.0,          han-
                                                             dle_unknown='value',
                                                             han-
                                                             dle_missing='value',
                                                             random_seed=0,
                                                             **kwargs)
```

A transformer that encodes categorical features into target encodings.

Parameters

- **cols** (*list*) – Columns to encode. If None, all string columns will be encoded, otherwise only the columns provided will be encoded. Defaults to None
- **smoothing** (*float*) – The smoothing factor to apply. The larger this value is, the more influence the expected target value has on the resulting target encodings. Must be strictly larger than 0. Defaults to 1.0
- **handle_unknown** (*string*) – Determines how to handle unknown categories for a feature encountered. Options are ‘value’, ‘error’, and ‘return_nan’. Defaults to ‘value’, which replaces with the target mean
- **handle_missing** (*string*) – Determines how to handle missing values encountered during *fit* or *transform*. Options are ‘value’, ‘error’, and ‘return_nan’. Defaults to ‘value’, which replaces with the target mean
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Target Encoder
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits the target encoder.
<code>fit_transform</code>	Fit and transform data using the target encoder.
<code>get_feature_names</code>	Return feature names for the input features after fitting.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transform data using the fitted target encoder.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits the target encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

fit_transform (*self*, *X*, *y*)

Fit and transform data using the target encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].

- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type `pd.DataFrame`

get_feature_names (*self*)

Return feature names for the input features after fitting.

Returns The feature names after encoding.

Return type `np.array`

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns `ComponentBase` object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transform data using the fitted target encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type `pd.DataFrame`

```
class evalml.pipelines.components.transformers.TargetImputer (impute_strategy='most_frequent',  
                                                         fill_value=None,  
                                                         random_seed=0,  
                                                         **kwargs)
```

Imputes missing target data according to a specified imputation strategy.

Parameters

- **impute_strategy** (*string*) – Impute strategy to use. Valid values include “mean”, “median”, “most_frequent”, “constant” for numerical data, and “most_frequent”, “constant” for object data types. Defaults to “most_frequent”.

- **fill_value** (*string*) – When `impute_strategy == “constant”`, `fill_value` is used to replace missing data. Defaults to `None` which uses 0 when imputing numerical data and “missing_value” for strings or object data types.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “impute_strategy”: [“mean”, “median”, “most_frequent”]}
modifies_features	False
modifies_target	True
name	Target Imputer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits imputer to target data. ‘None’ values are converted to <code>np.nan</code> before imputation and are treated as the same.
<i>fit_transform</i>	Fits on and transforms the input target data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input target data by imputing missing values. ‘None’ and <code>np.nan</code> values are treated as the same.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self, X, y*)

Fits imputer to target data. 'None' values are converted to np.nan before imputation and are treated as the same.

Parameters

- **X** (*pd.DataFrame or np.ndarray*) – The input training data of shape [n_samples, n_features]. Ignored.
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

Raises **TypeError** – If target is filled with all null values.

fit_transform (*self, X, y*)

Fits on and transforms the input target data.

Parameters

- **X** (*pd.DataFrame*) – Features. Ignored.
- **y** (*pd.Series*) – Target data to impute.

Returns The original X, transformed y

Return type (pd.DataFrame, pd.Series)

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y*)

Transforms input target data by imputing missing values. 'None' and np.nan values are treated as the same.

Parameters

- **X** (*pd.DataFrame*) – Features. Ignored.
- **y** (*pd.Series*) – Target data to impute.

Returns The original X, transformed y

Return type (*pd.DataFrame*, *pd.Series*)

class evalml.pipelines.components.transformers.**TextFeaturizer** (*random_seed=0*,
***kwargs*)

Transformer that can automatically featurize text columns using featuretools' nlp_primitives.

Since models cannot handle non-numeric data, any text must be broken down into features that provide useful information about that text. This component splits each text column into several informative features: Diversity Score, Mean Characters per Word, Polarity Score, and LSA (Latent Semantic Analysis). Calling transform on this component will replace any text columns in the given dataset with these numeric columns.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Text Featurization Component
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by creating new features using existing text columns.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*) – The target training data of length [n_samples]

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=*None*)

Transforms data *X* by creating new features using existing text columns.

Parameters

- **X** (*pd.DataFrame*) – The data to transform.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed *X*

Return type *pd.DataFrame*

```
class evalml.pipelines.components.transformers.Transformer (parameters=None,
                                                         component_obj=None,
                                                         random_seed=0,
                                                         **kwargs)
```

A component that may or may not need fitting that transforms data. These components are used before an estimator.

To implement a new Transformer, define your own class which is a subclass of Transformer, including a name and a list of acceptable ranges for any parameters to be tuned during the automl search (hyperparameters). Define an `__init__` method which sets up any necessary state and objects. Make sure your `__init__` only uses standard keyword arguments and calls `super().__init__()` with a parameters dict. You may also override the `fit`, `transform`, `fit_transform` and other methods in this class if appropriate.

To see some examples, check out the definitions of any Transformer component.

Parameters

- **parameters** (*dict*) – Dictionary of parameters for the component. Defaults to None.
- **component_obj** (*obj*) – Third-party objects useful in component implementation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

modifies_features	True
modifies_target	False
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.

continues on next page

Table 527 – continued from previous page

<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fits on X and transforms X.
<code>load</code>	Loads component at file path.
<code>name</code>	Returns string name of this component.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms data X.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`

Returns *self*

Raises **MethodPropertyNotFoundError** – If component does not have a `fit` method or a `component_obj` that implements `fit`.

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type `pd.DataFrame`

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a `component_obj` that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns `ComponentBase` object

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

abstract transform (*self*, *X*, *y=None*)

Transforms data X.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data.

Returns Transformed X

Return type `pd.DataFrame`

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a `component_obj` that implements transform.

```
class evalml.pipelines.components.transformers.Undersampler (sampling_ratio=0.25,
                                                             sam-
                                                             pling_ratio_dict=None,
                                                             min_samples=100,
                                                             min_percentage=0.1,
                                                             random_seed=0,
                                                             **kwargs)
```

Initializes an undersampling transformer to downsample the majority classes in the dataset.

This component is only run during training and not during predict.

Parameters

- **sampling_ratio** (*float*) – The smallest minority:majority ratio that is accepted as ‘balanced’. For instance, a 1:4 ratio would be represented as 0.25, while a 1:1 ratio is 1.0. Must be between 0 and 1, inclusive. Defaults to 0.25.
- **sampling_ratio_dict** (*dict*) – A dictionary specifying the desired balanced ratio for each target value. For instance, in a binary case where class 1 is the minority, we could specify: `sampling_ratio_dict={0: 0.5, 1: 1}`, which means we would undersample class 0 to have twice the number of samples as class 1 (minority:majority ratio = 0.5), and don’t sample class 1. Overrides `sampling_ratio` if provided. Defaults to None.
- **min_samples** (*int*) – The minimum number of samples that we must have for any class, pre or post sampling. If a class must be downsampled, it will not be downsampled past this value. To determine severe imbalance, the minority class must occur less often than this and must have a class ratio below `min_percentage`. Must be greater than 0. Defaults to 100.
- **min_percentage** (*float*) – The minimum percentage of the minimum class to total dataset that we tolerate, as long as it is above `min_samples`. If `min_percentage` and `min_samples` are not met, treat this as severely imbalanced, and we will not resample the data. Must be between 0 and 0.5, inclusive. Defaults to 0.1.
- **random_seed** (*int*) – The seed to use for random sampling. Defaults to 0.

Raises

- **ValueError** – If `sampling_ratio` is not in the range (0, 1].
- **ValueError** – If `min_sample` is not greater than 0.
- **ValueError** – If `min_percentage` is not between 0 and 0.5, inclusive.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	True
name	Undersampler
training_only	True

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits the sampler to the data.
<code>fit_resample</code>	Resampling technique for this sampler.
<code>fit_transform</code>	Fit and transform data using the sampler component.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

continues on next page

Table 528 – continued from previous page

<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms the input data by sampling the data.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or dict

fit (*self*, *X*, *y*)

Fits the sampler to the data.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series*) – Target.

Returns *self*

Raises **ValueError** – If *y* is `None`.

fit_resample (*self*, *X*, *y*)

Resampling technique for this sampler.

Parameters

- **X** (*pd.DataFrame*) – Training data to fit and resample.
- **y** (*pd.Series*) – Training data targets to fit and resample.

Returns Indices to keep for training data.

Return type list

fit_transform (*self*, *X*, *y*)

Fit and transform data using the sampler component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.

- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type (pd.DataFrame, pd.Series)

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transforms the input data by sampling the data.

Parameters

- **X** (*pd.DataFrame*) – Training features.
- **y** (*pd.Series*) – Target.

Returns Transformed features and target.

Return type pd.DataFrame, pd.Series

class evalml.pipelines.components.transformers.**URLFeaturizer** (*random_seed=0, **kwargs*)

Transformer that can automatically extract features from URL.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	URL Featurizer
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fits on X and transforms X.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms data X.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **x** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transforms data X.

Parameters

- **x** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series, optional*) – Target data.

Returns Transformed X

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

Submodules

component_base

Base class for all components.

Module Contents

Classes Summary

<i>ComponentBase</i>	Base class for all components.
----------------------	--------------------------------

Contents

class evalml.pipelines.components.component_base.**ComponentBase** (*parameters=None, component_obj=None, random_seed=0, **kwargs*)

Base class for all components.

Parameters

- **parameters** (*dict*) – Dictionary of parameters for the component. Defaults to None.
- **component_obj** (*obj*) – Third-party objects useful in component implementation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>load</i>	Loads component at file path.
<i>modifies_features</i>	Returns whether this component modifies (subsets or transforms) the features variable during transform.
<i>modifies_target</i>	Returns whether this component modifies (subsets or transforms) the target variable during transform.
<i>name</i>	Returns string name of this component.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>training_only</i>	Returns whether or not this component should be evaluated during training-time only, or during both training and prediction time.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a `component_obj` that implements fit.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property modifies_features (*cls*)

Returns whether this component modifies (subsets or transforms) the features variable during transform.

For Estimator objects, this attribute determines if the return value from *predict* or *predict_proba* should be used as features or targets.

property modifies_target (*cls*)

Returns whether this component modifies (subsets or transforms) the target variable during transform.

For Estimator objects, this attribute determines if the return value from *predict* or *predict_proba* should be used as features or targets.

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling *predict*, *predict_proba*, *transform*, or *feature_importances*.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

property training_only (*cls*)

Returns whether or not this component should be evaluated during training-time only, or during both training and prediction time.

component_base_meta

Metaclass that overrides creating a new component by wrapping methods with validators and setters.

Module Contents

Classes Summary

<i>ComponentBaseMeta</i>	Metaclass that overrides creating a new component by wrapping methods with validators and setters.
--------------------------	--

Contents

class evalml.pipelines.components.component_base_meta.**ComponentBaseMeta**

Metaclass that overrides creating a new component by wrapping methods with validators and setters.

Attributes

FIT_METHODS	['fit', 'fit_transform']
METHODS_TO_CHECK	['predict', 'predict_proba', 'transform', 'inverse_transform']
PROPERTIES_TO_CHECK	['feature_importance']

Methods

<i>check_for_fit</i>	<i>check_for_fit</i> wraps a method that validates if <i>self.is_fitted</i> is <i>True</i> .
<i>register</i>	Register a virtual subclass of an ABC.
<i>set_fit</i>	Wrapper for the fit method.

classmethod **check_for_fit** (*cls*, *method*)

check_for_fit wraps a method that validates if *self.is_fitted* is *True*.

It raises an exception if *False* and calls and returns the wrapped method if *True*.

Parameters `method` (*callable*) – Method to wrap.

Returns The wrapped method.

Raises `ComponentNotYetFittedError` – If component is not yet fitted.

register (*cls*, *subclass*)

Register a virtual subclass of an ABC.

Returns the subclass, to allow usage as a class decorator.

classmethod `set_fit` (*cls*, *method*)

Wrapper for the fit method.

utils

Utility methods for EvalML components.

Module Contents

Classes Summary

<code>WrappedSKClassifier</code>	Scikit-learn classifier wrapper class.
<code>WrappedSKRegressor</code>	Scikit-learn regressor wrapper class.

Functions

<code>all_components</code>	Get all available components.
<code>allowed_model_families</code>	List the model types allowed for a particular problem type.
<code>generate_component_code</code>	Creates and returns a string that contains the Python imports and code required for running the EvalML component.
<code>get_estimators</code>	Returns the estimators allowed for a particular problem type.
<code>handle_component_class</code>	Standardizes input from a string name to a Component-Base subclass if necessary.
<code>make_balancing_dictionary</code>	Makes dictionary for oversampler components. Find ratio of each class to the majority. If the ratio is smaller than the <code>sampling_ratio</code> , we want to oversample, otherwise, we don't want to sample at all, and we leave the data as is.
<code>scikit_learn_wrapped_estimator</code>	Wraps an EvalML object as a scikit-learn estimator.

Contents

`evalml.pipelines.components.utils.all_components()`

Get all available components.

`evalml.pipelines.components.utils.allowed_model_families(problem_type)`

List the model types allowed for a particular problem type.

Parameters *problem_type* (*ProblemTypes* or *str*) – *ProblemTypes* enum or string.

Returns A list of model families.

Return type `list[ModelFamily]`

`evalml.pipelines.components.utils.generate_component_code(element)`

Creates and returns a string that contains the Python imports and code required for running the EvalML component.

Parameters *element* (*component instance*) – The instance of the component to generate string Python code for.

Returns String representation of Python code that can be run separately in order to recreate the component instance. Does not include code for custom component implementation.

Raises **ValueError** – If the input element is not a component instance.

`evalml.pipelines.components.utils.get_estimators(problem_type,
model_families=None)`

Returns the estimators allowed for a particular problem type.

Can also optionally filter by a list of model types.

Parameters

- **problem_type** (*ProblemTypes* or *str*) – Problem type to filter for.
- **model_families** (*list[ModelFamily]* or *list[str]*) – Model families to filter for.

Returns A list of estimator subclasses.

Return type `list[class]`

Raises

- **TypeError** – If the *model_families* parameter is not a list.
- **RuntimeError** – If a model family is not valid for the problem type.

`evalml.pipelines.components.utils.handle_component_class(component_class)`

Standardizes input from a string name to a *ComponentBase* subclass if necessary.

If a *str* is provided, will attempt to look up a *ComponentBase* class by that name and return a new instance. Otherwise if a *ComponentBase* subclass or *Component* instance is provided, will return that without modification.

Parameters *component_class* (*str*, *ComponentBase*) – Input to be standardized.

Returns *ComponentBase*

Raises

- **ValueError** – If input is not a valid component class.
- **MissingComponentError** – If the component cannot be found.

`evalml.pipelines.components.utils.make_balancing_dictionary(y, sampling_ratio)`

Makes dictionary for oversampler components. Find ratio of each class to the majority. If the ratio is smaller than the `sampling_ratio`, we want to oversample, otherwise, we don't want to sample at all, and we leave the data as is.

Parameters

- **y** (*pd.Series*) – Target data.
- **sampling_ratio** (*float*) – The balanced ratio we want the samples to meet.

Returns Dictionary where keys are the classes, and the corresponding values are the counts of samples for each class that will satisfy `sampling_ratio`.

Return type dict

Raises **ValueError** – If sampling ratio is not in the range (0, 1] or the target is empty.

`evalml.pipelines.components.utils.scikit_learn_wrapped_estimator(evalml_obj)`

Wraps an EvalML object as a scikit-learn estimator.

class `evalml.pipelines.components.utils.WrappedSKClassifier(pipeline)`

Scikit-learn classifier wrapper class.

Methods

<code>fit</code>	Fits component to data.
<code>get_params</code>	Get parameters for this estimator.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>score</code>	Return the mean accuracy on the given test data and labels.
<code>set_params</code>	Set the parameters of this estimator.

fit (*self, X, y*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns *self*

get_params (*self, deep=True*)

Get parameters for this estimator.

Parameters **deep** (*bool*, *default=True*) – If True, will return the parameters for this estimator and contained subobjects that are estimators.

Returns **params** – Parameter names mapped to their values.

Return type dict

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Features

Returns Predicted values.

Return type *np.ndarray*

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *np.ndarray*

score (*self*, *X*, *y*, *sample_weight=None*)

Return the mean accuracy on the given test data and labels.

In multi-label classification, this is the subset accuracy which is a harsh metric since you require for each sample that each label set be correctly predicted.

Parameters

- *X* (array-like of shape (*n_samples*, *n_features*)) – Test samples.
- *y* (array-like of shape (*n_samples*,) or (*n_samples*, *n_outputs*)) – True labels for *X*.
- **sample_weight** (array-like of shape (*n_samples*,), *default=None*) – Sample weights.

Returns *score* – Mean accuracy of *self.predict(X)* wrt. *y*.

Return type *float*

set_params (*self*, ***params*)

Set the parameters of this estimator.

The method works on simple estimators as well as on nested objects (such as *Pipeline*). The latter have parameters of the form *<component>__<parameter>* so that it's possible to update each component of a nested object.

Parameters ***params* (*dict*) – Estimator parameters.

Returns *self* – Estimator instance.

Return type estimator instance

class *evalml.pipelines.components.utils.WrappedSKRegressor* (*pipeline*)

Scikit-learn regressor wrapper class.

Methods

<i>fit</i>	Fits component to data.
<i>get_params</i>	Get parameters for this estimator.
<i>predict</i>	Make predictions using selected features.
<i>score</i>	Return the coefficient of determination R^2 of the
<i>set_params</i>	Set the parameters of this estimator.

fit (*self*, *X*, *y*)

Fits component to data.

Parameters

- *X* (*pd.DataFrame* or *np.ndarray*) – the input training data of shape [*n_samples*, *n_features*]
- *y* (*pd.Series*, *optional*) – the target training data of length [*n_samples*]

Returns *self*

get_params (*self*, *deep=True*)

Get parameters for this estimator.

Parameters *deep* (*bool*, *default=True*) – If True, will return the parameters for this estimator and contained subobjects that are estimators.

Returns *params* – Parameter names mapped to their values.

Return type dict

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Predicted values.

Return type np.ndarray

score (*self*, *X*, *y*, *sample_weight=None*)

Return the coefficient of determination R^2 of the prediction.

The coefficient R^2 is defined as $(1 - \frac{u}{v})$, where u is the residual sum of squares $((y_{\text{true}} - y_{\text{pred}}) ** 2).sum()$ and v is the total sum of squares $((y_{\text{true}} - y_{\text{true}.mean()}) ** 2).sum()$. The best possible score is 1.0 and it can be negative (because the model can be arbitrarily worse). A constant model that always predicts the expected value of y , disregarding the input features, would get a R^2 score of 0.0.

Parameters

- **X** (*array-like of shape (n_samples, n_features)*) – Test samples. For some estimators this may be a precomputed kernel matrix or a list of generic objects instead with shape $(n_{\text{samples}}, n_{\text{samples_fitted}})$, where $n_{\text{samples_fitted}}$ is the number of samples used in the fitting for the estimator.
- **y** (*array-like of shape (n_samples,) or (n_samples, n_outputs)*) – True values for X.
- **sample_weight** (*array-like of shape (n_samples,)*, *default=None*) – Sample weights.

Returns *score* – R^2 of *self.predict(X)* wrt. *y*.

Return type float

Notes

The R^2 score used when calling `score` on a regressor uses `multioutput='uniform_average'` from version 0.23 to keep consistent with default value of `r2_score()`. This influences the `score` method of all the multioutput regressors (except for `MultiOutputRegressor`).

set_params (*self*, ***params*)

Set the parameters of this estimator.

The method works on simple estimators as well as on nested objects (such as `Pipeline`). The latter have parameters of the form `<component>__<parameter>` so that it's possible to update each component of a nested object.

Parameters ***params* (*dict*) – Estimator parameters.

Returns *self* – Estimator instance.

Return type estimator instance

Package Contents

Classes Summary

<i>ARIMAREgressor</i>	Autoregressive Integrated Moving Average Model. The three parameters (p, d, q) are the AR order, the degree of differencing, and the MA order. More information here: https://www.statsmodels.org/devel/generated/statsmodels.tsa.arima_model.ARIMA.html .
<i>BaselineClassifier</i>	Classifier that predicts using the specified strategy.
<i>BaselineRegressor</i>	Baseline regressor that uses a simple strategy to make predictions. This is useful as a simple baseline regressor to compare with other regressors.
<i>CatBoostClassifier</i>	CatBoost Classifier, a classifier that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.
<i>CatBoostRegressor</i>	CatBoost Regressor, a regressor that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.
<i>ComponentBase</i>	Base class for all components.
<i>ComponentBaseMeta</i>	Metaclass that overrides creating a new component by wrapping methods with validators and setters.
<i>DateTimeFeaturizer</i>	Transformer that can automatically extract features from datetime columns.
<i>DecisionTreeClassifier</i>	Decision Tree Classifier.
<i>DecisionTreeRegressor</i>	Decision Tree Regressor.
<i>DelayedFeatureTransformer</i>	Transformer that delays input features and target variable for time series problems.
<i>DFSTransformer</i>	Featuretools DFS component that generates features for the input features.
<i>DropColumns</i>	Drops specified columns in input data.
<i>DropNullColumns</i>	Transformer to drop features whose percentage of NaN values exceeds a specified threshold.
<i>DropRowsTransformer</i>	Transformer to drop rows specified by row indices.
<i>ElasticNetClassifier</i>	Elastic Net Classifier. Uses Logistic Regression with elasticnet penalty as the base estimator.
<i>ElasticNetRegressor</i>	Elastic Net Regressor.
<i>EmailFeaturizer</i>	Transformer that can automatically extract features from emails.
<i>Estimator</i>	A component that fits and predicts given data.
<i>ExtraTreesClassifier</i>	Extra Trees Classifier.
<i>ExtraTreesRegressor</i>	Extra Trees Regressor.
<i>FeatureSelector</i>	Selects top features based on importance weights.
<i>Imputer</i>	Imputes missing data according to a specified imputation strategy.
<i>KNeighborsClassifier</i>	K-Nearest Neighbors Classifier.
<i>LabelEncoder</i>	A transformer that encodes target labels using values between 0 and num_classes - 1.
<i>LightGBMClassifier</i>	LightGBM Classifier.
<i>LightGBMRegressor</i>	LightGBM Regressor.

continues on next page

Table 538 – continued from previous page

<i>LinearDiscriminantAnalysis</i>	Reduces the number of features by using Linear Discriminant Analysis.
<i>LinearRegressor</i>	Linear Regressor.
<i>LogisticRegressionClassifier</i>	Logistic Regression Classifier.
<i>LogTransformer</i>	Applies a log transformation to the target data.
<i>LSA</i>	Transformer to calculate the Latent Semantic Analysis Values of text input.
<i>OneHotEncoder</i>	A transformer that encodes categorical features in a one-hot numeric array.
<i>Oversampler</i>	SMOTE Oversampler component. Will automatically select whether to use SMOTE, SMOTEN, or SMOTENC based on inputs to the component.
<i>PCA</i>	Reduces the number of features by using Principal Component Analysis (PCA).
<i>PerColumnImputer</i>	Imputes missing data according to a specified imputation strategy per column.
<i>PolynomialDetrender</i>	Removes trends from time series by fitting a polynomial to the data.
<i>ProphetRegressor</i>	Prophet is a procedure for forecasting time series data based on an additive model where non-linear trends are fit with yearly, weekly, and daily seasonality, plus holiday effects. It works best with time series that have strong seasonal effects and several seasons of historical data. Prophet is robust to missing data and shifts in the trend, and typically handles outliers well.
<i>RandomForestClassifier</i>	Random Forest Classifier.
<i>RandomForestRegressor</i>	Random Forest Regressor.
<i>RFClassifierSelectFromModel</i>	Selects top features based on importance weights using a Random Forest classifier.
<i>RFRegressorSelectFromModel</i>	Selects top features based on importance weights using a Random Forest regressor.
<i>SelectByType</i>	Selects columns by specified Woodwork logical type or semantic tag in input data.
<i>SelectColumns</i>	Selects specified columns in input data.
<i>SimpleImputer</i>	Imputes missing data according to a specified imputation strategy.
<i>StackedEnsembleClassifier</i>	Stacked Ensemble Classifier.
<i>StackedEnsembleRegressor</i>	Stacked Ensemble Regressor.
<i>StandardScaler</i>	A transformer that standardizes input features by removing the mean and scaling to unit variance.
<i>SVMClassifier</i>	Support Vector Machine Classifier.
<i>SVMRegressor</i>	Support Vector Machine Regressor.
<i>TargetEncoder</i>	A transformer that encodes categorical features into target encodings.
<i>TargetImputer</i>	Imputes missing target data according to a specified imputation strategy.
<i>TextFeaturizer</i>	Transformer that can automatically featurize text columns using featuretools' nlp_primitives.
<i>TimeSeriesBaselineEstimator</i>	Time series estimator that predicts using the naive forecasting approach.

continues on next page

Table 538 – continued from previous page

<i>Transformer</i>	A component that may or may not need fitting that transforms data. These components are used before an estimator.
<i>Undersampler</i>	Initializes an undersampling transformer to downsample the majority classes in the dataset.
<i>URLFeaturizer</i>	Transformer that can automatically extract features from URL.
<i>XGBoostClassifier</i>	XGBoost Classifier.
<i>XGBoostRegressor</i>	XGBoost Regressor.

Contents

```
class evalml.pipelines.components.ARIMAREgressor (date_index=None, trend=None,
start_p=2, d=0, start_q=2,
max_p=5, max_d=2, max_q=5,
seasonal=True, n_jobs=- 1, random_seed=0, **kwargs)
```

Autoregressive Integrated Moving Average Model. The three parameters (p, d, q) are the AR order, the degree of differencing, and the MA order. More information here: https://www.statsmodels.org/devel/generated/statsmodels.tsa.arima_model.ARIMA.html.

Currently ARIMAREgressor isn't supported via conda install. It's recommended that it be installed via PyPI.

Parameters

- **date_index** (*str*) – Specifies the name of the column in X that provides the datetime objects. Defaults to None.
- **trend** (*str*) – Controls the deterministic trend. Options are ['n', 'c', 't', 'ct'] where 'c' is a constant term, 't' indicates a linear trend, and 'ct' is both. Can also be an iterable when defining a polynomial, such as [1, 1, 0, 1].
- **start_p** (*int*) – Minimum Autoregressive order. Defaults to 2.
- **d** (*int*) – Minimum Differencing degree. Defaults to 0.
- **start_q** (*int*) – Minimum Moving Average order. Defaults to 2.
- **max_p** (*int*) – Maximum Autoregressive order. Defaults to 5.
- **max_d** (*int*) – Maximum Differencing degree. Defaults to 2.
- **max_q** (*int*) – Maximum Moving Average order. Defaults to 5.
- **seasonal** (*boolean*) – Whether to fit a seasonal model to ARIMA. Defaults to True.
- **n_jobs** (*int or None*) – Non-negative integer describing level of parallelism used for pipelines. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "start_p": Integer(1, 3), "d": Integer(0, 2), "start_q": Integer(1, 3), "max_p": Integer(3, 10), "max_d": Integer(2, 5), "max_q": Integer(3, 10), "seasonal": [True, False], }
model_family	ModelFamily.ARIMA
modifies_features	True
modifies_target	False
name	ARIMA Regressor
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.TIME_SERIES_REGRESSION]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns array of 0's with a length of 1 as feature_importance is not defined for ARIMA regressor.
<i>fit</i>	Fits ARIMA regressor to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted ARIMA regressor.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns array of 0's with a length of 1 as feature_importance is not defined for ARIMA regressor.

fit (*self, X, y=None*)

Fits ARIMA regressor to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If X was passed to *fit* but not passed in *predict*.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X, y=None*)

Make predictions using fitted ARIMA regressor.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – Target data.

Returns Predicted values.

Return type pd.Series

Raises **ValueError** – If X was passed to *fit* but not passed in *predict*.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.components.**BaselineClassifier** (*strategy*='mode', *random_seed*=0, ***kwargs*)

Classifier that predicts using the specified strategy.

This is useful as a simple baseline classifier to compare with other classifiers.

Parameters

- **strategy** (*str*) – Method used to predict. Valid options are “mode”, “random” and “random_weighted”. Defaults to “mode”.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.BASELINE
modifies_features	True
modifies_target	False
name	Baseline Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS]
training_only	False

Methods

<i>classes_</i>	Returns class labels. Will return None before fitting.
<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature. Since baseline classifiers do not use input features to calculate predictions, returns an array of zeroes.
<i>fit</i>	Fits baseline classifier component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

continues on next page

Table 540 – continued from previous page

<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using the baseline classification strategy.
<i>predict_proba</i>	Make prediction probabilities using the baseline classification strategy.
<i>save</i>	Saves component at file path.

property classes_ (*self*)

Returns class labels. Will return None before fitting.

Returns Class names

Return type list[str] or list(float)

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature. Since baseline classifiers do not use input features to calculate predictions, returns an array of zeroes.

Returns An array of zeroes

Return type np.ndarray (float)

fit (*self*, *X*, *y=None*)

Fits baseline classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If `y` is None.

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using the baseline classification strategy.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

predict_proba (*self*, *X*)

Make prediction probabilities using the baseline classification strategy.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted probability values.

Return type *pd.DataFrame*

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.components.**BaselineRegressor** (*strategy='mean', random_seed=0, **kwargs*)

Baseline regressor that uses a simple strategy to make predictions. This is useful as a simple baseline regressor to compare with other regressors.

Parameters

- **strategy** (*str*) – Method used to predict. Valid options are “mean”, “median”. Defaults to “mean”.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.BASELINE
modifies_features	True
modifies_target	False
name	Baseline Regressor
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature. Since baseline regressors do not use input features to calculate predictions, returns an array of zeroes.
<i>fit</i>	Fits baseline regression component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using the baseline regression strategy.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature. Since baseline regressors do not use input features to calculate predictions, returns an array of zeroes.

Returns An array of zeroes.

Return type np.ndarray (float)

fit (*self, X, y=None*)

Fits baseline regression component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If input y is None.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using the baseline regression strategy.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.CatBoostClassifier (n_estimators=10, eta=0.03,
                                                    max_depth=6, bootstrap_type=None, silent=True,
                                                    allow_writing_files=False,
                                                    random_seed=0, n_jobs=- 1,
                                                    **kwargs)
```

CatBoost Classifier, a classifier that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.

For more information, check out <https://catboost.ai/>

Parameters

- **n_estimators** (*float*) – The maximum number of trees to build. Defaults to 10.
- **eta** (*float*) – The learning rate. Defaults to 0.03.
- **max_depth** (*int*) – The maximum tree depth for base learners. Defaults to 6.
- **bootstrap_type** (*string*) – Defines the method for sampling the weights of objects. Available methods are ‘Bayesian’, ‘Bernoulli’, ‘MVS’. Defaults to None.
- **silent** (*boolean*) – Whether to use the “silent” logging mode. Defaults to True.
- **allow_writing_files** (*boolean*) – Whether to allow writing snapshot files while training. Defaults to False.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(4, 100), “eta”: Real(0.000001, 1), “max_depth”: Integer(4, 10), }
model_family	ModelFamily.CATBOOST
modifies_features	True
modifies_target	False
name	CatBoost Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Feature importance of fitted CatBoost classifier.
<code>fit</code>	Fits CatBoost classifier component to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using the fitted CatBoost classifier.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted CatBoost classifier.

fit (*self*, *X*, *y=None*)

Fits CatBoost classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using the fitted CatBoost classifier.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.DataFrame*

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.CatBoostRegressor (n_estimators=10,      eta=0.03,
                                                    max_depth=6,          boot-
                                                    strap_type=None, silent=False,
                                                    allow_writing_files=False,
                                                    random_seed=0, n_jobs=- 1,
                                                    **kwargs)
```

CatBoost Regressor, a regressor that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.

For more information, check out <https://catboost.ai/>

Parameters

- **n_estimators** (*float*) – The maximum number of trees to build. Defaults to 10.
- **eta** (*float*) – The learning rate. Defaults to 0.03.
- **max_depth** (*int*) – The maximum tree depth for base learners. Defaults to 6.
- **bootstrap_type** (*string*) – Defines the method for sampling the weights of objects. Available methods are ‘Bayesian’, ‘Bernoulli’, ‘MVS’. Defaults to None.
- **silent** (*boolean*) – Whether to use the “silent” logging mode. Defaults to True.

- **allow_writing_files** (*boolean*) – Whether to allow writing snapshot files while training. Defaults to False.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(4, 100), “eta”: Real(0.000001, 1), “max_depth”: Integer(4, 10), }
model_family	ModelFamily.CATBOOST
modifies_features	True
modifies_target	False
name	CatBoost Regressor
predict Uses y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance of fitted CatBoost regressor.
<i>fit</i>	Fits CatBoost regressor component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted CatBoost regressor.

fit (*self*, *X*, *y=None*)

Fits CatBoost regressor component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

`save` (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **`file_path`** (*str*) – Location to save file.
- **`pickle_protocol`** (*int*) – The pickle data stream format.

`class evalml.pipelines.components.ComponentBase` (*parameters=None*, *component_obj=None*, *random_seed=0*, ***kwargs*)

Base class for all components.

Parameters

- **`parameters`** (*dict*) – Dictionary of parameters for the component. Defaults to None.
- **`component_obj`** (*obj*) – Third-party objects useful in component implementation. Defaults to None.
- **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>load</code>	Loads component at file path.
<code>modifies_features</code>	Returns whether this component modifies (subsets or transforms) the features variable during transform.
<code>modifies_target</code>	Returns whether this component modifies (subsets or transforms) the target variable during transform.
<code>name</code>	Returns string name of this component.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>training_only</code>	Returns whether or not this component should be evaluated during training-time only, or during both training and prediction time.

`clone` (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

`default_parameters` (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property modifies_features (*cls*)

Returns whether this component modifies (subsets or transforms) the features variable during transform.

For Estimator objects, this attribute determines if the return value from *predict* or *predict_proba* should be used as features or targets.

property modifies_target (*cls*)

Returns whether this component modifies (subsets or transforms) the target variable during transform.

For Estimator objects, this attribute determines if the return value from *predict* or *predict_proba* should be used as features or targets.

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

property training_only (*cls*)

Returns whether or not this component should be evaluated during training-time only, or during both training and prediction time.

class evalml.pipelines.components.**ComponentBaseMeta**

Metaclass that overrides creating a new component by wrapping methods with validators and setters.

Attributes

FIT_METHODS	['fit', 'fit_transform']
METHODS_TO_CHECK	['predict', 'predict_proba', 'transform', 'inverse_transform']
PROPERTIES_TO_CHECK	['feature_importance']

Methods

<i>check_for_fit</i>	<i>check_for_fit</i> wraps a method that validates if <i>self.is_fitted</i> is <i>True</i> .
<i>register</i>	Register a virtual subclass of an ABC.
<i>set_fit</i>	Wrapper for the fit method.

classmethod **check_for_fit** (*cls, method*)

check_for_fit wraps a method that validates if *self.is_fitted* is *True*.

It raises an exception if *False* and calls and returns the wrapped method if *True*.

Parameters **method** (*callable*) – Method to wrap.

Returns The wrapped method.

Raises **ComponentNotYetFittedError** – If component is not yet fitted.

register (*cls, subclass*)

Register a virtual subclass of an ABC.

Returns the subclass, to allow usage as a class decorator.

classmethod **set_fit** (*cls, method*)

Wrapper for the fit method.

class evalml.pipelines.components.**DateTimeFeaturizer** (*features_to_extract=None, encode_as_categories=False, date_index=None, random_seed=0, **kwargs*)

Transformer that can automatically extract features from datetime columns.

Parameters

- **features_to_extract** (*list*) – List of features to extract. Valid options include “year”, “month”, “day_of_week”, “hour”. Defaults to None.
- **encode_as_categories** (*bool*) – Whether day-of-week and month features should be encoded as pandas “category” dtype. This allows OneHotEncoders to encode these features. Defaults to False.

- **date_index** (*str*) – Name of the column containing the datetime information used to order the data. Ignored.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	DateTime Featurization Component
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fit the datetime featurizer component.
<i>fit_transform</i>	Fits on X and transforms X.
<i>get_feature_names</i>	Gets the categories of each datetime feature.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by creating new features using existing DateTime columns, and then dropping those DateTime columns.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self, X, y=None*)

Fit the datetime featurizer component.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series, optional*) – Target data. Ignored.

Returns self

fit_transform (*self, X, y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

get_feature_names (*self*)

Gets the categories of each datetime feature.

Returns

Dictionary, where each key-value pair is a column name and a dictionary mapping the unique feature values to their integer encoding.

Return type dict

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data *X* by creating new features using existing DateTime columns, and then dropping those DateTime columns.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed *X*

Return type *pd.DataFrame*

```
class evalml.pipelines.components.DecisionTreeClassifier (criterion='gini',
                                                         max_features='auto',
                                                         max_depth=6,
                                                         min_samples_split=2,
                                                         min_weight_fraction_leaf=0.0,
                                                         random_seed=0,
                                                         **kwargs)
```

Decision Tree Classifier.

Parameters

- **criterion** (*{ "gini", "entropy" }*) – The function to measure the quality of a split. Supported criteria are “gini” for the Gini impurity and “entropy” for the information gain. Defaults to “gini”.
- **max_features** (*int, float or { "auto", "sqrt", "log2" }*) – The number of features to consider when looking for the best split:
 - If *int*, then consider *max_features* features at each split.
 - If *float*, then *max_features* is a fraction and *int(max_features * n_features)* features are considered at each split.
 - If “auto”, then *max_features=sqrt(n_features)*.
 - If “sqrt”, then *max_features=sqrt(n_features)*.
 - If “log2”, then *max_features=log2(n_features)*.
 - If *None*, then *max_features = n_features*.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than *max_features* features. Defaults to “auto”.

- **max_depth** (*int*) – The maximum depth of the tree. Defaults to 6.
- **min_samples_split** (*int or float*) – The minimum number of samples required to split an internal node:
 - If *int*, then consider *min_samples_split* as the minimum number.
 - If *float*, then *min_samples_split* is a fraction and *ceil(min_samples_split * n_samples)* are the minimum number of samples for each split.

Defaults to 2.

- **min_weight_fraction_leaf** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "criterion": ["gini", "entropy"], "max_features": ["auto", "sqrt", "log2"], "max_depth": Integer(4, 10), }
model_family	ModelFamily.DECISION_TREE
modifies_features	True
modifies_target	False
name	Decision Tree Classifier
pre_dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type `pd.Series`

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.DecisionTreeRegressor (criterion='mse',
                                                         max_features='auto',
                                                         max_depth=6,
                                                         min_samples_split=2,
                                                         min_weight_fraction_leaf=0.0,
                                                         random_seed=0,
                                                         **kwargs)
```

Decision Tree Regressor.

Parameters

- **criterion** (`{ "mse", "friedman_mse", "mae", "poisson" }`) – The function to measure the quality of a split. Supported criteria are:
 - “mse” for the mean squared error, which is equal to variance reduction as feature selection criterion and minimizes the L2 loss using the mean of each terminal node
 - “friedman_mse”, which uses mean squared error with Friedman’s improvement score for potential splits
 - “mae” for the mean absolute error, which minimizes the L1 loss using the median of each terminal node,
 - “poisson” which uses reduction in Poisson deviance to find splits.
- **max_features** (*int, float or { "auto", "sqrt", "log2" }*) – The number of features to consider when looking for the best split:
 - If *int*, then consider `max_features` features at each split.
 - If *float*, then `max_features` is a fraction and `int(max_features * n_features)` features are considered at each split.
 - If “auto”, then `max_features=sqrt(n_features)`.
 - If “sqrt”, then `max_features=sqrt(n_features)`.
 - If “log2”, then `max_features=log2(n_features)`.
 - If *None*, then `max_features = n_features`.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than `max_features` features.

- **max_depth** (*int*) – The maximum depth of the tree. Defaults to 6.
- **min_samples_split** (*int or float*) – The minimum number of samples required to split an internal node:
 - If *int*, then consider `min_samples_split` as the minimum number.

- If float, then `min_samples_split` is a fraction and `ceil(min_samples_split * n_samples)` are the minimum number of samples for each split.

Defaults to 2.

- **`min_weight_fraction_leaf`** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “criterion”: [“mse”, “friedman_mse”, “mae”], “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10),}
model_family	ModelFamily.DECISION_TREE
modifies_features	True
modifies_target	False
name	Decision Tree Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

`clone` (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

`default_parameters` (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.DelayedFeatureTransformer (date_index=None,
                                                             max_delay=2,
                                                             gap=0, fore-
                                                             cast_horizon=1, de-
                                                             lay_features=True,
                                                             delay_target=True,
                                                             random_seed=0,
                                                             **kwargs)
```

Transformer that delays input features and target variable for time series problems.

Parameters

- **date_index** (*str*) – Name of the column containing the datetime information used to order the data. Ignored.
- **max_delay** (*int*) – Maximum number of time units to delay each feature. Defaults to 2.
- **forecast_horizon** (*int*) – The number of time periods the pipeline is expected to forecast.
- **delay_features** (*bool*) – Whether to delay the input features. Defaults to True.
- **delay_target** (*bool*) – Whether to delay the target. Defaults to True.
- **gap** (*int*) – The number of time units between when the features are collected and when the target is collected. For example, if you are predicting the next time step's target, `gap=1`. This is only needed because when `gap=0`, we need to be sure to start the lagging of the target variable at 1. Defaults to 1.
- **random_seed** (*int*) – Seed for the random number generator. This transformer performs the same regardless of the random seed provided.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Delayed Feature Transformer
needs_fitting	False
target_colname_prefix	target_delay_{ }
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the DelayFeatureTransformer.
<i>fit_transform</i>	Fit the component and transform the input data.
<i>load</i>	Loads component at file path.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Computes the delayed features for all features in X and y.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the DelayFeatureTransformer.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, optional) – The target training data of length [n_samples]

Returns *self*

fit_transform (*self*, *X*, *y*)

Fit the component and transform the input data.

Parameters

- **X** (*pd.DataFrame* or *None*) – Data to transform. *None* is expected when only the target variable is being used.
- **y** (*pd.Series*, or *None*) – Target.

Returns Transformed X.

Return type *pd.DataFrame*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Computes the delayed features for all features in X and y.

For each feature in X, it will add a column to the output dataframe for each delay in the (inclusive) range [1, max_delay]. The values of each delayed feature are simply the original feature shifted forward in time by the delay amount. For example, a delay of 3 units means that the feature value at row n will be taken from the n-3rd row of that feature

If y is not *None*, it will also compute the delayed values for the target variable.

Parameters

- **X** (*pd.DataFrame* or *None*) – Data to transform. *None* is expected when only the target variable is being used.
- **y** (*pd.Series*, or *None*) – Target.

Returns Transformed X.

Return type *pd.DataFrame*

```
class evalml.pipelines.components.DFSTransformer (index='index',      random_seed=0,
                                                    **kwargs)
```

Featuretools DFS component that generates features for the input features.

Parameters

- **index** (*string*) – The name of the column that contains the indices. If no column with this name exists, then `featuretools.EntitySet()` creates a column with this name to serve as the index column. Defaults to 'index'.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	DFS Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the DFSTransformer Transformer component.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Computes the feature matrix for the input X using featuretools' dfs algorithm.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the DFSTransformer Transformer component.

Parameters

- **X** (*pd.DataFrame*, *np.array*) – The input data to transform, of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Computes the feature matrix for the input X using featuretools' dfs algorithm.

Parameters

- **x** (*pd.DataFrame* or *np.ndarray*) – The input training data to transform. Has shape [n_samples, n_features]
- **y** (*pd.Series*, optional) – Ignored.

Returns Feature matrix

Return type `pd.DataFrame`

```
class evalml.pipelines.components.DropColumns(columns=None, random_seed=0,  
                                              **kwargs)
```

Drops specified columns in input data.

Parameters

- **columns** (*list (string)*) – List of column names, used to determine which columns to drop.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Drop Columns Transformer
needs_fitting	False
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the transformer by checking if column names are present in the dataset.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by dropping columns.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the transformer by checking if column names are present in the dataset.

Parameters

- **X** (*pd.DataFrame*) – Data to check.
- **y** (*pd.Series*, *optional*) – Targets.

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data *X* by dropping columns.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Targets.

Returns Transformed *X*.

Return type *pd.DataFrame*

class evalml.pipelines.components.**DropNullColumns** (*pct_null_threshold=1.0*, *random_seed=0*, ***kwargs*) *ran-*

Transformer to drop features whose percentage of NaN values exceeds a specified threshold.

Parameters

- **pct_null_threshold** (*float*) – The percentage of NaN values in an input feature to drop. Must be a value between [0, 1] inclusive. If equal to 0.0, will drop columns with any null values. If equal to 1.0, will drop columns with all null values. Defaults to 0.95.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Drop Null Columns Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fits on <i>X</i> and transforms <i>X</i> .
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data <i>X</i> by dropping columns that exceed the threshold of null values.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns *self*

fit_transform (*self*, *X*, *y=None*)

Fits on *X* and transforms *X*.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed *X*.

Return type `pd.DataFrame`

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns `ComponentBase` object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property `parameters` (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=`cloudpickle.DEFAULT_PROTOCOL`)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data X by dropping columns that exceed the threshold of null values.

Parameters

- **X** (*pd.DataFrame*) – Data to transform
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed X

Return type `pd.DataFrame`

class `evalml.pipelines.components.DropRowsTransformer` (*indices_to_drop=None*, *random_seed=0*)

Transformer to drop rows specified by row indices.

Parameters

- **indices_to_drop** (*list*) – List of indices to drop in the input data. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Is not used by this component. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	True
name	Drop Rows Transformer
training_only	True

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fits on X and transforms X.
<code>load</code>	Loads component at file path.

continues on next page

Table 553 – continued from previous page

<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data using fitted component.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If indices to drop do not exist in input features or target.

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=*None*)

Transforms data using fitted component.

Parameters

- **X** (*pd.DataFrame*) – Features.
- **y** (*pd.Series*, *optional*) – Target data.

Returns Data with row indices dropped.

Return type (*pd.DataFrame*, *pd.Series*)

```
class evalml.pipelines.components.ElasticNetClassifier (penalty='elasticnet',  
                                                    C=1.0, l1_ratio=0.15,  
                                                    multi_class='auto',  
                                                    solver='saga', n_jobs=- 1,  
                                                    random_seed=0, **kwargs)
```

Elastic Net Classifier. Uses Logistic Regression with elasticnet penalty as the base estimator.

Parameters

- **penalty** (*{ "l1", "l2", "elasticnet", "none" }*) – The norm used in penalization. Defaults to “elasticnet”.
- **C** (*float*) – Inverse of regularization strength. Must be a positive float. Defaults to 1.0.
- **l1_ratio** (*float*) – The mixing parameter, with $0 \leq \text{l1_ratio} \leq 1$. Only used if *penalty*=‘elasticnet’. Setting *l1_ratio*=0 is equivalent to using *penalty*=‘l2’, while setting *l1_ratio*=1 is equivalent to using *penalty*=‘l1’. For $0 < \text{l1_ratio} < 1$, the penalty is a combination of L1 and L2. Defaults to 0.15.
- **multi_class** (*{ "auto", "ovr", "multinomial" }*) – If the option chosen is “ovr”, then a binary problem is fit for each label. For “multinomial” the loss minimised is the multinomial loss fit across the entire probability distribution, even when the data is binary. “multinomial” is unavailable when *solver*=“liblinear”. “auto” selects “ovr” if the data is binary, or if *solver*=“liblinear”, and otherwise selects “multinomial”. Defaults to “auto”.

- **solver** (`{ "newton-cg", "lbfgs", "liblinear", "sag", "saga" }`) – Algorithm to use in the optimization problem. For small datasets, “liblinear” is a good choice, whereas “sag” and “saga” are faster for large ones. For multiclass problems, only “newton-cg”, “sag”, “saga” and “lbfgs” handle multinomial loss; “liblinear” is limited to one-versus-rest schemes.
 - “newton-cg”, “lbfgs”, “sag” and “saga” handle L2 or no penalty
 - “liblinear” and “saga” also handle L1 penalty
 - “saga” also supports “elasticnet” penalty
 - “liblinear” does not support setting `penalty='none'`

Defaults to “saga”.

- **n_jobs** (`int`) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to -1.
- **random_seed** (`int`) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “C”: Real(0.01, 10), “l1_ratio”: Real(0, 1)}
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Elastic Net Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
train_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Feature importance for fitted ElasticNet classifier.
<code>fit</code>	Fits ElasticNet classifier component to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted ElasticNet classifier.

fit (*self*, *X*, *y*)

Fits ElasticNet classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises `MethodPropertyNotFoundError` – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.ElasticNetRegressor (alpha=0.0001, l1_ratio=0.15,  
                                                    max_iter=1000, normalize=False,  
                                                    random_seed=0,  
                                                    **kwargs)
```

Elastic Net Regressor.

Parameters

- **alpha** (*float*) – Constant that multiplies the penalty terms. Defaults to 0.0001.
- **l1_ratio** (*float*) – The mixing parameter, with $0 \leq \text{l1_ratio} \leq 1$. Only used if `penalty='elasticnet'`. Setting `l1_ratio=0` is equivalent to using `penalty='l2'`, while setting `l1_ratio=1` is equivalent to using `penalty='l1'`. For $0 < \text{l1_ratio} < 1$, the penalty is a combination of L1 and L2. Defaults to 0.15.
- **max_iter** (*int*) – The maximum number of iterations. Defaults to 1000.
- **normalize** (*boolean*) – If True, the regressors will be normalized before regression by subtracting the mean and dividing by the l2-norm. Defaults to False.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "alpha": Real(0, 1), "l1_ratio": Real(0, 1), }
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Elastic Net Regressor
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance for fitted ElasticNet regressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted ElasticNet regressor.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.components.**EmailFeaturizer** (*random_seed=0, **kwargs*)
Transformer that can automatically extract features from emails.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Email Featurizer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self, X, y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series, optional*) – The target training data of length [n_samples]

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self, X, y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transforms data X.

Parameters

- **x** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data.

Returns Transformed X

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

class evalml.pipelines.components.**Estimator** (*parameters=None*, *component_obj=None*, *random_seed=0*, ***kwargs*)

A component that fits and predicts given data.

To implement a new Estimator, define your own class which is a subclass of Estimator, including a name and a list of acceptable ranges for any parameters to be tuned during the automl search (hyperparameters). Define an `__init__` method which sets up any necessary state and objects. Make sure your `__init__` only uses standard keyword arguments and calls `super().__init__()` with a parameters dict. You may also override the `fit`, `transform`, `fit_transform` and other methods in this class if appropriate.

To see some examples, check out the definitions of any Estimator component subclass.

Parameters

- **parameters** (*dict*) – Dictionary of parameters for the component. Defaults to None.
- **component_obj** (*obj*) – Third-party objects useful in component implementation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

model_family	ModelFamily.NONE
modifies_features	True
modifies_target	False
pre-dict_uses_y	False
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>model_family</i>	ModelFamily.NONE
<i>name</i>	Returns string name of this component.

continues on next page

Table 557 – continued from previous page

<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.
<i>supported_problem_types</i>	Problem types this estimator supports.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property model_family (*cls*)
Returns ModelFamily of this component.

property name (*cls*)
Returns string name of this component.

needs_fitting (*self*)
Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)
Returns the parameters which were used to initialize the component.

predict (*self*, *X*)
Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)
Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol*=cloudpickle.DEFAULT_PROTOCOL)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

property supported_problem_types (*cls*)
Problem types this estimator supports.

```
class evalml.pipelines.components.ExtraTreesClassifier (n_estimators=100,  
                                                    max_features='auto',  
                                                    max_depth=6,  
                                                    min_samples_split=2,  
                                                    min_weight_fraction_leaf=0.0,  
                                                    n_jobs=-1, random_seed=0, **kwargs)
```

Extra Trees Classifier.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_features** (*int, float or {"auto", "sqrt", "log2"}*) – The number of features to consider when looking for the best split:
 - If *int*, then consider `max_features` features at each split.
 - If *float*, then `max_features` is a fraction and `int(max_features * n_features)` features are considered at each split.
 - If “auto”, then `max_features=sqrt(n_features)`.
 - If “sqrt”, then `max_features=sqrt(n_features)`.
 - If “log2”, then `max_features=log2(n_features)`.
 - If *None*, then `max_features = n_features`.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than `max_features` features. Defaults to “auto”.
- **max_depth** (*int*) – The maximum depth of the tree. Defaults to 6.
- **min_samples_split** (*int or float*) – The minimum number of samples required to split an internal node:
 - If *int*, then consider `min_samples_split` as the minimum number.
 - If *float*, then `min_samples_split` is a fraction and `ceil(min_samples_split * n_samples)` are the minimum number of samples for each split.
- **to 2.** (*Defaults*) –
- **min_weight_fraction_leaf** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(10, 1000), “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10), }
model_family	ModelFamily.EXTRA_TREES
modifies_features	True
modifies_target	False
name	Extra Trees Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
train_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a `feature_importance` method or a `component_obj` that implements `feature_importance`.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns `self`

static load (*file_path*)

Loads component at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters `X` (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type `pd.Series`

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters `X` (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type `pd.Series`

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.ExtraTreesRegressor (n_estimators=100,
                                                    max_features='auto',
                                                    max_depth=6,
                                                    min_samples_split=2,
                                                    min_weight_fraction_leaf=0.0,
                                                    n_jobs=-1, random_seed=0,
                                                    **kwargs)
```

Extra Trees Regressor.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.

- **max_features** (*int, float or {"auto", "sqrt", "log2"}*) – The number of features to consider when looking for the best split:
 - If *int*, then consider `max_features` features at each split.
 - If *float*, then `max_features` is a fraction and `int(max_features * n_features)` features are considered at each split.
 - If “auto”, then `max_features=sqrt(n_features)`.
 - If “sqrt”, then `max_features=sqrt(n_features)`.
 - If “log2”, then `max_features=log2(n_features)`.
 - If *None*, then `max_features = n_features`.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than `max_features` features. Defaults to “auto”.
- **max_depth** (*int*) – The maximum depth of the tree. Defaults to 6.
- **min_samples_split** (*int or float*) – The minimum number of samples required to split an internal node:
 - If *int*, then consider `min_samples_split` as the minimum number.
 - If *float*, then `min_samples_split` is a fraction and `ceil(min_samples_split * n_samples)` are the minimum number of samples for each split.
- **to 2.** (*Defaults*) –
- **min_weight_fraction_leaf** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(10, 1000), “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10), }
model_family	ModelFamily.EXTRA_TREES
modifies_features	True
modifies_target	False
name	Extra Trees Regressor
predict Uses y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns `self`

static load (*file_path*)

Loads component at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters `X` (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type `pd.Series`

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters `X` (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type `pd.Series`

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.components.**FeatureSelector** (*parameters=None*, *component_obj=None*, *random_seed=0*, ***kwargs*)

Selects top features based on importance weights.

Parameters

- **parameters** (*dict*) – Dictionary of parameters for the component. Defaults to None.
- **component_obj** (*obj*) – Third-party objects useful in component implementation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

modi- fies_features	True
modi- fies_target	False
train- ing_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fit and transform data using the feature selector.
<i>get_names</i>	Get names of selected features.
<i>load</i>	Loads component at file path.
<i>name</i>	Returns string name of this component.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an MethodPropertyNotFoundError exception.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns *self*

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the feature selector.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

get_names (*self*)

Get names of selected features.

Returns List of the names of features selected.

Return type *list[str]*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an *MethodPropertyNotFoundError* exception.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data. Ignored.

Returns Transformed X**Return type** *pd.DataFrame***Raises** **MethodPropertyNotFoundError** – If feature selector does not have a transform method or a component_obj that implements transform

```
class evalml.pipelines.components.Imputer (categorical_impute_strategy='most_frequent',
                                             categorical_fill_value=None,           nu-
                                             meric_impute_strategy='mean',           nu-
                                             meric_fill_value=None,           random_seed=0,
                                             **kwargs)
```

Imputes missing data according to a specified imputation strategy.

Parameters

- **categorical_impute_strategy** (*string*) – Impute strategy to use for string, object, boolean, categorical dtypes. Valid values include “most_frequent” and “constant”.
- **numeric_impute_strategy** (*string*) – Impute strategy to use for numeric columns. Valid values include “mean”, “median”, “most_frequent”, and “constant”.
- **categorical_fill_value** (*string*) – When categorical_impute_strategy == “constant”, fill_value is used to replace missing data. The default value of None will fill with the string “missing_value”.
- **numeric_fill_value** (*int*, *float*) – When numeric_impute_strategy == “constant”, fill_value is used to replace missing data. The default value of None will fill with 0.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “categorical_impute_strategy”: [“most_frequent”], “numeric_impute_strategy”: [“mean”, “median”, “most_frequent”], }
modifies_features	True
modifies_target	False
name	Imputer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits imputer to data. ‘None’ values are converted to np.nan before imputation and are treated as the same.

continues on next page

Table 561 – continued from previous page

<code>fit_transform</code>	Fits on X and transforms X.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms data X by imputing missing values. ‘None’ values are converted to np.nan before imputation and are treated as the same.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {“name”: name, “parameters”: parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits imputer to data. ‘None’ values are converted to np.nan before imputation and are treated as the same.

Parameters

- **X** (*pd.DataFrame*, *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises `MethodPropertyNotFoundError` – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns `ComponentBase` object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- `file_path` (*str*) – Location to save file.
- `pickle_protocol` (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data *X* by imputing missing values. ‘None’ values are converted to `np.nan` before imputation and are treated as the same.

Parameters

- `X` (*pd.DataFrame*) – Data to transform
- `y` (*pd.Series*, *optional*) – Ignored.

Returns Transformed *X*

Return type `pd.DataFrame`

```
class evalml.pipelines.components.KNeighborsClassifier (n_neighbors=5,
                                                    weights='uniform', algo-
                                                    rithm='auto', leaf_size=30,
                                                    p=2, random_seed=0,
                                                    **kwargs)
```

K-Nearest Neighbors Classifier.

Parameters

- `n_neighbors` (*int*) – Number of neighbors to use by default. Defaults to 5.
- `weights` (*{ 'uniform', 'distance' } or callable*) – Weight function used in prediction. Can be:
 - ‘uniform’ : uniform weights. All points in each neighborhood are weighted equally.
 - ‘distance’ : weight points by the inverse of their distance. in this case, closer neighbors of a query point will have a greater influence than neighbors which are further away.
 - [callable] : a user-defined function which accepts an array of distances, and returns an array of the same shape containing the weights.

Defaults to “uniform”.

- **algorithm** ({'auto', 'ball_tree', 'kd_tree', 'brute'}) – Algorithm used to compute the nearest neighbors:
 - 'ball_tree' will use BallTree
 - 'kd_tree' will use KDTree
 - 'brute' will use a brute-force search.

'auto' will attempt to decide the most appropriate algorithm based on the values passed to fit method. Defaults to "auto". Note: fitting on sparse input will override the setting of this parameter, using brute force.
- **leaf_size** (int) – Leaf size passed to BallTree or KDTree. This can affect the speed of the construction and query, as well as the memory required to store the tree. The optimal value depends on the nature of the problem. Defaults to 30.
- **p** (int) – Power parameter for the Minkowski metric. When $p = 1$, this is equivalent to using `manhattan_distance` (l1), and `euclidean_distance` (l2) for $p = 2$. For arbitrary p , `minkowski_distance (l_p)` is used. Defaults to 2.
- **random_seed** (int) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "n_neighbors": Integer(2, 12), "weights": ["uniform", "distance"], "algorithm": ["auto", "ball_tree", "kd_tree", "brute"], "leaf_size": Integer(10, 30), "p": Integer(1, 5), }
model_family	ModelFamily.K_NEIGHBORS
modifies_features	True
modifies_target	False
name	KNN Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns array of 0's matching the input number of features as <code>feature_importance</code> is not defined for KNN classifiers.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .

continues on next page

Table 562 – continued from previous page

<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns array of 0's matching the input number of features as `feature_importance` is not defined for KNN classifiers.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.components.**LabelEncoder** (*random_seed=0*, ***kwargs*)

A transformer that encodes target labels using values between 0 and num_classes - 1.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0. Ignored.

Attributes

hyper-parameter_ranges	{}
modifies_features	False
modifies_target	True
name	Label Encoder
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
--------------	---

<i>default_parameters</i>	Returns the default parameters for this component.
---------------------------	--

continues on next page

Table 563 – continued from previous page

<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the label encoder.
<i>fit_transform</i>	Fit and transform data using the label encoder.
<i>inverse_transform</i>	Decodes the target data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transform the target using the fitted label encoder.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y*)

Fits the label encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`. Ignored.
- **y** (*pd.Series*) – The target training data of length `[n_samples]`.

Returns *self*

Raises **ValueError** – If input *y* is `None`.

fit_transform (*self*, *X*, *y*)

Fit and transform data using the label encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*) – The target training data of length `[n_samples]`.

Returns The original features and an encoded version of the target.

Return type `pd.DataFrame`, `pd.Series`

`inverse_transform` (*self*, *y*)

Decodes the target data.

Parameters *y* (`pd.Series`) – Target data.

Returns The decoded version of the target.

Return type `pd.Series`

Raises **ValueError** – If input *y* is `None`.

`static load` (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns `ComponentBase` object

`needs_fitting` (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

`property parameters` (*self*)

Returns the parameters which were used to initialize the component.

`save` (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- *file_path* (*str*) – Location to save file.
- *pickle_protocol* (*int*) – The pickle data stream format.

`transform` (*self*, *X*, *y=None*)

Transform the target using the fitted label encoder.

Parameters

- *X* (`pd.DataFrame`) – The input training data of shape `[n_samples, n_features]`. Ignored.
- *y* (`pd.Series`) – The target training data of length `[n_samples]`.

Returns The original features and an encoded version of the target.

Return type `pd.DataFrame`, `pd.Series`

Raises **ValueError** – If input *y* is `None`.

```
class evalml.pipelines.components.LightGBMClassifier (boosting_type='gbdt',  
                                                    learning_rate=0.1,  
                                                    n_estimators=100,  
                                                    max_depth=0, num_leaves=31,  
                                                    min_child_samples=20, bag-  
                                                    ging_fraction=0.9, bag-  
                                                    ging_freq=0, n_jobs=- 1,  
                                                    random_seed=0, **kwargs)
```

LightGBM Classifier.

Parameters

- **boosting_type** (*string*) – Type of boosting to use. Defaults to “gbdt”. - ‘gbdt’ uses traditional Gradient Boosting Decision Tree - “dart”, uses Dropouts meet Multiple Additive Regression Trees - “goss”, uses Gradient-based One-Side Sampling - “rf”, uses Random Forest
- **learning_rate** (*float*) – Boosting learning rate. Defaults to 0.1.
- **n_estimators** (*int*) – Number of boosted trees to fit. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners, <=0 means no limit. Defaults to 0.
- **num_leaves** (*int*) – Maximum tree leaves for base learners. Defaults to 31.
- **min_child_samples** (*int*) – Minimum number of data needed in a child (leaf). Defaults to 20.
- **bagging_fraction** (*float*) – LightGBM will randomly select a subset of features on each iteration (tree) without resampling if this is smaller than 1.0. For example, if set to 0.8, LightGBM will select 80% of features before training each tree. This can be used to speed up training and deal with overfitting. Defaults to 0.9.
- **bagging_freq** (*int*) – Frequency for bagging. 0 means bagging is disabled. k means perform bagging at every k iteration. Every k-th iteration, LightGBM will randomly select bagging_fraction * 100 % of the data to use for the next k iterations. Defaults to 0.
- **n_jobs** (*int or None*) – Number of threads to run in parallel. -1 uses all threads. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “learning_rate”: Real(0.000001, 1), “boosting_type”: [“gbdt”, “dart”, “goss”, “rf”], “n_estimators”: Integer(10, 100), “max_depth”: Integer(0, 10), “num_leaves”: Integer(2, 100), “min_child_samples”: Integer(1, 100), “bagging_fraction”: Real(0.000001, 1), “bagging_freq”: Integer(0, 1),}
model_family	ModelFamily.LIGHTGBM
modifies_features	True
modifies_target	False
name	LightGBM Classifier
predict_uses_y	False
SEED_MAX	SEED_BOUNDS.max_bound
SEED_MIN	0
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits LightGBM classifier component to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using the fitted LightGBM classifier.
<code>predict_proba</code>	Make prediction probabilities using the fitted LightGBM classifier.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a `feature_importance` method or a `component_obj` that implements `feature_importance`.

fit (*self*, *X*, *y=None*)

Fits LightGBM classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using the fitted LightGBM classifier.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.DataFrame

predict_proba (*self, X*)

Make prediction probabilities using the fitted LightGBM classifier.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted probability values.

Return type pd.DataFrame

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.LightGBMRegressor (boosting_type='gbdt',    learn-  
                                                    ing_rate=0.1, n_estimators=20,  
                                                    max_depth=0, num_leaves=31,  
                                                    min_child_samples=20,    bag-  
                                                    ging_fraction=0.9,      bag-  
                                                    ging_freq=0,    n_jobs=- 1,  
                                                    random_seed=0, **kwargs)
```

LightGBM Regressor.

Parameters

- **boosting_type** (*string*) – Type of boosting to use. Defaults to “gbdt”. - ‘gbdt’ uses traditional Gradient Boosting Decision Tree - “dart”, uses Dropouts meet Multiple Additive Regression Trees - “goss”, uses Gradient-based One-Side Sampling - “rf”, uses Random Forest

- **learning_rate** (*float*) – Boosting learning rate. Defaults to 0.1.
- **n_estimators** (*int*) – Number of boosted trees to fit. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners, ≤ 0 means no limit. Defaults to 0.
- **num_leaves** (*int*) – Maximum tree leaves for base learners. Defaults to 31.
- **min_child_samples** (*int*) – Minimum number of data needed in a child (leaf). Defaults to 20.
- **bagging_fraction** (*float*) – LightGBM will randomly select a subset of features on each iteration (tree) without resampling if this is smaller than 1.0. For example, if set to 0.8, LightGBM will select 80% of features before training each tree. This can be used to speed up training and deal with overfitting. Defaults to 0.9.
- **bagging_freq** (*int*) – Frequency for bagging. 0 means bagging is disabled. k means perform bagging at every k iteration. Every k-th iteration, LightGBM will randomly select $\text{bagging_fraction} * 100\%$ of the data to use for the next k iterations. Defaults to 0.
- **n_jobs** (*int or None*) – Number of threads to run in parallel. -1 uses all threads. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "learning_rate": Real(0.000001, 1), "boosting_type": ["gbdt", "dart", "goss", "rf"], "n_estimators": Integer(10, 100), "max_depth": Integer(0, 10), "num_leaves": Integer(2, 100), "min_child_samples": Integer(1, 100), "bagging_fraction": Real(0.000001, 1), "bagging_freq": Integer(0, 1), }
model_family	ModelFamily.LIGHTGBM
modifies_features	True
modifies_target	False
name	LightGBM Regressor
predict_uses_y	False
SEED_MAX	SEED_BOUNDS.max_bound
SEED_MIN	0
supported_problem_types	[ProblemTypes.REGRESSION]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits LightGBM regressor to data.
<code>load</code>	Loads component at file path.

continues on next page

Table 565 – continued from previous page

<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using fitted LightGBM regressor.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits LightGBM regressor to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using fitted LightGBM regressor.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.components.**LinearDiscriminantAnalysis** (*n_components=None*,
random_seed=0,
***kwargs*)

Reduces the number of features by using Linear Discriminant Analysis.

Parameters

- **n_components** (*int*) – The number of features to maintain after computation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Linear Discriminant Analysis Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the LDA component.
<i>fit_transform</i>	Fit and transform data using the LDA component.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transform data using the fitted LDA component.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits the LDA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns *self***Raises** **ValueError** – If input data is not all numeric.**fit_transform** (*self, X, y=None*)

Fit and transform data using the LDA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.**Return type** *pd.DataFrame***Raises** **ValueError** – If input data is not all numeric.**static load** (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.**Returns** ComponentBase object**needs_fitting** (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.**property parameters** (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transform data using the fitted LDA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.**Return type** *pd.DataFrame***Raises** **ValueError** – If input data is not all numeric.

```
class evalml.pipelines.components.LinearRegressor (fit_intercept=True, normalize=False, n_jobs=-1, random_seed=0, **kwargs)
```

Linear Regressor.

Parameters

- **fit_intercept** (*boolean*) – Whether to calculate the intercept for this model. If set to False, no intercept will be used in calculations (i.e. data is expected to be centered). Defaults to True.
- **normalize** (*boolean*) – If True, the regressors will be normalized before regression by subtracting the mean and dividing by the l2-norm. This parameter is ignored when fit_intercept is set to False. Defaults to False.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all threads. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “fit_intercept”: [True, False], “normalize”: [True, False]}
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Linear Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance for fitted linear regressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted linear regressor.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises `MethodPropertyNotFoundError` – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.LogisticRegressionClassifier (penalty='l2',
                                                                C=1.0,
                                                                multi_class='auto',
                                                                solver='lbfgs',
                                                                n_jobs=- 1, random_seed=0,
                                                                **kwargs)
```

Logistic Regression Classifier.

Parameters

- **penalty** (*{ "l1", "l2", "elasticnet", "none" }*) – The norm used in penalization. Defaults to “l2”.
- **C** (*float*) – Inverse of regularization strength. Must be a positive float. Defaults to 1.0.
- **multi_class** (*{ "auto", "ovr", "multinomial" }*) – If the option chosen is “ovr”, then a binary problem is fit for each label. For “multinomial” the loss minimised is the multinomial loss fit across the entire probability distribution, even when the data is binary. “multinomial” is unavailable when solver=“liblinear”. “auto” selects “ovr” if the data is binary, or if solver=“liblinear”, and otherwise selects “multinomial”. Defaults to “auto”.
- **solver** (*{ "newton-cg", "lbfgs", "liblinear", "sag", "saga" }*) – Algorithm to use in the optimization problem. For small datasets, “liblinear” is a good choice, whereas “sag” and “saga” are faster for large ones. For multiclass problems, only “newton-cg”, “sag”, “saga” and “lbfgs” handle multinomial loss; “liblinear” is limited to one-versus-rest schemes.
 - “newton-cg”, “lbfgs”, “sag” and “saga” handle L2 or no penalty
 - “liblinear” and “saga” also handle L1 penalty
 - “saga” also supports “elasticnet” penalty
 - “liblinear” does not support setting penalty=“none”

Defaults to “lbfgs”.

- **n_jobs** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to -1.

- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “penalty”: [“l2”], “C”: Real(0.01, 10), }
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Logistic Regression Classifier
pre_dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance for fitted logistic regression classifier.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted logistic regression classifier.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.components.**LogTransformer** (*random_seed*=0)
Applies a log transformation to the target data.

Attributes

hyper-parameter_ranges	{}
modifies_features	False
modifies_target	True
name	Log Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the LogTransformer.
<i>fit_transform</i>	Log transforms the target variable.
<i>inverse_transform</i>	Apply exponential to target data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Log transforms the target variable.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the LogTransformer.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Ignored.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns *self*

fit_transform (*self*, *X*, *y=None*)

Log transforms the target variable.

Parameters

- **X** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target variable to log transform.

Returns

The input features are returned without modification. The target variable *y* is log transformed.

Return type tuple of *pd.DataFrame*, *pd.Series*

inverse_transform (*self*, *y*)

Apply exponential to target data.

Parameters **y** (*pd.Series*) – Target variable.

Returns Target with exponential applied.

Return type *pd.Series*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=*None*)
Log transforms the target variable.

Parameters

- **X** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target data to log transform.

Returns

The input features are returned without modification. The target variable *y* is log transformed.

Return type tuple of *pd.DataFrame*, *pd.Series*

class evalml.pipelines.components.**LSA** (*random_seed*=0, ***kwargs*)
Transformer to calculate the Latent Semantic Analysis Values of text input.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	LSA Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the input data.
<i>fit_transform</i>	Fits on <i>X</i> and transforms <i>X</i> .
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.

continues on next page

Table 570 – continued from previous page

<i>transform</i>	Transforms data X by applying the LSA pipeline.
clone (<i>self</i>)	
Constructs a new component with the same parameters and random state.	
Returns A new instance of this component with identical parameters and random state.	
default_parameters (<i>cls</i>)	
Returns the default parameters for this component.	
Our convention is that <code>Component.default_parameters == Component().parameters</code> .	
Returns Default parameters for this component.	
Return type dict	
describe (<i>self</i> , <i>print_name=False</i> , <i>return_dict=False</i>)	
Describe a component and its parameters.	
Parameters	
<ul style="list-style-type: none"> • print_name (<i>bool</i>, <i>optional</i>) – whether to print name of component • return_dict (<i>bool</i>, <i>optional</i>) – whether to return description as dictionary in the format {"name": name, "parameters": parameters} 	
Returns Returns dictionary if <i>return_dict</i> is True, else None.	
Return type None or dict	
fit (<i>self</i> , <i>X</i> , <i>y=None</i>)	
Fits the input data.	
Parameters	
<ul style="list-style-type: none"> • X (<i>pd.DataFrame</i>) – The data to transform. • y (<i>pd.Series</i>, <i>optional</i>) – Ignored. 	
Returns <i>self</i>	
fit_transform (<i>self</i> , <i>X</i> , <i>y=None</i>)	
Fits on X and transforms X.	
Parameters	
<ul style="list-style-type: none"> • X (<i>pd.DataFrame</i>) – Data to fit and transform. • y (<i>pd.Series</i>) – Target data. 	
Returns Transformed X.	
Return type <i>pd.DataFrame</i>	
Raises MethodPropertyNotFoundError – If transformer does not have a transform method or a <i>component_obj</i> that implements transform.	
static load (<i>file_path</i>)	
Loads component at file path.	
Parameters file_path (<i>str</i>) – Location to load file.	
Returns <i>ComponentBase</i> object	

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=cloudpickle.DEFAULT_PROTOCOL)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=None)

Transforms data X by applying the LSA pipeline.

Parameters

- **X** (*pd.DataFrame*) – The data to transform.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns

Transformed X. The original column is removed and replaced with two columns of the format *LSA(original_column_name)[feature_number]*, where *feature_number* is 0 or 1.

Return type *pd.DataFrame*

```
class evalml.pipelines.components.OneHotEncoder (top_n=10, features_to_encode=None,
                                                categories=None, drop='if_binary',
                                                handle_unknown='ignore', handle_missing='error',
                                                random_seed=0,
                                                **kwargs)
```

A transformer that encodes categorical features in a one-hot numeric array.

Parameters

- **top_n** (*int*) – Number of categories per column to encode. If None, all categories will be encoded. Otherwise, the *n* most frequent will be encoded and all others will be dropped. Defaults to 10.
- **features_to_encode** (*list[str]*) – List of columns to encode. All other columns will remain untouched. If None, all appropriate columns will be encoded. Defaults to None.
- **categories** (*list*) – A two dimensional list of categories, where *categories[i]* is a list of the categories for the column at index *i*. This can also be None, or “auto” if *top_n* is not None. Defaults to None.
- **drop** (*string*, *list*) – Method (“first” or “if_binary”) to use to drop one category per feature. Can also be a list specifying which categories to drop for each feature. Defaults to ‘if_binary’.
- **handle_unknown** (*string*) – Whether to ignore or error for unknown categories for a feature encountered during *fit* or *transform*. If either *top_n* or *categories* is used to limit the number of categories per column, this must be “ignore”. Defaults to “ignore”.

- **handle_missing** (*string*) – Options for how to handle missing (NaN) values encountered during *fit* or *transform*. If this is set to “as_category” and NaN values are within the *n* most frequent, “nan” values will be encoded as their own column. If this is set to “error”, any missing values encountered will raise an error. Defaults to “error”.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	One Hot Encoder
training_only	False

Methods

<i>categories</i>	Returns a list of the unique categories to be encoded for the particular feature, in order.
<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the one-hot encoder component.
<i>fit_transform</i>	Fits on X and transforms X.
<i>get_feature_names</i>	Return feature names for the categorical features after fitting.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	One-hot encode the input data.

categories (*self*, *feature_name*)

Returns a list of the unique categories to be encoded for the particular feature, in order.

Parameters **feature_name** (*str*) – The name of any feature provided to one-hot encoder during fit.

Returns The unique categories, in the same dtype as they were provided during fit.

Return type np.ndarray

Raises **ValueError** – If feature was not provided to one-hot encoder as a training feature.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the one-hot encoder component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns *self*

Raises **ValueError** – If encoding a column failed.

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

get_feature_names (*self*)

Return feature names for the categorical features after fitting.

Feature names are formatted as {column name}_{category name}. In the event of a duplicate name, an integer will be added at the end of the feature name to distinguish it.

For example, consider a dataframe with a column called “A” and category “x_y” and another column called “A_x” with “y”. In this example, the feature names would be “A_x_y” and “A_x_y_1”.

Returns The feature names after encoding, provided in the same order as `input_features`.

Return type *np.ndarray*

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=*None*)

One-hot encode the input data.

Parameters

- **X** (*pd.DataFrame*) – Features to one-hot encode.
- **y** (*pd.Series*) – Ignored.

Returns Transformed data, where each categorical feature has been encoded into numerical columns using one-hot encoding.

Return type *pd.DataFrame*

```
class evalml.pipelines.components.Oversampler (sampling_ratio=0.25, sampling_ratio_dict=None,
k_neighbors_default=5, n_jobs=-1,
random_seed=0, **kwargs)
```

SMOTE Oversampler component. Will automatically select whether to use SMOTE, SMOTEN, or SMOTENC based on inputs to the component.

Parameters

- **sampling_ratio** (*float*) – This is the goal ratio of the minority to majority class, with range (0, 1]. A value of 0.25 means we want a 1:4 ratio of the minority to majority class after oversampling. We will create the a sampling dictionary using this ratio, with the keys corresponding to the class and the values responding to the number of samples. Defaults to 0.25.
- **sampling_ratio_dict** (*dict*) – A dictionary specifying the desired balanced ratio for each target value. For instance, in a binary case where class 1 is the minority, we could specify: *sampling_ratio_dict*={0: 0.5, 1: 1}, which means we would undersample class 0 to have twice the number of samples as class 1 (minority:majority ratio = 0.5), and don't sample class 1. Overrides *sampling_ratio* if provided. Defaults to None.
- **k_neighbors_default** (*int*) – The number of nearest neighbors used to construct synthetic samples. This is the default value used, but the actual *k_neighbors* value might be smaller if there are less samples. Defaults to 5.

- **n_jobs** (*int*) – The number of CPU cores to use. Defaults to -1.
- **random_seed** (*int*) – The seed to use for random sampling. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	True
name	Oversampler
training_only	True

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits oversampler to data.
<i>fit_transform</i>	Fit and transform data using the sampler component.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms the input data by sampling the data.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or `dict`

fit (*self*, *X*, *y*)

Fits oversampler to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns *self*

fit_transform (*self*, *X*, *y*)

Fit and transform data using the sampler component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns Transformed data.

Return type (*pd.DataFrame*, *pd.Series*)

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms the input data by sampling the data.

Parameters

- **X** (*pd.DataFrame*) – Training features.
- **y** (*pd.Series*) – Target.

Returns Transformed features and target.

Return type *pd.DataFrame*, *pd.Series*

```
class evalml.pipelines.components.PCA (variance=0.95, n_components=None, random_seed=0, **kwargs)
```

Reduces the number of features by using Principal Component Analysis (PCA).

Parameters

- **variance** (*float*) – The percentage of the original data variance that should be preserved when reducing the number of features. Defaults to 0.95.
- **n_components** (*int*) – The number of features to maintain after computing SVD. Defaults to None, but will override variance variable if set.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	Real(0.25, 1)}:type: {"variance"}
modifies_features	True
modifies_target	False
name	PCA Transformer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the PCA component.
<i>fit_transform</i>	Fit and transform data using the PCA component.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transform data using fitted PCA component.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the PCA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If input data is not all numeric.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the PCA component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type pd.DataFrame

Raises **ValueError** – If input data is not all numeric.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transform data using fitted PCA component.

Parameters

- **x** (*pd.DataFrame*) – The input training data of shape [*n_samples*, *n_features*].
- **y** (*pd.Series*, *optional*) – The target training data of length [*n_samples*].

Returns Transformed data.

Return type *pd.DataFrame*

Raises **ValueError** – If input data is not all numeric.

class *evalml.pipelines.components.PerColumnImputer* (*impute_strategies=None*, *default_impute_strategy='most_frequent'*, *random_seed=0*, ***kwargs*)

Imputes missing data according to a specified imputation strategy per column.

Parameters

- **impute_strategies** (*dict*) – Column and {"impute_strategy": strategy, "fill_value":value} pairings. Valid values for impute strategy include "mean", "median", "most_frequent", "constant" for numerical data, and "most_frequent", "constant" for object data types. Defaults to None, which uses "most_frequent" for all columns. When *impute_strategy* == "constant", *fill_value* is used to replace missing data. When None, uses 0 when imputing numerical data and "missing_value" for strings or object data types.
- **default_impute_strategy** (*str*) – Impute strategy to fall back on when none is provided for a certain column. Valid values include "mean", "median", "most_frequent", "constant" for numerical data, and "most_frequent", "constant" for object data types. Defaults to "most_frequent".
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Per Column Imputer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits imputers on input data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.

continues on next page

Table 574 – continued from previous page

<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input data by imputing missing values.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits imputers on input data.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features] to fit.
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]. Ignored.

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=cloudpickle.DEFAULT_PROTOCOL)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=None)

Transforms input data by imputing missing values.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features] to transform.
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]. Ignored.

Returns Transformed X

Return type pd.DataFrame

class evalml.pipelines.components.**PolynomialDetrender** (*degree*=1, *random_seed*=0, ***kwargs*)

Removes trends from time series by fitting a polynomial to the data.

Parameters

- **degree** (*int*) – Degree for the polynomial. If 1, linear model is fit to the data. If 2, quadratic model is fit, etc. Defaults to 1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “degree”: Integer(1, 3)}
modifies_features	False
modifies_target	True
name	Polynomial Detrender
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits the PolynomialDetrender.
<code>fit_transform</code>	Removes fitted trend from target variable.
<code>inverse_transform</code>	Adds back fitted trend to target variable.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Removes fitted trend from target variable.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the PolynomialDetrender.

Parameters

- **X** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target variable to detrend.

Returns self

Raises **ValueError** – If y is None.

fit_transform (*self*, *X*, *y=None*)

Removes fitted trend from target variable.

Parameters

- **x** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target variable to detrend.

Returns

The first element are the input features returned without modification. The second element is the target variable y with the fitted trend removed.

Return type tuple of *pd.DataFrame*, *pd.Series*

inverse_transform (*self*, *y*)

Adds back fitted trend to target variable.

Parameters **y** (*pd.Series*) – Target variable.

Returns

The first element are the input features returned without modification. The second element is the target variable y with the trend added back.

Return type tuple of *pd.DataFrame*, *pd.Series*

Raises **ValueError** – If y is None.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Removes fitted trend from target variable.

Parameters

- **x** (*pd.DataFrame*, *optional*) – Ignored.
- **y** (*pd.Series*) – Target variable to detrend.

Returns

The input features are returned without modification. The target variable y is detrended

Return type tuple of *pd.DataFrame*, *pd.Series*


```
class evalml.pipelines.components.ProphetRegressor (date_index=None, change-  

point_prior_scale=0.05, sea-  

sonality_prior_scale=10, hol-  

idays_prior_scale=10, sea-  

sonality_mode='additive',  

random_seed=0,  

stan_backend='CMDSTANPY',  

**kwargs)
```

Prophet is a procedure for forecasting time series data based on an additive model where non-linear trends are fit with yearly, weekly, and daily seasonality, plus holiday effects. It works best with time series that have strong seasonal effects and several seasons of historical data. Prophet is robust to missing data and shifts in the trend, and typically handles outliers well.

More information here: <https://facebook.github.io/prophet/>

Attributes

hyper-parameter_ranges	{ "changepoint_prior_scale": Real(0.001, 0.5), "seasonality_prior_scale": Real(0.01, 10), "holidays_prior_scale": Real(0.01, 10), "seasonality_mode": ["additive", "multiplicative"], }
model_family	ModelFamily.PROPHET
modifies_features	True
modifies_target	False
name	Prophet Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.TIME_SERIES_REGRESSION]
training_only	False

Methods

<i>build_prophet_df</i>	Build the Prophet data to pass fit and predict on.
<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns array of 0's with len(1) as feature_importance is not defined for Prophet regressor.
<i>fit</i>	Fits Prophet regressor component to data.
<i>get_params</i>	Get parameters for the Prophet regressor.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted Prophet regressor.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

static build_prophet_df (*X*, *y=None*, *date_column='ds'*)

Build the Prophet data to pass fit and predict on.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns array of 0's with len(1) as feature_importance is not defined for Prophet regressor.

fit (*self*, *X*, *y=None*)

Fits Prophet regressor component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

get_params (*self*)

Get parameters for the Prophet regressor.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*, *y=None*)

Make predictions using fitted Prophet regressor.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – Target data.

Returns Predicted values.

Return type *pd.Series*

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.RandomForestClassifier (n_estimators=100,  
                                                         max_depth=6, n_jobs=-  
                                                         1, random_seed=0,  
                                                         **kwargs)
```

Random Forest Classifier.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "n_estimators": Integer(10, 1000), "max_depth": Integer(1, 10), }
model_family	ModelFamily.RANDOM_FOREST
modifies_features	True
modifies_target	False
name	Random Forest Classifier
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

`save` (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **`file_path`** (*str*) – Location to save file.
- **`pickle_protocol`** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.RandomForestRegressor (n_estimators=100,
                                                    max_depth=6, n_jobs=-1,
                                                    random_seed=0,
                                                    **kwargs)
```

Random Forest Regressor.

Parameters

- **`n_estimators`** (*float*) – The number of trees in the forest. Defaults to 100.
- **`max_depth`** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **`n_jobs`** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "n_estimators": Integer(10, 1000), "max_depth": Integer(1, 32), }
model_family	ModelFamily.RANDOM_FOREST
modifies_features	True
modifies_target	False
name	Random Forest Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.

continues on next page

Table 578 – continued from previous page

<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.RFClassifierSelectFromModel (number_features=None,  
                                                             n_estimators=10,  
                                                             max_depth=None,  
                                                             per-  
                                                             cent_features=0.5,  
                                                             threshold=-  
                                                             np.inf, n_jobs=-  
                                                             1, ran-  
                                                             dom_seed=0,  
                                                             **kwargs)
```

Selects top features based on importance weights using a Random Forest classifier.

Parameters

- **number_features** (*int*) – The maximum number of features to select. If both percent_features and number_features are specified, take the greater number of features. Defaults to 0.5. Defaults to None.
- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.

- **percent_features** (*float*) – Percentage of features to use. If both percent_features and number_features are specified, take the greater number of features. Defaults to 0.5.
- **threshold** (*string or float*) – The threshold value to use for feature selection. Features whose importance is greater or equal are kept while the others are discarded. If “median”, then the threshold value is the median of the feature importances. A scaling factor (e.g., “1.25*mean”) may also be used. Defaults to -np.inf.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “percent_features”: Real(0.01, 1), “threshold”: [“mean”, -np.inf], }
modifies_features	True
modifies_target	False
name	RF Classifier Select From Model
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fit and transform data using the feature selector.
<i>get_names</i>	Get names of selected features.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an MethodPropertyNotFoundError exception.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the feature selector.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type pd.DataFrame

get_names (*self*)

Get names of selected features.

Returns List of the names of features selected.

Return type list[str]

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=*None*)

Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an `MethodPropertyNotFoundError` exception.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data. Ignored.

Returns Transformed X

Return type *pd.DataFrame*

Raises `MethodPropertyNotFoundError` – If feature selector does not have a transform method or a component_obj that implements transform

```
class evalml.pipelines.components.RFRegressorSelectFromModel (number_features=None,
                                                             n_estimators=10,
                                                             max_depth=None,
                                                             per-
                                                             cent_features=0.5,
                                                             threshold=- np.inf,
                                                             n_jobs=- 1, ran-
                                                             dom_seed=0,
                                                             **kwargs)
```

Selects top features based on importance weights using a Random Forest regressor.

Parameters

- **number_features** (*int*) – The maximum number of features to select. If both *percent_features* and *number_features* are specified, take the greater number of features. Defaults to 0.5. Defaults to *None*.
- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **percent_features** (*float*) – Percentage of features to use. If both *percent_features* and *number_features* are specified, take the greater number of features. Defaults to 0.5.
- **threshold** (*string* or *float*) – The threshold value to use for feature selection. Features whose importance is greater or equal are kept while the others are discarded. If “median”, then the threshold value is the median of the feature importances. A scaling factor (e.g., “1.25*mean”) may also be used. Defaults to *-np.inf*.
- **n_jobs** (*int* or *None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “percent_features”: Real(0.01, 1), “threshold”: [“mean”, -np.inf], }
modifies_features	True
modifies_target	False
name	RF Regressor Select From Model
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fit and transform data using the feature selector.
<i>get_names</i>	Get names of selected features.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an MethodPropertyNotFoundError exception.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {“name”: name, “parameters”: parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or `dict`

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`
- **y** (*pd.Series, optional*) – The target training data of length `[n_samples]`

Returns `self`

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a `component_obj` that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the feature selector.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series, optional*) – The target training data of length `[n_samples]`.

Returns Transformed data.

Return type `pd.DataFrame`

get_names (*self*)

Get names of selected features.

Returns List of the names of features selected.

Return type `list[str]`

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns `ComponentBase` object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms input data by selecting features. If the `component_obj` does not have a transform method, will raise an `MethodPropertyNotFoundError` exception.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data. Ignored.

Returns Transformed X**Return type** *pd.DataFrame***Raises** **MethodPropertyNotFoundError** – If feature selector does not have a transform method or a component_obj that implements transform

```
class evalml.pipelines.components.SelectByType (column_types=None, random_seed=0,  
                                              **kwargs)
```

Selects columns by specified Woodwork logical type or semantic tag in input data.

Parameters

- **column_types** (*string*, *ww.LogicalType*, *list(string)*, *list(ww.LogicalType)*) – List of Woodwork types or tags, used to determine which columns to select.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Select Columns By Type Transformer
needs_fitting	False
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the transformer by checking if column names are present in the dataset.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by selecting columns.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the transformer by checking if column names are present in the dataset.

Parameters

- **X** (*pd.DataFrame*) – Data to check.
- **y** (*pd.Series*, *optional*) – Targets.

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data *X* by selecting columns.

Parameters

- **x** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Targets.

Returns Transformed *X*.

Return type *pd.DataFrame*

class evalml.pipelines.components.**SelectColumns** (*columns=None*, *random_seed=0*,
***kwargs*)

Selects specified columns in input data.

Parameters

- **columns** (*list(string)*) – List of column names, used to determine which columns to select.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Select Columns Transformer
needs_fitting	False
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the transformer by checking if column names are present in the dataset.
<i>fit_transform</i>	Fits on <i>X</i> and transforms <i>X</i> .
<i>load</i>	Loads component at file path.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data <i>X</i> by selecting columns.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the transformer by checking if column names are present in the dataset.

Parameters

- **X** (*pd.DataFrame*) – Data to check.
- **y** (*pd.Series*, *optional*) – Targets.

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data *X* by selecting columns.

Parameters

- **x** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Targets.

Returns Transformed *X*.

Return type *pd.DataFrame*

class evalml.pipelines.components.**SimpleImputer** (*impute_strategy='most_frequent'*,
fill_value=None, *random_seed=0*,
***kwargs*)

Imputes missing data according to a specified imputation strategy.

Parameters

- **impute_strategy** (*string*) – Impute strategy to use. Valid values include “mean”, “median”, “most_frequent”, “constant” for numerical data, and “most_frequent”, “constant” for object data types.
- **fill_value** (*string*) – When *impute_strategy* == “constant”, *fill_value* is used to replace missing data. Defaults to 0 when imputing numerical data and “missing_value” for strings or object data types.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “impute_strategy”: [“mean”, “median”, “most_frequent”]}
modifies_features	True
modifies_target	False
name	Simple Imputer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits imputer to data. ‘None’ values are converted to np.nan before imputation and are treated as the same.
<i>fit_transform</i>	Fits on <i>X</i> and transforms <i>X</i> .
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

continues on next page

Table 583 – continued from previous page

<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input by imputing missing values. ‘None’ and np.nan values are treated as the same.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {“name”: name, “parameters”: parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits imputer to data. ‘None’ values are converted to np.nan before imputation and are treated as the same.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – the input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – the target training data of length [n_samples]

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform
- **y** (*pd.Series*, *optional*) – Target data.

Returns Transformed X

Return type pd.DataFrame

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

hyper-parameter_ranges	{}
model_family	ModelFamily.ENSEMBLE
modifies_features	True
modifies_target	False
name	Stacked Ensemble Classifier
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
train-only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for stacked ensemble classes.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for stacked ensemble classes.

Returns default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.StackedEnsembleRegressor (final_estimator=None,  
                                                         n_jobs=- 1,  ran-  
                                                         dom_seed=0,  
                                                         **kwargs)
```

Stacked Ensemble Regressor.

Parameters

- **final_estimator** (*Estimator or subclass*) – The regressor used to combine the base estimators. If None, uses ElasticNetRegressor.
- **n_jobs** (*int or None*) – Integer describing level of parallelism used for pipelines. None and 1 are equivalent. If set to -1, all CPUs are used. For n_jobs greater than -1, (n_cpus + 1 + n_jobs) are used. Defaults to -1. - Note: there could be some multi-process errors thrown for values of *n_jobs* != 1. If this is the case, please use *n_jobs* = 1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.ENSEMBLE
modifies_features	True
modifies_target	False
name	Stacked Ensemble Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for stacked ensemble classes.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

continues on next page

Table 585 – continued from previous page

<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for stacked ensemble classes.

Returns default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.components.**StandardScaler** (*random_seed=0*, ***kwargs*)

A transformer that standardizes input features by removing the mean and scaling to unit variance.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Standard Scaler
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fit and transform data using the standard scaler component.

continues on next page

Table 586 – continued from previous page

<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transform data using the fitted standard scaler.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`

Returns *self*

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a `component_obj` that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the standard scaler component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns Transformed data.

Return type `pd.DataFrame`

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=cloudpickle.DEFAULT_PROTOCOL)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=None)

Transform data using the fitted standard scaler.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, optional) – The target training data of length [n_samples].

Returns Transformed data.

Return type pd.DataFrame

```
class evalml.pipelines.components.SVMClassifier (C=1.0, kernel='rbf', gamma='auto',
                                                probability=True, random_seed=0,
                                                **kwargs)
```

Support Vector Machine Classifier.

Parameters

- **C** (*float*) – The regularization parameter. The strength of the regularization is inversely proportional to C. Must be strictly positive. The penalty is a squared l2 penalty. Defaults to 1.0.
- **kernel** ({*"poly"*, *"rbf"*, *"sigmoid"*}) – Specifies the kernel type to be used in the algorithm. Defaults to “rbf”.
- **gamma** ({*"scale"*, *"auto"*} or *float*) – Kernel coefficient for “rbf”, “poly” and “sigmoid”. Defaults to “auto”. - If gamma=’scale’ is passed then it uses 1 / (n_features * X.var()) as value of gamma - If “auto” (default), uses 1 / n_features
- **probability** (*boolean*) – Whether to enable probability estimates. Defaults to True.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “C”: Real(0, 10), “kernel”: [“poly”, “rbf”, “sigmoid”], “gamma”: [“scale”, “auto”], }
model_family	ModelFamily.SVM
modifies_features	True
modifies_target	False
name	SVM Classifier
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance only works with linear kernels.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance only works with linear kernels.

If the kernel isn't linear, we return a numpy array of zeros.

Returns Feature importance of fitted SVM classifier or a numpy array of zeroes if the kernel is not linear.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.components.**SVMRegressor** (*C*=1.0, *kernel*='rbf', *gamma*='auto', *random_seed*=0, ***kwargs*)

Support Vector Machine Regressor.

Parameters

- **C** (*float*) – The regularization parameter. The strength of the regularization is inversely proportional to C. Must be strictly positive. The penalty is a squared l2 penalty. Defaults to 1.0.
- **kernel** ({*"poly"*, *"rbf"*, *"sigmoid"*}) – Specifies the kernel type to be used in the algorithm. Defaults to “rbf”.
- **gamma** ({*"scale"*, *"auto"*} or *float*) – Kernel coefficient for “rbf”, “poly” and “sigmoid”. Defaults to “auto”. - If gamma=’scale’ is passed then it uses $1 / (n_features * X.var())$ as value of gamma - If “auto” (default), uses $1 / n_features$
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “C”: Real(0, 10), “kernel”: [“poly”, “rbf”, “sigmoid”], “gamma”: [“scale”, “auto”], }
model_family	ModelFamily.SVM
modifies_features	True
modifies_target	False
name	SVM Regressor
predict Uses y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance of fitted SVM regressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.

continues on next page

Table 588 – continued from previous page

<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted SVM regresor.

Only works with linear kernels. If the kernel isn't linear, we return a numpy array of zeros.

Returns The feature importance of the fitted SVM regressor, or an array of zeroes if the kernel is not linear.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.TargetEncoder (cols=None, smoothing=1.0,  
                                                handle_unknown='value', handle_missing='value', random_seed=0,  
                                                **kwargs)
```

A transformer that encodes categorical features into target encodings.

Parameters

- **cols** (*list*) – Columns to encode. If None, all string columns will be encoded, otherwise only the columns provided will be encoded. Defaults to None
- **smoothing** (*float*) – The smoothing factor to apply. The larger this value is, the more influence the expected target value has on the resulting target encodings. Must be strictly larger than 0. Defaults to 1.0
- **handle_unknown** (*string*) – Determines how to handle unknown categories for a feature encountered. Options are 'value', 'error', and 'return_nan'. Defaults to 'value', which replaces with the target mean
- **handle_missing** (*string*) – Determines how to handle missing values encountered during *fit* or *transform*. Options are 'value', 'error', and 'return_nan'. Defaults to 'value', which replaces with the target mean

- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Target Encoder
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the target encoder.
<i>fit_transform</i>	Fit and transform data using the target encoder.
<i>get_feature_names</i>	Return feature names for the input features after fitting.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transform data using the fitted target encoder.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or `dict`

fit (*self*, *X*, *y*)

Fits the target encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns `self`

fit_transform (*self*, *X*, *y*)

Fit and transform data using the target encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns Transformed data.

Return type `pd.DataFrame`

get_feature_names (*self*)

Return feature names for the input features after fitting.

Returns The feature names after encoding.

Return type `np.array`

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns `ComponentBase` object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transform data using the fitted target encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.

- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type `pd.DataFrame`

```
class evalml.pipelines.components.TargetImputer (impute_strategy='most_frequent',  
                                                fill_value=None,      random_seed=0,  
                                                **kwargs)
```

Imputes missing target data according to a specified imputation strategy.

Parameters

- **impute_strategy** (*string*) – Impute strategy to use. Valid values include “mean”, “median”, “most_frequent”, “constant” for numerical data, and “most_frequent”, “constant” for object data types. Defaults to “most_frequent”.
- **fill_value** (*string*) – When `impute_strategy == “constant”`, `fill_value` is used to replace missing data. Defaults to `None` which uses 0 when imputing numerical data and “missing_value” for strings or object data types.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “impute_strategy”: [“mean”, “median”, “most_frequent”]}
modifies_features	False
modifies_target	True
name	Target Imputer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits imputer to target data. ‘None’ values are converted to <code>np.nan</code> before imputation and are treated as the same.
<i>fit_transform</i>	Fits on and transforms the input target data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input target data by imputing missing values. ‘None’ and <code>np.nan</code> values are treated as the same.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits imputer to target data. 'None' values are converted to np.nan before imputation and are treated as the same.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features]. Ignored.
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

Raises **TypeError** – If target is filled with all null values.

fit_transform (*self*, *X*, *y*)

Fits on and transforms the input target data.

Parameters

- **X** (*pd.DataFrame*) – Features. Ignored.
- **y** (*pd.Series*) – Target data to impute.

Returns The original X, transformed y

Return type (pd.DataFrame, pd.Series)

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*)

Transforms input target data by imputing missing values. ‘None’ and np.nan values are treated as the same.

Parameters

- **X** (*pd.DataFrame*) – Features. Ignored.
- **y** (*pd.Series*) – Target data to impute.

Returns The original X, transformed y

Return type (pd.DataFrame, pd.Series)

class evalml.pipelines.components.**TextFeaturizer** (*random_seed=0*, ***kwargs*)

Transformer that can automatically featurize text columns using featuretools’ nlp_primitives.

Since models cannot handle non-numeric data, any text must be broken down into features that provide useful information about that text. This component splits each text column into several informative features: Diversity Score, Mean Characters per Word, Polarity Score, and LSA (Latent Semantic Analysis). Calling transform on this component will replace any text columns in the given dataset with these numeric columns.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Text Featurization Component
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.

continues on next page

Table 591 – continued from previous page

<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms data X by creating new features using existing text columns.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*) – The target training data of length [n_samples]

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=cloudpickle.DEFAULT_PROTOCOL)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=None)

Transforms data X by creating new features using existing text columns.

Parameters

- **X** (*pd.DataFrame*) – The data to transform.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed X

Return type *pd.DataFrame*

```
class evalml.pipelines.components.TimeSeriesBaselineEstimator (gap=1, fore-  
                                cast_horizon=1,  
                                random_seed=0,  
                                **kwargs)
```

Time series estimator that predicts using the naive forecasting approach.

This is useful as a simple baseline estimator for time series problems.

Parameters

- **gap** (*int*) – Gap between prediction date and target date and must be a positive integer. If gap is 0, target date will be shifted ahead by 1 time period. Defaults to 1.
- **forecast_horizon** (*int*) – Number of time steps the model is expected to predict.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.BASELINE
modifies_features	True
modifies_target	False
name	Time Series Baseline Estimator
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.TIME_SERIES_REGRESSION, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits time series baseline estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted time series baseline estimator.
<i>predict_proba</i>	Make prediction probabilities using fitted time series baseline estimator.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Since baseline estimators do not use input features to calculate predictions, returns an array of zeroes.

Returns An array of zeroes.

Return type np.ndarray (float)

fit (*self, X, y=None*)

Fits time series baseline estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If input y is None.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using fitted time series baseline estimator.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **ValueError** – If input y is None.

predict_proba (*self, X*)

Make prediction probabilities using fitted time series baseline estimator.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted probability values.

Return type pd.DataFrame

Raises **ValueError** – If input y is None.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.components.**Transformer** (*parameters=None*, *component_obj=None*, *random_seed=0*, ***kwargs*)

A component that may or may not need fitting that transforms data. These components are used before an estimator.

To implement a new Transformer, define your own class which is a subclass of Transformer, including a name and a list of acceptable ranges for any parameters to be tuned during the automl search (hyperparameters). Define an `__init__` method which sets up any necessary state and objects. Make sure your `__init__` only uses standard keyword arguments and calls `super().__init__()` with a parameters dict. You may also override the `fit`, `transform`, `fit_transform` and other methods in this class if appropriate.

To see some examples, check out the definitions of any Transformer component.

Parameters

- **parameters** (*dict*) – Dictionary of parameters for the component. Defaults to None.
- **component_obj** (*obj*) – Third-party objects useful in component implementation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

modifies_features	True
modifies_target	False
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>name</i>	Returns string name of this component.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.

continues on next page

Table 593 – continued from previous page

transform

Transforms data X.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.**default_parameters** (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.**Returns** Default parameters for this component.**Return type** dict**describe** (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.**Return type** `None` or dict**fit** (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`

Returns *self***Raises** **MethodPropertyNotFoundError** – If component does not have a `fit` method or a `component_obj` that implements `fit`.**fit_transform** (*self*, *X*, *y=None*)Fits on *X* and transforms *X*.**Parameters**

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed *X*.**Return type** *pd.DataFrame***Raises** **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.**static load** (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.**Returns** *ComponentBase* object

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=cloudpickle.DEFAULT_PROTOCOL)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

abstract transform (*self*, *X*, *y=None*)

Transforms data X.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data.

Returns Transformed X

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

```
class evalml.pipelines.components.Undersampler (sampling_ratio=0.25, sam-  
                                           pling_ratio_dict=None,  
                                           min_samples=100,  
                                           min_percentage=0.1, random_seed=0,  
                                           **kwargs)
```

Initializes an undersampling transformer to downsample the majority classes in the dataset.

This component is only run during training and not during predict.

Parameters

- **sampling_ratio** (*float*) – The smallest minority:majority ratio that is accepted as ‘balanced’. For instance, a 1:4 ratio would be represented as 0.25, while a 1:1 ratio is 1.0. Must be between 0 and 1, inclusive. Defaults to 0.25.
- **sampling_ratio_dict** (*dict*) – A dictionary specifying the desired balanced ratio for each target value. For instance, in a binary case where class 1 is the minority, we could specify: *sampling_ratio_dict*={0: 0.5, 1: 1}, which means we would undersample class 0 to have twice the number of samples as class 1 (minority:majority ratio = 0.5), and don’t sample class 1. Overrides *sampling_ratio* if provided. Defaults to None.
- **min_samples** (*int*) – The minimum number of samples that we must have for any class, pre or post sampling. If a class must be downsampled, it will not be downsampled past this value. To determine severe imbalance, the minority class must occur less often than this and must have a class ratio below *min_percentage*. Must be greater than 0. Defaults to 100.

- **min_percentage** (*float*) – The minimum percentage of the minimum class to total dataset that we tolerate, as long as it is above min_samples. If min_percentage and min_samples are not met, treat this as severely imbalanced, and we will not resample the data. Must be between 0 and 0.5, inclusive. Defaults to 0.1.
- **random_seed** (*int*) – The seed to use for random sampling. Defaults to 0.

Raises

- **ValueError** – If sampling_ratio is not in the range (0, 1].
- **ValueError** – If min_sample is not greater than 0.
- **ValueError** – If min_percentage is not between 0 and 0.5, inclusive.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	True
name	Undersampler
training_only	True

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the sampler to the data.
<i>fit_resample</i>	Resampling technique for this sampler.
<i>fit_transform</i>	Fit and transform data using the sampler component.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms the input data by sampling the data.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits the sampler to the data.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series*) – Target.

Returns self

Raises **ValueError** – If y is None.

fit_resample (*self*, *X*, *y*)

Resampling technique for this sampler.

Parameters

- **X** (*pd.DataFrame*) – Training data to fit and resample.
- **y** (*pd.Series*) – Training data targets to fit and resample.

Returns Indices to keep for training data.

Return type list

fit_transform (*self*, *X*, *y*)

Fit and transform data using the sampler component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type (pd.DataFrame, pd.Series)

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms the input data by sampling the data.

Parameters

- **X** (*pd.DataFrame*) – Training features.
- **y** (*pd.Series*) – Target.

Returns Transformed features and target.

Return type *pd.DataFrame*, *pd.Series*

class `evalml.pipelines.components.URLFeaturizer` (*random_seed=0*, ***kwargs*)

Transformer that can automatically extract features from URL.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	URL Featurizer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.

continues on next page

Table 595 – continued from previous page

<i>transform</i>	Transforms data X.
clone (<i>self</i>)	
Constructs a new component with the same parameters and random state.	
Returns A new instance of this component with identical parameters and random state.	
default_parameters (<i>cls</i>)	
Returns the default parameters for this component.	
Our convention is that <code>Component.default_parameters == Component().parameters</code> .	
Returns Default parameters for this component.	
Return type dict	
describe (<i>self</i> , <i>print_name=False</i> , <i>return_dict=False</i>)	
Describe a component and its parameters.	
Parameters	
<ul style="list-style-type: none"> • print_name (<i>bool</i>, <i>optional</i>) – whether to print name of component • return_dict (<i>bool</i>, <i>optional</i>) – whether to return description as dictionary in the format {"name": name, "parameters": parameters} 	
Returns Returns dictionary if <i>return_dict</i> is True, else None.	
Return type None or dict	
fit (<i>self</i> , <i>X</i> , <i>y=None</i>)	
Fits component to data.	
Parameters	
<ul style="list-style-type: none"> • X (<i>pd.DataFrame</i>) – The input training data of shape [n_samples, n_features] • y (<i>pd.Series</i>, <i>optional</i>) – The target training data of length [n_samples] 	
Returns self	
Raises MethodPropertyNotFoundError – If component does not have a fit method or a component_obj that implements fit.	
fit_transform (<i>self</i> , <i>X</i> , <i>y=None</i>)	
Fits on X and transforms X.	
Parameters	
<ul style="list-style-type: none"> • X (<i>pd.DataFrame</i>) – Data to fit and transform. • y (<i>pd.Series</i>) – Target data. 	
Returns Transformed X.	
Return type pd.DataFrame	
Raises MethodPropertyNotFoundError – If transformer does not have a transform method or a component_obj that implements transform.	
static load (<i>file_path</i>)	
Loads component at file path.	
Parameters file_path (<i>str</i>) – Location to load file.	
Returns ComponentBase object	

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms data X.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data.

Returns Transformed X

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

```
class evalml.pipelines.components.XGBoostClassifier(eta=0.1, max_depth=6,
                                                    min_child_weight=1,
                                                    n_estimators=100,
                                                    random_seed=0,
                                                    eval_metric='logloss',
                                                    n_jobs=12, **kwargs)
```

XGBoost Classifier.

Parameters

- **eta** (*float*) – Boosting learning rate. Defaults to 0.1.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **min_child_weight** (*float*) – Minimum sum of instance weight (hessian) needed in a child. Defaults to 1.0
- **n_estimators** (*int*) – Number of gradient boosted trees. Equivalent to number of boosting rounds. Defaults to 100.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.
- **n_jobs** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to 12.

Attributes

hyper-parameter_ranges	{ “eta”: Real(0.000001, 1), “max_depth”: Integer(1, 10), “min_child_weight”: Real(1, 10), “n_estimators”: Integer(1, 1000), }
model_family	ModelFamily.XGBOOST
modifies_features	True
modifies_target	False
name	XGBoost Classifier
pre-dict_uses_y	False
SEED_MAX	None
SEED_MIN	None
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance of fitted XGBoost classifier.
<i>fit</i>	Fits XGBoost classifier component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using the fitted XGBoost classifier.
<i>predict_proba</i>	Make predictions using the fitted CatBoost classifier.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted XGBoost classifier.

fit (*self, X, y=None*)

Fits XGBoost classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using the fitted XGBoost classifier.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.DataFrame

predict_proba (*self, X*)

Make predictions using the fitted CatBoost classifier.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.DataFrame

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.components.XGBoostRegressor (eta=0.1,          max_depth=6,
                                                    min_child_weight=1,
                                                    n_estimators=100,      ran-
                                                    dom_seed=0,          n_jobs=12,
                                                    **kwargs)
```

XGBoost Regressor.

Parameters

- **eta** (*float*) – Boosting learning rate. Defaults to 0.1.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **min_child_weight** (*float*) – Minimum sum of instance weight (hessian) needed in a child. Defaults to 1.0
- **n_estimators** (*int*) – Number of gradient boosted trees. Equivalent to number of boosting rounds. Defaults to 100.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.
- **n_jobs** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to 12.

Attributes

hyper-parameter_ranges	{ "eta": Real(0.000001, 1), "max_depth": Integer(1, 20), "min_child_weight": Real(1, 10), "n_estimators": Integer(1, 1000), }
model_family	ModelFamily.XGBOOST
modifies_features	True
modifies_target	False
name	XGBoost Regressor
predict Uses y	False
SEED_MAX	None
SEED_MIN	None
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance of fitted XGBoost regressor.
<i>fit</i>	Fits XGBoost regressor component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

continues on next page

Table 597 – continued from previous page

<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted XGBoost regressor.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted XGBoost regressor.

fit (*self*, *X*, *y=None*)

Fits XGBoost regressor component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using fitted XGBoost regressor.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

Submodules

binary_classification_pipeline

Pipeline subclass for all binary classification pipelines.

Module Contents

Classes Summary

<i>BinaryClassificationPipeline</i>	Pipeline subclass for all binary classification pipelines.
-------------------------------------	--

Contents

class evalml.pipelines.binary_classification_pipeline.**BinaryClassificationPipeline** (*component*

*pa-
ram-
e-
ters=None,
cus-
tom_name=
ran-
dom_seed=*

Pipeline subclass for all binary classification pipelines.

Parameters

- **component_graph** (*ComponentGraph*, *list*, *dict*) – *ComponentGraph* instance, list of components in order, or dictionary of components. Accepts strings or *ComponentBase* subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”]
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or *None* implies using all default values for component parameters. Defaults to *None*.
- **custom_name** (*str*) – Custom name for the pipeline. Defaults to *None*.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	ProblemTypes.BINARY
---------------------	---------------------

Methods

<i>can_tune_threshold_with_objective</i>	Determine whether the threshold of a binary classification pipeline can be tuned.
<i>classes_</i>	Gets the class names for the pipeline. Will return <i>None</i> before pipeline is fit.
<i>clone</i>	Constructs a new pipeline with the same components, parameters, and random state.
<i>create_objectives</i>	Create objective instances from a list of strings or objective classes.
<i>custom_name</i>	Custom name of the pipeline.
<i>describe</i>	Outputs pipeline details including component parameters.
<i>feature_importance</i>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<i>fit</i>	Build a classification model. For string and categorical targets, classes are sorted by <code>sorted(set(y))</code> and then are mapped to values between 0 and <code>n_classes-1</code> .
<i>get_component</i>	Returns component by name.
<i>get_hyperparameter_ranges</i>	Returns hyperparameter ranges from all components as a dictionary.
<i>graph</i>	Generate an image representing the pipeline graph.
<i>graph_feature_importance</i>	Generate a bar graph of the pipeline’s feature importance.
<i>graph_json</i>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<i>inverse_transform</i>	Apply component <code>inverse_transform</code> methods to estimator predictions in reverse order.
<i>load</i>	Loads pipeline at file path.
<i>model_family</i>	Returns model family of this pipeline.
<i>name</i>	Name of the pipeline.

continues on next page

Table 599 – continued from previous page

<code>new</code>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's <code>__new__</code> method.
<code>optimize_threshold</code>	Optimize the pipeline threshold given the objective to use. Only used for binary problems with objectives whose thresholds can be tuned.
<code>parameters</code>	Parameter dictionary for this pipeline.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels. Assumes that the column at index 1 represents the positive label case.
<code>save</code>	Saves pipeline at file path.
<code>score</code>	Evaluate model performance on objectives.
<code>summary</code>	A short summary of the pipeline structure, describing the list of components used.
<code>threshold</code>	Threshold used to make a prediction. Defaults to None.
<code>transform</code>	Transform the input.
<code>transform_all_but_final</code>	Transforms the data by applying all pre-processing components.

can_tune_threshold_with_objective (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters **objective** (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

property classes_ (*self*)

Gets the class names for the pipeline. Will return None before pipeline is fit.

clone (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

static create_objectives (*objectives*)

Create objective instances from a list of strings or objective classes.

property custom_name (*self*)

Custom name of the pipeline.

describe (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **return_dict** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if *return_dict* is True, else None.

Return type dict

property feature_importance (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type `pd.DataFrame`

fit (*self*, *X*, *y*)

Build a classification model. For string and categorical targets, classes are sorted by `sorted(set(y))` and then are mapped to values between 0 and `n_classes-1`.

Parameters

- **X** (`pd.DataFrame` or `np.ndarray`) – The input training data of shape `[n_samples, n_features]`
- **y** (`pd.Series`, `np.ndarray`) – The target training labels of length `[n_samples]`

Returns `self`

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type `dict`

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to `None` (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type `graphviz.Digraph`

Raises

- **RuntimeError** – If `graphviz` is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline's feature importance.

Parameters **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than `importance_threshold`. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type `plotly.Figure`

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

x_edges specifies from which component feature data is being passed. *y_edges* specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: {"Nodes": {"component_name": {"Name": class_name, "Attributes": parameters_attributes}, ...}, "x_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], "y_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}

Returns A serialized JSON representation of a DAG structure.

Return type dag_json (str)

inverse_transform (*self*, *y*)

Apply component *inverse_transform* methods to estimator predictions in reverse order.

Components that implement *inverse_transform* are PolynomialDetrender, LogTransformer, LabelEncoder (tbd).

Parameters *y* (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type *pd.Series*

static load (*file_path*)

Loads pipeline at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns PipelineBase object

property model_family (*self*)

Returns model family of this pipeline.

property name (*self*)

Name of the pipeline.

new (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's `__new__` method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component's parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

optimize_threshold (*self*, *X*, *y*, *y_pred_proba*, *objective*)

Optimize the pipeline threshold given the objective to use. Only used for binary problems with objectives whose thresholds can be tuned.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series*) – Input target values.

- **y_pred_proba** (*pd.Series*) – The predicted probabilities of the target outputted by the pipeline.
- **objective** (*ObjectiveBase*) – The objective to threshold with. Must have a tunable threshold.

Raises **ValueError** – If objective is not optimizable.

property parameters (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type dict

predict (*self, X, objective=None, X_train=None, y_train=None*)

Make predictions using selected features.

Note: we cast y as ints first to address boolean values that may be returned from calculating predictions which we would not be able to otherwise transform if we originally had integer targets.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].
- **objective** (*Object or string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series*) – Training labels. Ignored. Only used for time series.

Returns Estimated labels.

Return type pd.Series

predict_proba (*self, X, X_train=None, y_train=None*)

Make probability estimates for labels. Assumes that the column at index 1 represents the positive label case.

Parameters

- **X** (*pd.DataFrame or np.ndarray*) – Data of shape [n_samples, n_features]
- **X_train** (*pd.DataFrame or np.ndarray or None*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series or None*) – Training labels. Ignored. Only used for time series.

Returns Probability estimates

Return type pd.Series

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

score (*self, X, y, objectives, X_train=None, y_train=None*)

Evaluate model performance on objectives.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features]

- **y** (*pd.Series*) – True labels of length [n_samples]
- **objectives** (*list*) – List of objectives to score
- **X_train** (*pd.DataFrame*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series*) – Training labels. Ignored. Only used for time series.

Returns Ordered dictionary of objective scores.

Return type dict

property summary (*self*)

A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

property threshold (*self*)

Threshold used to make a prediction. Defaults to None.

transform (*self, X, y=None*)

Transform the input.

Parameters

- **X** (*pd.DataFrame, or np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type pd.DataFrame

transform_all_but_final (*self, X, y=None, X_train=None, y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series or None*) – Targets corresponding to X. Optional.
- **X_train** (*pd.DataFrame or np.ndarray or None*) – Training data. Only used for time series.
- **y_train** (*pd.Series or None*) – Training labels. Only used for time series.

Returns New transformed features.

Return type pd.DataFrame

binary_classification_pipeline_mixin

Binary classification pipeline mix-in class.

Module Contents

Classes Summary

<i>BinaryClassificationPipelineMixin</i>	Binary classification pipeline mix-in class.
--	--

Contents

class evalml.pipelines.binary_classification_pipeline_mixin.**BinaryClassificationPipelineMixin**
Binary classification pipeline mix-in class.

Methods

<i>optimize_threshold</i>	Optimize the pipeline threshold given the objective to use. Only used for binary problems with objectives whose thresholds can be tuned.
<i>threshold</i>	Threshold used to make a prediction. Defaults to None.

optimize_threshold (*self*, *X*, *y*, *y_pred_proba*, *objective*)

Optimize the pipeline threshold given the objective to use. Only used for binary problems with objectives whose thresholds can be tuned.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series*) – Input target values.
- **y_pred_proba** (*pd.Series*) – The predicted probabilities of the target outputted by the pipeline.
- **objective** (*ObjectiveBase*) – The objective to threshold with. Must have a tunable threshold.

Raises ValueError – If objective is not optimizable.

property threshold (*self*)

Threshold used to make a prediction. Defaults to None.

classification_pipeline

Pipeline subclass for all classification pipelines.

Module Contents

Classes Summary

<i>ClassificationPipeline</i>	Pipeline subclass for all classification pipelines.
-------------------------------	---

Contents

```
class evalml.pipelines.classification_pipeline.ClassificationPipeline(component_graph,  
                                                                    parameters=None,  
                                                                    custom_name=None,  
                                                                    random_seed=0)
```

Pipeline subclass for all classification pipelines.

Parameters

- **component_graph** (*list or dict*) – List of components in order. Accepts strings or ComponentBase subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”]
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **custom_name** (*str*) – Custom name for the pipeline. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	None
---------------------	------

Methods

<i>can_tune_threshold_with_objective</i>	Determine whether the threshold of a binary classification pipeline can be tuned.
<i>classes_</i>	Gets the class names for the pipeline. Will return None before pipeline is fit.
<i>clone</i>	Constructs a new pipeline with the same components, parameters, and random state.

continues on next page

Table 603 – continued from previous page

<code>create_objectives</code>	Create objective instances from a list of strings or objective classes.
<code>custom_name</code>	Custom name of the pipeline.
<code>describe</code>	Outputs pipeline details including component parameters.
<code>feature_importance</code>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<code>fit</code>	Build a classification model. For string and categorical targets, classes are sorted by <code>sorted(set(y))</code> and then are mapped to values between 0 and <code>n_classes-1</code> .
<code>get_component</code>	Returns component by name.
<code>get_hyperparameter_ranges</code>	Returns hyperparameter ranges from all components as a dictionary.
<code>graph</code>	Generate an image representing the pipeline graph.
<code>graph_feature_importance</code>	Generate a bar graph of the pipeline's feature importance.
<code>graph_json</code>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<code>inverse_transform</code>	Apply component <code>inverse_transform</code> methods to estimator predictions in reverse order.
<code>load</code>	Loads pipeline at file path.
<code>model_family</code>	Returns model family of this pipeline.
<code>name</code>	Name of the pipeline.
<code>new</code>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's <code>__new__</code> method.
<code>parameters</code>	Parameter dictionary for this pipeline.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves pipeline at file path.
<code>score</code>	Evaluate model performance on objectives.
<code>summary</code>	A short summary of the pipeline structure, describing the list of components used.
<code>transform</code>	Transform the input.
<code>transform_all_but_final</code>	Transforms the data by applying all pre-processing components.

can_tune_threshold_with_objective (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters *objective* (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

property classes_ (*self*)

Gets the class names for the pipeline. Will return None before pipeline is fit.

clone (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

static create_objectives (*objectives*)

Create objective instances from a list of strings or objective classes.

property custom_name (*self*)

Custom name of the pipeline.

describe (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **return_dict** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if *return_dict* is True, else None.

Return type dict

property feature_importance (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type pd.DataFrame

fit (*self*, *X*, *y*)

Build a classification model. For string and categorical targets, classes are sorted by sorted(set(y)) and then are mapped to values between 0 and n_classes-1.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *np.ndarray*) – The target training labels of length [n_samples]

Returns self

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type dict

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to None (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Digraph

Raises

- **RuntimeError** – If graphviz is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline's feature importance.

Parameters **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than importance_threshold. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type plotly.Figure

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

x_edges specifies from which component feature data is being passed. y_edges specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: {"Nodes": {"component_name": {"Name": class_name, "Attributes": parameters_attributes}, ... }, "x_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], "y_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}

Returns A serialized JSON representation of a DAG structure.

Return type dag_json (str)

inverse_transform (*self*, *y*)

Apply component inverse_transform methods to estimator predictions in reverse order.

Components that implement inverse_transform are PolynomialDetrender, LogTransformer, LabelEncoder (tbd).

Parameters **y** (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type pd.Series

static load (*file_path*)

Loads pipeline at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns PipelineBase object

property model_family (*self*)

Returns model family of this pipeline.

property name (*self*)

Name of the pipeline.

new (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's __new__ method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

property parameters (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type dict

predict (*self*, *X*, *objective=None*, *X_train=None*, *y_train=None*)

Make predictions using selected features.

Note: we cast y as ints first to address boolean values that may be returned from calculating predictions which we would not be able to otherwise transform if we originally had integer targets.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].
- **objective** (*Object or string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series*) – Training labels. Ignored. Only used for time series.

Returns Estimated labels.

Return type pd.Series

predict_proba (*self*, *X*, *X_train=None*, *y_train=None*)

Make probability estimates for labels.

Parameters

- **X** (*pd.DataFrame or np.ndarray*) – Data of shape [n_samples, n_features]
- **X_train** (*pd.DataFrame or np.ndarray or None*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series or None*) – Training labels. Ignored. Only used for time series.

Returns Probability estimates

Return type pd.DataFrame

Raises ValueError – If final component is not an estimator.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

score (*self*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Evaluate model performance on objectives.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features]
- **y** (*pd.Series*) – True labels of length [n_samples]
- **objectives** (*list*) – List of objectives to score
- **X_train** (*pd.DataFrame*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series*) – Training labels. Ignored. Only used for time series.

Returns Ordered dictionary of objective scores.

Return type dict

property summary (*self*)

A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

transform (*self, X, y=None*)

Transform the input.

Parameters

- **X** (*pd.DataFrame, or np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type *pd.DataFrame*

transform_all_but_final (*self, X, y=None, X_train=None, y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series or None*) – Targets corresponding to X. Optional.
- **X_train** (*pd.DataFrame or np.ndarray or None*) – Training data. Only used for time series.
- **y_train** (*pd.Series or None*) – Training labels. Only used for time series.

Returns New transformed features.

Return type *pd.DataFrame*

component_graph

Component graph for a pipeline as a directed acyclic graph (DAG).

Module Contents

Classes Summary

<i>ComponentGraph</i>	Component graph for a pipeline as a directed acyclic graph (DAG).
-----------------------	---

Attributes Summary

<i>logger</i>

Contents

class evalml.pipelines.component_graph.**ComponentGraph**(*component_dict=None*, *random_seed=0*)

Component graph for a pipeline as a directed acyclic graph (DAG).

Parameters

- **component_dict** (*dict*) – A dictionary which specifies the components and edges between components that should be used to create the component graph. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Example

```
>>> component_dict = {'imputer': ['Imputer'], 'ohe': ['One Hot Encoder', 'imputer.
↪x'], 'estimator_1': ['Random Forest Classifier', 'ohe.x'], 'estimator_2': [
↪'Decision Tree Classifier', 'ohe.x'], 'final': ['Logistic Regression Classifier
↪', 'estimator_1', 'estimator_2']}
>>> component_graph = ComponentGraph(component_dict)
```

Methods

<i>compute_order</i>	The order that components will be computed or called in.
<i>default_parameters</i>	The default parameter dictionary for this pipeline.
<i>describe</i>	Outputs component graph details including component parameters.
<i>fit</i>	Fit each component in the graph.
<i>fit_and_transform_all_but_final</i>	Fit and transform all components save the final one, usually an estimator.
<i>generate_order</i>	Regenerated the topologically sorted order of the graph.
<i>get_component</i>	Retrieves a single component object from the graph.
<i>get_estimators</i>	Gets a list of all the estimator components within this graph.
<i>get_inputs</i>	Retrieves all inputs for a given component.

continues on next page

Table 606 – continued from previous page

<code>get_last_component</code>	Retrieves the component that is computed last in the graph, usually the final estimator.
<code>graph</code>	Generate an image representing the component graph.
<code>instantiate</code>	Instantiates all uninstantiated components within the graph using the given parameters. An error will be raised if a component is already instantiated but the parameters dict contains arguments for that component.
<code>inverse_transform</code>	Apply component <code>inverse_transform</code> methods to estimator predictions in reverse order.
<code>predict</code>	Make predictions using selected features.
<code>transform</code>	Transform the input using the component graph.
<code>transform_all_but_final</code>	Transform all components save the final one, and gathers the data from any number of parents to get all the information that should be fed to the final component.

property `compute_order` (*self*)

The order that components will be computed or called in.

property `default_parameters` (*self*)

The default parameter dictionary for this pipeline.

Returns Dictionary of all component default parameters.

Return type dict

describe (*self*, *return_dict=False*)

Outputs component graph details including component parameters.

Parameters `return_dict` (*bool*) – If True, return dictionary of information about component graph. Defaults to False.

Returns Dictionary of all component parameters if `return_dict` is True, else None

Return type dict

fit (*self*, *X*, *y*)

Fit each component in the graph.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns *self*

fit_and_transform_all_but_final (*self*, *X*, *y*)

Fit and transform all components save the final one, usually an estimator.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns Transformed features and target.

Return type Tuple (*pd.DataFrame*, *pd.Series*)

classmethod generate_order (*cls, component_dict*)

Regenerated the topologically sorted order of the graph.

get_component (*self, component_name*)

Retrieves a single component object from the graph.

Parameters **component_name** (*str*) – Name of the component to retrieve

Returns ComponentBase object

Raises **ValueError** – If the component is not in the graph.

get_estimators (*self*)

Gets a list of all the estimator components within this graph.

Returns All estimator objects within the graph.

Return type list

Raises **ValueError** – If the component graph is not yet instantiated.

get_inputs (*self, component_name*)

Retrieves all inputs for a given component.

Parameters **component_name** (*str*) – Name of the component to look up.

Returns List of inputs for the component to use.

Return type list[str]

Raises **ValueError** – If the component is not in the graph.

get_last_component (*self*)

Retrieves the component that is computed last in the graph, usually the final estimator.

Returns ComponentBase object

Raises **ValueError** – If the component graph has no edges.

graph (*self, name=None, graph_format=None*)

Generate an image representing the component graph.

Parameters

- **name** (*str*) – Name of the graph. Defaults to None.
- **graph_format** (*str*) – file format to save the graph in. Defaults to None.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Digraph

Raises **RuntimeError** – If graphviz is not installed.

instantiate (*self, parameters=None*)

Instantiates all uninstantiated components within the graph using the given parameters. An error will be raised if a component is already instantiated but the parameters dict contains arguments for that component.

Parameters **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component's parameters as values. An empty dictionary {} or None implies using all default values for component parameters. If a component in the component graph is already instantiated, it will not use any of its parameters defined in this dictionary. Defaults to None.

Returns self

Raises **ValueError** – If component graph is already instantiated or if a component errored while instantiating.

inverse_transform (*self*, *y*)

Apply component inverse_transform methods to estimator predictions in reverse order.

Components that implement inverse_transform are PolynomialDetrender, LabelEncoder (tbd).

Parameters *y* – (pd.Series): Final component features.

Returns The target with inverse transformation applied.

Return type pd.Series

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (pd.DataFrame) – Input features of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **ValueError** – If final component is not an Estimator.

transform (*self*, *X*, *y=None*)

Transform the input using the component graph.

Parameters

- *X* (pd.DataFrame) – Input features of shape [n_samples, n_features].
- *y* (pd.Series) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type pd.DataFrame

Raises **ValueError** – If final component is not a Transformer.

transform_all_but_final (*self*, *X*, *y=None*)

Transform all components save the final one, and gathers the data from any number of parents to get all the information that should be fed to the final component.

Parameters

- *X* (pd.DataFrame) – Data of shape [n_samples, n_features].
- *y* (pd.Series) – The target training data of length [n_samples]. Defaults to None.

Returns Transformed values.

Return type pd.DataFrame

evalml.pipelines.component_graph.logger

multiclass_classification_pipeline

Pipeline subclass for all multiclass classification pipelines.

Module Contents

Classes Summary

<i>MulticlassClassificationPipeline</i>	Pipeline subclass for all multiclass classification pipelines.
---	--

Contents

`class evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline`

Pipeline subclass for all multiclass classification pipelines.

Parameters

- **component_graph** (*ComponentGraph*, *list*, *dict*) – ComponentGraph instance, list of components in order, or dictionary of components. Accepts strings or ComponentBase subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”]
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **custom_name** (*str*) – Custom name for the pipeline. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	ProblemTypes.MULTICLASS
---------------------	-------------------------

Methods

<i>can_tune_threshold_with_objective</i>	Determine whether the threshold of a binary classification pipeline can be tuned.
<i>classes_</i>	Gets the class names for the pipeline. Will return None before pipeline is fit.
<i>clone</i>	Constructs a new pipeline with the same components, parameters, and random state.
<i>create_objectives</i>	Create objective instances from a list of strings or objective classes.

continues on next page

Table 608 – continued from previous page

<code>custom_name</code>	Custom name of the pipeline.
<code>describe</code>	Outputs pipeline details including component parameters.
<code>feature_importance</code>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<code>fit</code>	Build a classification model. For string and categorical targets, classes are sorted by sorted(set(y)) and then are mapped to values between 0 and n_classes-1.
<code>get_component</code>	Returns component by name.
<code>get_hyperparameter_ranges</code>	Returns hyperparameter ranges from all components as a dictionary.
<code>graph</code>	Generate an image representing the pipeline graph.
<code>graph_feature_importance</code>	Generate a bar graph of the pipeline's feature importance.
<code>graph_json</code>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<code>inverse_transform</code>	Apply component inverse_transform methods to estimator predictions in reverse order.
<code>load</code>	Loads pipeline at file path.
<code>model_family</code>	Returns model family of this pipeline.
<code>name</code>	Name of the pipeline.
<code>new</code>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's <code>__new__</code> method.
<code>parameters</code>	Parameter dictionary for this pipeline.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves pipeline at file path.
<code>score</code>	Evaluate model performance on objectives.
<code>summary</code>	A short summary of the pipeline structure, describing the list of components used.
<code>transform</code>	Transform the input.
<code>transform_all_but_final</code>	Transforms the data by applying all pre-processing components.

can_tune_threshold_with_objective (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters **objective** (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

property classes_ (*self*)

Gets the class names for the pipeline. Will return None before pipeline is fit.

clone (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

static create_objectives (*objectives*)

Create objective instances from a list of strings or objective classes.

property custom_name (*self*)

Custom name of the pipeline.

describe (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **return_dict** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if return_dict is True, else None.

Return type dict

property feature_importance (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type pd.DataFrame

fit (*self*, *X*, *y*)

Build a classification model. For string and categorical targets, classes are sorted by sorted(set(y)) and then are mapped to values between 0 and n_classes-1.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *np.ndarray*) – The target training labels of length [n_samples]

Returns self

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type dict

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to None (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Digraph

Raises

- **RuntimeError** – If graphviz is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline’s feature importance.

Parameters **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than importance_threshold. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type `plotly.Figure`

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

x_edges specifies from which component feature data is being passed. *y_edges* specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: {“Nodes”: {“component_name”: {“Name”: *class_name*, “Attributes”: *parameters_attributes*}, ... }}, “x_edges”: [[*from_component_name*, *to_component_name*], [*from_component_name*, *to_component_name*], ...], “y_edges”: [[*from_component_name*, *to_component_name*], [*from_component_name*, *to_component_name*], ...]}

Returns A serialized JSON representation of a DAG structure.

Return type `dag_json (str)`

inverse_transform (*self*, *y*)

Apply component inverse_transform methods to estimator predictions in reverse order.

Components that implement inverse_transform are PolynomialDetrender, LogTransformer, LabelEncoder (tbd).

Parameters **y** (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type `pd.Series`

static load (*file_path*)

Loads pipeline at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns PipelineBase object

property model_family (*self*)

Returns model family of this pipeline.

property name (*self*)

Name of the pipeline.

new (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python’s `__new__` method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

property parameters (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type dict

predict (*self*, *X*, *objective=None*, *X_train=None*, *y_train=None*)

Make predictions using selected features.

Note: we cast y as ints first to address boolean values that may be returned from calculating predictions which we would not be able to otherwise transform if we originally had integer targets.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].
- **objective** (*Object or string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series*) – Training labels. Ignored. Only used for time series.

Returns Estimated labels.

Return type pd.Series

predict_proba (*self*, *X*, *X_train=None*, *y_train=None*)

Make probability estimates for labels.

Parameters

- **X** (*pd.DataFrame or np.ndarray*) – Data of shape [n_samples, n_features]
- **X_train** (*pd.DataFrame or np.ndarray or None*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series or None*) – Training labels. Ignored. Only used for time series.

Returns Probability estimates

Return type pd.DataFrame

Raises ValueError – If final component is not an estimator.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

score (*self*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Evaluate model performance on objectives.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features]
- **y** (*pd.Series*) – True labels of length [n_samples]
- **objectives** (*list*) – List of objectives to score
- **X_train** (*pd.DataFrame*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series*) – Training labels. Ignored. Only used for time series.

Returns Ordered dictionary of objective scores.

Return type dict

property summary (*self*)

A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

transform (*self, X, y=None*)

Transform the input.

Parameters

- **X** (*pd.DataFrame, or np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type *pd.DataFrame*

transform_all_but_final (*self, X, y=None, X_train=None, y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series or None*) – Targets corresponding to X. Optional.
- **X_train** (*pd.DataFrame or np.ndarray or None*) – Training data. Only used for time series.
- **y_train** (*pd.Series or None*) – Training labels. Only used for time series.

Returns New transformed features.

Return type *pd.DataFrame*

pipeline_base

Base machine learning pipeline class.

Module Contents

Classes Summary

<i>PipelineBase</i>	Machine learning pipeline.
---------------------	----------------------------

Attributes Summary

<i>logger</i>	
---------------	--

Contents

evalml.pipelines.pipeline_base.**logger**

class evalml.pipelines.pipeline_base.**PipelineBase**(*component_graph*, *parameters=None*, *custom_name=None*, *random_seed=0*)

Machine learning pipeline.

Parameters

- **component_graph** (*ComponentGraph*, *list*, *dict*) – ComponentGraph instance, list of components in order, or dictionary of components. Accepts strings or ComponentBase subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”].
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **custom_name** (*str*) – Custom name for the pipeline. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	None
---------------------	------

Methods

<i>can_tune_threshold_with_objective</i>	Determine whether the threshold of a binary classification pipeline can be tuned.
<i>clone</i>	Constructs a new pipeline with the same components, parameters, and random state.
<i>create_objectives</i>	Create objective instances from a list of strings or objective classes.

continues on next page

Table 611 – continued from previous page

<code>custom_name</code>	Custom name of the pipeline.
<code>describe</code>	Outputs pipeline details including component parameters.
<code>feature_importance</code>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<code>fit</code>	Build a model.
<code>get_component</code>	Returns component by name.
<code>get_hyperparameter_ranges</code>	Returns hyperparameter ranges from all components as a dictionary.
<code>graph</code>	Generate an image representing the pipeline graph.
<code>graph_feature_importance</code>	Generate a bar graph of the pipeline's feature importance.
<code>graph_json</code>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<code>inverse_transform</code>	Apply component <code>inverse_transform</code> methods to estimator predictions in reverse order.
<code>load</code>	Loads pipeline at file path.
<code>model_family</code>	Returns model family of this pipeline.
<code>name</code>	Name of the pipeline.
<code>new</code>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's <code>__new__</code> method.
<code>parameters</code>	Parameter dictionary for this pipeline.
<code>predict</code>	Make predictions using selected features.
<code>save</code>	Saves pipeline at file path.
<code>score</code>	Evaluate model performance on current and additional objectives.
<code>summary</code>	A short summary of the pipeline structure, describing the list of components used.
<code>transform</code>	Transform the input.
<code>transform_all_but_final</code>	Transforms the data by applying all pre-processing components.

can_tune_threshold_with_objective (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters *objective* (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

clone (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

static create_objectives (*objectives*)

Create objective instances from a list of strings or objective classes.

property custom_name (*self*)

Custom name of the pipeline.

describe (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **return_dict** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if *return_dict* is True, else None.

Return type dict

property feature_importance (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type pd.DataFrame

abstract fit (*self*, *X*, *y*)

Build a model.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *np.ndarray*) – The target training data of length [n_samples].

Returns self

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type dict

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to None (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Digraph

Raises

- **RuntimeError** – If graphviz is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline's feature importance.

Parameters `importance_threshold` (*float, optional*) – If provided, graph features with a permutation importance whose absolute value is larger than `importance_threshold`. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type `plotly.Figure`

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

`x_edges` specifies from which component feature data is being passed. `y_edges` specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: `{“Nodes”: {“component_name”: {“Name”: class_name, “Attributes”: parameters_attributes}, ...}}, “x_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], “y_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}`

Returns A serialized JSON representation of a DAG structure.

Return type `dag_json (str)`

inverse_transform (*self, y*)

Apply component `inverse_transform` methods to estimator predictions in reverse order.

Components that implement `inverse_transform` are `PolynomialDetrender`, `LogTransformer`, `LabelEncoder` (tbd).

Parameters `y` (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type `pd.Series`

static load (*file_path*)

Loads pipeline at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns `PipelineBase` object

property model_family (*self*)

Returns model family of this pipeline.

property name (*self*)

Name of the pipeline.

new (*self, parameters, random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python’s `__new__` method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or `None` implies using all default values for component parameters. Defaults to `None`.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

property parameters (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type dict

predict (*self*, *X*, *objective=None*, *X_train=None*, *y_train=None*)

Make predictions using selected features.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **objective** (*Object* or *string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series* or *None*) – Training labels. Ignored. Only used for time series.

Returns Predicted values.

Return type *pd.Series*

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

abstract score (*self*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Evaluate model performance on current and additional objectives.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*, *np.ndarray*) – True labels of length [n_samples].
- **objectives** (*list*) – Non-empty list of objectives to score on.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series* or *None*) – Training labels. Ignored. Only used for time series.

Returns Ordered dictionary of objective scores.

Return type dict

property summary (*self*)

A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

transform (*self*, *X*, *y=None*)

Transform the input.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type *pd.DataFrame*

transform_all_but_final (*self, X, y=None, X_train=None, y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series* or *None*) – Targets corresponding to X. Optional.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data. Only used for time series.
- **y_train** (*pd.Series* or *None*) – Training labels. Only used for time series.

Returns New transformed features.

Return type *pd.DataFrame*

pipeline_meta

Metaclass that overrides creating a new pipeline by wrapping methods with validators and setters.

Module Contents

Classes Summary

PipelineBaseMeta

Metaclass that overrides creating a new pipeline by wrapping methods with validators and setters.

Contents

class evalml.pipelines.pipeline_meta.**PipelineBaseMeta**

Metaclass that overrides creating a new pipeline by wrapping methods with validators and setters.

Attributes

FIT_METHODS	['fit', 'fit_transform']
METHODS_TO_CHECK	['predict', 'predict_proba', 'transform', 'inverse_transform']
PROPERTIES_TO_CHECK	['feature_importance']

Methods

<code>check_for_fit</code>	<code>check_for_fit</code> wraps a method that validates if <code>self._is_fitted</code> is <code>True</code> .
<code>register</code>	Register a virtual subclass of an ABC.
<code>set_fit</code>	Wrapper for the fit method.

classmethod `check_for_fit` (*cls*, *method*)

`check_for_fit` wraps a method that validates if `self._is_fitted` is `True`.

Parameters `method` (*callable*) – Method to wrap.

Returns The wrapped method.

Raises `PipelineNotYetFittedError` – If pipeline is not yet fitted.

register (*cls*, *subclass*)

Register a virtual subclass of an ABC.

Returns the subclass, to allow usage as a class decorator.

classmethod `set_fit` (*cls*, *method*)

Wrapper for the fit method.

regression_pipeline

Pipeline subclass for all regression pipelines.

Module Contents

Classes Summary

<code>RegressionPipeline</code>	Pipeline subclass for all regression pipelines.
---------------------------------	---

Contents

class `evalml.pipelines.regression_pipeline.RegressionPipeline` (*component_graph*, *parameters=None*, *custom_name=None*, *random_seed=0*)

Pipeline subclass for all regression pipelines.

Parameters

- **component_graph** (*ComponentGraph*, *list*, *dict*) – `ComponentGraph` instance, list of components in order, or dictionary of components. Accepts strings or `ComponentBase` subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”]
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or `None` implies using all default

values for component parameters. Defaults to None.

- **custom_name** (*str*) – Custom name for the pipeline. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	ProblemTypes.REGRESSION
---------------------	-------------------------

Methods

<i>can_tune_threshold_with_objective</i>	Determine whether the threshold of a binary classification pipeline can be tuned.
<i>clone</i>	Constructs a new pipeline with the same components, parameters, and random state.
<i>create_objectives</i>	Create objective instances from a list of strings or objective classes.
<i>custom_name</i>	Custom name of the pipeline.
<i>describe</i>	Outputs pipeline details including component parameters.
<i>feature_importance</i>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<i>fit</i>	Build a regression model.
<i>get_component</i>	Returns component by name.
<i>get_hyperparameter_ranges</i>	Returns hyperparameter ranges from all components as a dictionary.
<i>graph</i>	Generate an image representing the pipeline graph.
<i>graph_feature_importance</i>	Generate a bar graph of the pipeline's feature importance.
<i>graph_json</i>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<i>inverse_transform</i>	Apply component <code>inverse_transform</code> methods to estimator predictions in reverse order.
<i>load</i>	Loads pipeline at file path.
<i>model_family</i>	Returns model family of this pipeline.
<i>name</i>	Name of the pipeline.
<i>new</i>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's <code>__new__</code> method.
<i>parameters</i>	Parameter dictionary for this pipeline.
<i>predict</i>	Make predictions using selected features.
<i>save</i>	Saves pipeline at file path.
<i>score</i>	Evaluate model performance on current and additional objectives.
<i>summary</i>	A short summary of the pipeline structure, describing the list of components used.
<i>transform</i>	Transform the input.
<i>transform_all_but_final</i>	Transforms the data by applying all pre-processing components.

can_tune_threshold_with_objective (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters **objective** (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

clone (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

static create_objectives (*objectives*)

Create objective instances from a list of strings or objective classes.

property custom_name (*self*)

Custom name of the pipeline.

describe (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **return_dict** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if return_dict is True, else None.

Return type dict

property feature_importance (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type pd.DataFrame

fit (*self*, *X*, *y*)

Build a regression model.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *np.ndarray*) – The target training data of length [n_samples]

Returns self

Raises **ValueError** – If the target is not numeric.

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type dict

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to None (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Digraph

Raises

- **RuntimeError** – If graphviz is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline’s feature importance.

Parameters **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than importance_threshold. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type plotly.Figure

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

x_edges specifies from which component feature data is being passed. *y_edges* specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: {“Nodes”: {“component_name”: {“Name”: class_name, “Attributes”: parameters_attributes}, ...}}, “x_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], “y_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}

Returns A serialized JSON representation of a DAG structure.

Return type dag_json (str)

inverse_transform (*self*, *y*)

Apply component inverse_transform methods to estimator predictions in reverse order.

Components that implement inverse_transform are PolynomialDetrender, LogTransformer, LabelEncoder (tbd).

Parameters **y** (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type pd.Series

static load (*file_path*)

Loads pipeline at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns PipelineBase object

property `model_family` (*self*)

Returns model family of this pipeline.

property `name` (*self*)

Name of the pipeline.

new (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's `__new__` method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component's parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

property `parameters` (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type dict

predict (*self*, *X*, *objective=None*, *X_train=None*, *y_train=None*)

Make predictions using selected features.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **objective** (*Object* or *string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series* or *None*) – Training labels. Ignored. Only used for time series.

Returns Predicted values.

Return type pd.Series

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

score (*self*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Evaluate model performance on current and additional objectives.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features]
- **y** (*pd.Series*, or *np.ndarray*) – True values of length [n_samples]
- **objectives** (*list*) – Non-empty list of objectives to score on

- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series* or *None*) – Training labels. Ignored. Only used for time series.

Returns Ordered dictionary of objective scores.

Return type dict

property summary (*self*)

A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

transform (*self*, *X*, *y=None*)

Transform the input.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type *pd.DataFrame*

transform_all_but_final (*self*, *X*, *y=None*, *X_train=None*, *y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series* or *None*) – Targets corresponding to X. Optional.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data. Only used for time series.
- **y_train** (*pd.Series* or *None*) – Training labels. Only used for time series.

Returns New transformed features.

Return type *pd.DataFrame*

time_series_classification_pipelines

Pipeline base class for time-series classification problems.

Module Contents

Classes Summary

<i>TimeSeriesBinaryClassificationPipeline</i>	Pipeline base class for time series binary classification problems.
<i>TimeSeriesClassificationPipeline</i>	Pipeline base class for time series classification problems.

continues on next page

Table 616 – continued from previous page

<i>TimeSeriesMulticlassClassificationPipeline</i>	Pipeline base class for time series multiclass classification problems.
---	---

Contents

`class evalml.pipelines.time_series_classification_pipelines.TimeSeriesBinaryClassification`

Pipeline base class for time series binary classification problems.

Parameters

- **component_graph** (*list or dict*) – List of components in order. Accepts strings or ComponentBase subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”]
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary {} implies using all default values for component parameters. Pipeline-level parameters such as date_index, gap, and max_delay must be specified with the “pipeline” key. For example: Pipeline(parameters={“pipeline”: {“date_index”: “Date”, “max_delay”: 4, “gap”: 2}}).
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	None
---------------------	------

Methods

<i>can_tune_threshold_with_objective</i>	Determine whether the threshold of a binary classification pipeline can be tuned.
<i>classes_</i>	Gets the class names for the pipeline. Will return None before pipeline is fit.
<i>clone</i>	Constructs a new pipeline with the same components, parameters, and random state.
<i>create_objectives</i>	Create objective instances from a list of strings or objective classes.
<i>custom_name</i>	Custom name of the pipeline.
<i>describe</i>	Outputs pipeline details including component parameters.
<i>feature_importance</i>	Importance associated with each feature. Features dropped by the feature selection are excluded.

continues on next page

Table 617 – continued from previous page

<code>fit</code>	Fit a time series classification pipeline.
<code>get_component</code>	Returns component by name.
<code>get_hyperparameter_ranges</code>	Returns hyperparameter ranges from all components as a dictionary.
<code>graph</code>	Generate an image representing the pipeline graph.
<code>graph_feature_importance</code>	Generate a bar graph of the pipeline's feature importance.
<code>graph_json</code>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<code>inverse_transform</code>	Apply component <code>inverse_transform</code> methods to estimator predictions in reverse order.
<code>load</code>	Loads pipeline at file path.
<code>model_family</code>	Returns model family of this pipeline.
<code>name</code>	Name of the pipeline.
<code>new</code>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's <code>__new__</code> method.
<code>optimize_threshold</code>	Optimize the pipeline threshold given the objective to use. Only used for binary problems with objectives whose thresholds can be tuned.
<code>parameters</code>	Parameter dictionary for this pipeline.
<code>predict</code>	Predict on future data where target is not known.
<code>predict_in_sample</code>	Predict on future data where the target is known, e.g. cross validation.
<code>predict_proba</code>	Predict on future data where the target is unknown.
<code>predict_proba_in_sample</code>	Predict on future data where the target is known, e.g. cross validation.
<code>save</code>	Saves pipeline at file path.
<code>score</code>	Evaluate model performance on current and additional objectives.
<code>summary</code>	A short summary of the pipeline structure, describing the list of components used.
<code>threshold</code>	Threshold used to make a prediction. Defaults to None.
<code>transform</code>	Transform the input.
<code>transform_all_but_final</code>	Transforms the data by applying all pre-processing components.

can_tune_threshold_with_objective (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters *objective* (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

property classes_ (*self*)

Gets the class names for the pipeline. Will return None before pipeline is fit.

clone (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

static create_objectives (*objectives*)

Create objective instances from a list of strings or objective classes.

property custom_name (*self*)

Custom name of the pipeline.

describe (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **return_dict** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if *return_dict* is True, else None.

Return type dict

property feature_importance (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type pd.DataFrame

fit (*self*, *X*, *y*)

Fit a time series classification pipeline.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *np.ndarray*) – The target training targets of length [n_samples].

Returns self

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type dict

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to None (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Digraph

Raises

- **RuntimeError** – If graphviz is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline’s feature importance.

Parameters **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than importance_threshold. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type plotly.Figure

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

x_edges specifies from which component feature data is being passed. y_edges specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: {“Nodes”: {“component_name”: {“Name”: class_name, “Attributes”: parameters_attributes}, ... }}, “x_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], “y_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}

Returns A serialized JSON representation of a DAG structure.

Return type dag_json (str)

inverse_transform (*self*, *y*)

Apply component inverse_transform methods to estimator predictions in reverse order.

Components that implement inverse_transform are PolynomialDetrender, LogTransformer, LabelEncoder (tbd).

Parameters **y** (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type pd.Series

static load (*file_path*)

Loads pipeline at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns PipelineBase object

property model_family (*self*)

Returns model family of this pipeline.

property name (*self*)

Name of the pipeline.

new (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python’s __new__ method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component's parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

optimize_threshold (*self, X, y, y_pred_proba, objective*)

Optimize the pipeline threshold given the objective to use. Only used for binary problems with objectives whose thresholds can be tuned.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series*) – Input target values.
- **y_pred_proba** (*pd.Series*) – The predicted probabilities of the target outputted by the pipeline.
- **objective** (*ObjectiveBase*) – The objective to threshold with. Must have a tunable threshold.

Raises **ValueError** – If objective is not optimizable.

property parameters (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type dict

predict (*self, X, objective=None, X_train=None, y_train=None*)

Predict on future data where target is not known.

Parameters

- **X** (*pd.DataFrame, or np.ndarray*) – Data of shape [n_samples, n_features].
- **objective** (*Object or string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame or np.ndarray or None*) – Training data.
- **y_train** (*pd.Series or None*) – Training labels.

Raises **ValueError** – If final component is not an Estimator.

Returns Predictions.

predict_in_sample (*self, X, y, X_train, y_train, objective=None*)

Predict on future data where the target is known, e.g. cross validation.

Parameters

- **X** (*pd.DataFrame*) – Future data of shape [n_samples, n_features].
- **y** (*pd.Series*) – Future target of shape [n_samples].
- **X_train** (*pd.DataFrame*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series*) – Targets used to train the pipeline of shape [n_samples_train].
- **objective** (*ObjectiveBase, str*) – Objective used to threshold predicted probabilities, optional. Defaults to None.

Returns Estimated labels.

Return type `pd.Series`

Raises **ValueError** – If objective is not defined for time-series binary classification problems.

predict_proba (*self*, *X*, *X_train=None*, *y_train=None*)

Predict on future data where the target is unknown.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Future data of shape `[n_samples, n_features]`.
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape `[n_samples_train, n_features]`.
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape `[n_samples_train]`.

Returns Estimated probabilities.

Return type `pd.Series`

Raises **ValueError** – If final component is not an Estimator.

predict_proba_in_sample (*self*, *X_holdout*, *y_holdout*, *X_train*, *y_train*)

Predict on future data where the target is known, e.g. cross validation.

Parameters

- **X_holdout** (*pd.DataFrame* or *np.ndarray*) – Future data of shape `[n_samples, n_features]`.
- **y_holdout** (*pd.Series*, *np.ndarray*) – Future target of shape `[n_samples]`.
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape `[n_samples_train, n_features]`.
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape `[n_samples_train]`.

Returns Estimated probabilities.

Return type `pd.Series`

Raises **ValueError** – If the final component is not an Estimator.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

score (*self*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Evaluate model performance on current and additional objectives.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*) – True labels of length `[n_samples]`.
- **objectives** (*list*) – Non-empty list of objectives to score on.
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape `[n_samples_train, n_features]`.

- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].

Returns Ordered dictionary of objective scores.

Return type dict

property summary (*self*)

A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

property threshold (*self*)

Threshold used to make a prediction. Defaults to None.

transform (*self*, *X*, *y=None*)

Transform the input.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type *pd.DataFrame*

transform_all_but_final (*self*, *X*, *y=None*, *X_train=None*, *y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series*) – Targets corresponding to the pipeline targets.
- **X_train** (*pd.DataFrame*) – Training data used to generate features from past observations.
- **y_train** (*pd.Series*) – Training targets used to generate features from past observations.

Returns New transformed features.

Return type *pd.DataFrame*

class evalml.pipelines.time_series_classification_pipelines.**TimeSeriesClassificationPipeline**

Pipeline base class for time series classification problems.

Parameters

- **component_graph** (*ComponentGraph*, *list*, *dict*) – *ComponentGraph* instance, list of components in order, or dictionary of components. Accepts strings or *ComponentBase* subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component's index in the list.

For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names ["Imputer", "One Hot Encoder", "Imputer_2", "Logistic Regression Classifier"]

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component's parameters as values. An empty dictionary {} implies using all default values for component parameters. Pipeline-level parameters such as `date_index`, `gap`, and `max_delay` must be specified with the "pipeline" key. For example: `Pipeline(parameters={"pipeline": {"date_index": "Date", "max_delay": 4, "gap": 2}})`.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	None
---------------------	------

Methods

<code>can_tune_threshold_with_objective</code>	Determine whether the threshold of a binary classification pipeline can be tuned.
<code>classes_</code>	Gets the class names for the pipeline. Will return None before pipeline is fit.
<code>clone</code>	Constructs a new pipeline with the same components, parameters, and random state.
<code>create_objectives</code>	Create objective instances from a list of strings or objective classes.
<code>custom_name</code>	Custom name of the pipeline.
<code>describe</code>	Outputs pipeline details including component parameters.
<code>feature_importance</code>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<code>fit</code>	Fit a time series classification pipeline.
<code>get_component</code>	Returns component by name.
<code>get_hyperparameter_ranges</code>	Returns hyperparameter ranges from all components as a dictionary.
<code>graph</code>	Generate an image representing the pipeline graph.
<code>graph_feature_importance</code>	Generate a bar graph of the pipeline's feature importance.
<code>graph_json</code>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<code>inverse_transform</code>	Apply component <code>inverse_transform</code> methods to estimator predictions in reverse order.
<code>load</code>	Loads pipeline at file path.
<code>model_family</code>	Returns model family of this pipeline.
<code>name</code>	Name of the pipeline.
<code>new</code>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's <code>__new__</code> method.
<code>parameters</code>	Parameter dictionary for this pipeline.
<code>predict</code>	Predict on future data where target is not known.

continues on next page

Table 618 – continued from previous page

<code>predict_in_sample</code>	Predict on future data where the target is known, e.g. cross validation.
<code>predict_proba</code>	Predict on future data where the target is unknown.
<code>predict_proba_in_sample</code>	Predict on future data where the target is known, e.g. cross validation.
<code>save</code>	Saves pipeline at file path.
<code>score</code>	Evaluate model performance on current and additional objectives.
<code>summary</code>	A short summary of the pipeline structure, describing the list of components used.
<code>transform</code>	Transform the input.
<code>transform_all_but_final</code>	Transforms the data by applying all pre-processing components.

can_tune_threshold_with_objective (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters **objective** (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

property classes_ (*self*)

Gets the class names for the pipeline. Will return None before pipeline is fit.

clone (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

static create_objectives (*objectives*)

Create objective instances from a list of strings or objective classes.

property custom_name (*self*)

Custom name of the pipeline.

describe (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **return_dict** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if *return_dict* is True, else None.

Return type dict

property feature_importance (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type pd.DataFrame

fit (*self*, *X*, *y*)

Fit a time series classification pipeline.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features].

- **y** (*pd.Series*, *np.ndarray*) – The target training targets of length [n_samples].

Returns self

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type dict

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to None (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Digraph

Raises

- **RuntimeError** – If graphviz is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline's feature importance.

Parameters **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than importance_threshold. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type plotly.Figure

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

x_edges specifies from which component feature data is being passed. y_edges specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: {"Nodes": {"component_name": {"Name": class_name, "Attributes": parameters_attributes}, ...}, "x_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], "y_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}

Returns A serialized JSON representation of a DAG structure.

Return type dag_json (str)

inverse_transform (*self*, *y*)

Apply component inverse_transform methods to estimator predictions in reverse order.

Components that implement inverse_transform are PolynomialDetrender, LogTransformer, LabelEncoder (tbd).

Parameters *y* (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type *pd.Series*

static load (*file_path*)

Loads pipeline at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns PipelineBase object

property model_family (*self*)

Returns model family of this pipeline.

property name (*self*)

Name of the pipeline.

new (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's `__new__` method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component's parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

property parameters (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type *dict*

predict (*self*, *X*, *objective=None*, *X_train=None*, *y_train=None*)

Predict on future data where target is not known.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape `[n_samples, n_features]`.
- **objective** (*Object* or *string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data.
- **y_train** (*pd.Series* or *None*) – Training labels.

Raises **ValueError** – If final component is not an Estimator.

Returns Predictions.

predict_in_sample (*self*, *X*, *y*, *X_train*, *y_train*, *objective=None*)

Predict on future data where the target is known, e.g. cross validation.

Note: we cast y as ints first to address boolean values that may be returned from calculating predictions which we would not be able to otherwise transform if we originally had integer targets.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Future data of shape [n_samples, n_features].
- **y** (*pd.Series*, *np.ndarray*) – Future target of shape [n_samples].
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].
- **objective** (*ObjectiveBase*, *str*, *None*) – Objective used to threshold predicted probabilities, optional.

Returns Estimated labels.

Return type *pd.Series*

Raises **ValueError** – If final component is not an Estimator.

predict_proba (*self*, *X*, *X_train=None*, *y_train=None*)

Predict on future data where the target is unknown.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Future data of shape [n_samples, n_features].
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].

Returns Estimated probabilities.

Return type *pd.Series*

Raises **ValueError** – If final component is not an Estimator.

predict_proba_in_sample (*self*, *X_holdout*, *y_holdout*, *X_train*, *y_train*)

Predict on future data where the target is known, e.g. cross validation.

Parameters

- **X_holdout** (*pd.DataFrame* or *np.ndarray*) – Future data of shape [n_samples, n_features].
- **y_holdout** (*pd.Series*, *np.ndarray*) – Future target of shape [n_samples].
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].

Returns Estimated probabilities.

Return type *pd.Series*

Raises **ValueError** – If the final component is not an Estimator.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

score (*self*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Evaluate model performance on current and additional objectives.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – True labels of length [n_samples].
- **objectives** (*list*) – Non-empty list of objectives to score on.
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].

Returns Ordered dictionary of objective scores.

Return type dict

property summary (*self*)

A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

transform (*self*, *X*, *y=None*)

Transform the input.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type pd.DataFrame

transform_all_but_final (*self*, *X*, *y=None*, *X_train=None*, *y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series*) – Targets corresponding to the pipeline targets.
- **X_train** (*pd.DataFrame*) – Training data used to generate features from past observations.
- **y_train** (*pd.Series*) – Training targets used to generate features from past observations.

Returns New transformed features.

Return type pd.DataFrame

```
class evalml.pipelines.time_series_classification_pipelines.TimeSeriesMulticlassClassifier
```

Pipeline base class for time series multiclass classification problems.

Parameters

- **component_graph** (*list or dict*) – List of components in order. Accepts strings or ComponentBase subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”]
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary {} implies using all default values for component parameters. Pipeline-level parameters such as `date_index`, `gap`, and `max_delay` must be specified with the “pipeline” key. For example: `Pipeline(parameters={"pipeline": {"date_index": "Date", "max_delay": 4, "gap": 2}})`.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	ProblemTypes.TIME_SERIES_MULTICLASS
---------------------	-------------------------------------

Methods

<i>can_tune_threshold_with_objective</i>	Determine whether the threshold of a binary classification pipeline can be tuned.
<i>classes_</i>	Gets the class names for the pipeline. Will return None before pipeline is fit.
<i>clone</i>	Constructs a new pipeline with the same components, parameters, and random state.
<i>create_objectives</i>	Create objective instances from a list of strings or objective classes.
<i>custom_name</i>	Custom name of the pipeline.
<i>describe</i>	Outputs pipeline details including component parameters.
<i>feature_importance</i>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<i>fit</i>	Fit a time series classification pipeline.
<i>get_component</i>	Returns component by name.
<i>get_hyperparameter_ranges</i>	Returns hyperparameter ranges from all components as a dictionary.
<i>graph</i>	Generate an image representing the pipeline graph.
<i>graph_feature_importance</i>	Generate a bar graph of the pipeline’s feature importance.

continues on next page

Table 619 – continued from previous page

<code>graph_json</code>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<code>inverse_transform</code>	Apply component <code>inverse_transform</code> methods to estimator predictions in reverse order.
<code>load</code>	Loads pipeline at file path.
<code>model_family</code>	Returns model family of this pipeline.
<code>name</code>	Name of the pipeline.
<code>new</code>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's <code>__new__</code> method.
<code>parameters</code>	Parameter dictionary for this pipeline.
<code>predict</code>	Predict on future data where target is not known.
<code>predict_in_sample</code>	Predict on future data where the target is known, e.g. cross validation.
<code>predict_proba</code>	Predict on future data where the target is unknown.
<code>predict_proba_in_sample</code>	Predict on future data where the target is known, e.g. cross validation.
<code>save</code>	Saves pipeline at file path.
<code>score</code>	Evaluate model performance on current and additional objectives.
<code>summary</code>	A short summary of the pipeline structure, describing the list of components used.
<code>transform</code>	Transform the input.
<code>transform_all_but_final</code>	Transforms the data by applying all pre-processing components.

`can_tune_threshold_with_objective` (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters **`objective`** (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

`property classes_` (*self*)

Gets the class names for the pipeline. Will return None before pipeline is fit.

`clone` (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

`static create_objectives` (*objectives*)

Create objective instances from a list of strings or objective classes.

`property custom_name` (*self*)

Custom name of the pipeline.

`describe` (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **`return_dict`** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if `return_dict` is `True`, else `None`.

Return type `dict`

property `feature_importance` (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type `pd.DataFrame`

fit (*self*, *X*, *y*)

Fit a time series classification pipeline.

Parameters

- **X** (`pd.DataFrame` or `np.ndarray`) – The input training data of shape `[n_samples, n_features]`.
- **y** (`pd.Series`, `np.ndarray`) – The target training targets of length `[n_samples]`.

Returns *self*

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type `Component`

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type `dict`

graph (*self*, *filepath*=*None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to `None` (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type `graphviz.Digraph`

Raises

- **RuntimeError** – If `graphviz` is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold*=0)

Generate a bar graph of the pipeline's feature importance.

Parameters **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than `importance_threshold`. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type `plotly.Figure`

Raises `ValueError` – If importance threshold is not valid.

`graph_json` (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

`x_edges` specifies from which component feature data is being passed. `y_edges` specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: `{“Nodes”: {“component_name”: {“Name”: class_name, “Attributes”: parameters_attributes}, ... }, “x_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], “y_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}`

Returns A serialized JSON representation of a DAG structure.

Return type `dag_json` (*str*)

`inverse_transform` (*self*, *y*)

Apply component `inverse_transform` methods to estimator predictions in reverse order.

Components that implement `inverse_transform` are `PolynomialDetrender`, `LogTransformer`, `LabelEncoder` (*tbd*).

Parameters *y* (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type `pd.Series`

`static load` (*file_path*)

Loads pipeline at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns `PipelineBase` object

`property model_family` (*self*)

Returns model family of this pipeline.

`property name` (*self*)

Name of the pipeline.

`new` (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python’s `__new__` method.

Parameters

- **`parameters`** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or `None` implies using all default values for component parameters. Defaults to `None`.
- **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

`property parameters` (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type `dict`

`predict` (*self*, *X*, *objective=None*, *X_train=None*, *y_train=None*)

Predict on future data where target is not known.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **objective** (*Object* or *string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data.
- **y_train** (*pd.Series* or *None*) – Training labels.

Raises **ValueError** – If final component is not an Estimator.

Returns Predictions.

predict_in_sample (*self*, *X*, *y*, *X_train*, *y_train*, *objective=None*)

Predict on future data where the target is known, e.g. cross validation.

Note: we cast y as ints first to address boolean values that may be returned from calculating predictions which we would not be able to otherwise transform if we originally had integer targets.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Future data of shape [n_samples, n_features].
- **y** (*pd.Series*, *np.ndarray*) – Future target of shape [n_samples].
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].
- **objective** (*ObjectiveBase*, *str*, *None*) – Objective used to threshold predicted probabilities, optional.

Returns Estimated labels.

Return type *pd.Series*

Raises **ValueError** – If final component is not an Estimator.

predict_proba (*self*, *X*, *X_train=None*, *y_train=None*)

Predict on future data where the target is unknown.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Future data of shape [n_samples, n_features].
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].

Returns Estimated probabilities.

Return type *pd.Series*

Raises **ValueError** – If final component is not an Estimator.

predict_proba_in_sample (*self*, *X_holdout*, *y_holdout*, *X_train*, *y_train*)

Predict on future data where the target is known, e.g. cross validation.

Parameters

- **X_holdout** (*pd.DataFrame* or *np.ndarray*) – Future data of shape [n_samples, n_features].
- **y_holdout** (*pd.Series*, *np.ndarray*) – Future target of shape [n_samples].
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].

Returns Estimated probabilities.

Return type *pd.Series*

Raises **ValueError** – If the final component is not an Estimator.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)
Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

score (*self*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)
Evaluate model performance on current and additional objectives.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – True labels of length [n_samples].
- **objectives** (*list*) – Non-empty list of objectives to score on.
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].

Returns Ordered dictionary of objective scores.

Return type *dict*

property summary (*self*)
A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

transform (*self*, *X*, *y=None*)
Transform the input.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type *pd.DataFrame*

transform_all_but_final (*self*, *X*, *y=None*, *X_train=None*, *y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series*) – Targets corresponding to the pipeline targets.
- **X_train** (*pd.DataFrame*) – Training data used to generate features from past observations.
- **y_train** (*pd.Series*) – Training targets used to generate features from past observations.

Returns New transformed features.

Return type *pd.DataFrame*

time_series_pipeline_base

Pipeline base class for time-series problems.

Module Contents

Classes Summary

TimeSeriesPipelineBase

Pipeline base class for time series problems.

Contents

class evalml.pipelines.time_series_pipeline_base.**TimeSeriesPipelineBase** (*component_graph*, *parameters=None*, *custom_name=None*, *random_seed=0*)

Pipeline base class for time series problems.

Parameters

- **component_graph** (*ComponentGraph*, *list*, *dict*) – *ComponentGraph* instance, list of components in order, or dictionary of components. Accepts strings or *ComponentBase* subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”]
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary {} implies using all default values for component parameters. Pipeline-level parameters such as

date_index, gap, and max_delay must be specified with the “pipeline” key. For example: Pipeline(parameters={"pipeline": {"date_index": "Date", "max_delay": 4, "gap": 2}}).

- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	None
---------------------	------

Methods

<i>can_tune_threshold_with_objective</i>	Determine whether the threshold of a binary classification pipeline can be tuned.
<i>clone</i>	Constructs a new pipeline with the same components, parameters, and random state.
<i>create_objectives</i>	Create objective instances from a list of strings or objective classes.
<i>custom_name</i>	Custom name of the pipeline.
<i>describe</i>	Outputs pipeline details including component parameters.
<i>feature_importance</i>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<i>fit</i>	Fit a time series pipeline.
<i>get_component</i>	Returns component by name.
<i>get_hyperparameter_ranges</i>	Returns hyperparameter ranges from all components as a dictionary.
<i>graph</i>	Generate an image representing the pipeline graph.
<i>graph_feature_importance</i>	Generate a bar graph of the pipeline’s feature importance.
<i>graph_json</i>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<i>inverse_transform</i>	Apply component inverse_transform methods to estimator predictions in reverse order.
<i>load</i>	Loads pipeline at file path.
<i>model_family</i>	Returns model family of this pipeline.
<i>name</i>	Name of the pipeline.
<i>new</i>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python’s __new__ method.
<i>parameters</i>	Parameter dictionary for this pipeline.
<i>predict</i>	Predict on future data where target is not known.
<i>predict_in_sample</i>	Predict on future data where the target is known, e.g. cross validation.
<i>save</i>	Saves pipeline at file path.
<i>score</i>	Evaluate model performance on current and additional objectives.
<i>summary</i>	A short summary of the pipeline structure, describing the list of components used.
<i>transform</i>	Transform the input.

continues on next page

Table 621 – continued from previous page

<code>transform_all_but_final</code>	Transforms the data by applying all pre-processing components.
<code>can_tune_threshold_with_objective</code> (<i>self</i> , <i>objective</i>)	
Determine whether the threshold of a binary classification pipeline can be tuned.	
Parameters <i>objective</i> (<i>ObjectiveBase</i>) – Primary AutoMLSearch objective.	
Returns True if the pipeline threshold can be tuned.	
Return type bool	
<code>clone</code> (<i>self</i>)	
Constructs a new pipeline with the same components, parameters, and random state.	
Returns A new instance of this pipeline with identical components, parameters, and random state.	
<code>static create_objectives</code> (<i>objectives</i>)	
Create objective instances from a list of strings or objective classes.	
<code>property custom_name</code> (<i>self</i>)	
Custom name of the pipeline.	
<code>describe</code> (<i>self</i> , <i>return_dict=False</i>)	
Outputs pipeline details including component parameters.	
Parameters <i>return_dict</i> (<i>bool</i>) – If True, return dictionary of information about pipeline. Defaults to False.	
Returns Dictionary of all component parameters if <i>return_dict</i> is True, else None.	
Return type dict	
<code>property feature_importance</code> (<i>self</i>)	
Importance associated with each feature. Features dropped by the feature selection are excluded.	
Returns Feature names and their corresponding importance	
Return type pd.DataFrame	
<code>fit</code> (<i>self</i> , <i>X</i> , <i>y</i>)	
Fit a time series pipeline.	
Parameters	
<ul style="list-style-type: none"> • <i>X</i> (<i>pd.DataFrame</i> or <i>np.ndarray</i>) – The input training data of shape [n_samples, n_features]. • <i>y</i> (<i>pd.Series</i>, <i>np.ndarray</i>) – The target training targets of length [n_samples]. 	
Returns self	
<code>get_component</code> (<i>self</i> , <i>name</i>)	
Returns component by name.	
Parameters <i>name</i> (<i>str</i>) – Name of component.	
Returns Component to return	
Return type Component	
<code>get_hyperparameter_ranges</code> (<i>self</i> , <i>custom_hyperparameters</i>)	
Returns hyperparameter ranges from all components as a dictionary.	

Parameters `custom_hyperparameters` (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type dict

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters `filepath` (*str*, *optional*) – Path to where the graph should be saved. If set to None (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Digraph

Raises

- **RuntimeError** – If graphviz is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline's feature importance.

Parameters `importance_threshold` (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than `importance_threshold`. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type plotly.Figure

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

`x_edges` specifies from which component feature data is being passed. `y_edges` specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: {"Nodes": {"component_name": {"Name": class_name, "Attributes": parameters_attributes}, ...}, "x_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], "y_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}

Returns A serialized JSON representation of a DAG structure.

Return type dag_json (str)

inverse_transform (*self*, *y*)

Apply component `inverse_transform` methods to estimator predictions in reverse order.

Components that implement `inverse_transform` are PolynomialDetrender, LogTransformer, LabelEncoder (tbd).

Parameters `y` (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type pd.Series

static load (*file_path*)

Loads pipeline at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns PipelineBase object

property `model_family` (*self*)

Returns model family of this pipeline.

property `name` (*self*)

Name of the pipeline.

new (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's `__new__` method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component's parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

property `parameters` (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type dict

predict (*self*, *X*, *objective=None*, *X_train=None*, *y_train=None*)

Predict on future data where target is not known.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **objective** (*Object* or *string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data.
- **y_train** (*pd.Series* or *None*) – Training labels.

Raises **ValueError** – If final component is not an Estimator.

Returns Predictions.

predict_in_sample (*self*, *X*, *y*, *X_train*, *y_train*, *objective=None*)

Predict on future data where the target is known, e.g. cross validation.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Future data of shape [n_samples, n_features]
- **y** (*pd.Series*, *np.ndarray*) – Future target of shape [n_samples]
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features]
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train]
- **objective** (*ObjectiveBase*, *str*, *None*) – Objective used to threshold predicted probabilities, optional.

Returns Estimated labels.

Return type `pd.Series`

Raises **ValueError** – If final component is not an Estimator.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)
Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

abstract score (*self*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)
Evaluate model performance on current and additional objectives.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *np.ndarray*) – True labels of length `[n_samples]`.
- **objectives** (*list*) – Non-empty list of objectives to score on.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series* or *None*) – Training labels. Ignored. Only used for time series.

Returns Ordered dictionary of objective scores.

Return type `dict`

property summary (*self*)
A short summary of the pipeline structure, describing the list of components used.
Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

transform (*self*, *X*, *y=None*)
Transform the input.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*) – The target data of length `[n_samples]`. Defaults to *None*.

Returns Transformed output.

Return type `pd.DataFrame`

transform_all_but_final (*self*, *X*, *y=None*, *X_train=None*, *y_train=None*)
Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series*) – Targets corresponding to the pipeline targets.
- **X_train** (*pd.DataFrame*) – Training data used to generate features from past observations.
- **y_train** (*pd.Series*) – Training targets used to generate features from past observations.

Returns New transformed features.

Return type `pd.DataFrame`

time_series_regression_pipeline

Pipeline base class for time series regression problems.

Module Contents

Classes Summary

<i>TimeSeriesRegressionPipeline</i>	Pipeline base class for time series regression problems.
-------------------------------------	--

Contents

class `evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline` (*component_graph, parameters=None, custom_name=None, random_seed=None*)

Pipeline base class for time series regression problems.

Parameters

- **component_graph** (*ComponentGraph, list, dict*) – *ComponentGraph* instance, list of components in order, or dictionary of components. Accepts strings or *ComponentBase* subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”]
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary {} implies using all default values for component parameters. Pipeline-level parameters such as `date_index`, `gap`, and `max_delay` must be specified with the “pipeline” key. For example: `Pipeline(parameters={"pipeline": {"date_index": "Date", "max_delay": 4, "gap": 2}})`.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	<code>ProblemTypes.TIME_SERIES_REGRESSION</code>
---------------------	--

Methods

<code>can_tune_threshold_with_objective</code>	Determine whether the threshold of a binary classification pipeline can be tuned.
<code>clone</code>	Constructs a new pipeline with the same components, parameters, and random state.
<code>create_objectives</code>	Create objective instances from a list of strings or objective classes.
<code>custom_name</code>	Custom name of the pipeline.
<code>describe</code>	Outputs pipeline details including component parameters.
<code>feature_importance</code>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<code>fit</code>	Fit a time series pipeline.
<code>get_component</code>	Returns component by name.
<code>get_hyperparameter_ranges</code>	Returns hyperparameter ranges from all components as a dictionary.
<code>graph</code>	Generate an image representing the pipeline graph.
<code>graph_feature_importance</code>	Generate a bar graph of the pipeline's feature importance.
<code>graph_json</code>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<code>inverse_transform</code>	Apply component <code>inverse_transform</code> methods to estimator predictions in reverse order.
<code>load</code>	Loads pipeline at file path.
<code>model_family</code>	Returns model family of this pipeline.
<code>name</code>	Name of the pipeline.
<code>new</code>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's <code>__new__</code> method.
<code>parameters</code>	Parameter dictionary for this pipeline.
<code>predict</code>	Predict on future data where target is not known.
<code>predict_in_sample</code>	Predict on future data where the target is known, e.g. cross validation.
<code>save</code>	Saves pipeline at file path.
<code>score</code>	Evaluate model performance on current and additional objectives.
<code>summary</code>	A short summary of the pipeline structure, describing the list of components used.
<code>transform</code>	Transform the input.
<code>transform_all_but_final</code>	Transforms the data by applying all pre-processing components.

`can_tune_threshold_with_objective` (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters **`objective`** (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

`clone` (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

static create_objectives (*objectives*)

Create objective instances from a list of strings or objective classes.

property custom_name (*self*)

Custom name of the pipeline.

describe (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **return_dict** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if *return_dict* is True, else None.

Return type dict

property feature_importance (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type pd.DataFrame

fit (*self*, *X*, *y*)

Fit a time series pipeline.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *np.ndarray*) – The target training targets of length [n_samples].

Returns self

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type dict

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to None (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Digraph

Raises

- **RuntimeError** – If graphviz is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline's feature importance.

Parameters **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than *importance_threshold*. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type plotly.Figure

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

x_edges specifies from which component feature data is being passed. *y_edges* specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: {"Nodes": {"component_name": {"Name": class_name, "Attributes": parameters_attributes}, ... }, "x_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], "y_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}

Returns A serialized JSON representation of a DAG structure.

Return type dag_json (str)

inverse_transform (*self*, *y*)

Apply component *inverse_transform* methods to estimator predictions in reverse order.

Components that implement *inverse_transform* are PolynomialDetrender, LogTransformer, LabelEncoder (tbd).

Parameters **y** (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type pd.Series

static load (*file_path*)

Loads pipeline at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns PipelineBase object

property model_family (*self*)

Returns model family of this pipeline.

property name (*self*)

Name of the pipeline.

new (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's `__new__` method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component's parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

property parameters (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type dict

predict (*self, X, objective=None, X_train=None, y_train=None*)

Predict on future data where target is not known.

Parameters

- **X** (*pd.DataFrame, or np.ndarray*) – Data of shape [n_samples, n_features].
- **objective** (*Object or string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame or np.ndarray or None*) – Training data.
- **y_train** (*pd.Series or None*) – Training labels.

Raises **ValueError** – If final component is not an Estimator.

Returns Predictions.

predict_in_sample (*self, X, y, X_train, y_train, objective=None*)

Predict on future data where the target is known, e.g. cross validation.

Parameters

- **X** (*pd.DataFrame or np.ndarray*) – Future data of shape [n_samples, n_features]
- **y** (*pd.Series, np.ndarray*) – Future target of shape [n_samples]
- **X_train** (*pd.DataFrame, np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features]
- **y_train** (*pd.Series, np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train]
- **objective** (*ObjectiveBase, str, None*) – Objective used to threshold predicted probabilities, optional.

Returns Estimated labels.

Return type pd.Series

Raises **ValueError** – If final component is not an Estimator.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

score (*self, X, y, objectives, X_train=None, y_train=None*)

Evaluate model performance on current and additional objectives.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – True labels of length [n_samples].
- **objectives** (*list*) – Non-empty list of objectives to score on.
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].

Returns Ordered dictionary of objective scores.

Return type dict

property summary (*self*)

A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

transform (*self*, *X*, *y=None*)

Transform the input.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type pd.DataFrame

transform_all_but_final (*self*, *X*, *y=None*, *X_train=None*, *y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series*) – Targets corresponding to the pipeline targets.
- **X_train** (*pd.DataFrame*) – Training data used to generate features from past observations.
- **y_train** (*pd.Series*) – Training targets used to generate features from past observations.

Returns New transformed features.

Return type pd.DataFrame

utils

Utility methods for EvalML pipelines.

Module Contents

Functions

<code>generate_pipeline_code</code>	Creates and returns a string that contains the Python imports and code required for running the EvalML pipeline.
<code>make_pipeline</code>	Given input data, target data, an estimator class and the problem type, generates a pipeline class with a preprocessing chain which was recommended based on the inputs. The pipeline will be a subclass of the appropriate pipeline base class for the specified problem_type.
<code>make_timeseries_baseline_pipeline</code>	Make a baseline pipeline for time series regression problems.

Attributes Summary

<code>logger</code>

Contents

`evalml.pipelines.utils.generate_pipeline_code` (*element*)

Creates and returns a string that contains the Python imports and code required for running the EvalML pipeline.

Parameters *element* (*pipeline instance*) – The instance of the pipeline to generate string Python code.

Returns String representation of Python code that can be run separately in order to recreate the pipeline instance. Does not include code for custom component implementation.

Return type `str`

Raises **ValueError** – If element is not a pipeline, or if the pipeline is nonlinear.

`evalml.pipelines.utils.logger`

`evalml.pipelines.utils.make_pipeline` (*X*, *y*, *estimator*, *problem_type*, *parameters=None*, *sampler_name=None*, *extra_components=None*)

Given input data, target data, an estimator class and the problem type, generates a pipeline class with a preprocessing chain which was recommended based on the inputs. The pipeline will be a subclass of the appropriate pipeline base class for the specified problem_type.

Parameters

- **X** (*pd.DataFrame*) – The input data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples].

- **estimator** (*Estimator*) – Estimator for pipeline.
- **problem_type** (*ProblemTypes* or *str*) – Problem type for pipeline to generate.
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or None implies using all default values for component parameters.
- **sampler_name** (*str*) – The name of the sampler component to add to the pipeline. Only used in classification problems. Defaults to None
- **extra_components** (*list[ComponentBase]*) – List of extra components to be added after preprocessing components. Defaults to None.

Returns PipelineBase instance with dynamically generated preprocessing components and specified estimator.

Return type PipelineBase object

Raises ValueError – If estimator is not valid for the given problem type, or sampling is not supported for the given problem type.

`evalml.pipelines.utils.make_timeseries_baseline_pipeline(problem_type, gap, forecast_horizon)`

Make a baseline pipeline for time series regression problems.

Parameters

- **problem_type** – One of TIME_SERIES_REGRESSION, TIME_SERIES_MULTICLASS, TIME_SERIES_BINARY
- **gap** (*int*) – Non-negative gap parameter.
- **forecast_horizon** (*int*) – Positive forecast_horizon parameter.

Returns TimeSeriesPipelineBase, a time series pipeline corresponding to the problem type.

Package Contents

Classes Summary

<i>ARIMAREgressor</i>	Autoregressive Integrated Moving Average Model. The three parameters (p, d, q) are the AR order, the degree of differencing, and the MA order. More information here: https://www.statsmodels.org/devel/generated/statsmodels.tsa.arima_model.ARIMA.html .
<i>BinaryClassificationPipeline</i>	Pipeline subclass for all binary classification pipelines.
<i>CatBoostClassifier</i>	CatBoost Classifier, a classifier that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.
<i>CatBoostRegressor</i>	CatBoost Regressor, a regressor that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.
<i>ClassificationPipeline</i>	Pipeline subclass for all classification pipelines.
<i>ComponentGraph</i>	Component graph for a pipeline as a directed acyclic graph (DAG).
<i>DecisionTreeClassifier</i>	Decision Tree Classifier.

continues on next page

Table 626 – continued from previous page

<i>DecisionTreeRegressor</i>	Decision Tree Regressor.
<i>DelayedFeatureTransformer</i>	Transformer that delays input features and target variable for time series problems.
<i>DFSTransformer</i>	Featuretools DFS component that generates features for the input features.
<i>ElasticNetClassifier</i>	Elastic Net Classifier. Uses Logistic Regression with elasticnet penalty as the base estimator.
<i>ElasticNetRegressor</i>	Elastic Net Regressor.
<i>Estimator</i>	A component that fits and predicts given data.
<i>ExtraTreesClassifier</i>	Extra Trees Classifier.
<i>ExtraTreesRegressor</i>	Extra Trees Regressor.
<i>FeatureSelector</i>	Selects top features based on importance weights.
<i>KNeighborsClassifier</i>	K-Nearest Neighbors Classifier.
<i>LightGBMClassifier</i>	LightGBM Classifier.
<i>LightGBMRegressor</i>	LightGBM Regressor.
<i>LinearRegressor</i>	Linear Regressor.
<i>LogisticRegressionClassifier</i>	Logistic Regression Classifier.
<i>MulticlassClassificationPipeline</i>	Pipeline subclass for all multiclass classification pipelines.
<i>OneHotEncoder</i>	A transformer that encodes categorical features in a one-hot numeric array.
<i>PerColumnImputer</i>	Imputes missing data according to a specified imputation strategy per column.
<i>PipelineBase</i>	Machine learning pipeline.
<i>ProphetRegressor</i>	Prophet is a procedure for forecasting time series data based on an additive model where non-linear trends are fit with yearly, weekly, and daily seasonality, plus holiday effects. It works best with time series that have strong seasonal effects and several seasons of historical data. Prophet is robust to missing data and shifts in the trend, and typically handles outliers well.
<i>RandomForestClassifier</i>	Random Forest Classifier.
<i>RandomForestRegressor</i>	Random Forest Regressor.
<i>RegressionPipeline</i>	Pipeline subclass for all regression pipelines.
<i>RFClassifierSelectFromModel</i>	Selects top features based on importance weights using a Random Forest classifier.
<i>RFRegressorSelectFromModel</i>	Selects top features based on importance weights using a Random Forest regressor.
<i>SimpleImputer</i>	Imputes missing data according to a specified imputation strategy.
<i>StackedEnsembleClassifier</i>	Stacked Ensemble Classifier.
<i>StackedEnsembleRegressor</i>	Stacked Ensemble Regressor.
<i>StandardScaler</i>	A transformer that standardizes input features by removing the mean and scaling to unit variance.
<i>SVMClassifier</i>	Support Vector Machine Classifier.
<i>SVMRegressor</i>	Support Vector Machine Regressor.
<i>TargetEncoder</i>	A transformer that encodes categorical features into target encodings.
<i>TimeSeriesBinaryClassificationPipeline</i>	Pipeline base class for time series binary classification problems.

continues on next page

Table 626 – continued from previous page

<i>TimeSeriesClassificationPipeline</i>	Pipeline base class for time series classification problems.
<i>TimeSeriesMulticlassClassificationPipeline</i>	Pipeline base class for time series multiclass classification problems.
<i>TimeSeriesRegressionPipeline</i>	Pipeline base class for time series regression problems.
<i>Transformer</i>	A component that may or may not need fitting that transforms data. These components are used before an estimator.
<i>XGBoostClassifier</i>	XGBoost Classifier.
<i>XGBoostRegressor</i>	XGBoost Regressor.

Contents

class evalml.pipelines.**ARIMAREgressor**(*date_index=None*, *trend=None*, *start_p=2*, *d=0*, *start_q=2*, *max_p=5*, *max_d=2*, *max_q=5*, *seasonal=True*, *n_jobs=-1*, *random_seed=0*, ***kwargs*)

Autoregressive Integrated Moving Average Model. The three parameters (p, d, q) are the AR order, the degree of differencing, and the MA order. More information here: https://www.statsmodels.org/devel/generated/statsmodels.tsa.arima_model.ARIMA.html.

Currently ARIMAREgressor isn't supported via conda install. It's recommended that it be installed via PyPI.

Parameters

- **date_index** (*str*) – Specifies the name of the column in X that provides the datetime objects. Defaults to None.
- **trend** (*str*) – Controls the deterministic trend. Options are ['n', 'c', 't', 'ct'] where 'c' is a constant term, 't' indicates a linear trend, and 'ct' is both. Can also be an iterable when defining a polynomial, such as [1, 1, 0, 1].
- **start_p** (*int*) – Minimum Autoregressive order. Defaults to 2.
- **d** (*int*) – Minimum Differencing degree. Defaults to 0.
- **start_q** (*int*) – Minimum Moving Average order. Defaults to 2.
- **max_p** (*int*) – Maximum Autoregressive order. Defaults to 5.
- **max_d** (*int*) – Maximum Differencing degree. Defaults to 2.
- **max_q** (*int*) – Maximum Moving Average order. Defaults to 5.
- **seasonal** (*boolean*) – Whether to fit a seasonal model to ARIMA. Defaults to True.
- **n_jobs** (*int or None*) – Non-negative integer describing level of parallelism used for pipelines. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "start_p": Integer(1, 3), "d": Integer(0, 2), "start_q": Integer(1, 3), "max_p": Integer(3, 10), "max_d": Integer(2, 5), "max_q": Integer(3, 10), "seasonal": [True, False], }
model_family	ModelFamily.ARIMA
modifies_features	True
modifies_target	False
name	ARIMA Regressor
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.TIME_SERIES_REGRESSION]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns array of 0's with a length of 1 as feature_importance is not defined for ARIMA regressor.
<i>fit</i>	Fits ARIMA regressor to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted ARIMA regressor.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns array of 0's with a length of 1 as feature_importance is not defined for ARIMA regressor.

fit (*self, X, y=None*)

Fits ARIMA regressor to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If X was passed to *fit* but not passed in *predict*.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X, y=None*)

Make predictions using fitted ARIMA regressor.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – Target data.

Returns Predicted values.

Return type pd.Series

Raises **ValueError** – If X was passed to *fit* but not passed in *predict*.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.**BinaryClassificationPipeline** (*component_graph*, *parameters*=*None*, *custom_name*=*None*, *random_seed*=*0*)

Pipeline subclass for all binary classification pipelines.

Parameters

- **component_graph** (*ComponentGraph*, *list*, *dict*) – *ComponentGraph* instance, list of components in order, or dictionary of components. Accepts strings or *ComponentBase* subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”]
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or *None* implies using all default values for component parameters. Defaults to *None*.
- **custom_name** (*str*) – Custom name for the pipeline. Defaults to *None*.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	ProblemTypes.BINARY
---------------------	---------------------

Methods

<i>can_tune_threshold_with_objective</i>	Determine whether the threshold of a binary classification pipeline can be tuned.
<i>classes_</i>	Gets the class names for the pipeline. Will return <i>None</i> before pipeline is fit.
<i>clone</i>	Constructs a new pipeline with the same components, parameters, and random state.
<i>create_objectives</i>	Create objective instances from a list of strings or objective classes.
<i>custom_name</i>	Custom name of the pipeline.
<i>describe</i>	Outputs pipeline details including component parameters.
<i>feature_importance</i>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<i>fit</i>	Build a classification model. For string and categorical targets, classes are sorted by <code>sorted(set(y))</code> and then are mapped to values between 0 and <code>n_classes-1</code> .
<i>get_component</i>	Returns component by name.

continues on next page

Table 628 – continued from previous page

<code>get_hyperparameter_ranges</code>	Returns hyperparameter ranges from all components as a dictionary.
<code>graph</code>	Generate an image representing the pipeline graph.
<code>graph_feature_importance</code>	Generate a bar graph of the pipeline’s feature importance.
<code>graph_json</code>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<code>inverse_transform</code>	Apply component <code>inverse_transform</code> methods to estimator predictions in reverse order.
<code>load</code>	Loads pipeline at file path.
<code>model_family</code>	Returns model family of this pipeline.
<code>name</code>	Name of the pipeline.
<code>new</code>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python’s <code>__new__</code> method.
<code>optimize_threshold</code>	Optimize the pipeline threshold given the objective to use. Only used for binary problems with objectives whose thresholds can be tuned.
<code>parameters</code>	Parameter dictionary for this pipeline.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels. Assumes that the column at index 1 represents the positive label case.
<code>save</code>	Saves pipeline at file path.
<code>score</code>	Evaluate model performance on objectives.
<code>summary</code>	A short summary of the pipeline structure, describing the list of components used.
<code>threshold</code>	Threshold used to make a prediction. Defaults to None.
<code>transform</code>	Transform the input.
<code>transform_all_but_final</code>	Transforms the data by applying all pre-processing components.

can_tune_threshold_with_objective (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters **objective** (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

property classes_ (*self*)

Gets the class names for the pipeline. Will return None before pipeline is fit.

clone (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

static create_objectives (*objectives*)

Create objective instances from a list of strings or objective classes.

property custom_name (*self*)

Custom name of the pipeline.

describe (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **return_dict** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if *return_dict* is True, else None.

Return type dict

property feature_importance (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type pd.DataFrame

fit (*self*, *X*, *y*)

Build a classification model. For string and categorical targets, classes are sorted by sorted(set(y)) and then are mapped to values between 0 and n_classes-1.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *np.ndarray*) – The target training labels of length [n_samples]

Returns self

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type dict

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to None (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Digraph

Raises

- **RuntimeError** – If graphviz is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline's feature importance.

Parameters **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than *importance_threshold*. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type `plotly.Figure`

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

x_edges specifies from which component feature data is being passed. *y_edges* specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: `{“Nodes”: {“component_name”: {“Name”: class_name, “Attributes”: parameters_attributes}, ... }}, “x_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], “y_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}`

Returns A serialized JSON representation of a DAG structure.

Return type `dag_json (str)`

inverse_transform (*self*, *y*)

Apply component `inverse_transform` methods to estimator predictions in reverse order.

Components that implement `inverse_transform` are `PolynomialDetrender`, `LogTransformer`, `LabelEncoder` (`tbd`).

Parameters **y** (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type `pd.Series`

static load (*file_path*)

Loads pipeline at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns `PipelineBase` object

property model_family (*self*)

Returns model family of this pipeline.

property name (*self*)

Name of the pipeline.

new (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's `__new__` method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component's parameters as values. An empty dictionary or `None` implies using all default values for component parameters. Defaults to `None`.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

optimize_threshold (*self*, *X*, *y*, *y_pred_proba*, *objective*)

Optimize the pipeline threshold given the objective to use. Only used for binary problems with objectives whose thresholds can be tuned.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series*) – Input target values.
- **y_pred_proba** (*pd.Series*) – The predicted probabilities of the target outputted by the pipeline.
- **objective** (*ObjectiveBase*) – The objective to threshold with. Must have a tunable threshold.

Raises **ValueError** – If objective is not optimizable.

property parameters (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type dict

predict (*self*, *X*, *objective=None*, *X_train=None*, *y_train=None*)

Make predictions using selected features.

Note: we cast y as ints first to address boolean values that may be returned from calculating predictions which we would not be able to otherwise transform if we originally had integer targets.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].
- **objective** (*Object or string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series*) – Training labels. Ignored. Only used for time series.

Returns Estimated labels.

Return type pd.Series

predict_proba (*self*, *X*, *X_train=None*, *y_train=None*)

Make probability estimates for labels. Assumes that the column at index 1 represents the positive label case.

Parameters

- **X** (*pd.DataFrame or np.ndarray*) – Data of shape [n_samples, n_features]
- **X_train** (*pd.DataFrame or np.ndarray or None*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series or None*) – Training labels. Ignored. Only used for time series.

Returns Probability estimates

Return type pd.Series

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

score (*self*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Evaluate model performance on objectives.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features]
- **y** (*pd.Series*) – True labels of length [n_samples]
- **objectives** (*list*) – List of objectives to score
- **X_train** (*pd.DataFrame*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series*) – Training labels. Ignored. Only used for time series.

Returns Ordered dictionary of objective scores.

Return type dict

property summary (*self*)

A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

property threshold (*self*)

Threshold used to make a prediction. Defaults to None.

transform (*self*, *X*, *y=None*)

Transform the input.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type pd.DataFrame

transform_all_but_final (*self*, *X*, *y=None*, *X_train=None*, *y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series* or *None*) – Targets corresponding to X. Optional.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data. Only used for time series.
- **y_train** (*pd.Series* or *None*) – Training labels. Only used for time series.

Returns New transformed features.

Return type pd.DataFrame

```
class evalml.pipelines.CatBoostClassifier(n_estimators=10, eta=0.03, max_depth=6,  
                                          bootstrap_type=None, silent=True, al-  
                                          low_writing_files=False, random_seed=0,  
                                          n_jobs=-1, **kwargs)
```

CatBoost Classifier, a classifier that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.

For more information, check out <https://catboost.ai/>

Parameters

- **n_estimators** (*float*) – The maximum number of trees to build. Defaults to 10.
- **eta** (*float*) – The learning rate. Defaults to 0.03.
- **max_depth** (*int*) – The maximum tree depth for base learners. Defaults to 6.
- **bootstrap_type** (*string*) – Defines the method for sampling the weights of objects. Available methods are ‘Bayesian’, ‘Bernoulli’, ‘MVS’. Defaults to None.
- **silent** (*boolean*) – Whether to use the “silent” logging mode. Defaults to True.
- **allow_writing_files** (*boolean*) – Whether to allow writing snapshot files while training. Defaults to False.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(4, 100), “eta”: Real(0.000001, 1), “max_depth”: Integer(4, 10), }
model_family	ModelFamily.CATBOOST
modifies_features	True
modifies_target	False
name	CatBoost Classifier
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance of fitted CatBoost classifier.
<i>fit</i>	Fits CatBoost classifier component to data.
<i>load</i>	Loads component at file path.

continues on next page

Table 629 – continued from previous page

<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using the fitted CatBoost classifier.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted CatBoost classifier.

fit (*self*, *X*, *y=None*)

Fits CatBoost classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using the fitted CatBoost classifier.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.DataFrame*

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.CatBoostRegressor (n_estimators=10, eta=0.03, max_depth=6,
                                         bootstrap_type=None, silent=False, al-
                                         low_writing_files=False, random_seed=0,
                                         n_jobs=-1, **kwargs)
```

CatBoost Regressor, a regressor that uses gradient-boosting on decision trees. CatBoost is an open-source library and natively supports categorical features.

For more information, check out <https://catboost.ai/>

Parameters

- **n_estimators** (*float*) – The maximum number of trees to build. Defaults to 10.
- **eta** (*float*) – The learning rate. Defaults to 0.03.
- **max_depth** (*int*) – The maximum tree depth for base learners. Defaults to 6.
- **bootstrap_type** (*string*) – Defines the method for sampling the weights of objects. Available methods are ‘Bayesian’, ‘Bernoulli’, ‘MVS’. Defaults to None.
- **silent** (*boolean*) – Whether to use the “silent” logging mode. Defaults to True.
- **allow_writing_files** (*boolean*) – Whether to allow writing snapshot files while training. Defaults to False.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "n_estimators": Integer(4, 100), "eta": Real(0.000001, 1), "max_depth": Integer(4, 10), }
model_family	ModelFamily.CATBOOST
modifies_features	True
modifies_target	False
name	CatBoost Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance of fitted CatBoost regressor.
<i>fit</i>	Fits CatBoost regressor component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted CatBoost regressor.

fit (*self, X, y=None*)

Fits CatBoost regressor component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.**ClassificationPipeline** (*component_graph*, *parameters=None*, *custom_name=None*, *random_seed=0*)

Pipeline subclass for all classification pipelines.

Parameters

- **component_graph** (*list or dict*) – List of components in order. Accepts strings or ComponentBase subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”]
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **custom_name** (*str*) – Custom name for the pipeline. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	None
---------------------	------

Methods

<i>can_tune_threshold_with_objective</i>	Determine whether the threshold of a binary classification pipeline can be tuned.
<i>classes_</i>	Gets the class names for the pipeline. Will return None before pipeline is fit.
<i>clone</i>	Constructs a new pipeline with the same components, parameters, and random state.
<i>create_objectives</i>	Create objective instances from a list of strings or objective classes.
<i>custom_name</i>	Custom name of the pipeline.
<i>describe</i>	Outputs pipeline details including component parameters.
<i>feature_importance</i>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<i>fit</i>	Build a classification model. For string and categorical targets, classes are sorted by sorted(set(y)) and then are mapped to values between 0 and n_classes-1.
<i>get_component</i>	Returns component by name.
<i>get_hyperparameter_ranges</i>	Returns hyperparameter ranges from all components as a dictionary.
<i>graph</i>	Generate an image representing the pipeline graph.
<i>graph_feature_importance</i>	Generate a bar graph of the pipeline’s feature importance.

continues on next page

Table 631 – continued from previous page

<code>graph_json</code>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<code>inverse_transform</code>	Apply component <code>inverse_transform</code> methods to estimator predictions in reverse order.
<code>load</code>	Loads pipeline at file path.
<code>model_family</code>	Returns model family of this pipeline.
<code>name</code>	Name of the pipeline.
<code>new</code>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's <code>__new__</code> method.
<code>parameters</code>	Parameter dictionary for this pipeline.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves pipeline at file path.
<code>score</code>	Evaluate model performance on objectives.
<code>summary</code>	A short summary of the pipeline structure, describing the list of components used.
<code>transform</code>	Transform the input.
<code>transform_all_but_final</code>	Transforms the data by applying all pre-processing components.

`can_tune_threshold_with_objective` (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters **`objective`** (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

`property classes_` (*self*)

Gets the class names for the pipeline. Will return None before pipeline is fit.

`clone` (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

`static create_objectives` (*objectives*)

Create objective instances from a list of strings or objective classes.

`property custom_name` (*self*)

Custom name of the pipeline.

`describe` (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **`return_dict`** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if `return_dict` is True, else None.

Return type dict

`property feature_importance` (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type `pd.DataFrame`

fit (*self*, *X*, *y*)

Build a classification model. For string and categorical targets, classes are sorted by `sorted(set(y))` and then are mapped to values between 0 and `n_classes-1`.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape `[n_samples, n_features]`
- **y** (*pd.Series*, *np.ndarray*) – The target training labels of length `[n_samples]`

Returns *self*

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type *dict*

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to `None` (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type `graphviz.Digraph`

Raises

- **RuntimeError** – If `graphviz` is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline's feature importance.

Parameters **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than `importance_threshold`. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type `plotly.Figure`

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

x_edges specifies from which component feature data is being passed. *y_edges* specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: {"Nodes": {"component_name": {"Name": class_name, "Attributes": parameters_attributes}, ...}, "x_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], "y_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}

Returns A serialized JSON representation of a DAG structure.

Return type dag_json (str)

inverse_transform (*self*, *y*)

Apply component inverse_transform methods to estimator predictions in reverse order.

Components that implement inverse_transform are PolynomialDetrender, LogTransformer, LabelEncoder (tbd).

Parameters *y* (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type pd.Series

static load (*file_path*)

Loads pipeline at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns PipelineBase object

property model_family (*self*)

Returns model family of this pipeline.

property name (*self*)

Name of the pipeline.

new (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's __new__ method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component's parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

property parameters (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type dict

predict (*self*, *X*, *objective=None*, *X_train=None*, *y_train=None*)

Make predictions using selected features.

Note: we cast `y` as ints first to address boolean values that may be returned from calculating predictions which we would not be able to otherwise transform if we originally had integer targets.

Parameters

- **X** (*pd.DataFrame*) – Data of shape `[n_samples, n_features]`.
- **objective** (*Object or string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series*) – Training labels. Ignored. Only used for time series.

Returns Estimated labels.

Return type `pd.Series`

predict_proba (*self, X, X_train=None, y_train=None*)

Make probability estimates for labels.

Parameters

- **X** (*pd.DataFrame or np.ndarray*) – Data of shape `[n_samples, n_features]`
- **X_train** (*pd.DataFrame or np.ndarray or None*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series or None*) – Training labels. Ignored. Only used for time series.

Returns Probability estimates

Return type `pd.DataFrame`

Raises **ValueError** – If final component is not an estimator.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

score (*self, X, y, objectives, X_train=None, y_train=None*)

Evaluate model performance on objectives.

Parameters

- **X** (*pd.DataFrame*) – Data of shape `[n_samples, n_features]`
- **y** (*pd.Series*) – True labels of length `[n_samples]`
- **objectives** (*list*) – List of objectives to score
- **X_train** (*pd.DataFrame*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series*) – Training labels. Ignored. Only used for time series.

Returns Ordered dictionary of objective scores.

Return type `dict`

property summary (*self*)

A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

transform (*self*, *X*, *y=None*)

Transform the input.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type *pd.DataFrame*

transform_all_but_final (*self*, *X*, *y=None*, *X_train=None*, *y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series* or *None*) – Targets corresponding to X. Optional.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data. Only used for time series.
- **y_train** (*pd.Series* or *None*) – Training labels. Only used for time series.

Returns New transformed features.

Return type *pd.DataFrame*

class *evalml.pipelines.ComponentGraph* (*component_dict=None*, *random_seed=0*)

Component graph for a pipeline as a directed acyclic graph (DAG).

Parameters

- **component_dict** (*dict*) – A dictionary which specifies the components and edges between components that should be used to create the component graph. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Example

```
>>> component_dict = {'imputer': ['Imputer'], 'ohe': ['One Hot Encoder', 'imputer.
↪x'], 'estimator_1': ['Random Forest Classifier', 'ohe.x'], 'estimator_2': [
↪'Decision Tree Classifier', 'ohe.x'], 'final': ['Logistic Regression Classifier
↪', 'estimator_1', 'estimator_2']}
>>> component_graph = ComponentGraph(component_dict)
```

Methods

<i>compute_order</i>	The order that components will be computed or called in.
<i>default_parameters</i>	The default parameter dictionary for this pipeline.
<i>describe</i>	Outputs component graph details including component parameters.
<i>fit</i>	Fit each component in the graph.
<i>fit_and_transform_all_but_final</i>	Fit and transform all components save the final one, usually an estimator.

continues on next page

Table 632 – continued from previous page

<code>generate_order</code>	Regenerated the topologically sorted order of the graph.
<code>get_component</code>	Retrieves a single component object from the graph.
<code>get_estimators</code>	Gets a list of all the estimator components within this graph.
<code>get_inputs</code>	Retrieves all inputs for a given component.
<code>get_last_component</code>	Retrieves the component that is computed last in the graph, usually the final estimator.
<code>graph</code>	Generate an image representing the component graph.
<code>instantiate</code>	Instantiates all uninstantiated components within the graph using the given parameters. An error will be raised if a component is already instantiated but the parameters dict contains arguments for that component.
<code>inverse_transform</code>	Apply component <code>inverse_transform</code> methods to estimator predictions in reverse order.
<code>predict</code>	Make predictions using selected features.
<code>transform</code>	Transform the input using the component graph.
<code>transform_all_but_final</code>	Transform all components save the final one, and gathers the data from any number of parents to get all the information that should be fed to the final component.

property `compute_order` (*self*)

The order that components will be computed or called in.

property `default_parameters` (*self*)

The default parameter dictionary for this pipeline.

Returns Dictionary of all component default parameters.

Return type dict

describe (*self*, *return_dict=False*)

Outputs component graph details including component parameters.

Parameters `return_dict` (*bool*) – If True, return dictionary of information about component graph. Defaults to False.

Returns Dictionary of all component parameters if `return_dict` is True, else None

Return type dict

fit (*self*, *X*, *y*)

Fit each component in the graph.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns *self*

fit_and_transform_all_but_final (*self*, *X*, *y*)

Fit and transform all components save the final one, usually an estimator.

Parameters

- **x** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns Transformed features and target.

Return type Tuple (pd.DataFrame, pd.Series)

classmethod generate_order (*cls, component_dict*)
Regenerated the topologically sorted order of the graph.

get_component (*self, component_name*)
Retrieves a single component object from the graph.

Parameters **component_name** (*str*) – Name of the component to retrieve

Returns ComponentBase object

Raises **ValueError** – If the component is not in the graph.

get_estimators (*self*)
Gets a list of all the estimator components within this graph.

Returns All estimator objects within the graph.

Return type list

Raises **ValueError** – If the component graph is not yet instantiated.

get_inputs (*self, component_name*)
Retrieves all inputs for a given component.

Parameters **component_name** (*str*) – Name of the component to look up.

Returns List of inputs for the component to use.

Return type list[str]

Raises **ValueError** – If the component is not in the graph.

get_last_component (*self*)
Retrieves the component that is computed last in the graph, usually the final estimator.

Returns ComponentBase object

Raises **ValueError** – If the component graph has no edges.

graph (*self, name=None, graph_format=None*)
Generate an image representing the component graph.

Parameters

- **name** (*str*) – Name of the graph. Defaults to None.
- **graph_format** (*str*) – file format to save the graph in. Defaults to None.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Digraph

Raises **RuntimeError** – If graphviz is not installed.

instantiate (*self, parameters=None*)

Instantiates all uninstantiated components within the graph using the given parameters. An error will be raised if a component is already instantiated but the parameters dict contains arguments for that component.

Parameters **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary {} or None implies using all default values for component parameters. If a component in the component graph is already instantiated, it will not use any of its parameters defined in this dictionary. Defaults to None.

Returns *self*

Raises **ValueError** – If component graph is already instantiated or if a component errored while instantiating.

inverse_transform (*self*, *y*)

Apply component inverse_transform methods to estimator predictions in reverse order.

Components that implement inverse_transform are PolynomialDetrender, LabelEncoder (tbd).

Parameters **y** – (*pd.Series*): Final component features.

Returns The target with inverse transformation applied.

Return type *pd.Series*

predict (*self*, *X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Input features of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **ValueError** – If final component is not an Estimator.

transform (*self*, *X*, *y=None*)

Transform the input using the component graph.

Parameters

- **X** (*pd.DataFrame*) – Input features of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type *pd.DataFrame*

Raises **ValueError** – If final component is not a Transformer.

transform_all_but_final (*self*, *X*, *y=None*)

Transform all components save the final one, and gathers the data from any number of parents to get all the information that should be fed to the final component.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples]. Defaults to None.

Returns Transformed values.

Return type *pd.DataFrame*

```
class evalml.pipelines.DecisionTreeClassifier (criterion='gini',      max_features='auto',  
                                              max_depth=6,      min_samples_split=2,  
                                              min_weight_fraction_leaf=0.0,      ran-  
                                              dom_seed=0, **kwargs)
```

Decision Tree Classifier.

Parameters

- **criterion** (*{ "gini", "entropy" }*) – The function to measure the quality of a split. Supported criteria are “gini” for the Gini impurity and “entropy” for the information gain. Defaults to “gini”.
- **max_features** (*int, float or { "auto", "sqrt", "log2" }*) – The number of features to consider when looking for the best split:
 - If *int*, then consider *max_features* features at each split.
 - If *float*, then *max_features* is a fraction and *int(max_features * n_features)* features are considered at each split.
 - If “auto”, then *max_features*=*sqrt(n_features)*.
 - If “sqrt”, then *max_features*=*sqrt(n_features)*.
 - If “log2”, then *max_features*=*log2(n_features)*.
 - If *None*, then *max_features* = *n_features*.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than *max_features* features. Defaults to “auto”.
- **max_depth** (*int*) – The maximum depth of the tree. Defaults to 6.
- **min_samples_split** (*int or float*) – The minimum number of samples required to split an internal node:
 - If *int*, then consider *min_samples_split* as the minimum number.
 - If *float*, then *min_samples_split* is a fraction and *ceil(min_samples_split * n_samples)* are the minimum number of samples for each split.

Defaults to 2.
- **min_weight_fraction_leaf** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “criterion”: [“gini”, “entropy”], “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10), }
model_family	ModelFamily.DECISION_TREE
modifies_features	True
modifies_target	False
name	Decision Tree Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a `feature_importance` method or a `component_obj` that implements `feature_importance`.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`.

Returns `self`

static load (*file_path*)

Loads component at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns `ComponentBase` object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters `X` (*pd.DataFrame*) – Data of shape `[n_samples, n_features]`.

Returns Predicted values.

Return type `pd.Series`

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict` method or a `component_obj` that implements `predict`.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters `X` (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type `pd.Series`

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- `file_path` (*str*) – Location to save file.
- `pickle_protocol` (*int*) – The pickle data stream format.

```
class evalml.pipelines.DecisionTreeRegressor (criterion='mse', max_features='auto',
                                              max_depth=6, min_samples_split=2,
                                              min_weight_fraction_leaf=0.0, ran-
                                              dom_seed=0, **kwargs)
```

Decision Tree Regressor.

Parameters

- `criterion` (`{ "mse", "friedman_mse", "mae", "poisson" }`) – The function to measure the quality of a split. Supported criteria are:
 - “mse” for the mean squared error, which is equal to variance reduction as feature selection criterion and minimizes the L2 loss using the mean of each terminal node

- “friedman_mse”, which uses mean squared error with Friedman’s improvement score for potential splits
- “mae” for the mean absolute error, which minimizes the L1 loss using the median of each terminal node,
- “poisson” which uses reduction in Poisson deviance to find splits.
- **max_features** (*int, float or {"auto", "sqrt", "log2"}*) – The number of features to consider when looking for the best split:
 - If *int*, then consider max_features features at each split.
 - If *float*, then max_features is a fraction and $\text{int}(\text{max_features} * \text{n_features})$ features are considered at each split.
 - If “auto”, then $\text{max_features} = \text{sqrt}(\text{n_features})$.
 - If “sqrt”, then $\text{max_features} = \text{sqrt}(\text{n_features})$.
 - If “log2”, then $\text{max_features} = \log_2(\text{n_features})$.
 - If *None*, then $\text{max_features} = \text{n_features}$.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than max_features features.
- **max_depth** (*int*) – The maximum depth of the tree. Defaults to 6.
- **min_samples_split** (*int or float*) – The minimum number of samples required to split an internal node:
 - If *int*, then consider min_samples_split as the minimum number.
 - If *float*, then min_samples_split is a fraction and $\text{ceil}(\text{min_samples_split} * \text{n_samples})$ are the minimum number of samples for each split.

Defaults to 2.
- **min_weight_fraction_leaf** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “criterion”: [“mse”, “friedman_mse”, “mae”], “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10), }
model_family	ModelFamily.DECISION_TREE
modifies_features	True
modifies_target	False
name	Decision Tree Regressor
predict Uses y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].

- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.DelayedFeatureTransformer (date_index=None, max_delay=2,  
                                                gap=0, forecast_horizon=1,  
                                                delay_features=True, de-  
                                                lay_target=True, random_seed=0,  
                                                **kwargs)
```

Transformer that delays input features and target variable for time series problems.

Parameters

- **date_index** (*str*) – Name of the column containing the datetime information used to order the data. Ignored.

- **max_delay** (*int*) – Maximum number of time units to delay each feature. Defaults to 2.
- **forecast_horizon** (*int*) – The number of time periods the pipeline is expected to forecast.
- **delay_features** (*bool*) – Whether to delay the input features. Defaults to True.
- **delay_target** (*bool*) – Whether to delay the target. Defaults to True.
- **gap** (*int*) – The number of time units between when the features are collected and when the target is collected. For example, if you are predicting the next time step’s target, gap=1. This is only needed because when gap=0, we need to be sure to start the lagging of the target variable at 1. Defaults to 1.
- **random_seed** (*int*) – Seed for the random number generator. This transformer performs the same regardless of the random seed provided.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Delayed Feature Transformer
needs_fitting	False
target_colname_prefix	target_delay_{ }
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the DelayFeatureTransformer.
<i>fit_transform</i>	Fit the component and transform the input data.
<i>load</i>	Loads component at file path.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Computes the delayed features for all features in X and y.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the DelayFeatureTransformer.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

fit_transform (*self*, *X*, *y*)

Fit the component and transform the input data.

Parameters

- **X** (*pd.DataFrame* or *None*) – Data to transform. None is expected when only the target variable is being used.
- **y** (*pd.Series*, or *None*) – Target.

Returns Transformed X.

Return type pd.DataFrame

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Computes the delayed features for all features in X and y.

For each feature in X, it will add a column to the output dataframe for each delay in the (inclusive) range [1, max_delay]. The values of each delayed feature are simply the original feature shifted forward in time

by the delay amount. For example, a delay of 3 units means that the feature value at row n will be taken from the $n-3$ rd row of that feature

If y is not `None`, it will also compute the delayed values for the target variable.

Parameters

- **X** (*pd.DataFrame or None*) – Data to transform. `None` is expected when only the target variable is being used.
- **y** (*pd.Series, or None*) – Target.

Returns Transformed X.

Return type `pd.DataFrame`

class `evalml.pipelines.DFSTransformer` (*index='index', random_seed=0, **kwargs*)

Featuretools DFS component that generates features for the input features.

Parameters

- **index** (*string*) – The name of the column that contains the indices. If no column with this name exists, then `featuretools.EntitySet()` creates a column with this name to serve as the index column. Defaults to `'index'`.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	<code>{}</code>
modifies_features	<code>True</code>
modifies_target	<code>False</code>
name	DFS Transformer
training_only	<code>False</code>

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits the DFSTransformer Transformer component.
<code>fit_transform</code>	Fits on X and transforms X.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Computes the feature matrix for the input X using featuretools' dfs algorithm.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the DFSTransformer Transformer component.

Parameters

- **X** (*pd.DataFrame*, *np.array*) – The input data to transform, of shape `[n_samples, n_features]`.
- **y** (*pd.Series*) – The target training data of length `[n_samples]`.

Returns self

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Computes the feature matrix for the input X using featuretools’ dfs algorithm.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data to transform. Has shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Feature matrix

Return type *pd.DataFrame*

class evalml.pipelines.**ElasticNetClassifier** (*penalty='elasticnet', C=1.0, l1_ratio=0.15, multi_class='auto', solver='saga', n_jobs=-1, random_seed=0, **kwargs*)

Elastic Net Classifier. Uses Logistic Regression with elasticnet penalty as the base estimator.

Parameters

- **penalty** (*{ "l1", "l2", "elasticnet", "none" }*) – The norm used in penalization. Defaults to “elasticnet”.
- **C** (*float*) – Inverse of regularization strength. Must be a positive float. Defaults to 1.0.
- **l1_ratio** (*float*) – The mixing parameter, with $0 \leq \text{l1_ratio} \leq 1$. Only used if *penalty='elasticnet'*. Setting *l1_ratio=0* is equivalent to using *penalty='l2'*, while setting *l1_ratio=1* is equivalent to using *penalty='l1'*. For $0 < \text{l1_ratio} < 1$, the penalty is a combination of L1 and L2. Defaults to 0.15.
- **multi_class** (*{ "auto", "ovr", "multinomial" }*) – If the option chosen is “ovr”, then a binary problem is fit for each label. For “multinomial” the loss minimised is the multinomial loss fit across the entire probability distribution, even when the data is binary. “multinomial” is unavailable when *solver='liblinear'*. “auto” selects “ovr” if the data is binary, or if *solver='liblinear'*, and otherwise selects “multinomial”. Defaults to “auto”.
- **solver** (*{ "newton-cg", "lbfgs", "liblinear", "sag", "saga" }*) – Algorithm to use in the optimization problem. For small datasets, “liblinear” is a good choice, whereas “sag” and “saga” are faster for large ones. For multiclass problems, only “newton-cg”, “sag”, “saga” and “lbfgs” handle multinomial loss; “liblinear” is limited to one-versus-rest schemes.
 - “newton-cg”, “lbfgs”, “sag” and “saga” handle L2 or no penalty
 - “liblinear” and “saga” also handle L1 penalty
 - “saga” also supports “elasticnet” penalty
 - “liblinear” does not support setting *penalty='none'*
 Defaults to “saga”.

- **n_jobs** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "C": Real(0.01, 10), "l1_ratio": Real(0, 1)}
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Elastic Net Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance for fitted ElasticNet classifier.
<i>fit</i>	Fits ElasticNet classifier component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted ElasticNet classifier.

fit (*self, X, y*)

Fits ElasticNet classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.**ElasticNetRegressor** (*alpha*=0.0001, *l1_ratio*=0.15, *max_iter*=1000, *normalize*=False, *random_seed*=0, ***kwargs*)

Elastic Net Regressor.

Parameters

- **alpha** (*float*) – Constant that multiplies the penalty terms. Defaults to 0.0001.
- **l1_ratio** (*float*) – The mixing parameter, with $0 \leq \text{l1_ratio} \leq 1$. Only used if `penalty='elasticnet'`. Setting `l1_ratio=0` is equivalent to using `penalty='l2'`, while setting `l1_ratio=1` is equivalent to using `penalty='l1'`. For $0 < \text{l1_ratio} < 1$, the penalty is a combination of L1 and L2. Defaults to 0.15.
- **max_iter** (*int*) – The maximum number of iterations. Defaults to 1000.
- **normalize** (*boolean*) – If True, the regressors will be normalized before regression by subtracting the mean and dividing by the l2-norm. Defaults to False.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "alpha": Real(0, 1), "l1_ratio": Real(0, 1), }
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Elastic Net Regressor
predict Uses y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance for fitted ElasticNet regressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.

continues on next page

Table 638 – continued from previous page

<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted ElasticNet regressor.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

model_family	ModelFamily.NONE
modifies_features	True
modifies_target	False
predict_uses_y	False
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>model_family</i>	ModelFamily.NONE
<i>name</i>	Returns string name of this component.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.
<i>supported_problem_types</i>	Problem types this estimator supports.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property model_family (*cls*)

Returns ModelFamily of this component.

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

property supported_problem_types (*cls*)

Problem types this estimator supports.

```
class evalml.pipelines.ExtraTreesClassifier (n_estimators=100,      max_features='auto',
                                           max_depth=6,          min_samples_split=2,
                                           min_weight_fraction_leaf=0.0, n_jobs=-1,
                                           random_seed=0, **kwargs)
```

Extra Trees Classifier.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_features** (*int, float or {"auto", "sqrt", "log2"}*) – The number of features to consider when looking for the best split:
 - If *int*, then consider `max_features` features at each split.
 - If *float*, then `max_features` is a fraction and `int(max_features * n_features)` features are considered at each split.
 - If “auto”, then `max_features=sqrt(n_features)`.
 - If “sqrt”, then `max_features=sqrt(n_features)`.
 - If “log2”, then `max_features=log2(n_features)`.
 - If *None*, then `max_features = n_features`.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than `max_features` features. Defaults to “auto”.

- **max_depth** (*int*) – The maximum depth of the tree. Defaults to 6.
- **min_samples_split** (*int or float*) – The minimum number of samples required to split an internal node:
 - If *int*, then consider `min_samples_split` as the minimum number.
 - If *float*, then `min_samples_split` is a fraction and `ceil(min_samples_split * n_samples)` are the minimum number of samples for each split.
- **to 2.** (*Defaults*) –
- **min_weight_fraction_leaf** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "n_estimators": Integer(10, 1000), "max_features": ["auto", "sqrt", "log2"], "max_depth": Integer(4, 10), }
model_family	ModelFamily.EXTRA_TREES
modifies_features	True
modifies_target	False
name	Extra Trees Classifier
pre_dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

`save` (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **`file_path`** (*str*) – Location to save file.
- **`pickle_protocol`** (*int*) – The pickle data stream format.

```
class evalml.pipelines.ExtraTreesRegressor (n_estimators=100,      max_features='auto',  
                                           max_depth=6,      min_samples_split=2,  
                                           min_weight_fraction_leaf=0.0,  n_jobs=-1,  
                                           random_seed=0, **kwargs)
```

Extra Trees Regressor.

Parameters

- **`n_estimators`** (*float*) – The number of trees in the forest. Defaults to 100.
- **`max_features`** (*int*, *float* or {"auto", "sqrt", "log2"}) – The number of features to consider when looking for the best split:
 - If *int*, then consider `max_features` features at each split.
 - If *float*, then `max_features` is a fraction and `int(max_features * n_features)` features are considered at each split.
 - If “auto”, then `max_features=sqrt(n_features)`.
 - If “sqrt”, then `max_features=sqrt(n_features)`.
 - If “log2”, then `max_features=log2(n_features)`.
 - If *None*, then `max_features = n_features`.

The search for a split does not stop until at least one valid partition of the node samples is found, even if it requires to effectively inspect more than `max_features` features. Defaults to “auto”.

- **`max_depth`** (*int*) – The maximum depth of the tree. Defaults to 6.
- **`min_samples_split`** (*int* or *float*) – The minimum number of samples required to split an internal node:
 - If *int*, then consider `min_samples_split` as the minimum number.
 - If *float*, then `min_samples_split` is a fraction and `ceil(min_samples_split * n_samples)` are the minimum number of samples for each split.
- **`to 2.`** (*Defaults*) –
- **`min_weight_fraction_leaf`** (*float*) – The minimum weighted fraction of the sum total of weights (of all the input samples) required to be at a leaf node. Defaults to 0.0.
- **`n_jobs`** (*int* or *None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(10, 1000), “max_features”: [“auto”, “sqrt”, “log2”], “max_depth”: Integer(4, 10),}
model_family	ModelFamily.EXTRA_TREES
modifies_features	True
modifies_target	False
name	Extra Trees Regressor
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

`save` (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **`file_path`** (*str*) – Location to save file.
- **`pickle_protocol`** (*int*) – The pickle data stream format.

`class evalml.pipelines.FeatureSelector` (*parameters*=*None*, *component_obj*=*None*, *random_seed*=*0*, ***kwargs*)

Selects top features based on importance weights.

Parameters

- **`parameters`** (*dict*) – Dictionary of parameters for the component. Defaults to *None*.
- **`component_obj`** (*obj*) – Third-party objects useful in component implementation. Defaults to *None*.
- **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

<code>modifies_features</code>	True
<code>modifies_target</code>	False
<code>training_only</code>	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits component to data.
<i>fit_transform</i>	Fit and transform data using the feature selector.
<i>get_names</i>	Get names of selected features.
<i>load</i>	Loads component at file path.
<i>name</i>	Returns string name of this component.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input data by selecting features. If the <code>component_obj</code> does not have a <code>transform</code> method, will raise an <code>MethodPropertyNotFoundError</code> exception.

`clone` (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns *self*

Raises **MethodPropertyNotFoundError** – If component does not have a `fit` method or a `component_obj` that implements `fit`.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the feature selector.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

get_names (*self*)

Get names of selected features.

Returns List of the names of features selected.

Return type list[str]

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an `MethodPropertyNotFoundError` exception.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data. Ignored.

Returns Transformed X

Return type `pd.DataFrame`

Raises **MethodPropertyNotFoundError** – If feature selector does not have a transform method or a component_obj that implements transform

class `evalml.pipelines.KNeighborsClassifier` (*n_neighbors=5*, *weights='uniform'*, *algorithm='auto'*, *leaf_size=30*, *p=2*, *random_seed=0*, ***kwargs*)

K-Nearest Neighbors Classifier.

Parameters

- **n_neighbors** (*int*) – Number of neighbors to use by default. Defaults to 5.
- **weights** (*{ 'uniform', 'distance' } or callable*) – Weight function used in prediction. Can be:
 - ‘uniform’ : uniform weights. All points in each neighborhood are weighted equally.
 - ‘distance’ : weight points by the inverse of their distance. in this case, closer neighbors of a query point will have a greater influence than neighbors which are further away.
 - [callable] : a user-defined function which accepts an array of distances, and returns an array of the same shape containing the weights.

Defaults to “uniform”.

- **algorithm** (*{ 'auto', 'ball_tree', 'kd_tree', 'brute' }*) – Algorithm used to compute the nearest neighbors:
 - ‘ball_tree’ will use `BallTree`
 - ‘kd_tree’ will use `KDTree`
 - ‘brute’ will use a brute-force search.

‘auto’ will attempt to decide the most appropriate algorithm based on the values passed to fit method. Defaults to “auto”. Note: fitting on sparse input will override the setting of this parameter, using brute force.

- **leaf_size** (*int*) – Leaf size passed to BallTree or KDTree. This can affect the speed of the construction and query, as well as the memory required to store the tree. The optimal value depends on the nature of the problem. Defaults to 30.
- **p** (*int*) – Power parameter for the Minkowski metric. When $p = 1$, this is equivalent to using manhattan_distance (l1), and euclidean_distance (l2) for $p = 2$. For arbitrary p , minkowski_distance (l_p) is used. Defaults to 2.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_neighbors”: Integer(2, 12), “weights”: [“uniform”, “distance”], “algorithm”: [“auto”, “ball_tree”, “kd_tree”, “brute”], “leaf_size”: Integer(10, 30), “p”: Integer(1, 5), }
model_family	ModelFamily.K_NEIGHBORS
modifies_features	True
modifies_target	False
name	KNN Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns array of 0’s matching the input number of features as feature_importance is not defined for KNN classifiers.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

property feature_importance (*self*)

Returns array of 0's matching the input number of features as `feature_importance` is not defined for KNN classifiers.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a predict method or a `component_obj` that implements predict.

`predict_proba` (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

`save` (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **`file_path`** (*str*) – Location to save file.
- **`pickle_protocol`** (*int*) – The pickle data stream format.

```
class evalml.pipelines.LightGBMClassifier (boosting_type='gbdt', learning_rate=0.1,  
                                           n_estimators=100, max_depth=0,  
                                           num_leaves=31, min_child_samples=20, bag-  
                                           ging_fraction=0.9, bagging_freq=0, n_jobs=-  
                                           1, random_seed=0, **kwargs)
```

LightGBM Classifier.

Parameters

- **`boosting_type`** (*string*) – Type of boosting to use. Defaults to “gbdt”. - “gbdt” uses traditional Gradient Boosting Decision Tree - “dart”, uses Dropouts meet Multiple Additive Regression Trees - “goss”, uses Gradient-based One-Side Sampling - “rf”, uses Random Forest
- **`learning_rate`** (*float*) – Boosting learning rate. Defaults to 0.1.
- **`n_estimators`** (*int*) – Number of boosted trees to fit. Defaults to 100.
- **`max_depth`** (*int*) – Maximum tree depth for base learners, <=0 means no limit. Defaults to 0.
- **`num_leaves`** (*int*) – Maximum tree leaves for base learners. Defaults to 31.
- **`min_child_samples`** (*int*) – Minimum number of data needed in a child (leaf). Defaults to 20.
- **`bagging_fraction`** (*float*) – LightGBM will randomly select a subset of features on each iteration (tree) without resampling if this is smaller than 1.0. For example, if set to 0.8, LightGBM will select 80% of features before training each tree. This can be used to speed up training and deal with overfitting. Defaults to 0.9.
- **`bagging_freq`** (*int*) – Frequency for bagging. 0 means bagging is disabled. k means perform bagging at every k iteration. Every k-th iteration, LightGBM will randomly select `bagging_fraction * 100 %` of the data to use for the next k iterations. Defaults to 0.
- **`n_jobs`** (*int or None*) – Number of threads to run in parallel. -1 uses all threads. Defaults to -1.
- **`random_seed`** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "learning_rate": Real(0.000001, 1), "boosting_type": ["gbdt", "dart", "goss", "rf"], "n_estimators": Integer(10, 100), "max_depth": Integer(0, 10), "num_leaves": Integer(2, 100), "min_child_samples": Integer(1, 100), "bagging_fraction": Real(0.000001, 1), "bagging_freq": Integer(0, 1),}
model_family	ModelFamily.LIGHTGBM
modifies_features	True
modifies_target	False
name	LightGBM Classifier
pre_dict_uses_y	False
SEED_MAX	SEED_BOUNDS.max_bound
SEED_MIN	0
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
train_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits LightGBM classifier component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using the fitted LightGBM classifier.
<i>predict_proba</i>	Make prediction probabilities using the fitted LightGBM classifier.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits LightGBM classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using the fitted LightGBM classifier.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.DataFrame

predict_proba (*self*, *X*)

Make prediction probabilities using the fitted LightGBM classifier.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted probability values.

Return type `pd.DataFrame`

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.LightGBMRegressor(boosting_type='gbdt', learning_rate=0.1,
                                         n_estimators=20, max_depth=0,
                                         num_leaves=31, min_child_samples=20, bagging_fraction=0.9,
                                         bagging_freq=0, n_jobs=-1,
                                         random_seed=0, **kwargs)
```

LightGBM Regressor.

Parameters

- **boosting_type** (*string*) – Type of boosting to use. Defaults to “gbdt”. - ‘gbdt’ uses traditional Gradient Boosting Decision Tree - “dart”, uses Dropouts meet Multiple Additive Regression Trees - “goss”, uses Gradient-based One-Side Sampling - “rf”, uses Random Forest
- **learning_rate** (*float*) – Boosting learning rate. Defaults to 0.1.
- **n_estimators** (*int*) – Number of boosted trees to fit. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners, <=0 means no limit. Defaults to 0.
- **num_leaves** (*int*) – Maximum tree leaves for base learners. Defaults to 31.
- **min_child_samples** (*int*) – Minimum number of data needed in a child (leaf). Defaults to 20.
- **bagging_fraction** (*float*) – LightGBM will randomly select a subset of features on each iteration (tree) without resampling if this is smaller than 1.0. For example, if set to 0.8, LightGBM will select 80% of features before training each tree. This can be used to speed up training and deal with overfitting. Defaults to 0.9.
- **bagging_freq** (*int*) – Frequency for bagging. 0 means bagging is disabled. k means perform bagging at every k iteration. Every k-th iteration, LightGBM will randomly select *bagging_fraction* * 100 % of the data to use for the next k iterations. Defaults to 0.
- **n_jobs** (*int or None*) – Number of threads to run in parallel. -1 uses all threads. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "learning_rate": Real(0.000001, 1), "boosting_type": ["gbdt", "dart", "goss", "rf"], "n_estimators": Integer(10, 100), "max_depth": Integer(0, 10), "num_leaves": Integer(2, 100), "min_child_samples": Integer(1, 100), "bagging_fraction": Real(0.000001, 1), "bagging_freq": Integer(0, 1),}
model_family	ModelFamily.LIGHTGBM
modifies_features	True
modifies_target	False
name	LightGBM Regressor
pre-dict_uses_y	False
SEED_MAX	SEED_BOUNDS.max_bound
SEED_MIN	0
supported_problem_types	[ProblemTypes.REGRESSION]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits LightGBM regressor to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted LightGBM regressor.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool, optional*) – whether to print name of component
- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self, X, y=None*)

Fits LightGBM regressor to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using fitted LightGBM regressor.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.**LinearRegressor** (*fit_intercept=True*, *normalize=False*, *n_jobs=-1*, *random_seed=0*, ***kwargs*)

Linear Regressor.

Parameters

- **fit_intercept** (*boolean*) – Whether to calculate the intercept for this model. If set to False, no intercept will be used in calculations (i.e. data is expected to be centered). Defaults to True.
- **normalize** (*boolean*) – If True, the regressors will be normalized before regression by subtracting the mean and dividing by the l2-norm. This parameter is ignored when fit_intercept is set to False. Defaults to False.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all threads. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “fit_intercept”: [True, False], “normalize”: [True, False]}
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Linear Regressor
predict Uses y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance for fitted linear regressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.

continues on next page

Table 646 – continued from previous page

<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted linear regressor.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.LogisticRegressionClassifier (penalty='l2', C=1.0,  
                                                    multi_class='auto',  
                                                    solver='lbfgs', n_jobs=-1,  
                                                    random_seed=0, **kwargs)
```

Logistic Regression Classifier.

Parameters

- **penalty** (*{'l1', 'l2', 'elasticnet', 'none'}*) – The norm used in penalization. Defaults to “l2”.
- **C** (*float*) – Inverse of regularization strength. Must be a positive float. Defaults to 1.0.
- **multi_class** (*{'auto', 'ovr', 'multinomial'}*) – If the option chosen is “ovr”, then a binary problem is fit for each label. For “multinomial” the loss minimised is the multinomial loss fit across the entire probability distribution, even when the data is binary. “multinomial” is unavailable when solver=“liblinear”. “auto” selects “ovr” if the data is binary, or if solver=“liblinear”, and otherwise selects “multinomial”. Defaults to “auto”.
- **solver** (*{'newton-cg', 'lbfgs', 'liblinear', 'sag', 'saga'}*) – Algorithm to use in the optimization problem. For small datasets, “liblinear” is a good choice, whereas “sag” and “saga” are faster for large ones. For multiclass problems, only “newton-cg”, “sag”, “saga” and “lbfgs” handle multinomial loss; “liblinear” is limited to one-versus-rest schemes.
 - “newton-cg”, “lbfgs”, “sag” and “saga” handle L2 or no penalty
 - “liblinear” and “saga” also handle L1 penalty

- “saga” also supports “elasticnet” penalty
- “liblinear” does not support setting penalty=’none’

Defaults to “lbfgs”.

- **n_jobs** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “penalty”: [“l2”], “C”: Real(0.01, 10), }
model_family	ModelFamily.LINEAR_MODEL
modifies_features	True
modifies_target	False
name	Logistic Regression Classifier
predict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance for fitted logistic regression classifier.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

property feature_importance (*self*)

Feature importance for fitted logistic regression classifier.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict` method or a `component_obj` that implements `predict`.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type `pd.Series`

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol*=`cloudpickle.DEFAULT_PROTOCOL`)
Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

```
class evalml.pipelines.MulticlassClassificationPipeline(component_graph, pa-  
                                                    rameters=None, cus-  
                                                    tom_name=None, ran-  
                                                    dom_seed=0)
```

Pipeline subclass for all multiclass classification pipelines.

Parameters

- **component_graph** (*ComponentGraph*, *list*, *dict*) – *ComponentGraph* instance, list of components in order, or dictionary of components. Accepts strings or *ComponentBase* subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”]
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or *None* implies using all default values for component parameters. Defaults to *None*.
- **custom_name** (*str*) – Custom name for the pipeline. Defaults to *None*.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	<code>ProblemTypes.MULTICLASS</code>
---------------------	--------------------------------------

Methods

<code>can_tune_threshold_with_objective</code>	Determine whether the threshold of a binary classification pipeline can be tuned.
<code>classes_</code>	Gets the class names for the pipeline. Will return <i>None</i> before pipeline is fit.
<code>clone</code>	Constructs a new pipeline with the same components, parameters, and random state.
<code>create_objectives</code>	Create objective instances from a list of strings or objective classes.
<code>custom_name</code>	Custom name of the pipeline.
<code>describe</code>	Outputs pipeline details including component parameters.

continues on next page

Table 648 – continued from previous page

<i>feature_importance</i>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<i>fit</i>	Build a classification model. For string and categorical targets, classes are sorted by sorted(set(y)) and then are mapped to values between 0 and n_classes-1.
<i>get_component</i>	Returns component by name.
<i>get_hyperparameter_ranges</i>	Returns hyperparameter ranges from all components as a dictionary.
<i>graph</i>	Generate an image representing the pipeline graph.
<i>graph_feature_importance</i>	Generate a bar graph of the pipeline's feature importance.
<i>graph_json</i>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<i>inverse_transform</i>	Apply component inverse_transform methods to estimator predictions in reverse order.
<i>load</i>	Loads pipeline at file path.
<i>model_family</i>	Returns model family of this pipeline.
<i>name</i>	Name of the pipeline.
<i>new</i>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's __new__ method.
<i>parameters</i>	Parameter dictionary for this pipeline.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves pipeline at file path.
<i>score</i>	Evaluate model performance on objectives.
<i>summary</i>	A short summary of the pipeline structure, describing the list of components used.
<i>transform</i>	Transform the input.
<i>transform_all_but_final</i>	Transforms the data by applying all pre-processing components.

can_tune_threshold_with_objective (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters *objective* (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

property classes_ (*self*)

Gets the class names for the pipeline. Will return None before pipeline is fit.

clone (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

static create_objectives (*objectives*)

Create objective instances from a list of strings or objective classes.

property custom_name (*self*)

Custom name of the pipeline.

describe (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **return_dict** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if *return_dict* is True, else None.

Return type dict

property feature_importance (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type pd.DataFrame

fit (*self*, *X*, *y*)

Build a classification model. For string and categorical targets, classes are sorted by sorted(set(y)) and then are mapped to values between 0 and n_classes-1.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *np.ndarray*) – The target training labels of length [n_samples]

Returns self

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type dict

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to None (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Digraph

Raises

- **RuntimeError** – If graphviz is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline's feature importance.

Parameters **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than *importance_threshold*. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type `plotly.Figure`

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

x_edges specifies from which component feature data is being passed. *y_edges* specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: `{“Nodes”: {“component_name”: {“Name”: class_name, “Attributes”: parameters_attributes, ... }}, “x_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], “y_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}`

Returns A serialized JSON representation of a DAG structure.

Return type `dag_json (str)`

inverse_transform (*self*, *y*)

Apply component `inverse_transform` methods to estimator predictions in reverse order.

Components that implement `inverse_transform` are `PolynomialDetrender`, `LogTransformer`, `LabelEncoder` (`tbd`).

Parameters **y** (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type `pd.Series`

static load (*file_path*)

Loads pipeline at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns `PipelineBase` object

property model_family (*self*)

Returns model family of this pipeline.

property name (*self*)

Name of the pipeline.

new (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's `__new__` method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component's parameters as values. An empty dictionary or `None` implies using all default values for component parameters. Defaults to `None`.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

property parameters (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type dict

predict (*self*, *X*, *objective=None*, *X_train=None*, *y_train=None*)

Make predictions using selected features.

Note: we cast *y* as ints first to address boolean values that may be returned from calculating predictions which we would not be able to otherwise transform if we originally had integer targets.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].
- **objective** (*Object or string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series*) – Training labels. Ignored. Only used for time series.

Returns Estimated labels.

Return type *pd.Series*

predict_proba (*self*, *X*, *X_train=None*, *y_train=None*)

Make probability estimates for labels.

Parameters

- **X** (*pd.DataFrame or np.ndarray*) – Data of shape [n_samples, n_features]
- **X_train** (*pd.DataFrame or np.ndarray or None*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series or None*) – Training labels. Ignored. Only used for time series.

Returns Probability estimates

Return type *pd.DataFrame*

Raises **ValueError** – If final component is not an estimator.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

score (*self*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Evaluate model performance on objectives.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features]
- **y** (*pd.Series*) – True labels of length [n_samples]
- **objectives** (*list*) – List of objectives to score
- **X_train** (*pd.DataFrame*) – Training data. Ignored. Only used for time series.

- **y_train** (*pd.Series*) – Training labels. Ignored. Only used for time series.

Returns Ordered dictionary of objective scores.

Return type dict

property summary (*self*)

A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

transform (*self*, *X*, *y=None*)

Transform the input.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type *pd.DataFrame*

transform_all_but_final (*self*, *X*, *y=None*, *X_train=None*, *y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series* or *None*) – Targets corresponding to X. Optional.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data. Only used for time series.
- **y_train** (*pd.Series* or *None*) – Training labels. Only used for time series.

Returns New transformed features.

Return type *pd.DataFrame*

```
class evalml.pipelines.OneHotEncoder (top_n=10, features_to_encode=None, categories=None, drop='if_binary', handle_unknown='ignore', handle_missing='error', random_seed=0, **kwargs)
```

A transformer that encodes categorical features in a one-hot numeric array.

Parameters

- **top_n** (*int*) – Number of categories per column to encode. If None, all categories will be encoded. Otherwise, the *n* most frequent will be encoded and all others will be dropped. Defaults to 10.
- **features_to_encode** (*list[str]*) – List of columns to encode. All other columns will remain untouched. If None, all appropriate columns will be encoded. Defaults to None.
- **categories** (*list*) – A two dimensional list of categories, where *categories[i]* is a list of the categories for the column at index *i*. This can also be *None*, or “auto” if *top_n* is not None. Defaults to None.
- **drop** (*string*, *list*) – Method (“first” or “if_binary”) to use to drop one category per feature. Can also be a list specifying which categories to drop for each feature. Defaults to ‘if_binary’.

- **handle_unknown** (*string*) – Whether to ignore or error for unknown categories for a feature encountered during *fit* or *transform*. If either *top_n* or *categories* is used to limit the number of categories per column, this must be “ignore”. Defaults to “ignore”.
- **handle_missing** (*string*) – Options for how to handle missing (NaN) values encountered during *fit* or *transform*. If this is set to “as_category” and NaN values are within the *n* most frequent, “nan” values will be encoded as their own column. If this is set to “error”, any missing values encountered will raise an error. Defaults to “error”.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	One Hot Encoder
training_only	False

Methods

<i>categories</i>	Returns a list of the unique categories to be encoded for the particular feature, in order.
<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the one-hot encoder component.
<i>fit_transform</i>	Fits on X and transforms X.
<i>get_feature_names</i>	Return feature names for the categorical features after fitting.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	One-hot encode the input data.

categories (*self*, *feature_name*)

Returns a list of the unique categories to be encoded for the particular feature, in order.

Parameters **feature_name** (*str*) – The name of any feature provided to one-hot encoder during fit.

Returns The unique categories, in the same dtype as they were provided during fit.

Return type np.ndarray

Raises **ValueError** – If feature was not provided to one-hot encoder as a training feature.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits the one-hot encoder component.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

Raises **ValueError** – If encoding a column failed.

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a `component_obj` that implements transform.

get_feature_names (*self*)

Return feature names for the categorical features after fitting.

Feature names are formatted as {column name}_{category name}. In the event of a duplicate name, an integer will be added at the end of the feature name to distinguish it.

For example, consider a dataframe with a column called “A” and category “x_y” and another column called “A_x” with “y”. In this example, the feature names would be “A_x_y” and “A_x_y_1”.

Returns The feature names after encoding, provided in the same order as `input_features`.

Return type np.ndarray

static load (*file_path*)

Loads component at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=cloudpickle.DEFAULT_PROTOCOL)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=None)

One-hot encode the input data.

Parameters

- **X** (*pd.DataFrame*) – Features to one-hot encode.
- **y** (*pd.Series*) – Ignored.

Returns Transformed data, where each categorical feature has been encoded into numerical columns using one-hot encoding.

Return type pd.DataFrame

```
class evalml.pipelines.PerColumnImputer (impute_strategies=None, de-
                                         fault_impute_strategy='most_frequent', ran-
                                         dom_seed=0, **kwargs)
```

Imputes missing data according to a specified imputation strategy per column.

Parameters

- **impute_strategies** (*dict*) – Column and {"impute_strategy": strategy, "fill_value":value} pairings. Valid values for impute strategy include "mean", "median", "most_frequent", "constant" for numerical data, and "most_frequent", "constant" for object data types. Defaults to None, which uses "most_frequent" for all columns. When impute_strategy == "constant", fill_value is used to replace missing data. When None, uses 0 when imputing numerical data and "missing_value" for strings or object data types.
- **default_impute_strategy** (*str*) – Impute strategy to fall back on when none is provided for a certain column. Valid values include "mean", "median", "most_frequent", "constant" for numerical data, and "most_frequent", "constant" for object data types. Defaults to "most_frequent".
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Per Column Imputer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits imputers on input data.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input data by imputing missing values.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits imputers on input data.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [*n_samples*, *n_features*] to fit.
- **y** (*pd.Series*, *optional*) – The target training data of length [*n_samples*]. Ignored.

Returns *self*

fit_transform (*self*, *X*, *y=None*)

Fits on *X* and transforms *X*.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed *X*.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a `transform` method or a `component_obj` that implements `transform`.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns `True`.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms input data by imputing missing values.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [*n_samples*, *n_features*] to transform.
- **y** (*pd.Series*, *optional*) – The target training data of length [*n_samples*]. Ignored.

Returns Transformed *X*

Return type *pd.DataFrame*

class evalml.pipelines.PipelineBase(*component_graph*, *parameters=None*, *custom_name=None*, *random_seed=0*)
Machine learning pipeline.

Parameters

- **component_graph** (*ComponentGraph*, *list*, *dict*) – ComponentGraph instance, list of components in order, or dictionary of components. Accepts strings or ComponentBase subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”].
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **custom_name** (*str*) – Custom name for the pipeline. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	None
---------------------	------

Methods

<i>can_tune_threshold_with_objective</i>	Determine whether the threshold of a binary classification pipeline can be tuned.
<i>clone</i>	Constructs a new pipeline with the same components, parameters, and random state.
<i>create_objectives</i>	Create objective instances from a list of strings or objective classes.
<i>custom_name</i>	Custom name of the pipeline.
<i>describe</i>	Outputs pipeline details including component parameters.
<i>feature_importance</i>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<i>fit</i>	Build a model.
<i>get_component</i>	Returns component by name.
<i>get_hyperparameter_ranges</i>	Returns hyperparameter ranges from all components as a dictionary.
<i>graph</i>	Generate an image representing the pipeline graph.
<i>graph_feature_importance</i>	Generate a bar graph of the pipeline’s feature importance.
<i>graph_json</i>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<i>inverse_transform</i>	Apply component <i>inverse_transform</i> methods to estimator predictions in reverse order.
<i>load</i>	Loads pipeline at file path.
<i>model_family</i>	Returns model family of this pipeline.
<i>name</i>	Name of the pipeline.

continues on next page

Table 651 – continued from previous page

<code>new</code>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's <code>__new__</code> method.
<code>parameters</code>	Parameter dictionary for this pipeline.
<code>predict</code>	Make predictions using selected features.
<code>save</code>	Saves pipeline at file path.
<code>score</code>	Evaluate model performance on current and additional objectives.
<code>summary</code>	A short summary of the pipeline structure, describing the list of components used.
<code>transform</code>	Transform the input.
<code>transform_all_but_final</code>	Transforms the data by applying all pre-processing components.

can_tune_threshold_with_objective (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters **objective** (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

clone (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

static create_objectives (*objectives*)

Create objective instances from a list of strings or objective classes.

property custom_name (*self*)

Custom name of the pipeline.

describe (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **return_dict** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if *return_dict* is True, else None.

Return type dict

property feature_importance (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type pd.DataFrame

abstract fit (*self*, *X*, *y*)

Build a model.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features].

- **y** (*pd.Series*, *np.ndarray*) – The target training data of length [n_samples].

Returns self

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type dict

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to None (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Digraph

Raises

- **RuntimeError** – If graphviz is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline’s feature importance.

Parameters **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than importance_threshold. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type plotly.Figure

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

x_edges specifies from which component feature data is being passed. y_edges specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: {“Nodes”: {“component_name”: {“Name”: class_name, “Attributes”: parameters_attributes}, ...}}, “x_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], “y_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}

Returns A serialized JSON representation of a DAG structure.

Return type dag_json (str)

inverse_transform (*self*, *y*)

Apply component inverse_transform methods to estimator predictions in reverse order.

Components that implement inverse_transform are PolynomialDetrender, LogTransformer, LabelEncoder (tbd).

Parameters *y* (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type *pd.Series*

static load (*file_path*)

Loads pipeline at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns PipelineBase object

property model_family (*self*)

Returns model family of this pipeline.

property name (*self*)

Name of the pipeline.

new (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's __new__ method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component's parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

property parameters (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type *dict*

predict (*self*, *X*, *objective=None*, *X_train=None*, *y_train=None*)

Make predictions using selected features.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **objective** (*Object* or *string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series* or *None*) – Training labels. Ignored. Only used for time series.

Returns Predicted values.

Return type *pd.Series*

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

abstract score (*self*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Evaluate model performance on current and additional objectives.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*, *np.ndarray*) – True labels of length [n_samples].
- **objectives** (*list*) – Non-empty list of objectives to score on.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series* or *None*) – Training labels. Ignored. Only used for time series.

Returns Ordered dictionary of objective scores.

Return type dict

property summary (*self*)

A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

transform (*self*, *X*, *y=None*)

Transform the input.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type pd.DataFrame

transform_all_but_final (*self*, *X*, *y=None*, *X_train=None*, *y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series* or *None*) – Targets corresponding to X. Optional.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data. Only used for time series.
- **y_train** (*pd.Series* or *None*) – Training labels. Only used for time series.

Returns New transformed features.

Return type pd.DataFrame

```
class evalml.pipelines.ProphetRegressor (date_index=None, changepoint_prior_scale=0.05,
                                         seasonality_prior_scale=10, holidays_prior_scale=10,
                                         idays_prior_scale=10, seasonality_mode='additive',
                                         random_seed=0, stan_backend='CMDSTANPY', **kwargs)
```

Prophet is a procedure for forecasting time series data based on an additive model where non-linear trends are fit with yearly, weekly, and daily seasonality, plus holiday effects. It works best with time series that have strong seasonal effects and several seasons of historical data. Prophet is robust to missing data and shifts in the trend, and typically handles outliers well.

More information here: <https://facebook.github.io/prophet/>

Attributes

hyper-parameter_ranges	{ "changepoint_prior_scale": Real(0.001, 0.5), "seasonality_prior_scale": Real(0.01, 10), "holidays_prior_scale": Real(0.01, 10), "seasonality_mode": ["additive", "multiplicative"], }
model_family	ModelFamily.PROPHET
modifies_features	True
modifies_target	False
name	Prophet Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.TIME_SERIES_REGRESSION]
training_only	False

Methods

<i>build_prophet_df</i>	Build the Prophet data to pass fit and predict on.
<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns array of 0's with len(1) as feature_importance is not defined for Prophet regressor.
<i>fit</i>	Fits Prophet regressor component to data.
<i>get_params</i>	Get parameters for the Prophet regressor.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using fitted Prophet regressor.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

```
static build_prophet_df (X, y=None, date_column='ds')
    Build the Prophet data to pass fit and predict on.
```

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns array of 0's with len(1) as feature_importance is not defined for Prophet regressor.

fit (*self*, *X*, *y=None*)

Fits Prophet regressor component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

get_params (*self*)

Get parameters for the Prophet regressor.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*, *y=None*)

Make predictions using fitted Prophet regressor.

Parameters

- **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

- **y** (*pd.Series*) – Target data.

Returns Predicted values.

Return type *pd.Series*

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class `evalml.pipelines.RandomForestClassifier` (*n_estimators=100, max_depth=6, n_jobs=-1, random_seed=0, **kwargs*)

Random Forest Classifier.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “n_estimators”: Integer(10, 1000), “max_depth”: Integer(1, 10), }
model_family	ModelFamily.RANDOM_FOREST
modifies_features	True
modifies_target	False
name	Random Forest Classifier
predict Uses y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Returns importance associated with each feature.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns `self`

static load (*file_path*)

Loads component at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters `X` (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type `pd.Series`

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters `X` (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type `pd.Series`

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.**RandomForestRegressor** (*n_estimators=100*, *max_depth=6*, *n_jobs=-1*, *random_seed=0*, ***kwargs*)

Random Forest Regressor.

Parameters

- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **n_jobs** (*int* or *None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "n_estimators": Integer(10, 1000), "max_depth": Integer(1, 32), }
model_family	ModelFamily.RANDOM_FOREST
modifies_features	True
modifies_target	False
name	Random Forest Regressor
pre-dict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Returns importance associated with each feature.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Returns importance associated with each feature.

Returns Importance associated with each feature.

Return type np.ndarray

Raises **MethodPropertyNotFoundError** – If estimator does not have a feature_importance method or a component_obj that implements feature_importance.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises `MethodPropertyNotFoundError` – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.**RegressionPipeline** (*component_graph*, *parameters=None*, *custom_name=None*, *random_seed=0*)

Pipeline subclass for all regression pipelines.

Parameters

- **component_graph** (*ComponentGraph*, *list*, *dict*) – *ComponentGraph* instance, list of components in order, or dictionary of components. Accepts strings or *ComponentBase* subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”]
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or *None* implies using all default values for component parameters. Defaults to *None*.
- **custom_name** (*str*) – Custom name for the pipeline. Defaults to *None*.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	ProblemTypes.REGRESSION
---------------------	-------------------------

Methods

<i>can_tune_threshold_with_objective</i>	Determine whether the threshold of a binary classification pipeline can be tuned.
<i>clone</i>	Constructs a new pipeline with the same components, parameters, and random state.
<i>create_objectives</i>	Create objective instances from a list of strings or objective classes.
<i>custom_name</i>	Custom name of the pipeline.
<i>describe</i>	Outputs pipeline details including component parameters.
<i>feature_importance</i>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<i>fit</i>	Build a regression model.
<i>get_component</i>	Returns component by name.
<i>get_hyperparameter_ranges</i>	Returns hyperparameter ranges from all components as a dictionary.
<i>graph</i>	Generate an image representing the pipeline graph.

continues on next page

Table 655 – continued from previous page

<code>graph_feature_importance</code>	Generate a bar graph of the pipeline’s feature importance.
<code>graph_json</code>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<code>inverse_transform</code>	Apply component <code>inverse_transform</code> methods to estimator predictions in reverse order.
<code>load</code>	Loads pipeline at file path.
<code>model_family</code>	Returns model family of this pipeline.
<code>name</code>	Name of the pipeline.
<code>new</code>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python’s <code>__new__</code> method.
<code>parameters</code>	Parameter dictionary for this pipeline.
<code>predict</code>	Make predictions using selected features.
<code>save</code>	Saves pipeline at file path.
<code>score</code>	Evaluate model performance on current and additional objectives.
<code>summary</code>	A short summary of the pipeline structure, describing the list of components used.
<code>transform</code>	Transform the input.
<code>transform_all_but_final</code>	Transforms the data by applying all pre-processing components.

`can_tune_threshold_with_objective` (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters **`objective`** (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

`clone` (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

`static create_objectives` (*objectives*)

Create objective instances from a list of strings or objective classes.

`property custom_name` (*self*)

Custom name of the pipeline.

`describe` (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **`return_dict`** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if `return_dict` is True, else None.

Return type dict

`property feature_importance` (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type `pd.DataFrame`

fit (*self*, *X*, *y*)

Build a regression model.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *np.ndarray*) – The target training data of length [n_samples]

Returns *self*

Raises **ValueError** – If the target is not numeric.

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type dict

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to None (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type `graphviz.Digraph`

Raises

- **RuntimeError** – If graphviz is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline's feature importance.

Parameters **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than importance_threshold. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type `plotly.Figure`

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

x_edges specifies from which component feature data is being passed. *y_edges* specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: {"Nodes": {"component_name": {"Name": class_name, "Attributes": parameters_attributes}, ...}, "x_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], "y_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}

Returns A serialized JSON representation of a DAG structure.

Return type dag_json (str)

inverse_transform (*self*, *y*)

Apply component *inverse_transform* methods to estimator predictions in reverse order.

Components that implement *inverse_transform* are PolynomialDetrender, LogTransformer, LabelEncoder (tbd).

Parameters *y* (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type *pd.Series*

static load (*file_path*)

Loads pipeline at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns PipelineBase object

property model_family (*self*)

Returns model family of this pipeline.

property name (*self*)

Name of the pipeline.

new (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's `__new__` method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component's parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

property parameters (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type dict

predict (*self*, *X*, *objective=None*, *X_train=None*, *y_train=None*)

Make predictions using selected features.

Parameters

- **X** (*pd.DataFrame, or np.ndarray*) – Data of shape [n_samples, n_features].
- **objective** (*Object or string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame or np.ndarray or None*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series or None*) – Training labels. Ignored. Only used for time series.

Returns Predicted values.

Return type `pd.Series`

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)
Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

score (*self, X, y, objectives, X_train=None, y_train=None*)
Evaluate model performance on current and additional objectives.

Parameters

- **X** (*pd.DataFrame, or np.ndarray*) – Data of shape [n_samples, n_features]
- **y** (*pd.Series, or np.ndarray*) – True values of length [n_samples]
- **objectives** (*list*) – Non-empty list of objectives to score on
- **X_train** (*pd.DataFrame or np.ndarray or None*) – Training data. Ignored. Only used for time series.
- **y_train** (*pd.Series or None*) – Training labels. Ignored. Only used for time series.

Returns Ordered dictionary of objective scores.

Return type `dict`

property summary (*self*)
A short summary of the pipeline structure, describing the list of components used.
Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

transform (*self, X, y=None*)
Transform the input.

Parameters

- **X** (*pd.DataFrame, or np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type `pd.DataFrame`

transform_all_but_final (*self, X, y=None, X_train=None, y_train=None*)
Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series* or *None*) – Targets corresponding to X. Optional.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data. Only used for time series.
- **y_train** (*pd.Series* or *None*) – Training labels. Only used for time series.

Returns New transformed features.

Return type *pd.DataFrame*

```
class evalml.pipelines.RFClassifierSelectFromModel (number_features=None,
                                                    n_estimators=10,
                                                    max_depth=None,           per-
                                                    cent_features=0.5,   threshold=-
                                                    np.inf,   n_jobs=-1,   ran-
                                                    dom_seed=0, **kwargs)
```

Selects top features based on importance weights using a Random Forest classifier.

Parameters

- **number_features** (*int*) – The maximum number of features to select. If both *percent_features* and *number_features* are specified, take the greater number of features. Defaults to 0.5. Defaults to *None*.
- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **percent_features** (*float*) – Percentage of features to use. If both *percent_features* and *number_features* are specified, take the greater number of features. Defaults to 0.5.
- **threshold** (*string* or *float*) – The threshold value to use for feature selection. Features whose importance is greater or equal are kept while the others are discarded. If “median”, then the threshold value is the median of the feature importances. A scaling factor (e.g., “1.25*mean”) may also be used. Defaults to *-np.inf*.
- **n_jobs** (*int* or *None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “percent_features”: Real(0.01, 1), “threshold”: [“mean”, -np.inf], }
modifies_features	True
modifies_target	False
name	RF Classifier Select From Model
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fit and transform data using the feature selector.
<code>get_names</code>	Get names of selected features.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an <code>MethodPropertyNotFoundError</code> exception.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the feature selector.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

get_names (*self*)

Get names of selected features.

Returns List of the names of features selected.

Return type *list[str]*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an *MethodPropertyNotFoundError* exception.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data. Ignored.

Returns Transformed X

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If feature selector does not have a transform method or a component_obj that implements transform

```
class evalml.pipelines.RFRegressorSelectFromModel (number_features=None,
                                                    n_estimators=10,
                                                    max_depth=None,           per-
                                                    cent_features=0.5,       threshold=-
                                                    np.inf, n_jobs=-1, random_seed=0,
                                                    **kwargs)
```

Selects top features based on importance weights using a Random Forest regressor.

Parameters

- **number_features** (*int*) – The maximum number of features to select. If both `percent_features` and `number_features` are specified, take the greater number of features. Defaults to 0.5. Defaults to None.
- **n_estimators** (*float*) – The number of trees in the forest. Defaults to 100.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **percent_features** (*float*) – Percentage of features to use. If both `percent_features` and `number_features` are specified, take the greater number of features. Defaults to 0.5.
- **threshold** (*string or float*) – The threshold value to use for feature selection. Features whose importance is greater or equal are kept while the others are discarded. If “median”, then the threshold value is the median of the feature importances. A scaling factor (e.g., “1.25*mean”) may also be used. Defaults to `-np.inf`.
- **n_jobs** (*int or None*) – Number of jobs to run in parallel. -1 uses all processes. Defaults to -1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “percent_features”: Real(0.01, 1), “threshold”: [“mean”, -np.inf], }
modifies_features	True
modifies_target	False
name	RF Regressor Select From Model
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fit and transform data using the feature selector.
<code>get_names</code>	Get names of selected features.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling <code>predict</code> , <code>predict_proba</code> , <code>transform</code> , or <code>feature_importances</code> .

continues on next page

Table 657 – continued from previous page

<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an <code>MethodPropertyNotFoundError</code> exception.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns self

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a component_obj that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the feature selector.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type pd.DataFrame

get_names (*self*)

Get names of selected features.

Returns List of the names of features selected.

Return type list[str]

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol*=cloudpickle.DEFAULT_PROTOCOL)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y*=None)

Transforms input data by selecting features. If the component_obj does not have a transform method, will raise an MethodPropertyNotFoundError exception.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Target data. Ignored.

Returns Transformed X

Return type pd.DataFrame

Raises **MethodPropertyNotFoundError** – If feature selector does not have a transform method or a component_obj that implements transform

class evalml.pipelines.**SimpleImputer** (*impute_strategy*='most_frequent', *fill_value*=None, *random_seed*=0, ***kwargs*)

Imputes missing data according to a specified imputation strategy.

Parameters

- **impute_strategy** (*string*) – Impute strategy to use. Valid values include “mean”, “median”, “most_frequent”, “constant” for numerical data, and “most_frequent”, “constant” for object data types.
- **fill_value** (*string*) – When impute_strategy == “constant”, fill_value is used to replace missing data. Defaults to 0 when imputing numerical data and “missing_value” for strings or object data types.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "impute_strategy": ["mean", "median", "most_frequent"] }
modifies_features	True
modifies_target	False
name	Simple Imputer
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits imputer to data. 'None' values are converted to np.nan before imputation and are treated as the same.
<i>fit_transform</i>	Fits on X and transforms X.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transforms input by imputing missing values. 'None' and np.nan values are treated as the same.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits imputer to data. ‘None’ values are converted to np.nan before imputation and are treated as the same.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – the input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – the target training data of length [n_samples]

Returns *self*

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **X** (*pd.DataFrame*) – Data to fit and transform
- **y** (*pd.Series*, *optional*) – Target data.

Returns Transformed X

Return type *pd.DataFrame*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transforms input by imputing missing values. ‘None’ and np.nan values are treated as the same.

Parameters

- **X** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series*, *optional*) – Ignored.

Returns Transformed X

Return type *pd.DataFrame*

class evalml.pipelines.**StackedEnsembleClassifier** (*final_estimator=None, n_jobs=-1, random_seed=0, **kwargs*)

Stacked Ensemble Classifier.

Parameters

- **final_estimator** (*Estimator or subclass*) – The classifier used to combine the base estimators. If None, uses ElasticNetClassifier.
- **n_jobs** (*int or None*) – Integer describing level of parallelism used for pipelines. None and 1 are equivalent. If set to -1, all CPUs are used. For n_jobs below -1, (n_cpus + 1 + n_jobs) are used. Defaults to -1. - Note: there could be some multi-process errors thrown for values of *n_jobs* != 1. If this is the case, please use *n_jobs* = 1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.ENSEMBLE
modifies_features	True
modifies_target	False
name	Stacked Ensemble Classifier
predict Uses y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for stacked ensemble classes.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for stacked ensemble classes.

Returns default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a `predict_proba` method or a `component_obj` that implements `predict_proba`.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class `evalml.pipelines.StackedEnsembleRegressor` (*final_estimator=None*, *n_jobs=-1*, *random_seed=0*, ***kwargs*)

Stacked Ensemble Regressor.

Parameters

- **final_estimator** (*Estimator or subclass*) – The regressor used to combine the base estimators. If `None`, uses `ElasticNetRegressor`.
- **n_jobs** (*int or None*) – Integer describing level of parallelism used for pipelines. `None` and `1` are equivalent. If set to `-1`, all CPUs are used. For `n_jobs` greater than `-1`, `(n_cpus + 1 + n_jobs)` are used. Defaults to `-1`. - Note: there could be some multi-process errors thrown for values of `n_jobs != 1`. If this is the case, please use `n_jobs = 1`.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to `0`.

Attributes

hyper-parameter_ranges	{}
model_family	ModelFamily.ENSEMBLE
modifies_features	True
modifies_target	False
name	Stacked Ensemble Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

clone

Constructs a new component with the same parameters and random state.

continues on next page

Table 660 – continued from previous page

<code>default_parameters</code>	Returns the default parameters for stacked ensemble classes.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.
<code>fit</code>	Fits estimator to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for stacked ensemble classes.

Returns default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Not implemented for StackedEnsembleClassifier and StackedEnsembleRegressor.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.**StandardScaler** (*random_seed=0*, ***kwargs*)

A transformer that standardizes input features by removing the mean and scaling to unit variance.

Parameters **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Standard Scaler
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fit and transform data using the standard scaler component.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transform data using the fitted standard scaler.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type `None` or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`
- **y** (*pd.Series*, *optional*) – The target training data of length `[n_samples]`

Returns *self*

Raises **MethodPropertyNotFoundError** – If component does not have a `fit` method or a `component_obj` that implements `fit`.

fit_transform (*self*, *X*, *y=None*)

Fit and transform data using the standard scaler component.

Parameters

- **x** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self, X, y=None*)

Transform data using the fitted standard scaler.

Parameters

- **x** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

class evalml.pipelines.**SVMClassifier** (*C=1.0, kernel='rbf', gamma='auto', probability=True, random_seed=0, **kwargs*)

Support Vector Machine Classifier.

Parameters

- **C** (*float*) – The regularization parameter. The strength of the regularization is inversely proportional to C. Must be strictly positive. The penalty is a squared l2 penalty. Defaults to 1.0.
- **kernel** (*{ "poly", "rbf", "sigmoid" }*) – Specifies the kernel type to be used in the algorithm. Defaults to “rbf”.
- **gamma** (*{ "scale", "auto" } or float*) – Kernel coefficient for “rbf”, “poly” and “sigmoid”. Defaults to “auto”. - If gamma=’scale’ is passed then it uses 1 / (n_features * X.var()) as value of gamma - If “auto” (default), uses 1 / n_features
- **probability** (*boolean*) – Whether to enable probability estimates. Defaults to True.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ "C": Real(0, 10), "kernel": ["poly", "rbf", "sigmoid"], "gamma": ["scale", "auto"], }
model_family	ModelFamily.SVM
modifies_features	True
modifies_target	False
name	SVM Classifier
pre_dict_uses_y	False
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance only works with linear kernels.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using selected features.
<i>predict_proba</i>	Make probability estimates for labels.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component

- **return_dict** (*bool, optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance only works with linear kernels.

If the kernel isn't linear, we return a numpy array of zeros.

Returns Feature importance of fitted SVM classifier or a numpy array of zeroes if the kernel is not linear.

fit (*self, X, y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series, optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self, X*)

Make predictions using selected features.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self, X*)

Make probability estimates for labels.

Parameters **X** (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type pd.Series

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol*=*cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.SVMRegressor (*C*=1.0, *kernel*='rbf', *gamma*='auto', *random_seed*=0, ***kwargs*)

Support Vector Machine Regressor.

Parameters

- **C** (*float*) – The regularization parameter. The strength of the regularization is inversely proportional to C. Must be strictly positive. The penalty is a squared l2 penalty. Defaults to 1.0.
- **kernel** ({*"poly"*, *"rbf"*, *"sigmoid"*}) – Specifies the kernel type to be used in the algorithm. Defaults to “rbf”.
- **gamma** ({*"scale"*, *"auto"*} or *float*) – Kernel coefficient for “rbf”, “poly” and “sigmoid”. Defaults to “auto”. - If gamma=’scale’ is passed then it uses $1 / (n_features * X.var())$ as value of gamma - If “auto” (default), uses $1 / n_features$
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{ “C”: Real(0, 10), “kernel”: [“poly”, “rbf”, “sigmoid”], “gamma”: [“scale”, “auto”], }
model_family	ModelFamily.SVM
modifies_features	True
modifies_target	False
name	SVM Regressor
predict_uses_y	False
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance of fitted SVM regresor.
<i>fit</i>	Fits estimator to data.
<i>load</i>	Loads component at file path.

continues on next page

Table 663 – continued from previous page

<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using selected features.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted SVM regresor.

Only works with linear kernels. If the kernel isn't linear, we return a numpy array of zeros.

Returns The feature importance of the fitted SVM regressor, or an array of zeroes if the kernel is not linear.

fit (*self*, *X*, *y=None*)

Fits estimator to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using selected features.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict method or a component_obj that implements predict.

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class evalml.pipelines.**TargetEncoder** (*cols=None*, *smoothing=1.0*, *handle_unknown='value'*, *handle_missing='value'*, *random_seed=0*, ***kwargs*)

A transformer that encodes categorical features into target encodings.

Parameters

- **cols** (*list*) – Columns to encode. If None, all string columns will be encoded, otherwise only the columns provided will be encoded. Defaults to None
- **smoothing** (*float*) – The smoothing factor to apply. The larger this value is, the more influence the expected target value has on the resulting target encodings. Must be strictly larger than 0. Defaults to 1.0
- **handle_unknown** (*string*) – Determines how to handle unknown categories for a feature encountered. Options are 'value', 'error', and 'return_nan'. Defaults to 'value', which replaces with the target mean
- **handle_missing** (*string*) – Determines how to handle missing values encountered during *fit* or *transform*. Options are 'value', 'error', and 'return_nan'. Defaults to 'value', which replaces with the target mean
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

hyper-parameter_ranges	{}
modifies_features	True
modifies_target	False
name	Target Encoder
training_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>fit</i>	Fits the target encoder.
<i>fit_transform</i>	Fit and transform data using the target encoder.
<i>get_feature_names</i>	Return feature names for the input features after fitting.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>save</i>	Saves component at file path.
<i>transform</i>	Transform data using the fitted target encoder.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

fit (*self*, *X*, *y*)

Fits the target encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns *self*

fit_transform (*self*, *X*, *y*)

Fit and transform data using the target encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type *pd.DataFrame*

get_feature_names (*self*)

Return feature names for the input features after fitting.

Returns The feature names after encoding.

Return type *np.array*

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns *ComponentBase* object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

transform (*self*, *X*, *y=None*)

Transform data using the fitted target encoder.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns Transformed data.

Return type `pd.DataFrame`

```
class evalml.pipelines.TimeSeriesBinaryClassificationPipeline(component_graph,
                                                             param-
                                                             eters=None, cus-
                                                             tom_name=None,
                                                             random_seed=0)
```

Pipeline base class for time series binary classification problems.

Parameters

- **component_graph** (*list or dict*) – List of components in order. Accepts strings or ComponentBase subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”]
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary {} implies using all default values for component parameters. Pipeline-level parameters such as `date_index`, `gap`, and `max_delay` must be specified with the “pipeline” key. For example: `Pipeline(parameters={“pipeline”: {“date_index”: “Date”, “max_delay”: 4, “gap”: 2}})`.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	None
---------------------	------

Methods

<i>can_tune_threshold_with_objective</i>	Determine whether the threshold of a binary classification pipeline can be tuned.
<i>classes_</i>	Gets the class names for the pipeline. Will return None before pipeline is fit.
<i>clone</i>	Constructs a new pipeline with the same components, parameters, and random state.
<i>create_objectives</i>	Create objective instances from a list of strings or objective classes.
<i>custom_name</i>	Custom name of the pipeline.
<i>describe</i>	Outputs pipeline details including component parameters.
<i>feature_importance</i>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<i>fit</i>	Fit a time series classification pipeline.
<i>get_component</i>	Returns component by name.
<i>get_hyperparameter_ranges</i>	Returns hyperparameter ranges from all components as a dictionary.
<i>graph</i>	Generate an image representing the pipeline graph.
<i>graph_feature_importance</i>	Generate a bar graph of the pipeline’s feature importance.

continues on next page

Table 665 – continued from previous page

<code>graph_json</code>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<code>inverse_transform</code>	Apply component <code>inverse_transform</code> methods to estimator predictions in reverse order.
<code>load</code>	Loads pipeline at file path.
<code>model_family</code>	Returns model family of this pipeline.
<code>name</code>	Name of the pipeline.
<code>new</code>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's <code>__new__</code> method.
<code>optimize_threshold</code>	Optimize the pipeline threshold given the objective to use. Only used for binary problems with objectives whose thresholds can be tuned.
<code>parameters</code>	Parameter dictionary for this pipeline.
<code>predict</code>	Predict on future data where target is not known.
<code>predict_in_sample</code>	Predict on future data where the target is known, e.g. cross validation.
<code>predict_proba</code>	Predict on future data where the target is unknown.
<code>predict_proba_in_sample</code>	Predict on future data where the target is known, e.g. cross validation.
<code>save</code>	Saves pipeline at file path.
<code>score</code>	Evaluate model performance on current and additional objectives.
<code>summary</code>	A short summary of the pipeline structure, describing the list of components used.
<code>threshold</code>	Threshold used to make a prediction. Defaults to <code>None</code> .
<code>transform</code>	Transform the input.
<code>transform_all_but_final</code>	Transforms the data by applying all pre-processing components.

can_tune_threshold_with_objective (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters **objective** (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

property classes_ (*self*)

Gets the class names for the pipeline. Will return `None` before pipeline is fit.

clone (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

static create_objectives (*objectives*)

Create objective instances from a list of strings or objective classes.

property custom_name (*self*)

Custom name of the pipeline.

describe (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **return_dict** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if *return_dict* is True, else None.

Return type dict

property feature_importance (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type pd.DataFrame

fit (*self*, *X*, *y*)

Fit a time series classification pipeline.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *np.ndarray*) – The target training targets of length [n_samples].

Returns self

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type dict

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to None (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Digraph

Raises

- **RuntimeError** – If graphviz is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline's feature importance.

Parameters `importance_threshold` (*float, optional*) – If provided, graph features with a permutation importance whose absolute value is larger than `importance_threshold`. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type `plotly.Figure`

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

`x_edges` specifies from which component feature data is being passed. `y_edges` specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: `{“Nodes”: {“component_name”: {“Name”: class_name, “Attributes”: parameters_attributes}, ...}}, “x_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], “y_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}`

Returns A serialized JSON representation of a DAG structure.

Return type `dag_json` (*str*)

inverse_transform (*self, y*)

Apply component `inverse_transform` methods to estimator predictions in reverse order.

Components that implement `inverse_transform` are `PolynomialDetrender`, `LogTransformer`, `LabelEncoder` (`tbd`).

Parameters `y` (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type `pd.Series`

static load (*file_path*)

Loads pipeline at file path.

Parameters `file_path` (*str*) – Location to load file.

Returns `PipelineBase` object

property model_family (*self*)

Returns model family of this pipeline.

property name (*self*)

Name of the pipeline.

new (*self, parameters, random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python’s `__new__` method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or `None` implies using all default values for component parameters. Defaults to `None`.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

optimize_threshold (*self*, *X*, *y*, *y_pred_proba*, *objective*)

Optimize the pipeline threshold given the objective to use. Only used for binary problems with objectives whose thresholds can be tuned.

Parameters

- **X** (*pd.DataFrame*) – Input features.
- **y** (*pd.Series*) – Input target values.
- **y_pred_proba** (*pd.Series*) – The predicted probabilities of the target outputted by the pipeline.
- **objective** (*ObjectiveBase*) – The objective to threshold with. Must have a tunable threshold.

Raises **ValueError** – If objective is not optimizable.

property parameters (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type dict

predict (*self*, *X*, *objective=None*, *X_train=None*, *y_train=None*)

Predict on future data where target is not known.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **objective** (*Object* or *string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data.
- **y_train** (*pd.Series* or *None*) – Training labels.

Raises **ValueError** – If final component is not an Estimator.

Returns Predictions.

predict_in_sample (*self*, *X*, *y*, *X_train*, *y_train*, *objective=None*)

Predict on future data where the target is known, e.g. cross validation.

Parameters

- **X** (*pd.DataFrame*) – Future data of shape [n_samples, n_features].
- **y** (*pd.Series*) – Future target of shape [n_samples].
- **X_train** (*pd.DataFrame*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series*) – Targets used to train the pipeline of shape [n_samples_train].
- **objective** (*ObjectiveBase*, *str*) – Objective used to threshold predicted probabilities, optional. Defaults to None.

Returns Estimated labels.

Return type *pd.Series*

Raises **ValueError** – If objective is not defined for time-series binary classification problems.

predict_proba (*self*, *X*, *X_train=None*, *y_train=None*)

Predict on future data where the target is unknown.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Future data of shape [n_samples, n_features].
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].

Returns Estimated probabilities.

Return type *pd.Series*

Raises **ValueError** – If final component is not an Estimator.

predict_proba_in_sample (*self*, *X_holdout*, *y_holdout*, *X_train*, *y_train*)

Predict on future data where the target is known, e.g. cross validation.

Parameters

- **X_holdout** (*pd.DataFrame* or *np.ndarray*) – Future data of shape [n_samples, n_features].
- **y_holdout** (*pd.Series*, *np.ndarray*) – Future target of shape [n_samples].
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].

Returns Estimated probabilities.

Return type *pd.Series*

Raises **ValueError** – If the final component is not an Estimator.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

score (*self*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Evaluate model performance on current and additional objectives.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – True labels of length [n_samples].
- **objectives** (*list*) – Non-empty list of objectives to score on.
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].

Returns Ordered dictionary of objective scores.

Return type *dict*

property summary (*self*)

A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

property threshold (*self*)

Threshold used to make a prediction. Defaults to None.

transform (*self*, *X*, *y=None*)

Transform the input.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [*n_samples*, *n_features*].
- **y** (*pd.Series*) – The target data of length [*n_samples*]. Defaults to None.

Returns Transformed output.

Return type *pd.DataFrame*

transform_all_but_final (*self*, *X*, *y=None*, *X_train=None*, *y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series*) – Targets corresponding to the pipeline targets.
- **X_train** (*pd.DataFrame*) – Training data used to generate features from past observations.
- **y_train** (*pd.Series*) – Training targets used to generate features from past observations.

Returns New transformed features.

Return type *pd.DataFrame*

```
class evalml.pipelines.TimeSeriesClassificationPipeline(component_graph, pa-  
                                                         rameters=None, cus-  
                                                         tom_name=None, ran-  
                                                         dom_seed=0)
```

Pipeline base class for time series classification problems.

Parameters

- **component_graph** (*ComponentGraph*, *list*, *dict*) – *ComponentGraph* instance, list of components in order, or dictionary of components. Accepts strings or *ComponentBase* subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”]
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary {} implies using all default values for component parameters. Pipeline-level parameters such as *date_index*, *gap*, and *max_delay* must be specified with the “pipeline” key. For example: Pipeline(parameters={“pipeline”: {“date_index”: “Date”, “max_delay”: 4, “gap”: 2}}).
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	None
---------------------	------

Methods

<i>can_tune_threshold_with_objective</i>	Determine whether the threshold of a binary classification pipeline can be tuned.
<i>classes_</i>	Gets the class names for the pipeline. Will return None before pipeline is fit.
<i>clone</i>	Constructs a new pipeline with the same components, parameters, and random state.
<i>create_objectives</i>	Create objective instances from a list of strings or objective classes.
<i>custom_name</i>	Custom name of the pipeline.
<i>describe</i>	Outputs pipeline details including component parameters.
<i>feature_importance</i>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<i>fit</i>	Fit a time series classification pipeline.
<i>get_component</i>	Returns component by name.
<i>get_hyperparameter_ranges</i>	Returns hyperparameter ranges from all components as a dictionary.
<i>graph</i>	Generate an image representing the pipeline graph.
<i>graph_feature_importance</i>	Generate a bar graph of the pipeline's feature importance.
<i>graph_json</i>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<i>inverse_transform</i>	Apply component <i>inverse_transform</i> methods to estimator predictions in reverse order.
<i>load</i>	Loads pipeline at file path.
<i>model_family</i>	Returns model family of this pipeline.
<i>name</i>	Name of the pipeline.
<i>new</i>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's <code>__new__</code> method.
<i>parameters</i>	Parameter dictionary for this pipeline.
<i>predict</i>	Predict on future data where target is not known.
<i>predict_in_sample</i>	Predict on future data where the target is known, e.g. cross validation.
<i>predict_proba</i>	Predict on future data where the target is unknown.
<i>predict_proba_in_sample</i>	Predict on future data where the target is known, e.g. cross validation.
<i>save</i>	Saves pipeline at file path.
<i>score</i>	Evaluate model performance on current and additional objectives.
<i>summary</i>	A short summary of the pipeline structure, describing the list of components used.

continues on next page

Table 666 – continued from previous page

<code>transform</code>	Transform the input.
<code>transform_all_but_final</code>	Transforms the data by applying all pre-processing components.

can_tune_threshold_with_objective (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters **objective** (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

property classes_ (*self*)

Gets the class names for the pipeline. Will return None before pipeline is fit.

clone (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

static create_objectives (*objectives*)

Create objective instances from a list of strings or objective classes.

property custom_name (*self*)

Custom name of the pipeline.

describe (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **return_dict** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if *return_dict* is True, else None.

Return type dict

property feature_importance (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type pd.DataFrame

fit (*self*, *X*, *y*)

Fit a time series classification pipeline.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *np.ndarray*) – The target training targets of length [n_samples].

Returns self

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type dict

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to None (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Digraph

Raises

- **RuntimeError** – If graphviz is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline's feature importance.

Parameters **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than importance_threshold. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type plotly.Figure

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

x_edges specifies from which component feature data is being passed. *y_edges* specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: {"Nodes": {"component_name": {"Name": class_name, "Attributes": parameters_attributes}, ...}, "x_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], "y_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}

Returns A serialized JSON representation of a DAG structure.

Return type dag_json (str)

inverse_transform (*self*, *y*)

Apply component inverse_transform methods to estimator predictions in reverse order.

Components that implement inverse_transform are PolynomialDetrender, LogTransformer, LabelEncoder (tbd).

Parameters **y** (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type pd.Series

static load (*file_path*)

Loads pipeline at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns PipelineBase object

property model_family (*self*)

Returns model family of this pipeline.

property name (*self*)

Name of the pipeline.

new (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's `__new__` method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component's parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

property parameters (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type dict

predict (*self*, *X*, *objective=None*, *X_train=None*, *y_train=None*)

Predict on future data where target is not known.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **objective** (*Object* or *string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data.
- **y_train** (*pd.Series* or *None*) – Training labels.

Raises **ValueError** – If final component is not an Estimator.

Returns Predictions.

predict_in_sample (*self*, *X*, *y*, *X_train*, *y_train*, *objective=None*)

Predict on future data where the target is known, e.g. cross validation.

Note: we cast y as ints first to address boolean values that may be returned from calculating predictions which we would not be able to otherwise transform if we originally had integer targets.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Future data of shape [n_samples, n_features].
- **y** (*pd.Series*, *np.ndarray*) – Future target of shape [n_samples].
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].

- **y_train** (*pd.Series, np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].
- **objective** (*ObjectiveBase, str, None*) – Objective used to threshold predicted probabilities, optional.

Returns Estimated labels.

Return type *pd.Series*

Raises **ValueError** – If final component is not an Estimator.

predict_proba (*self, X, X_train=None, y_train=None*)

Predict on future data where the target is unknown.

Parameters

- **X** (*pd.DataFrame or np.ndarray*) – Future data of shape [n_samples, n_features].
- **X_train** (*pd.DataFrame, np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series, np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].

Returns Estimated probabilities.

Return type *pd.Series*

Raises **ValueError** – If final component is not an Estimator.

predict_proba_in_sample (*self, X_holdout, y_holdout, X_train, y_train*)

Predict on future data where the target is known, e.g. cross validation.

Parameters

- **X_holdout** (*pd.DataFrame or np.ndarray*) – Future data of shape [n_samples, n_features].
- **y_holdout** (*pd.Series, np.ndarray*) – Future target of shape [n_samples].
- **X_train** (*pd.DataFrame, np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series, np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].

Returns Estimated probabilities.

Return type *pd.Series*

Raises **ValueError** – If the final component is not an Estimator.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

score (*self, X, y, objectives, X_train=None, y_train=None*)

Evaluate model performance on current and additional objectives.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – True labels of length [n_samples].
- **objectives** (*list*) – Non-empty list of objectives to score on.
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].

Returns Ordered dictionary of objective scores.

Return type dict

property summary (*self*)

A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

transform (*self*, *X*, *y=None*)

Transform the input.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type *pd.DataFrame*

transform_all_but_final (*self*, *X*, *y=None*, *X_train=None*, *y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series*) – Targets corresponding to the pipeline targets.
- **X_train** (*pd.DataFrame*) – Training data used to generate features from past observations.
- **y_train** (*pd.Series*) – Training targets used to generate features from past observations.

Returns New transformed features.

Return type *pd.DataFrame*

```
class evalml.pipelines.TimeSeriesMulticlassClassificationPipeline (component_graph,
                                                                    parameters=None,
                                                                    custom_name=None,
                                                                    random_seed=0)
```

Pipeline base class for time series multiclass classification problems.

Parameters

- **component_graph** (*list or dict*) – List of components in order. Accepts strings or ComponentBase subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”]
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary {} implies using all default values for component parameters. Pipeline-level parameters such as date_index, gap, and max_delay must be specified with the “pipeline” key. For example: Pipeline(parameters={“pipeline”: {“date_index”: “Date”, “max_delay”: 4, “gap”: 2}}).
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	ProblemTypes.TIME_SERIES_MULTICLASS
---------------------	-------------------------------------

Methods

<i>can_tune_threshold_with_objective</i>	Determine whether the threshold of a binary classification pipeline can be tuned.
<i>classes_</i>	Gets the class names for the pipeline. Will return None before pipeline is fit.
<i>clone</i>	Constructs a new pipeline with the same components, parameters, and random state.
<i>create_objectives</i>	Create objective instances from a list of strings or objective classes.
<i>custom_name</i>	Custom name of the pipeline.
<i>describe</i>	Outputs pipeline details including component parameters.
<i>feature_importance</i>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<i>fit</i>	Fit a time series classification pipeline.
<i>get_component</i>	Returns component by name.
<i>get_hyperparameter_ranges</i>	Returns hyperparameter ranges from all components as a dictionary.
<i>graph</i>	Generate an image representing the pipeline graph.
<i>graph_feature_importance</i>	Generate a bar graph of the pipeline’s feature importance.
<i>graph_json</i>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<i>inverse_transform</i>	Apply component inverse_transform methods to estimator predictions in reverse order.
<i>load</i>	Loads pipeline at file path.
<i>model_family</i>	Returns model family of this pipeline.
<i>name</i>	Name of the pipeline.

continues on next page

Table 667 – continued from previous page

<i>new</i>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's <code>__new__</code> method.
<i>parameters</i>	Parameter dictionary for this pipeline.
<i>predict</i>	Predict on future data where target is not known.
<i>predict_in_sample</i>	Predict on future data where the target is known, e.g. cross validation.
<i>predict_proba</i>	Predict on future data where the target is unknown.
<i>predict_proba_in_sample</i>	Predict on future data where the target is known, e.g. cross validation.
<i>save</i>	Saves pipeline at file path.
<i>score</i>	Evaluate model performance on current and additional objectives.
<i>summary</i>	A short summary of the pipeline structure, describing the list of components used.
<i>transform</i>	Transform the input.
<i>transform_all_but_final</i>	Transforms the data by applying all pre-processing components.

can_tune_threshold_with_objective (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters *objective* (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

property classes_ (*self*)

Gets the class names for the pipeline. Will return None before pipeline is fit.

clone (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

static create_objectives (*objectives*)

Create objective instances from a list of strings or objective classes.

property custom_name (*self*)

Custom name of the pipeline.

describe (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters *return_dict* (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if *return_dict* is True, else None.

Return type dict

property feature_importance (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type pd.DataFrame

fit (*self*, *X*, *y*)

Fit a time series classification pipeline.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *np.ndarray*) – The target training targets of length [n_samples].

Returns *self*

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type dict

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to None (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type graphviz.Digraph

Raises

- **RuntimeError** – If graphviz is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline's feature importance.

Parameters **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than importance_threshold. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type plotly.Figure

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

x_edges specifies from which component feature data is being passed. *y_edges* specifies from which component target data is being passed. This can be used to build graphs across a variety

of visualization tools. Template: {"Nodes": {"component_name": {"Name": class_name, "Attributes": parameters_attributes}, ...}, "x_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], "y_edges": [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}

Returns A serialized JSON representation of a DAG structure.

Return type dag_json (str)

inverse_transform (*self*, *y*)

Apply component inverse_transform methods to estimator predictions in reverse order.

Components that implement inverse_transform are PolynomialDetrender, LogTransformer, LabelEncoder (tbd).

Parameters *y* (*pd.Series*) – Final component features.

Returns The inverse transform of the target.

Return type pd.Series

static load (*file_path*)

Loads pipeline at file path.

Parameters *file_path* (*str*) – Location to load file.

Returns PipelineBase object

property model_family (*self*)

Returns model family of this pipeline.

property name (*self*)

Name of the pipeline.

new (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's __new__ method.

Parameters

- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component's parameters as values. An empty dictionary or None implies using all default values for component parameters. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

property parameters (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type dict

predict (*self*, *X*, *objective=None*, *X_train=None*, *y_train=None*)

Predict on future data where target is not known.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **objective** (*Object* or *string*) – The objective to use to make predictions.
- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data.
- **y_train** (*pd.Series* or *None*) – Training labels.

Raises `ValueError` – If final component is not an Estimator.

Returns Predictions.

`predict_in_sample` (*self*, *X*, *y*, *X_train*, *y_train*, *objective=None*)

Predict on future data where the target is known, e.g. cross validation.

Note: we cast *y* as ints first to address boolean values that may be returned from calculating predictions which we would not be able to otherwise transform if we originally had integer targets.

Parameters

- ***X*** (*pd.DataFrame* or *np.ndarray*) – Future data of shape [*n_samples*, *n_features*].
- ***y*** (*pd.Series*, *np.ndarray*) – Future target of shape [*n_samples*].
- ***X_train*** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [*n_samples_train*, *n_features*].
- ***y_train*** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [*n_samples_train*].
- ***objective*** (*ObjectiveBase*, *str*, *None*) – Objective used to threshold predicted probabilities, optional.

Returns Estimated labels.

Return type *pd.Series*

Raises `ValueError` – If final component is not an Estimator.

`predict_proba` (*self*, *X*, *X_train=None*, *y_train=None*)

Predict on future data where the target is unknown.

Parameters

- ***X*** (*pd.DataFrame* or *np.ndarray*) – Future data of shape [*n_samples*, *n_features*].
- ***X_train*** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [*n_samples_train*, *n_features*].
- ***y_train*** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [*n_samples_train*].

Returns Estimated probabilities.

Return type *pd.Series*

Raises `ValueError` – If final component is not an Estimator.

`predict_proba_in_sample` (*self*, *X_holdout*, *y_holdout*, *X_train*, *y_train*)

Predict on future data where the target is known, e.g. cross validation.

Parameters

- ***X_holdout*** (*pd.DataFrame* or *np.ndarray*) – Future data of shape [*n_samples*, *n_features*].
- ***y_holdout*** (*pd.Series*, *np.ndarray*) – Future target of shape [*n_samples*].
- ***X_train*** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [*n_samples_train*, *n_features*].
- ***y_train*** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [*n_samples_train*].

Returns Estimated probabilities.

Return type `pd.Series`

Raises **ValueError** – If the final component is not an Estimator.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

score (*self*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Evaluate model performance on current and additional objectives.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*) – True labels of length `[n_samples]`.
- **objectives** (*list*) – Non-empty list of objectives to score on.
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape `[n_samples_train, n_features]`.
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape `[n_samples_train]`.

Returns Ordered dictionary of objective scores.

Return type `dict`

property summary (*self*)

A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

transform (*self*, *X*, *y=None*)

Transform the input.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*) – The target data of length `[n_samples]`. Defaults to `None`.

Returns Transformed output.

Return type `pd.DataFrame`

transform_all_but_final (*self*, *X*, *y=None*, *X_train=None*, *y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series*) – Targets corresponding to the pipeline targets.
- **X_train** (*pd.DataFrame*) – Training data used to generate generates from past observations.

- **y_train** (*pd.Series*) – Training targets used to generate features from past observations.

Returns New transformed features.

Return type *pd.DataFrame*

class `evalml.pipelines.TimeSeriesRegressionPipeline` (*component_graph*, *parameters=None*, *custom_name=None*, *random_seed=0*)

Pipeline base class for time series regression problems.

Parameters

- **component_graph** (*ComponentGraph*, *list*, *dict*) – *ComponentGraph* instance, list of components in order, or dictionary of components. Accepts strings or *ComponentBase* subclasses in the list. Note that when duplicate components are specified in a list, the duplicate component names will be modified with the component’s index in the list. For example, the component graph [Imputer, One Hot Encoder, Imputer, Logistic Regression Classifier] will have names [“Imputer”, “One Hot Encoder”, “Imputer_2”, “Logistic Regression Classifier”]
- **parameters** (*dict*) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary {} implies using all default values for component parameters. Pipeline-level parameters such as *date_index*, *gap*, and *max_delay* must be specified with the “pipeline” key. For example: `Pipeline(parameters={"pipeline": {"date_index": "Date", "max_delay": 4, "gap": 2}})`.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

problem_type	<code>ProblemTypes.TIME_SERIES_REGRESSION</code>
---------------------	--

Methods

<code>can_tune_threshold_with_objective</code>	Determine whether the threshold of a binary classification pipeline can be tuned.
<code>clone</code>	Constructs a new pipeline with the same components, parameters, and random state.
<code>create_objectives</code>	Create objective instances from a list of strings or objective classes.
<code>custom_name</code>	Custom name of the pipeline.
<code>describe</code>	Outputs pipeline details including component parameters.
<code>feature_importance</code>	Importance associated with each feature. Features dropped by the feature selection are excluded.
<code>fit</code>	Fit a time series pipeline.
<code>get_component</code>	Returns component by name.
<code>get_hyperparameter_ranges</code>	Returns hyperparameter ranges from all components as a dictionary.
<code>graph</code>	Generate an image representing the pipeline graph.
<code>graph_feature_importance</code>	Generate a bar graph of the pipeline’s feature importance.

continues on next page

Table 668 – continued from previous page

<code>graph_json</code>	Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.
<code>inverse_transform</code>	Apply component <code>inverse_transform</code> methods to estimator predictions in reverse order.
<code>load</code>	Loads pipeline at file path.
<code>model_family</code>	Returns model family of this pipeline.
<code>name</code>	Name of the pipeline.
<code>new</code>	Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python's <code>__new__</code> method.
<code>parameters</code>	Parameter dictionary for this pipeline.
<code>predict</code>	Predict on future data where target is not known.
<code>predict_in_sample</code>	Predict on future data where the target is known, e.g. cross validation.
<code>save</code>	Saves pipeline at file path.
<code>score</code>	Evaluate model performance on current and additional objectives.
<code>summary</code>	A short summary of the pipeline structure, describing the list of components used.
<code>transform</code>	Transform the input.
<code>transform_all_but_final</code>	Transforms the data by applying all pre-processing components.

`can_tune_threshold_with_objective` (*self*, *objective*)

Determine whether the threshold of a binary classification pipeline can be tuned.

Parameters **`objective`** (*ObjectiveBase*) – Primary AutoMLSearch objective.

Returns True if the pipeline threshold can be tuned.

Return type bool

`clone` (*self*)

Constructs a new pipeline with the same components, parameters, and random state.

Returns A new instance of this pipeline with identical components, parameters, and random state.

`static create_objectives` (*objectives*)

Create objective instances from a list of strings or objective classes.

`property custom_name` (*self*)

Custom name of the pipeline.

`describe` (*self*, *return_dict=False*)

Outputs pipeline details including component parameters.

Parameters **`return_dict`** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Dictionary of all component parameters if `return_dict` is True, else None.

Return type dict

`property feature_importance` (*self*)

Importance associated with each feature. Features dropped by the feature selection are excluded.

Returns Feature names and their corresponding importance

Return type `pd.DataFrame`

fit (*self*, *X*, *y*)

Fit a time series pipeline.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – The input training data of shape `[n_samples, n_features]`.
- **y** (*pd.Series*, *np.ndarray*) – The target training targets of length `[n_samples]`.

Returns *self*

get_component (*self*, *name*)

Returns component by name.

Parameters **name** (*str*) – Name of component.

Returns Component to return

Return type Component

get_hyperparameter_ranges (*self*, *custom_hyperparameters*)

Returns hyperparameter ranges from all components as a dictionary.

Parameters **custom_hyperparameters** (*dict*) – Custom hyperparameters for the pipeline.

Returns Dictionary of hyperparameter ranges for each component in the pipeline.

Return type *dict*

graph (*self*, *filepath=None*)

Generate an image representing the pipeline graph.

Parameters **filepath** (*str*, *optional*) – Path to where the graph should be saved. If set to `None` (as by default), the graph will not be saved.

Returns Graph object that can be directly displayed in Jupyter notebooks.

Return type `graphviz.Digraph`

Raises

- **RuntimeError** – If `graphviz` is not installed.
- **ValueError** – If path is not writeable.

graph_feature_importance (*self*, *importance_threshold=0*)

Generate a bar graph of the pipeline's feature importance.

Parameters **importance_threshold** (*float*, *optional*) – If provided, graph features with a permutation importance whose absolute value is larger than `importance_threshold`. Defaults to zero.

Returns A bar graph showing features and their corresponding importance.

Return type `plotly.Figure`

Raises **ValueError** – If importance threshold is not valid.

graph_json (*self*)

Generates a JSON with nodes consisting of the component names and parameters, and edges detailing component relationships.

`x_edges` specifies from which component feature data is being passed. `y_edges` specifies from which component target data is being passed. This can be used to build graphs across a variety of visualization tools. Template: `{“Nodes”: {“component_name”: {“Name”: class_name, “Attributes”: parameters_attributes}, ...}}, “x_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...], “y_edges”: [[from_component_name, to_component_name], [from_component_name, to_component_name], ...]}`

Returns A serialized JSON representation of a DAG structure.

Return type `dag_json` (`str`)

`inverse_transform` (*self*, *y*)

Apply component `inverse_transform` methods to estimator predictions in reverse order.

Components that implement `inverse_transform` are `PolynomialDetrender`, `LogTransformer`, `LabelEncoder` (`tbd`).

Parameters *y* (`pd.Series`) – Final component features.

Returns The inverse transform of the target.

Return type `pd.Series`

`static load` (*file_path*)

Loads pipeline at file path.

Parameters *file_path* (`str`) – Location to load file.

Returns `PipelineBase` object

`property model_family` (*self*)

Returns model family of this pipeline.

`property name` (*self*)

Name of the pipeline.

`new` (*self*, *parameters*, *random_seed=0*)

Constructs a new instance of the pipeline with the same component graph but with a different set of parameters. Not to be confused with python’s `__new__` method.

Parameters

- **`parameters`** (`dict`) – Dictionary with component names as keys and dictionary of that component’s parameters as values. An empty dictionary or `None` implies using all default values for component parameters. Defaults to `None`.
- **`random_seed`** (`int`) – Seed for the random number generator. Defaults to 0.

Returns A new instance of this pipeline with identical components.

`property parameters` (*self*)

Parameter dictionary for this pipeline.

Returns Dictionary of all component parameters.

Return type `dict`

`predict` (*self*, *X*, *objective=None*, *X_train=None*, *y_train=None*)

Predict on future data where target is not known.

Parameters

- **`X`** (`pd.DataFrame`, or `np.ndarray`) – Data of shape `[n_samples, n_features]`.
- **`objective`** (`Object` or `string`) – The objective to use to make predictions.

- **X_train** (*pd.DataFrame* or *np.ndarray* or *None*) – Training data.
- **y_train** (*pd.Series* or *None*) – Training labels.

Raises **ValueError** – If final component is not an Estimator.

Returns Predictions.

predict_in_sample (*self*, *X*, *y*, *X_train*, *y_train*, *objective=None*)

Predict on future data where the target is known, e.g. cross validation.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Future data of shape [n_samples, n_features]
- **y** (*pd.Series*, *np.ndarray*) – Future target of shape [n_samples]
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features]
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train]
- **objective** (*ObjectiveBase*, *str*, *None*) – Objective used to threshold predicted probabilities, optional.

Returns Estimated labels.

Return type *pd.Series*

Raises **ValueError** – If final component is not an Estimator.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves pipeline at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

score (*self*, *X*, *y*, *objectives*, *X_train=None*, *y_train=None*)

Evaluate model performance on current and additional objectives.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – True labels of length [n_samples].
- **objectives** (*list*) – Non-empty list of objectives to score on.
- **X_train** (*pd.DataFrame*, *np.ndarray*) – Data the pipeline was trained on of shape [n_samples_train, n_features].
- **y_train** (*pd.Series*, *np.ndarray*) – Targets used to train the pipeline of shape [n_samples_train].

Returns Ordered dictionary of objective scores.

Return type *dict*

property summary (*self*)

A short summary of the pipeline structure, describing the list of components used.

Example: Logistic Regression Classifier w/ Simple Imputer + One Hot Encoder

Returns A string describing the pipeline structure.

transform (*self*, *X*, *y=None*)

Transform the input.

Parameters

- **X** (*pd.DataFrame*, or *np.ndarray*) – Data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target data of length [n_samples]. Defaults to None.

Returns Transformed output.

Return type *pd.DataFrame*

transform_all_but_final (*self*, *X*, *y=None*, *X_train=None*, *y_train=None*)

Transforms the data by applying all pre-processing components.

Parameters

- **X** (*pd.DataFrame*) – Input data to the pipeline to transform.
- **y** (*pd.Series*) – Targets corresponding to the pipeline targets.
- **X_train** (*pd.DataFrame*) – Training data used to generate features from past observations.
- **y_train** (*pd.Series*) – Training targets used to generate features from past observations.

Returns New transformed features.

Return type *pd.DataFrame*

class evalml.pipelines.**Transformer** (*parameters=None*, *component_obj=None*, *random_seed=0*, ***kwargs*)

A component that may or may not need fitting that transforms data. These components are used before an estimator.

To implement a new Transformer, define your own class which is a subclass of Transformer, including a name and a list of acceptable ranges for any parameters to be tuned during the automl search (hyperparameters). Define an `__init__` method which sets up any necessary state and objects. Make sure your `__init__` only uses standard keyword arguments and calls `super().__init__()` with a parameters dict. You may also override the `fit`, `transform`, `fit_transform` and other methods in this class if appropriate.

To see some examples, check out the definitions of any Transformer component.

Parameters

- **parameters** (*dict*) – Dictionary of parameters for the component. Defaults to None.
- **component_obj** (*obj*) – Third-party objects useful in component implementation. Defaults to None.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Attributes

modifies_features	True
modifies_target	False
training_only	False

Methods

<code>clone</code>	Constructs a new component with the same parameters and random state.
<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>fit</code>	Fits component to data.
<code>fit_transform</code>	Fits on X and transforms X.
<code>load</code>	Loads component at file path.
<code>name</code>	Returns string name of this component.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>save</code>	Saves component at file path.
<code>transform</code>	Transforms data X.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is True, else None.

Return type None or dict

fit (*self*, *X*, *y=None*)

Fits component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples]

Returns *self*

Raises **MethodPropertyNotFoundError** – If component does not have a fit method or a `component_obj` that implements fit.

fit_transform (*self*, *X*, *y=None*)

Fits on X and transforms X.

Parameters

- **x** (*pd.DataFrame*) – Data to fit and transform.
- **y** (*pd.Series*) – Target data.

Returns Transformed X.

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

property name (*cls*)

Returns string name of this component.

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

save (*self, file_path, pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

abstract transform (*self, X, y=None*)

Transforms data X.

Parameters

- **x** (*pd.DataFrame*) – Data to transform.
- **y** (*pd.Series, optional*) – Target data.

Returns Transformed X

Return type *pd.DataFrame*

Raises **MethodPropertyNotFoundError** – If transformer does not have a transform method or a component_obj that implements transform.

```
class evalml.pipelines.XGBoostClassifier(eta=0.1, max_depth=6, min_child_weight=1,  
                                         n_estimators=100, random_seed=0,  
                                         eval_metric='logloss', n_jobs=12, **kwargs)
```

XGBoost Classifier.

Parameters

- **eta** (*float*) – Boosting learning rate. Defaults to 0.1.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.

- **min_child_weight** (*float*) – Minimum sum of instance weight (hessian) needed in a child. Defaults to 1.0
- **n_estimators** (*int*) – Number of gradient boosted trees. Equivalent to number of boosting rounds. Defaults to 100.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.
- **n_jobs** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to 12.

Attributes

hyper-parameter_ranges	{ “eta”: Real(0.000001, 1), “max_depth”: Integer(1, 10), “min_child_weight”: Real(1, 10), “n_estimators”: Integer(1, 1000), }
model_family	ModelFamily.XGBOOST
modifies_features	True
modifies_target	False
name	XGBoost Classifier
predict_uses_y	False
SEED_MAX	None
SEED_MIN	None
supported_problem_types	[ProblemTypes.BINARY, ProblemTypes.MULTICLASS, ProblemTypes.TIME_SERIES_BINARY, ProblemTypes.TIME_SERIES_MULTICLASS,]
train_only	False

Methods

<i>clone</i>	Constructs a new component with the same parameters and random state.
<i>default_parameters</i>	Returns the default parameters for this component.
<i>describe</i>	Describe a component and its parameters.
<i>feature_importance</i>	Feature importance of fitted XGBoost classifier.
<i>fit</i>	Fits XGBoost classifier component to data.
<i>load</i>	Loads component at file path.
<i>needs_fitting</i>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<i>parameters</i>	Returns the parameters which were used to initialize the component.
<i>predict</i>	Make predictions using the fitted XGBoost classifier.
<i>predict_proba</i>	Make predictions using the fitted CatBoost classifier.
<i>save</i>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if `return_dict` is `True`, else `None`.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted XGBoost classifier.

fit (*self*, *X*, *y=None*)

Fits XGBoost classifier component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling `predict`, `predict_proba`, `transform`, or `feature_importances`.

This can be overridden to `False` for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using the fitted XGBoost classifier.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type pd.DataFrame

predict_proba (*self*, *X*)

Make predictions using the fitted CatBoost classifier.

Parameters **X** (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type `pd.DataFrame`

save (*self*, *file_path*, *pickle_protocol*=`cloudpickle.DEFAULT_PROTOCOL`)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

class `evalml.pipelines.XGBoostRegressor` (*eta*=0.1, *max_depth*=6, *min_child_weight*=1, *n_estimators*=100, *random_seed*=0, *n_jobs*=12, ***kwargs*)

XGBoost Regressor.

Parameters

- **eta** (*float*) – Boosting learning rate. Defaults to 0.1.
- **max_depth** (*int*) – Maximum tree depth for base learners. Defaults to 6.
- **min_child_weight** (*float*) – Minimum sum of instance weight (hessian) needed in a child. Defaults to 1.0
- **n_estimators** (*int*) – Number of gradient boosted trees. Equivalent to number of boosting rounds. Defaults to 100.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.
- **n_jobs** (*int*) – Number of parallel threads used to run xgboost. Note that creating thread contention will significantly slow down the algorithm. Defaults to 12.

Attributes

hyper-parameter_ranges	{ "eta": Real(0.000001, 1), "max_depth": Integer(1, 20), "min_child_weight": Real(1, 10), "n_estimators": Integer(1, 1000), }
model_family	ModelFamily.XGBOOST
modifies_features	True
modifies_target	False
name	XGBoost Regressor
predict_uses_y	False
SEED_MAX	None
SEED_MIN	None
supported_problem_types	[ProblemTypes.REGRESSION, ProblemTypes.TIME_SERIES_REGRESSION,]
training_only	False

Methods

clone

Constructs a new component with the same parameters and random state.

continues on next page

Table 671 – continued from previous page

<code>default_parameters</code>	Returns the default parameters for this component.
<code>describe</code>	Describe a component and its parameters.
<code>feature_importance</code>	Feature importance of fitted XGBoost regressor.
<code>fit</code>	Fits XGBoost regressor component to data.
<code>load</code>	Loads component at file path.
<code>needs_fitting</code>	Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.
<code>parameters</code>	Returns the parameters which were used to initialize the component.
<code>predict</code>	Make predictions using fitted XGBoost regressor.
<code>predict_proba</code>	Make probability estimates for labels.
<code>save</code>	Saves component at file path.

clone (*self*)

Constructs a new component with the same parameters and random state.

Returns A new instance of this component with identical parameters and random state.

default_parameters (*cls*)

Returns the default parameters for this component.

Our convention is that `Component.default_parameters == Component().parameters`.

Returns Default parameters for this component.

Return type dict

describe (*self*, *print_name=False*, *return_dict=False*)

Describe a component and its parameters.

Parameters

- **print_name** (*bool*, *optional*) – whether to print name of component
- **return_dict** (*bool*, *optional*) – whether to return description as dictionary in the format {"name": name, "parameters": parameters}

Returns Returns dictionary if return_dict is True, else None.

Return type None or dict

property feature_importance (*self*)

Feature importance of fitted XGBoost regressor.

fit (*self*, *X*, *y=None*)

Fits XGBoost regressor component to data.

Parameters

- **X** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features].
- **y** (*pd.Series*, *optional*) – The target training data of length [n_samples].

Returns self

static load (*file_path*)

Loads component at file path.

Parameters **file_path** (*str*) – Location to load file.

Returns ComponentBase object

needs_fitting (*self*)

Returns boolean determining if component needs fitting before calling predict, predict_proba, transform, or feature_importances.

This can be overridden to False for components that do not need to be fit or whose fit methods do nothing.

Returns True.

property parameters (*self*)

Returns the parameters which were used to initialize the component.

predict (*self*, *X*)

Make predictions using fitted XGBoost regressor.

Parameters *X* (*pd.DataFrame*) – Data of shape [n_samples, n_features].

Returns Predicted values.

Return type *pd.Series*

predict_proba (*self*, *X*)

Make probability estimates for labels.

Parameters *X* (*pd.DataFrame*) – Features.

Returns Probability estimates.

Return type *pd.Series*

Raises **MethodPropertyNotFoundError** – If estimator does not have a predict_proba method or a component_obj that implements predict_proba.

save (*self*, *file_path*, *pickle_protocol=cloudpickle.DEFAULT_PROTOCOL*)

Saves component at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_protocol** (*int*) – The pickle data stream format.

Preprocessing

Preprocessing utilities.

Subpackages

data_splitters

Data splitter classes.

Submodules

time_series_split

Rolling Origin Cross Validation for time series problems.

Module Contents

Classes Summary

<i>TimeSeriesSplit</i>	Rolling Origin Cross Validation for time series problems.
------------------------	---

Contents

class evalml.preprocessing.data_splitters.time_series_split.**TimeSeriesSplit** (*max_delay=0*, *gap=0*, *date_index=None*, *n_splits=3*)

Rolling Origin Cross Validation for time series problems.

This class uses `max_delay` and `gap` values to take into account that evalml time series pipelines perform some feature and target engineering, e.g delaying input features and shifting the target variable by the desired amount. If the data that will be split already has all the features and appropriate target values, and then set `max_delay` and `gap` to 0.

Parameters

- **max_delay** (*int*) – Max delay value for feature engineering. Time series pipelines create delayed features from existing features. This process will introduce NaNs into the first `max_delay` number of rows. The splitter uses the last `max_delay` number of rows from the previous split as the first `max_delay` number of rows of the current split to avoid “throwing out” more data than is necessary. Defaults to 0.
- **gap** (*int*) – Gap used in time series problem. Time series pipelines shift the target variable by `gap` rows. Defaults to 0.
- **date_index** (*str*) – Name of the column containing the datetime information used to order the data. Defaults to None.
- **n_splits** (*int*) – number of data splits to make. Defaults to 3.

Methods

<i>get_n_splits</i>	Get the number of data splits.
<i>split</i>	Get the time series splits.

get_n_splits (*self*, *X=None*, *y=None*, *groups=None*)
Get the number of data splits.

Parameters

- **X** (*pd.DataFrame*, *None*) – Features to split.

- **y** (*pd.DataFrame*, *None*) – Target variable to split. Defaults to *None*.
- **groups** – Ignored but kept for compatibility with sklearn API. Defaults to *None*.

Returns Number of splits.

split (*self*, *X*, *y=None*, *groups=None*)

Get the time series splits.

X and *y* are assumed to be sorted in ascending time order. This method can handle passing in empty or *None* *X* and *y* data but note that *X* and *y* cannot be *None* or empty at the same time.

Parameters

- **x** (*pd.DataFrame*, *None*) – Features to split.
- **y** (*pd.DataFrame*, *None*) – Target variable to split. Defaults to *None*.
- **groups** – Ignored but kept for compatibility with sklearn API. Defaults to *None*.

Yields Iterator of (train, test) indices tuples.

Raises **ValueError** – If one of the proposed splits would be empty.

training_validation_split

Training Validation Split class.

Module Contents

Classes Summary

<i>TrainingValidationSplit</i>

Split the training data into training and validation sets.
--

Contents

class evalml.preprocessing.data_splitters.training_validation_split.**TrainingValidationSplit**

Split the training data into training and validation sets.

Parameters

- **test_size** (*float*) – What percentage of data points should be included in the validation set. Defaults to the complement of *train_size* if *train_size* is set, and 0.25 otherwise.
- **train_size** (*float*) – What percentage of data points should be included in the training set. Defaults to the complement of *test_size*
- **shuffle** (*boolean*) – Whether to shuffle the data before splitting. Defaults to *False*.

- **stratify** (*list*) – Splits the data in a stratified fashion, using this argument as class labels. Defaults to None.
- **random_seed** (*int*) – The seed to use for random sampling. Defaults to 0.

Methods

<code>get_n_splits</code>	Return the number of splits of this object.
<code>split</code>	Divide the data into training and testing sets.

static `get_n_splits()`

Return the number of splits of this object.

Returns Always returns 1.

Return type int

split (*self*, *X*, *y=None*)

Divide the data into training and testing sets.

Parameters

- **x** (*pd.DataFrame*) – Dataframe of points to split
- **y** (*pd.Series*) – Series of points to split

Returns Indices to split data into training and test set

Return type list

Package Contents

Classes Summary

<code>TimeSeriesSplit</code>	Rolling Origin Cross Validation for time series problems.
<code>TrainingValidationSplit</code>	Split the training data into training and validation sets.

Contents

class `evalml.preprocessing.data_splitters.TimeSeriesSplit` (*max_delay=0*, *gap=0*, *date_index=None*, *n_splits=3*)

Rolling Origin Cross Validation for time series problems.

This class uses `max_delay` and `gap` values to take into account that evalml time series pipelines perform some feature and target engineering, e.g delaying input features and shifting the target variable by the desired amount. If the data that will be split already has all the features and appropriate target values, and then set `max_delay` and `gap` to 0.

Parameters

- **max_delay** (*int*) – Max delay value for feature engineering. Time series pipelines create delayed features from existing features. This process will introduce NaNs into the first `max_delay` number of rows. The splitter uses the last `max_delay` number of rows from the previous split as the first `max_delay` number of rows of the current split to avoid “throwing

out” more data than in necessary. Defaults to 0.

- **gap** (*int*) – Gap used in time series problem. Time series pipelines shift the target variable by gap rows. Defaults to 0.
- **date_index** (*str*) – Name of the column containing the datetime information used to order the data. Defaults to None.
- **n_splits** (*int*) – number of data splits to make. Defaults to 3.

Methods

<code>get_n_splits</code>	Get the number of data splits.
<code>split</code>	Get the time series splits.

get_n_splits (*self*, *X=None*, *y=None*, *groups=None*)

Get the number of data splits.

Parameters

- **X** (*pd.DataFrame*, *None*) – Features to split.
- **y** (*pd.DataFrame*, *None*) – Target variable to split. Defaults to None.
- **groups** – Ignored but kept for compatibility with sklearn API. Defaults to None.

Returns Number of splits.

split (*self*, *X*, *y=None*, *groups=None*)

Get the time series splits.

X and y are assumed to be sorted in ascending time order. This method can handle passing in empty or None X and y data but note that X and y cannot be None or empty at the same time.

Parameters

- **X** (*pd.DataFrame*, *None*) – Features to split.
- **y** (*pd.DataFrame*, *None*) – Target variable to split. Defaults to None.
- **groups** – Ignored but kept for compatibility with sklearn API. Defaults to None.

Yields Iterator of (train, test) indices tuples.

Raises **ValueError** – If one of the proposed splits would be empty.

```
class evalml.preprocessing.data_splitters.TrainingValidationSplit (test_size=None,  
                                                                train_size=None,  
                                                                shuf-  
                                                                fle=False,  
                                                                strat-  
                                                                ify=None,  
                                                                ran-  
                                                                dom_seed=0)
```

Split the training data into training and validation sets.

Parameters

- **test_size** (*float*) – What percentage of data points should be included in the validation set. Defaults to the complement of *train_size* if *train_size* is set, and 0.25 otherwise.
- **train_size** (*float*) – What percentage of data points should be included in the training set. Defaults to the complement of *test_size*

- **shuffle** (*boolean*) – Whether to shuffle the data before splitting. Defaults to False.
- **stratify** (*list*) – Splits the data in a stratified fashion, using this argument as class labels. Defaults to None.
- **random_seed** (*int*) – The seed to use for random sampling. Defaults to 0.

Methods

<code>get_n_splits</code>	Return the number of splits of this object.
<code>split</code>	Divide the data into training and testing sets.

static `get_n_splits()`

Return the number of splits of this object.

Returns Always returns 1.

Return type int

split (*self*, *X*, *y=None*)

Divide the data into training and testing sets.

Parameters

- **X** (*pd.DataFrame*) – Dataframe of points to split
- **y** (*pd.Series*) – Series of points to split

Returns Indices to split data into training and test set

Return type list

Submodules

utils

Helpful preprocessing utilities.

Module Contents

Functions

<code>load_data</code>	Load features and target from file.
<code>number_of_features</code>	Get the number of features of each specific dtype in a DataFrame.
<code>split_data</code>	Split data into train and test sets.
<code>target_distribution</code>	Get the target distributions.

Contents

`evalml.preprocessing.utils.load_data` (*path*, *index*, *target*, *n_rows=None*, *drop=None*, *verbose=True*, ***kwargs*)

Load features and target from file.

Parameters

- **path** (*str*) – Path to file or a http/ftp/s3 URL.
- **index** (*str*) – Column for index.
- **target** (*str*) – Column for target.
- **n_rows** (*int*) – Number of rows to return. Defaults to None.
- **drop** (*list*) – List of columns to drop. Defaults to None.
- **verbose** (*bool*) – If True, prints information about features and target. Defaults to True.
- ****kwargs** – Other keyword arguments that should be passed to panda's `read_csv` method.

Returns Features matrix and target.

Return type `pd.DataFrame`, `pd.Series`

`evalml.preprocessing.utils.number_of_features` (*dtypes*)

Get the number of features of each specific dtype in a DataFrame.

Parameters **dtypes** (*pd.Series*) – DataFrame.dtypes to get the number of features for.

Returns dtypes and the number of features for each input type.

Return type `pd.Series`

`evalml.preprocessing.utils.split_data` (*X*, *y*, *problem_type*, *problem_configuration=None*, *test_size=0.2*, *random_seed=0*)

Split data into train and test sets.

Parameters

- **X** (*pd.DataFrame* or *np.ndarray*) – data of shape [n_samples, n_features]
- **y** (*pd.Series*, or *np.ndarray*) – target data of length [n_samples]
- **problem_type** (*str* or *ProblemTypes*) – type of supervised learning problem. see `evalml.problem_types.problemtype.all_problem_types` for a full list.
- **problem_configuration** (*dict*) – Additional parameters needed to configure the search. For example, in time series problems, values should be passed in for the `date_index`, `gap`, and `max_delay` variables.
- **test_size** (*float*) – What percentage of data points should be included in the test set. Defaults to 0.2 (20%).
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns Feature and target data each split into train and test sets.

Return type `pd.DataFrame`, `pd.DataFrame`, `pd.Series`, `pd.Series`

`evalml.preprocessing.utils.target_distribution` (*targets*)

Get the target distributions.

Parameters **targets** (*pd.Series*) – Target data.

Returns Target data and their frequency distribution as percentages.

Return type `pd.Series`

Package Contents

Classes Summary

<code>TimeSeriesSplit</code>	Rolling Origin Cross Validation for time series problems.
<code>TrainingValidationSplit</code>	Split the training data into training and validation sets.

Functions

<code>load_data</code>	Load features and target from file.
<code>number_of_features</code>	Get the number of features of each specific dtype in a DataFrame.
<code>split_data</code>	Split data into train and test sets.
<code>target_distribution</code>	Get the target distributions.

Contents

`evalml.preprocessing.load_data` (*path*, *index*, *target*, *n_rows=None*, *drop=None*, *verbose=True*, ***kwargs*)

Load features and target from file.

Parameters

- **path** (*str*) – Path to file or a http/ftp/s3 URL.
- **index** (*str*) – Column for index.
- **target** (*str*) – Column for target.
- **n_rows** (*int*) – Number of rows to return. Defaults to None.
- **drop** (*list*) – List of columns to drop. Defaults to None.
- **verbose** (*bool*) – If True, prints information about features and target. Defaults to True.
- ****kwargs** – Other keyword arguments that should be passed to panda's `read_csv` method.

Returns Features matrix and target.

Return type `pd.DataFrame`, `pd.Series`

`evalml.preprocessing.number_of_features` (*dtypes*)

Get the number of features of each specific dtype in a DataFrame.

Parameters **dtypes** (*pd.Series*) – DataFrame.dtypes to get the number of features for.

Returns dtypes and the number of features for each input type.

Return type `pd.Series`

`evalml.preprocessing.split_data` (*X*, *y*, *problem_type*, *problem_configuration=None*, *test_size=0.2*, *random_seed=0*)

Split data into train and test sets.

Parameters

- **x** (*pd.DataFrame* or *np.ndarray*) – data of shape [n_samples, n_features]
- **y** (*pd.Series*, or *np.ndarray*) – target data of length [n_samples]
- **problem_type** (*str* or *ProblemTypes*) – type of supervised learning problem. see `evalml.problem_types.problemtypes.all_problem_types` for a full list.
- **problem_configuration** (*dict*) – Additional parameters needed to configure the search. For example, in time series problems, values should be passed in for the `date_index`, `gap`, and `max_delay` variables.
- **test_size** (*float*) – What percentage of data points should be included in the test set. Defaults to 0.2 (20%).
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.

Returns Feature and target data each split into train and test sets.

Return type *pd.DataFrame*, *pd.DataFrame*, *pd.Series*, *pd.Series*

`evalml.preprocessing.target_distribution(targets)`

Get the target distributions.

Parameters **targets** (*pd.Series*) – Target data.

Returns Target data and their frequency distribution as percentages.

Return type *pd.Series*

class `evalml.preprocessing.TimeSeriesSplit` (*max_delay=0*, *gap=0*, *date_index=None*,
n_splits=3)

Rolling Origin Cross Validation for time series problems.

This class uses `max_delay` and `gap` values to take into account that evalml time series pipelines perform some feature and target engineering, e.g delaying input features and shifting the target variable by the desired amount. If the data that will be split already has all the features and appropriate target values, and then set `max_delay` and `gap` to 0.

Parameters

- **max_delay** (*int*) – Max delay value for feature engineering. Time series pipelines create delayed features from existing features. This process will introduce NaNs into the first `max_delay` number of rows. The splitter uses the last `max_delay` number of rows from the previous split as the first `max_delay` number of rows of the current split to avoid “throwing out” more data than is necessary. Defaults to 0.
- **gap** (*int*) – Gap used in time series problem. Time series pipelines shift the target variable by gap rows. Defaults to 0.
- **date_index** (*str*) – Name of the column containing the datetime information used to order the data. Defaults to None.
- **n_splits** (*int*) – number of data splits to make. Defaults to 3.

Methods

<code>get_n_splits</code>	Get the number of data splits.
<code>split</code>	Get the time series splits.

get_n_splits (*self*, *X=None*, *y=None*, *groups=None*)
Get the number of data splits.

Parameters

- **x** (*pd.DataFrame, None*) – Features to split.
- **y** (*pd.DataFrame, None*) – Target variable to split. Defaults to None.
- **groups** – Ignored but kept for compatibility with sklearn API. Defaults to None.

Returns Number of splits.

split (*self, X, y=None, groups=None*)

Get the time series splits.

X and y are assumed to be sorted in ascending time order. This method can handle passing in empty or None X and y data but note that X and y cannot be None or empty at the same time.

Parameters

- **x** (*pd.DataFrame, None*) – Features to split.
- **y** (*pd.DataFrame, None*) – Target variable to split. Defaults to None.
- **groups** – Ignored but kept for compatibility with sklearn API. Defaults to None.

Yields Iterator of (train, test) indices tuples.

Raises ValueError – If one of the proposed splits would be empty.

class evalml.preprocessing.**TrainingValidationSplit** (*test_size=None, train_size=None, shuffle=False, stratify=None, random_seed=0*)

Split the training data into training and validation sets.

Parameters

- **test_size** (*float*) – What percentage of data points should be included in the validation set. Defaults to the complement of *train_size* if *train_size* is set, and 0.25 otherwise.
- **train_size** (*float*) – What percentage of data points should be included in the training set. Defaults to the complement of *test_size*
- **shuffle** (*boolean*) – Whether to shuffle the data before splitting. Defaults to False.
- **stratify** (*list*) – Splits the data in a stratified fashion, using this argument as class labels. Defaults to None.
- **random_seed** (*int*) – The seed to use for random sampling. Defaults to 0.

Methods

<code>get_n_splits</code>	Return the number of splits of this object.
<code>split</code>	Divide the data into training and testing sets.

static `get_n_splits()`

Return the number of splits of this object.

Returns Always returns 1.

Return type int

split (*self, X, y=None*)

Divide the data into training and testing sets.

Parameters

- **x** (*pd.DataFrame*) – Dataframe of points to split

- **y** (*pd.Series*) – Series of points to split

Returns Indices to split data into training and test set

Return type list

Problem Types

The supported types of machine learning problems.

Submodules

problem_types

Enum defining the supported types of machine learning problems.

Module Contents

Classes Summary

<i>ProblemTypes</i>	Enum defining the supported types of machine learning problems.
---------------------	---

Contents

class evalml.problem_types.problem_types.**ProblemTypes**

Enum defining the supported types of machine learning problems.

Attributes

BINARY	Binary classification problem.
MULTI-CLASS	Multiclass classification problem.
REGRESSION	Regression problem.
TIME_SERIES_BINARY	Time series binary classification problem.
TIME_SERIES_MULTICLASS	Time series multiclass classification problem.
TIME_SERIES_REGRESSION	Time series regression problem.

Methods

<i>all_problem_types</i>	Get a list of all defined problem types.
<i>name</i>	The name of the Enum member.
<i>value</i>	The value of the Enum member.

all_problem_types (*cls*)

Get a list of all defined problem types.

Returns List of all defined problem types.

Return type list(*ProblemTypes*)

name (*self*)

The name of the Enum member.

value (*self*)

The value of the Enum member.

utils

Utility methods for the ProblemTypes enum in EvalML.

Module Contents

Functions

<i>detect_problem_type</i>	Determine the type of problem is being solved based on the targets (binary vs multiclass classification, regression). Ignores missing and null data.
<i>handle_problem_types</i>	Handles problem_type by either returning the ProblemTypes or converting from a str.
<i>is_binary</i>	Determines if the provided problem_type is a binary classification problem type.
<i>is_classification</i>	Determines if the provided problem_type is a classification problem type.
<i>is_multiclass</i>	Determines if the provided problem_type is a multiclass classification problem type.
<i>is_regression</i>	Determines if the provided problem_type is a regression problem type.
<i>is_time_series</i>	Determines if the provided problem_type is a time series problem type.

Contents

`evalml.problem_types.utils.detect_problem_type(y)`

Determine the type of problem is being solved based on the targets (binary vs multiclass classification, regression). Ignores missing and null data.

Parameters *y* (*pd.Series*) – The target labels to predict.

Returns ProblemType Enum

Return type ProblemType

Example

```
>>> y = pd.Series([0, 1, 0, 0, 0, 1, 1, 0, 0, 1, 1])
>>> problem_type = detect_problem_type(y)
>>> assert problem_type == ProblemTypes.BINARY
```

Raises **ValueError** – If the input has less than two classes.

`evalml.problem_types.utils.handle_problem_types(problem_type)`

Handles `problem_type` by either returning the `ProblemTypes` or converting from a str.

Parameters **problem_type** (*str or ProblemTypes*) – Problem type that needs to be handled.

Returns `ProblemTypes` enum

Raises

- **KeyError** – If input is not a valid `ProblemTypes` enum value.
- **ValueError** – If input is not a string or `ProblemTypes` object.

`evalml.problem_types.utils.is_binary(problem_type)`

Determines if the provided `problem_type` is a binary classification problem type.

Parameters **problem_type** (*str or ProblemTypes*) – type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.

Returns Whether or not the provided `problem_type` is a binary classification problem type.

Return type bool

`evalml.problem_types.utils.is_classification(problem_type)`

Determines if the provided `problem_type` is a classification problem type.

Parameters **problem_type** (*str or ProblemTypes*) – type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.

Returns Whether or not the provided `problem_type` is a classification problem type.

Return type bool

`evalml.problem_types.utils.is_multiclass(problem_type)`

Determines if the provided `problem_type` is a multiclass classification problem type.

Parameters **problem_type** (*str or ProblemTypes*) – type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.

Returns Whether or not the provided `problem_type` is a multiclass classification problem type.

Return type bool

`evalml.problem_types.utils.is_regression(problem_type)`

Determines if the provided `problem_type` is a regression problem type.

Parameters **problem_type** (*str or ProblemTypes*) – type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.

Returns Whether or not the provided `problem_type` is a regression problem type.

Return type bool

`evalml.problem_types.utils.is_time_series(problem_type)`

Determines if the provided `problem_type` is a time series problem type.

Parameters `problem_type` (*str* or *ProblemTypes*) – type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.

Returns Whether or not the provided `problem_type` is a time series problem type.

Return type bool

Package Contents

Classes Summary

<i>ProblemTypes</i>	Enum defining the supported types of machine learning problems.
---------------------	---

Functions

<i>detect_problem_type</i>	Determine the type of problem is being solved based on the targets (binary vs multiclass classification, regression). Ignores missing and null data.
<i>handle_problem_types</i>	Handles <code>problem_type</code> by either returning the <code>ProblemTypes</code> or converting from a <code>str</code> .
<i>is_binary</i>	Determines if the provided <code>problem_type</code> is a binary classification problem type.
<i>is_classification</i>	Determines if the provided <code>problem_type</code> is a classification problem type.
<i>is_multiclass</i>	Determines if the provided <code>problem_type</code> is a multiclass classification problem type.
<i>is_regression</i>	Determines if the provided <code>problem_type</code> is a regression problem type.
<i>is_time_series</i>	Determines if the provided <code>problem_type</code> is a time series problem type.

Contents

`evalml.problem_types.detect_problem_type(y)`

Determine the type of problem is being solved based on the targets (binary vs multiclass classification, regression). Ignores missing and null data.

Parameters `y` (*pd.Series*) – The target labels to predict.

Returns `ProblemType` Enum

Return type `ProblemType`

Example

```
>>> y = pd.Series([0, 1, 0, 0, 0, 1, 1, 0, 0, 1, 1])
>>> problem_type = detect_problem_type(y)
>>> assert problem_type == ProblemTypes.BINARY
```

Raises **ValueError** – If the input has less than two classes.

`evalml.problem_types.handle_problem_types(problem_type)`

Handles `problem_type` by either returning the `ProblemTypes` or converting from a str.

Parameters `problem_type` (*str or ProblemTypes*) – Problem type that needs to be handled.

Returns `ProblemTypes` enum

Raises

- **KeyError** – If input is not a valid `ProblemTypes` enum value.
- **ValueError** – If input is not a string or `ProblemTypes` object.

`evalml.problem_types.is_binary(problem_type)`

Determines if the provided `problem_type` is a binary classification problem type.

Parameters `problem_type` (*str or ProblemTypes*) – type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.

Returns Whether or not the provided `problem_type` is a binary classification problem type.

Return type bool

`evalml.problem_types.is_classification(problem_type)`

Determines if the provided `problem_type` is a classification problem type.

Parameters `problem_type` (*str or ProblemTypes*) – type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.

Returns Whether or not the provided `problem_type` is a classification problem type.

Return type bool

`evalml.problem_types.is_multiclass(problem_type)`

Determines if the provided `problem_type` is a multiclass classification problem type.

Parameters `problem_type` (*str or ProblemTypes*) – type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.

Returns Whether or not the provided `problem_type` is a multiclass classification problem type.

Return type bool

`evalml.problem_types.is_regression(problem_type)`

Determines if the provided `problem_type` is a regression problem type.

Parameters `problem_type` (*str or ProblemTypes*) – type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.

Returns Whether or not the provided `problem_type` is a regression problem type.

Return type bool

`evalml.problem_types.is_time_series(problem_type)`

Determines if the provided `problem_type` is a time series problem type.

Parameters `problem_type` (*str* or `ProblemTypes`) – type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.

Returns Whether or not the provided `problem_type` is a time series problem type.

Return type `bool`

class `evalml.problem_types.ProblemTypes`

Enum defining the supported types of machine learning problems.

Attributes

BINARY	Binary classification problem.
MULTI-CLASS	Multiclass classification problem.
REGRESSION	Regression problem.
TIME_SERIES_BINARY	Time series binary classification problem.
TIME_SERIES_MULTICLASS	Time series multiclass classification problem.
TIME_SERIES_REGRESSION	Time series regression problem.

Methods

<code>all_problem_types</code>	Get a list of all defined problem types.
<code>name</code>	The name of the Enum member.
<code>value</code>	The value of the Enum member.

all_problem_types (*cls*)

Get a list of all defined problem types.

Returns List of all defined problem types.

Return type `list(ProblemTypes)`

name (*self*)

The name of the Enum member.

value (*self*)

The value of the Enum member.

Tuners

EvalML tuner classes.

Submodules

grid_search_tuner

Grid Search Optimizer, which generates all of the possible points to search for using a grid.

Module Contents

Classes Summary

<code>GridSearchTuner</code>	Grid Search Optimizer, which generates all of the possible points to search for using a grid.
------------------------------	---

Contents

class evalml.tuners.grid_search_tuner.**GridSearchTuner** (*pipeline_hyperparameter_ranges*, *n_points=10*, *random_seed=0*)

Grid Search Optimizer, which generates all of the possible points to search for using a grid.

Parameters

- **pipeline_hyperparameter_ranges** (*dict*) – a set of hyperparameter ranges corresponding to a pipeline’s parameters
- **n_points** (*int*) – The number of points to sample from along each dimension defined in the *space* argument. Defaults to 10.
- **random_seed** (*int*) – Seed for random number generator. Unused in this class, defaults to 0.

Example

```
>>> tuner = GridSearchTuner({'My Component': {'param a': [0.0, 10.0], 'param b': [
↪ 'a', 'b', 'c']}}, n_points=5)
>>> proposal = tuner.propose()
>>> assert proposal.keys() == {'My Component'}
>>> assert proposal['My Component'] == {'param a': 0.0, 'param b': 'a'}
```

Methods

<code>add</code>	Not applicable to grid search tuner as generated parameters are not dependent on scores of previous parameters.
<code>is_search_space_exhausted</code>	Checks if it is possible to generate a set of valid parameters. Stores generated parameters in <code>self.curr_params</code> to be returned by <code>propose()</code> .
<code>propose</code>	Returns parameters from <code>_grid_points</code> iterations.

add (*self*, *pipeline_parameters*, *score*)

Not applicable to grid search tuner as generated parameters are not dependent on scores of previous parameters.

Parameters

- **pipeline_parameters** (*dict*) – a dict of the parameters used to evaluate a pipeline
- **score** (*float*) – the score obtained by evaluating the pipeline with the provided parameters

is_search_space_exhausted (*self*)

Checks if it is possible to generate a set of valid parameters. Stores generated parameters in `self.curr_params` to be returned by `propose()`.

Returns If no more valid parameters exists in the search space, return False.

Return type bool

Raises `NoParamsException` – If a search space is exhausted, then this exception is thrown.

propose (*self*)

Returns parameters from `_grid_points` iterations.

If all possible combinations of parameters have been scored, then `NoParamsException` is raised.

Returns proposed pipeline parameters

Return type dict

random_search_tuner

Random Search Optimizer.

Module Contents

Classes Summary

RandomSearchTuner

Random Search Optimizer.

Contents

class `evalml.tuners.random_search_tuner.RandomSearchTuner` (*pipeline_hyperparameter_ranges*, *with_replacement=False*, *replacement_max_attempts=10*, *random_seed=0*)

Random Search Optimizer.

Parameters

- **pipeline_hyperparameter_ranges** (*dict*) – a set of hyperparameter ranges corresponding to a pipeline’s parameters
- **with_replacement** (*bool*) – If false, only unique hyperparameters will be shown
- **replacement_max_attempts** (*int*) – The maximum number of tries to get a unique set of random parameters. Only used if tuner is initialized with `with_replacement=True`
- **random_seed** (*int*) – Seed for random number generator. Defaults to 0.

Example

```
>>> tuner = RandomSearchTuner({'My Component': {'param a': [0.0, 10.0], 'param b':
↪ ['a', 'b', 'c']}}, random_seed=42)
>>> proposal = tuner.propose()
>>> assert proposal.keys() == {'My Component'}
>>> assert proposal['My Component'] == {'param a': 3.7454011884736254, 'param b':
↪ 'c'}
```

Methods

<code>add</code>	Not applicable to random search tuner as generated parameters are not dependent on scores of previous parameters.
<code>is_search_space_exhausted</code>	Checks if it is possible to generate a set of valid parameters. Stores generated parameters in <code>self.curr_params</code> to be returned by <code>propose()</code> .
<code>propose</code>	Generate a unique set of parameters.

add (*self*, *pipeline_parameters*, *score*)

Not applicable to random search tuner as generated parameters are not dependent on scores of previous parameters.

Parameters

- **pipeline_parameters** (*dict*) – A dict of the parameters used to evaluate a pipeline
- **score** (*float*) – The score obtained by evaluating the pipeline with the provided parameters

is_search_space_exhausted (*self*)

Checks if it is possible to generate a set of valid parameters. Stores generated parameters in `self.curr_params` to be returned by `propose()`.

Returns If no more valid parameters exists in the search space, return False.

Return type bool

Raises **NoParamsException** – If a search space is exhausted, then this exception is thrown.

propose (*self*)

Generate a unique set of parameters.

If tuner was initialized with `with_replacement=True` and the tuner is unable to generate a unique set of parameters after `replacement_max_attempts` tries, then `NoParamsException` is raised.

Returns Proposed pipeline parameters

Return type dict

skopt_tuner

Bayesian Optimizer.

Module Contents

Classes Summary

SKOptTuner

Bayesian Optimizer.

Attributes Summary

logger

Contents

`evalml.tuners.skopt_tuner.logger`

class `evalml.tuners.skopt_tuner.SKOptTuner` (*pipeline_hyperparameter_ranges*, *random_seed=0*)

Bayesian Optimizer.

Parameters

- **pipeline_hyperparameter_ranges** (*dict*) – A set of hyperparameter ranges corresponding to a pipeline’s parameters.
- **random_seed** (*int*) – The seed for the random number generator. Defaults to 0.

Methods

<i>add</i>	Add score to sample.
<i>is_search_space_exhausted</i>	Optional. If possible search space for tuner is finite, this method indicates whether or not all possible parameters have been scored.
<i>propose</i>	Returns a suggested set of parameters to train and score a pipeline with, based off the search space dimensions and prior samples.

add (*self*, *pipeline_parameters*, *score*)

Add score to sample.

Parameters

- **pipeline_parameters** (*dict*) – A dict of the parameters used to evaluate a pipeline
- **score** (*float*) – The score obtained by evaluating the pipeline with the provided parameters

Returns None

Raises

- **Exception** – If skopt tuner errors.
- **ParameterError** – If skopt receives invalid parameters.

is_search_space_exhausted (*self*)
Optional. If possible search space for tuner is finite, this method indicates whether or not all possible parameters have been scored.

Returns Returns true if all possible parameters in a search space has been scored.

Return type bool

propose (*self*)
Returns a suggested set of parameters to train and score a pipeline with, based off the search space dimensions and prior samples.

Returns Proposed pipeline parameters.

Return type dict

tuner

Base Tuner class.

Module Contents

Classes Summary

<i>Tuner</i>	Base Tuner class.
--------------	-------------------

Contents

class evalml.tuners.tuner.**Tuner** (*pipeline_hyperparameter_ranges*, *random_seed=0*)
Base Tuner class.

Tuners implement different strategies for sampling from a search space. They’re used in EvalML to search the space of pipeline hyperparameters.

Parameters

- **pipeline_hyperparameter_ranges** (*dict*) – a set of hyperparameter ranges corresponding to a pipeline’s parameters.
- **random_seed** (*int*) – The random state. Defaults to 0.

Methods

<i>add</i>	Register a set of hyperparameters with the score obtained from training a pipeline with those hyperparameters.
<i>is_search_space_exhausted</i>	Optional. If possible search space for tuner is finite, this method indicates whether or not all possible parameters have been scored.

continues on next page

Table 698 – continued from previous page

<i>propose</i>	Returns a suggested set of parameters to train and score a pipeline with, based off the search space dimensions and prior samples.
----------------	--

abstract add (*self*, *pipeline_parameters*, *score*)

Register a set of hyperparameters with the score obtained from training a pipeline with those hyperparameters.

Parameters

- **pipeline_parameters** (*dict*) – a dict of the parameters used to evaluate a pipeline
- **score** (*float*) – the score obtained by evaluating the pipeline with the provided parameters

Returns None

is_search_space_exhausted (*self*)

Optional. If possible search space for tuner is finite, this method indicates whether or not all possible parameters have been scored.

Returns Returns true if all possible parameters in a search space has been scored.

Return type bool

abstract propose (*self*)

Returns a suggested set of parameters to train and score a pipeline with, based off the search space dimensions and prior samples.

Returns Proposed pipeline parameters

Return type dict

tuner_exceptions

Exception thrown by tuner classes.

Module Contents

Contents

exception evalml.tuners.tuner_exceptions.NoParamsException

Raised when a tuner exhausts its search space and runs out of parameters to propose.

exception evalml.tuners.tuner_exceptions.ParameterError

Raised when a tuner encounters an error with the parameters being used with it.

Package Contents

Classes Summary

<i>GridSearchTuner</i>	Grid Search Optimizer, which generates all of the possible points to search for using a grid.
<i>RandomSearchTuner</i>	Random Search Optimizer.
<i>SKOptTuner</i>	Bayesian Optimizer.
<i>Tuner</i>	Base Tuner class.

Exceptions Summary

Contents

class evalml.tuners.**GridSearchTuner** (*pipeline_hyperparameter_ranges*, *n_points=10*, *random_seed=0*)
Grid Search Optimizer, which generates all of the possible points to search for using a grid.

Parameters

- **pipeline_hyperparameter_ranges** (*dict*) – a set of hyperparameter ranges corresponding to a pipeline’s parameters
- **n_points** (*int*) – The number of points to sample from along each dimension defined in the *space* argument. Defaults to 10.
- **random_seed** (*int*) – Seed for random number generator. Unused in this class, defaults to 0.

Example

```
>>> tuner = GridSearchTuner({'My Component': {'param a': [0.0, 10.0], 'param b': [
↪ 'a', 'b', 'c']}}, n_points=5)
>>> proposal = tuner.propose()
>>> assert proposal.keys() == {'My Component'}
>>> assert proposal['My Component'] == {'param a': 0.0, 'param b': 'a'}
```

Methods

<i>add</i>	Not applicable to grid search tuner as generated parameters are not dependent on scores of previous parameters.
<i>is_search_space_exhausted</i>	Checks if it is possible to generate a set of valid parameters. Stores generated parameters in <i>self.curr_params</i> to be returned by <i>propose()</i> .
<i>propose</i>	Returns parameters from <i>_grid_points</i> iterations.

add (*self*, *pipeline_parameters*, *score*)

Not applicable to grid search tuner as generated parameters are not dependent on scores of previous pa-

rameters.

Parameters

- **pipeline_parameters** (*dict*) – a dict of the parameters used to evaluate a pipeline
- **score** (*float*) – the score obtained by evaluating the pipeline with the provided parameters

```
is_search_space_exhausted(self)
```

Checks if it is possible to generate a set of valid parameters. Stores generated parameters in `self.curr_params` to be returned by `propose()`.

Returns If no more valid parameters exists in the search space, return False.

Return type bool

Raises *NoParamsException* – If a search space is exhausted, then this exception is thrown.

propose (*self*)

Returns parameters from `_grid_points` iterations.

If all possible combinations of parameters have been scored, then `NoParamsException` is raised.

Returns proposed pipeline parameters

Return type dict

```
exception evalml.tuners.NoParamsException
```

Raised when a tuner exhausts its search space and runs out of parameters to propose.

```
exception evalml.tuners.ParameterError
```

Raised when a tuner encounters an error with the parameters being used with it.

[illegible]

Random Search Optimizer.

Parameters

- **pipeline_hyperparameter_ranges** (*dict*) – a set of hyperparameter ranges corresponding to a pipeline’s parameters
- **with_replacement** (*bool*) – If false, only unique hyperparameters will be shown
- **replacement_max_attempts** (*int*) – The maximum number of tries to get a unique set of random parameters. Only used if tuner is initialized with with_replacement=True
- **random_seed** (*int*) – Seed for random number generator. Defaults to 0.

Example

```
>>> tuner = RandomSearchTuner({'My Component': {'param a': [0.0, 10.0], 'param b':
↪ ['a', 'b', 'c']}}, random_seed=42)
>>> proposal = tuner.propose()
>>> assert proposal.keys() == {'My Component'}
>>> assert proposal['My Component'] == {'param a': 3.7454011884736254, 'param b':
↪ 'c'}
```

Methods

<code>add</code>	Not applicable to random search tuner as generated parameters are not dependent on scores of previous parameters.
<code>is_search_space_exhausted</code>	Checks if it is possible to generate a set of valid parameters. Stores generated parameters in <code>self.curr_params</code> to be returned by <code>propose()</code> .
<code>propose</code>	Generate a unique set of parameters.

add (*self*, *pipeline_parameters*, *score*)

Not applicable to random search tuner as generated parameters are not dependent on scores of previous parameters.

Parameters

- **pipeline_parameters** (*dict*) – A dict of the parameters used to evaluate a pipeline
- **score** (*float*) – The score obtained by evaluating the pipeline with the provided parameters

is_search_space_exhausted (*self*)

Checks if it is possible to generate a set of valid parameters. Stores generated parameters in `self.curr_params` to be returned by `propose()`.

Returns If no more valid parameters exists in the search space, return False.

Return type bool

Raises `NoParamsException` – If a search space is exhausted, then this exception is thrown.

propose (*self*)

Generate a unique set of parameters.

If tuner was initialized with `with_replacement=True` and the tuner is unable to generate a unique set of parameters after `replacement_max_attempts` tries, then `NoParamsException` is raised.

Returns Proposed pipeline parameters

Return type dict

class `evalml.tuners.SKOptTuner` (*pipeline_hyperparameter_ranges*, *random_seed=0*)

Bayesian Optimizer.

Parameters

- **pipeline_hyperparameter_ranges** (*dict*) – A set of hyperparameter ranges corresponding to a pipeline's parameters.
- **random_seed** (*int*) – The seed for the random number generator. Defaults to 0.

Methods

<code>add</code>	Add score to sample.
<code>is_search_space_exhausted</code>	Optional. If possible search space for tuner is finite, this method indicates whether or not all possible parameters have been scored.
<code>propose</code>	Returns a suggested set of parameters to train and score a pipeline with, based off the search space dimensions and prior samples.

add (*self*, *pipeline_parameters*, *score*)

Add score to sample.

Parameters

- **pipeline_parameters** (*dict*) – A dict of the parameters used to evaluate a pipeline
- **score** (*float*) – The score obtained by evaluating the pipeline with the provided parameters

Returns None

Raises

- **Exception** – If skopt tuner errors.
- **ParameterError** – If skopt receives invalid parameters.

is_search_space_exhausted (*self*)

Optional. If possible search space for tuner is finite, this method indicates whether or not all possible parameters have been scored.

Returns Returns true if all possible parameters in a search space has been scored.

Return type bool

propose (*self*)

Returns a suggested set of parameters to train and score a pipeline with, based off the search space dimensions and prior samples.

Returns Proposed pipeline parameters.

Return type dict

class evalml.tuners.**Tuner** (*pipeline_hyperparameter_ranges*, *random_seed=0*)

Base Tuner class.

Tuners implement different strategies for sampling from a search space. They're used in EvalML to search the space of pipeline hyperparameters.

Parameters

- **pipeline_hyperparameter_ranges** (*dict*) – a set of hyperparameter ranges corresponding to a pipeline's parameters.
- **random_seed** (*int*) – The random state. Defaults to 0.

Methods

<i>add</i>	Register a set of hyperparameters with the score obtained from training a pipeline with those hyperparameters.
<i>is_search_space_exhausted</i>	Optional. If possible search space for tuner is finite, this method indicates whether or not all possible parameters have been scored.
<i>propose</i>	Returns a suggested set of parameters to train and score a pipeline with, based off the search space dimensions and prior samples.

abstract add (*self*, *pipeline_parameters*, *score*)

Register a set of hyperparameters with the score obtained from training a pipeline with those hyperparameters.

Parameters

- **pipeline_parameters** (*dict*) – a dict of the parameters used to evaluate a pipeline
- **score** (*float*) – the score obtained by evaluating the pipeline with the provided parameters

Returns None

is_search_space_exhausted (*self*)

Optional. If possible search space for tuner is finite, this method indicates whether or not all possible parameters have been scored.

Returns Returns true if all possible parameters in a search space has been scored.

Return type bool

abstract propose (*self*)

Returns a suggested set of parameters to train and score a pipeline with, based off the search space dimensions and prior samples.

Returns Proposed pipeline parameters

Return type dict

Utils

Utility methods.

Submodules

base_meta

Metaclass that overrides creating a new component or pipeline by wrapping methods with validators and setters.

Module Contents

Classes Summary

BaseMeta

Metaclass that overrides creating a new component or pipeline by wrapping methods with validators and setters.

Contents

class evalml.utils.base_meta.**BaseMeta**

Metaclass that overrides creating a new component or pipeline by wrapping methods with validators and setters.

Attributes

FIT_METHODS	['fit', 'fit_transform']
METHODS_TO_CHECK	['predict', 'predict_proba', 'transform', 'inverse_transform']
PROPERTIES_TO_CHECK	['feature_importance']

Methods

<code>register</code>	Register a virtual subclass of an ABC.
<code>set_fit</code>	Wrapper for the fit method.

register (*cls*, *subclass*)

Register a virtual subclass of an ABC.

Returns the subclass, to allow usage as a class decorator.

classmethod set_fit (*cls*, *method*)

Wrapper for the fit method.

cli_utils

CLI functions.

Module Contents

Functions

<code>get_evalml_root</code>	Gets location where evalml is installed.
<code>get_installed_packages</code>	Get dictionary mapping installed package names to their versions.
<code>get_sys_info</code>	Returns system information.
<code>print_deps</code>	Prints the version number of each dependency.
<code>print_info</code>	Prints information about the system, evalml, and dependencies of evalml.
<code>print_sys_info</code>	Prints system information.

Contents

`evalml.utils.cli_utils.get_evalml_root()`

Gets location where evalml is installed.

Returns Location where evalml is installed.

`evalml.utils.cli_utils.get_installed_packages()`

Get dictionary mapping installed package names to their versions.

Returns Dictionary mapping installed package names to their versions.

`evalml.utils.cli_utils.get_sys_info()`

Returns system information.

Returns List of tuples about system stats.

`evalml.utils.cli_utils.print_deps()`

Prints the version number of each dependency.

`evalml.utils.cli_utils.print_info()`

Prints information about the system, evalml, and dependencies of evalml.

`evalml.utils.cli_utils.print_sys_info()`

Prints system information.

gen_utils

General utility methods.

Module Contents

Classes Summary

<code>classproperty</code>	Allows function to be accessed as a class level property.
----------------------------	---

Functions

<code>convert_to_seconds</code>	Converts a string describing a length of time to its length in seconds.
<code>deprecate_arg</code>	Helper to raise warnings when a deprecated arg is used.
<code>drop_rows_with_nans</code>	Drop rows that have any NaNs in all dataframes or series.
<code>get_importable_subclasses</code>	Get importable subclasses of a base class. Used to list all of our estimators, transformers, components and pipelines dynamically.
<code>get_random_seed</code>	Given a <code>numpy.random.RandomState</code> object, generate an int representing a seed value for another random number generator. Or, if given an int, return that int.
<code>get_random_state</code>	Generates a <code>numpy.random.RandomState</code> instance using seed.
<code>import_or_raise</code>	Attempts to import the requested library by name. If the import fails, raises an <code>ImportError</code> or warning.
<code>is_all_numeric</code>	Checks if the given <code>DataFrame</code> contains only numeric values.
<code>jupyter_check</code>	Get whether or not the code is being run in a Jupyter environment (such as Jupyter Notebook or Jupyter Lab).
<code>pad_with_nans</code>	Pad the beginning <code>num_to_pad</code> rows with nans.
<code>safe_repr</code>	Convert the given value into a string that can safely be used for repr.
<code>save_plot</code>	Saves fig to filepath if specified, or to a default location if not.

Attributes Summary

logger

SEED_BOUNDS

Contents

class evalml.utils.gen_utils.**classproperty** (*func*)

Allows function to be accessed as a class level property.

Example: .. code-block:

```
class LogisticRegressionBinaryPipeline(PipelineBase):
    component_graph = ['Simple Imputer', 'Logistic Regression Classifier']

    @classproperty
    def summary(cls):
        summary = ""
        for component in cls.component_graph:
            component = handle_component_class(component)
            summary += component.name + " + "
        return summary

assert LogisticRegressionBinaryPipeline.summary == "Simple Imputer + Logistic_
↪Regression Classifier + "
assert LogisticRegressionBinaryPipeline().summary == "Simple Imputer + Logistic_
↪Regression Classifier + "
```

evalml.utils.gen_utils.**convert_to_seconds** (*input_str*)

Converts a string describing a length of time to its length in seconds.

evalml.utils.gen_utils.**deprecate_arg** (*old_arg, new_arg, old_value, new_value*)

Helper to raise warnings when a deprecated arg is used.

Parameters

- **old_arg** (*str*) – Name of old/deprecated argument.
- **new_arg** (*str*) – Name of new argument.
- **old_value** (*Any*) – Value the user passed in for the old argument.
- **new_value** (*Any*) – Value the user passed in for the new argument.

Returns old_value if not None, else new_value

evalml.utils.gen_utils.**drop_rows_with_nans** (**pd_data*)

Drop rows that have any NaNs in all dataframes or series.

Parameters ***pd_data** – sequence of pd.Series or pd.DataFrame or None

Returns list of pd.DataFrame or pd.Series or None

evalml.utils.gen_utils.**get_importable_subclasses** (*base_class, used_in_automl=True*)

Get importable subclasses of a base class. Used to list all of our estimators, transformers, components and pipelines dynamically.

Parameters

- **base_class** (*abc.ABCMeta*) – Base class to find all of the subclasses for.
- **used_in_automl** – Not all components/pipelines/estimators are used in automl search. If True, only include those subclasses that are used in the search. This would mean excluding classes related to ExtraTrees, ElasticNet, and Baseline estimators.

Returns List of subclasses.

`evalml.utils.gen_utils.get_random_seed(random_state, min_bound=SEED_BOUNDS.min_bound, max_bound=SEED_BOUNDS.max_bound)`

Given a `numpy.random.RandomState` object, generate an int representing a seed value for another random number generator. Or, if given an int, return that int.

To protect against invalid input to a particular library’s random number generator, if an int value is provided, and it is outside the bounds “[min_bound, max_bound)”, the value will be projected into the range between the min_bound (inclusive) and max_bound (exclusive) using modular arithmetic.

Parameters

- **random_state** (*int, numpy.random.RandomState*) – random state
- **min_bound** (*None, int*) – if not default of None, will be min bound when generating seed (inclusive). Must be less than max_bound.
- **max_bound** (*None, int*) – if not default of None, will be max bound when generating seed (exclusive). Must be greater than min_bound.

Returns Seed for random number generator

Return type int

Raises **ValueError** – If boundaries are not valid.

`evalml.utils.gen_utils.get_random_state(seed)`

Generates a `numpy.random.RandomState` instance using seed.

Parameters **seed** (*None, int, np.random.RandomState object*) – seed to use to generate `numpy.random.RandomState`. Must be between `SEED_BOUNDS.min_bound` and `SEED_BOUNDS.max_bound`, inclusive.

Raises **ValueError** – If the input seed is not within the acceptable range.

Returns A `numpy.random.RandomState` instance.

`evalml.utils.gen_utils.import_or_raise(library, error_msg=None, warning=False)`

Attempts to import the requested library by name. If the import fails, raises an `ImportError` or warning.

Parameters

- **library** (*str*) – The name of the library.
- **error_msg** (*str*) – Error message to return if the import fails.
- **warning** (*bool*) – If True, `import_or_raise` gives a warning instead of `ImportError`. Defaults to False.

Returns Returns the library if importing succeeded.

Raises

- **ImportError** – If attempting to import the library fails because the library is not installed.
- **Exception** – If importing the library fails.

`evalml.utils.gen_utils.is_all_numeric(df)`

Checks if the given DataFrame contains only numeric values.

Parameters `df` (*pd.DataFrame*) – The DataFrame to check data types of.

Returns True if all the columns are numeric and are not missing any values, False otherwise.

`evalml.utils.gen_utils.jupyter_check()`

Get whether or not the code is being run in a Jupyter environment (such as Jupyter Notebook or Jupyter Lab).

Returns True if Jupyter, False otherwise.

Return type boolean

`evalml.utils.gen_utils.logger`

`evalml.utils.gen_utils.pad_with_nans(pd_data, num_to_pad)`

Pad the beginning num_to_pad rows with nans.

Parameters

- **pd_data** (*pd.DataFrame* or *pd.Series*) – Data to pad.
- **num_to_pad** (*int*) – Number of nans to pad.

Returns *pd.DataFrame* or *pd.Series*

`evalml.utils.gen_utils.safe_repr(value)`

Convert the given value into a string that can safely be used for repr.

Parameters `value` – The item to convert

Returns String representation of the value

`evalml.utils.gen_utils.save_plot(fig, filepath=None, format='png', interactive=False, return_filepath=False)`

Saves fig to filepath if specified, or to a default location if not.

Parameters

- **fig** (*Figure*) – Figure to be saved.
- **filepath** (*str* or *Path*, *optional*) – Location to save file. Default is with filename “test_plot”.
- **format** (*str*) – Extension for figure to be saved as. Ignored if interactive is True and fig is of type *plotly.Figure*. Defaults to ‘png’.
- **interactive** (*bool*, *optional*) – If True and fig is of type *plotly.Figure*, saves the fig as interactive instead of static, and format will be set to ‘html’. Defaults to False.
- **return_filepath** (*bool*, *optional*) – Whether to return the final filepath the image is saved to. Defaults to False.

Returns String representing the final filepath the image was saved to if `return_filepath` is set to True. Defaults to None.

`evalml.utils.gen_utils.SEED_BOUNDS`

logger

Logging functions.

Module Contents

Functions

<code>get_logger</code>	Get the logger with the associated name.
<code>log_subtitle</code>	Log with a subtitle.
<code>log_title</code>	Log with a title.
<code>time_elapsed</code>	How much time has elapsed since the search started.

Contents

`evalml.utils.logger.get_logger(name)`

Get the logger with the associated name.

Parameters `name` (*str*) – Name of the logger to get.

Returns The logger object with the associated name.

`evalml.utils.logger.log_subtitle(logger, title, underline='=')`

Log with a subtitle.

`evalml.utils.logger.log_title(logger, title)`

Log with a title.

`evalml.utils.logger.time_elapsed(start_time)`

How much time has elapsed since the search started.

Parameters `start_time` (*int*) – Time when search started.

Returns elapsed time formatted as a string [H:]MM:SS

Return type `str`

update_checker

Check if EvalML has updated since the user installed.

Module Contents

Contents

`evalml.utils.update_checker.method`

woodwork_utils

Woodwork utility methods.

Module Contents

Functions

`infer_feature_types`

Create a Woodwork structure from the given list, pandas, or numpy input, with specified types for columns. If a column's type is not specified, it will be inferred by Woodwork.

Attributes Summary

`numeric_and_boolean_ww`

Contents

`evalml.utils.woodwork_utils.infer_feature_types` (*data*, *feature_types=None*)

Create a Woodwork structure from the given list, pandas, or numpy input, with specified types for columns. If a column's type is not specified, it will be inferred by Woodwork.

Parameters

- **data** (*pd.DataFrame*, *pd.Series*) – Input data to convert to a Woodwork data structure.
- **feature_types** (*string*, *ww.logical_type obj*, *dict*, *optional*) – If data is a 2D structure, feature_types must be a dictionary mapping column names to the type of data represented in the column. If data is a 1D structure, then feature_types must be a Woodwork logical type or a string representing a Woodwork logical type (“Double”, “Integer”, “Boolean”, “Categorical”, “Datetime”, “NaturalLanguage”)

Returns A Woodwork data structure where the data type of each column was either specified or inferred.

Raises `ValueError` – If there is a mismatch between the dataframe and the woodwork schema.

`evalml.utils.woodwork_utils.numeric_and_boolean_ww`

Package Contents

Classes Summary

<code>classproperty</code>	Allows function to be accessed as a class level property.
----------------------------	---

Functions

<code>convert_to_seconds</code>	Converts a string describing a length of time to its length in seconds.
<code>deprecate_arg</code>	Helper to raise warnings when a deprecated arg is used.
<code>drop_rows_with_nans</code>	Drop rows that have any NaNs in all dataframes or series.
<code>get_importable_subclasses</code>	Get importable subclasses of a base class. Used to list all of our estimators, transformers, components and pipelines dynamically.
<code>get_logger</code>	Get the logger with the associated name.
<code>get_random_seed</code>	Given a <code>numpy.random.RandomState</code> object, generate an int representing a seed value for another random number generator. Or, if given an int, return that int.
<code>get_random_state</code>	Generates a <code>numpy.random.RandomState</code> instance using seed.
<code>import_or_raise</code>	Attempts to import the requested library by name. If the import fails, raises an <code>ImportError</code> or warning.
<code>infer_feature_types</code>	Create a Woodwork structure from the given list, pandas, or numpy input, with specified types for columns. If a column's type is not specified, it will be inferred by Woodwork.
<code>is_all_numeric</code>	Checks if the given DataFrame contains only numeric values.
<code>jupyter_check</code>	Get whether or not the code is being run in a Jupyter environment (such as Jupyter Notebook or Jupyter Lab).
<code>log_subtitle</code>	Log with a subtitle.
<code>log_title</code>	Log with a title.
<code>pad_with_nans</code>	Pad the beginning <code>num_to_pad</code> rows with nans.
<code>safe_repr</code>	Convert the given value into a string that can safely be used for repr.
<code>save_plot</code>	Saves fig to filepath if specified, or to a default location if not.

Attributes Summary

SEED_BOUNDS

Contents

class evalml.utils.**classproperty** (*func*)

Allows function to be accessed as a class level property.

Example: .. code-block:

```
class LogisticRegressionBinaryPipeline(PipelineBase):
    component_graph = ['Simple Imputer', 'Logistic Regression Classifier']

    @classproperty
    def summary(cls):
        summary = ""
        for component in cls.component_graph:
            component = handle_component_class(component)
            summary += component.name + " + "
        return summary

assert LogisticRegressionBinaryPipeline.summary == "Simple Imputer + Logistic_
↪Regression Classifier + "
assert LogisticRegressionBinaryPipeline().summary == "Simple Imputer + Logistic_
↪Regression Classifier + "
```

evalml.utils.**convert_to_seconds** (*input_str*)

Converts a string describing a length of time to its length in seconds.

evalml.utils.**deprecate_arg** (*old_arg, new_arg, old_value, new_value*)

Helper to raise warnings when a deprecated arg is used.

Parameters

- **old_arg** (*str*) – Name of old/deprecated argument.
- **new_arg** (*str*) – Name of new argument.
- **old_value** (*Any*) – Value the user passed in for the old argument.
- **new_value** (*Any*) – Value the user passed in for the new argument.

Returns old_value if not None, else new_value

evalml.utils.**drop_rows_with_nans** (**pd_data*)

Drop rows that have any NaNs in all dataframes or series.

Parameters **pd_data* – sequence of pd.Series or pd.DataFrame or None

Returns list of pd.DataFrame or pd.Series or None

evalml.utils.**get_importable_subclasses** (*base_class, used_in_automl=True*)

Get importable subclasses of a base class. Used to list all of our estimators, transformers, components and pipelines dynamically.

Parameters

- **base_class** (*abc.ABCMeta*) – Base class to find all of the subclasses for.

- **used_in_automl** – Not all components/pipelines/estimators are used in automl search. If True, only include those subclasses that are used in the search. This would mean excluding classes related to ExtraTrees, ElasticNet, and Baseline estimators.

Returns List of subclasses.

`evalml.utils.get_logger(name)`

Get the logger with the associated name.

Parameters `name` (*str*) – Name of the logger to get.

Returns The logger object with the associated name.

`evalml.utils.get_random_seed(random_state, min_bound=SEED_BOUNDS.min_bound, max_bound=SEED_BOUNDS.max_bound)`

Given a `numpy.random.RandomState` object, generate an int representing a seed value for another random number generator. Or, if given an int, return that int.

To protect against invalid input to a particular library's random number generator, if an int value is provided, and it is outside the bounds "[min_bound, max_bound)", the value will be projected into the range between the min_bound (inclusive) and max_bound (exclusive) using modular arithmetic.

Parameters

- **random_state** (*int*, *numpy.random.RandomState*) – random state
- **min_bound** (*None*, *int*) – if not default of None, will be min bound when generating seed (inclusive). Must be less than max_bound.
- **max_bound** (*None*, *int*) – if not default of None, will be max bound when generating seed (exclusive). Must be greater than min_bound.

Returns Seed for random number generator

Return type int

Raises **ValueError** – If boundaries are not valid.

`evalml.utils.get_random_state(seed)`

Generates a `numpy.random.RandomState` instance using seed.

Parameters `seed` (*None*, *int*, *np.random.RandomState object*) – seed to use to generate `numpy.random.RandomState`. Must be between `SEED_BOUNDS.min_bound` and `SEED_BOUNDS.max_bound`, inclusive.

Raises **ValueError** – If the input seed is not within the acceptable range.

Returns A `numpy.random.RandomState` instance.

`evalml.utils.import_or_raise(library, error_msg=None, warning=False)`

Attempts to import the requested library by name. If the import fails, raises an `ImportError` or warning.

Parameters

- **library** (*str*) – The name of the library.
- **error_msg** (*str*) – Error message to return if the import fails.
- **warning** (*bool*) – If True, `import_or_raise` gives a warning instead of `ImportError`. Defaults to False.

Returns Returns the library if importing succeeded.

Raises

- **ImportError** – If attempting to import the library fails because the library is not installed.

- **Exception** – If importing the library fails.

`evalml.utils.infer_feature_types(data, feature_types=None)`

Create a Woodwork structure from the given list, pandas, or numpy input, with specified types for columns. If a column's type is not specified, it will be inferred by Woodwork.

Parameters

- **data** (*pd.DataFrame, pd.Series*) – Input data to convert to a Woodwork data structure.
- **feature_types** (*string, ww.logical_type obj, dict, optional*) – If data is a 2D structure, feature_types must be a dictionary mapping column names to the type of data represented in the column. If data is a 1D structure, then feature_types must be a Woodwork logical type or a string representing a Woodwork logical type (“Double”, “Integer”, “Boolean”, “Categorical”, “Datetime”, “NaturalLanguage”)

Returns A Woodwork data structure where the data type of each column was either specified or inferred.

Raises ValueError – If there is a mismatch between the dataframe and the woodwork schema.

`evalml.utils.is_all_numeric(df)`

Checks if the given DataFrame contains only numeric values.

Parameters **df** (*pd.DataFrame*) – The DataFrame to check data types of.

Returns True if all the columns are numeric and are not missing any values, False otherwise.

`evalml.utils.jupyter_check()`

Get whether or not the code is being run in a Ipython environment (such as Jupyter Notebook or Jupyter Lab).

Returns True if Ipython, False otherwise.

Return type boolean

`evalml.utils.log_subtitle(logger, title, underline='=')`

Log with a subtitle.

`evalml.utils.log_title(logger, title)`

Log with a title.

`evalml.utils.pad_with_nans(pd_data, num_to_pad)`

Pad the beginning num_to_pad rows with nans.

Parameters

- **pd_data** (*pd.DataFrame or pd.Series*) – Data to pad.
- **num_to_pad** (*int*) – Number of nans to pad.

Returns pd.DataFrame or pd.Series

`evalml.utils.safe_repr(value)`

Convert the given value into a string that can safely be used for repr.

Parameters **value** – The item to convert

Returns String representation of the value

`evalml.utils.save_plot(fig, filepath=None, format='png', interactive=False, return_filepath=False)`

Saves fig to filepath if specified, or to a default location if not.

Parameters

- **fig** (*Figure*) – Figure to be saved.

- **filepath** (*str* or *Path*, *optional*) – Location to save file. Default is with filename “test_plot”.
- **format** (*str*) – Extension for figure to be saved as. Ignored if interactive is True and fig is of type `plotly.Figure`. Defaults to ‘png’.
- **interactive** (*bool*, *optional*) – If True and fig is of type `plotly.Figure`, saves the fig as interactive instead of static, and format will be set to ‘html’. Defaults to False.
- **return_filepath** (*bool*, *optional*) – Whether to return the final filepath the image is saved to. Defaults to False.

Returns String representing the final filepath the image was saved to if `return_filepath` is set to True. Defaults to None.

`evalml.utils.SEED_BOUNDS`

Package Contents

Classes Summary

<code>AutoMLSearch</code>	Automated Pipeline search.
---------------------------	----------------------------

Functions

<code>search</code>	Given data and configuration, run an automl search.
<code>search_iterative</code>	Given data and configuration, run an automl search.

Contents

```
class evalml.AutoMLSearch(X_train=None, y_train=None, problem_type=None, objective='auto',
max_iterations=None, max_time=None, patience=None, tolerance=None, data_splitter=None, allowed_component_graphs=None,
allowed_model_families=None, start_iteration_callback=None, add_result_callback=None, error_callback=None, additional_objectives=None,
alternate_thresholding_objective='F1', random_seed=0, n_jobs=-1, tuner_class=None, optimize_thresholds=True, ensembling=False, max_batches=None,
problem_configuration=None, train_best_pipeline=True, pipeline_parameters=None, custom_hyperparameters=None, sampler_method='auto',
sampler_balanced_ratio=0.25, _ensembling_split_size=0.2, _pipelines_per_batch=5, _automl_algorithm='iterative', engine='sequential', verbose=False)
```

Automated Pipeline search.

Parameters

- **X_train** (`pd.DataFrame`) – The input training data of shape `[n_samples, n_features]`. Required.
- **y_train** (`pd.Series`) – The target training data of length `[n_samples]`. Required for supervised learning tasks.

- **problem_type** (*str* or *ProblemTypes*) – Type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.
- **objective** (*str*, *ObjectiveBase*) – The objective to optimize for. Used to propose and rank pipelines, but not for optimizing each pipeline during fit-time. When set to 'auto', chooses: - `LogLossBinary` for binary classification problems, - `LogLossMulticlass` for multiclass classification problems, and - `R2` for regression problems.
- **max_iterations** (*int*) – Maximum number of iterations to search. If `max_iterations` and `max_time` is not set, then `max_iterations` will default to `max_iterations` of 5.
- **max_time** (*int*, *str*) – Maximum time to search for pipelines. This will not start a new pipeline search after the duration has elapsed. If it is an integer, then the time will be in seconds. For strings, time can be specified as seconds, minutes, or hours.
- **patience** (*int*) – Number of iterations without improvement to stop search early. Must be positive. If `None`, early stopping is disabled. Defaults to `None`.
- **tolerance** (*float*) – Minimum percentage difference to qualify as score improvement for early stopping. Only applicable if `patience` is not `None`. Defaults to `None`.
- **allowed_component_graphs** (*dict*) – A dictionary of lists or `ComponentGraphs` indicating the component graphs allowed in the search. The format should follow { "Name_0": [list_of_components], "Name_1": `ComponentGraph(...)` }

The default of `None` indicates all pipeline component graphs for this problem type are allowed. Setting this field will cause `allowed_model_families` to be ignored.

e.g. `allowed_component_graphs = { "My_Graph": ["Imputer", "One Hot Encoder", "Random Forest Classifier"] }`

- **allowed_model_families** (*list(str, ModelFamily)*) – The model families to search. The default of `None` searches over all model families. Run `evalml.pipelines.components.utils.allowed_model_families("binary")` to see options. Change *binary* to *multiclass* or *regression* depending on the problem type. Note that if `allowed_pipelines` is provided, this parameter will be ignored.
- **data_splitter** (*sklearn.model_selection.BaseCrossValidator*) – Data splitting method to use. Defaults to `StratifiedKFold`.
- **tuner_class** – The tuner class to use. Defaults to `SKOptTuner`.
- **optimize_thresholds** (*bool*) – Whether or not to optimize the binary pipeline threshold. Defaults to `True`.
- **start_iteration_callback** (*callable*) – Function called before each pipeline training iteration. Callback function takes three positional parameters: The pipeline instance and the `AutoMLSearch` object.
- **add_result_callback** (*callable*) – Function called after each pipeline training iteration. Callback function takes three positional parameters: A dictionary containing the training results for the new pipeline, an `untrained_pipeline` containing the parameters used during training, and the `AutoMLSearch` object.
- **error_callback** (*callable*) – Function called when `search()` errors and raises an `Exception`. Callback function takes three positional parameters: the `Exception` raised, the `traceback`, and the `AutoMLSearch` object. Must also accept `kwargs`, so `AutoMLSearch` is able to pass along other appropriate parameters by default. Defaults to `None`, which will call `log_error_callback`.
- **additional_objectives** (*list*) – Custom set of objectives to score on. Will override default objectives for problem type if not empty.

- **alternate_thresholding_objective** (*str*) – The objective to use for thresholding binary classification pipelines if the main objective provided isn’t tuneable. Defaults to F1.
- **random_seed** (*int*) – Seed for the random number generator. Defaults to 0.
- **n_jobs** (*int or None*) – Non-negative integer describing level of parallelism used for pipelines. None and 1 are equivalent. If set to -1, all CPUs are used. For n_jobs below -1, (n_cpus + 1 + n_jobs) are used.
- **ensembling** (*boolean*) – If True, runs ensembling in a separate batch after every allowed pipeline class has been iterated over. If the number of unique pipelines to search over per batch is one, ensembling will not run. Defaults to False.
- **max_batches** (*int*) – The maximum number of batches of pipelines to search. Parameters max_time, and max_iterations have precedence over stopping the search.
- **problem_configuration** (*dict, None*) – Additional parameters needed to configure the search. For example, in time series problems, values should be passed in for the date_index, gap, forecast_horizon, and max_delay variables.
- **train_best_pipeline** (*boolean*) – Whether or not to train the best pipeline before returning it. Defaults to True.
- **pipeline_parameters** (*dict*) – A dict of the parameters used to initialize a pipeline with. Keys should consist of the component names and values should specify parameter values
e.g. pipeline_parameters = { ‘Imputer’ : { ‘numeric_impute_strategy’: ‘most_frequent’ } }
- **custom_hyperparameters** (*dict*) – A dict of the hyperparameter ranges used to iterate over during search. Keys should consist of the component names and values should specify a singular value or skopt.Space.
e.g. custom_hyperparameters = { ‘Imputer’ : { ‘numeric_impute_strategy’: Categorical([‘most_frequent’, ‘median’]) } }
- **sampler_method** (*str*) – The data sampling component to use in the pipelines if the problem type is classification and the target balance is smaller than the sampler_balanced_ratio. Either ‘auto’, which will use our preferred sampler for the data, ‘Undersampler’, ‘Oversampler’, or None. Defaults to ‘auto’.
- **sampler_balanced_ratio** (*float*) – The minority:majority class ratio that we consider balanced, so a 1:4 ratio would be equal to 0.25. If the class balance is larger than this provided value, then we will not add a sampler since the data is then considered balanced. Overrides the *sampler_ratio* of the samplers. Defaults to 0.25.
- **_ensembling_split_size** (*float*) – The amount of the training data we’ll set aside for training ensemble metalearners. Only used when ensembling is True. Must be between 0 and 1, exclusive. Defaults to 0.2
- **_pipelines_per_batch** (*int*) – The number of pipelines to train for every batch after the first one. The first batch will train a baseline pipeline + one of each pipeline family allowed in the search.
- **_automl_algorithm** (*str*) – The automl algorithm to use. Currently the two choices are ‘iterative’ and ‘default’. Defaults to *iterative*.
- **engine** (*EngineBase or str*) – The engine instance used to evaluate pipelines. Dask or concurrent.futures engines can also be chosen by providing a string from the list [“sequential”, “cf_threaded”, “cf_process”, “dask_threaded”, “dask_process”]. If a parallel engine

is selected this way, the maximum amount of parallelism, as determined by the engine, will be used. Defaults to “sequential”.

- **verbose** (*boolean*) – Whether or not to display semi-real-time updates to stdout while search is running. Defaults to False.

Methods

<code>add_to_rankings</code>	Fits and evaluates a given pipeline then adds the results to the automl rankings with the requirement that automl search has been run.
<code>best_pipeline</code>	Returns a trained instance of the best pipeline and parameters found during automl search. If <code>train_best_pipeline</code> is set to False, returns an untrained pipeline instance.
<code>close_engine</code>	Function to explicitly close the engine, client, parallel resources.
<code>describe_pipeline</code>	Describe a pipeline.
<code>full_rankings</code>	Returns a pandas.DataFrame with scoring results from all pipelines searched.
<code>get_pipeline</code>	Given the ID of a pipeline training result, returns an untrained instance of the specified pipeline initialized with the parameters used to train that pipeline during automl search.
<code>load</code>	Loads AutoML object at file path.
<code>plot</code>	Return an instance of the plot with the latest scores.
<code>rankings</code>	Returns a pandas.DataFrame with scoring results from the highest-scoring set of parameters used with each pipeline.
<code>results</code>	Class that allows access to a copy of the results from <code>automl_search</code> .
<code>save</code>	Saves AutoML object at file path.
<code>score_pipelines</code>	Score a list of pipelines on the given holdout data.
<code>search</code>	Find the best pipeline for the data set.
<code>train_pipelines</code>	Train a list of pipelines on the training data.

`add_to_rankings` (*self*, *pipeline*)

Fits and evaluates a given pipeline then adds the results to the automl rankings with the requirement that automl search has been run.

Parameters `pipeline` (*PipelineBase*) – pipeline to train and evaluate.

`property best_pipeline` (*self*)

Returns a trained instance of the best pipeline and parameters found during automl search. If `train_best_pipeline` is set to False, returns an untrained pipeline instance.

Returns A trained instance of the best pipeline and parameters found during automl search. If `train_best_pipeline` is set to False, returns an untrained pipeline instance.

Return type PipelineBase

Raises `PipelineNotFoundError` – If this is called before `.search()` is called.

`close_engine` (*self*)

Function to explicitly close the engine, client, parallel resources.

`describe_pipeline` (*self*, *pipeline_id*, *return_dict=False*)

Describe a pipeline.

Parameters

- **pipeline_id** (*int*) – pipeline to describe
- **return_dict** (*bool*) – If True, return dictionary of information about pipeline. Defaults to False.

Returns Description of specified pipeline. Includes information such as type of pipeline components, problem, training time, cross validation, etc.

Raises **PipelineNotFoundError** – If pipeline_id is not a valid ID.

property full_rankings (*self*)

Returns a pandas.DataFrame with scoring results from all pipelines searched.

get_pipeline (*self*, *pipeline_id*)

Given the ID of a pipeline training result, returns an untrained instance of the specified pipeline initialized with the parameters used to train that pipeline during automl search.

Parameters **pipeline_id** (*int*) – Pipeline to retrieve.

Returns Untrained pipeline instance associated with the provided ID.

Return type PipelineBase

Raises **PipelineNotFoundError** – if pipeline_id is not a valid ID.

static load (*file_path*, *pickle_type*='cloudpickle')

Loads AutoML object at file path.

Parameters

- **file_path** (*str*) – Location to find file to load
- **pickle_type** (*{ "pickle", "cloudpickle" }*) – The pickling library to use. Currently not used since the standard pickle library can handle cloudpickles.

Returns AutoSearchBase object

property plot (*self*)

Return an instance of the plot with the latest scores.

property rankings (*self*)

Returns a pandas.DataFrame with scoring results from the highest-scoring set of parameters used with each pipeline.

property results (*self*)

Class that allows access to a copy of the results from *automl_search*.

Returns

Dictionary containing *pipeline_results*, a dict with results from each pipeline, and *search_order*, a list describing the order the pipelines were searched.

Return type dict

save (*self*, *file_path*, *pickle_type*='cloudpickle', *pickle_protocol*=cloudpickle.DEFAULT_PROTOCOL)

Saves AutoML object at file path.

Parameters

- **file_path** (*str*) – Location to save file.
- **pickle_type** (*{ "pickle", "cloudpickle" }*) – The pickling library to use.

- **pickle_protocol** (*int*) – The pickle data stream format.

Raises **ValueError** – If `pickle_type` is not “pickle” or “cloudpickle”.

score_pipelines (*self, pipelines, X_holdout, y_holdout, objectives*)

Score a list of pipelines on the given holdout data.

Parameters

- **pipelines** (*list[PipelineBase]*) – List of pipelines to train.
- **X_holdout** (*pd.DataFrame*) – Holdout features.
- **y_holdout** (*pd.Series*) – Holdout targets for scoring.
- **objectives** (*list[str], list[ObjectiveBase]*) – Objectives used for scoring.

Returns Dictionary keyed by pipeline name that maps to a dictionary of scores. Note that the any pipelines that error out during scoring will not be included in the dictionary but the exception and stacktrace will be displayed in the log.

Return type dict[str, Dict[str, float]]

search (*self, show_iteration_plot=True*)

Find the best pipeline for the data set.

Parameters **show_iteration_plot** (*boolean, True*) – Shows an iteration vs. score plot in Jupyter notebook. Disabled by default in non-Jupyter environments.

Raises **AutoMLSearchException** – If all pipelines in the current AutoML batch produced a score of np.nan on the primary objective.

train_pipelines (*self, pipelines*)

Train a list of pipelines on the training data.

This can be helpful for training pipelines once the search is complete.

Parameters **pipelines** (*list[PipelineBase]*) – List of pipelines to train.

Returns Dictionary keyed by pipeline name that maps to the fitted pipeline. Note that the any pipelines that error out during training will not be included in the dictionary but the exception and stacktrace will be displayed in the log.

Return type Dict[str, PipelineBase]

`evalml.search` (*X_train=None, y_train=None, problem_type=None, objective='auto', mode='fast', max_time=None, patience=None, tolerance=None, problem_configuration=None, verbose=False*)

Given data and configuration, run an automl search.

This method will run EvalML’s default suite of data checks. If the data checks produce errors, the data check results will be returned before running the automl search. In that case we recommend you alter your data to address these errors and try again. This method is provided for convenience. If you’d like more control over when each of these steps is run, consider making calls directly to the various pieces like the data checks and AutoMLSearch, instead of using this method.

Parameters

- **X_train** (*pd.DataFrame*) – The input training data of shape [n_samples, n_features]. Required.
- **y_train** (*pd.Series*) – The target training data of length [n_samples]. Required for supervised learning tasks.

- **problem_type** (*str* or *ProblemTypes*) – Type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.
- **objective** (*str*, *ObjectiveBase*) – The objective to optimize for. Used to propose and rank pipelines, but not for optimizing each pipeline during fit-time. When set to 'auto', chooses: - `LogLossBinary` for binary classification problems, - `LogLossMulticlass` for multiclass classification problems, and - `R2` for regression problems.
- **mode** (*str*) – mode for `DefaultAlgorithm`. There are two modes: fast and long, where fast is a subset of long. Please look at `DefaultAlgorithm` for more details.
- **max_time** (*int*, *str*) – Maximum time to search for pipelines. This will not start a new pipeline search after the duration has elapsed. If it is an integer, then the time will be in seconds. For strings, time can be specified as seconds, minutes, or hours.
- **patience** (*int*) – Number of iterations without improvement to stop search early. Must be positive. If `None`, early stopping is disabled. Defaults to `None`.
- **tolerance** (*float*) – Minimum percentage difference to qualify as score improvement for early stopping. Only applicable if patience is not `None`. Defaults to `None`.
- **problem_configuration** (*dict*) – Additional parameters needed to configure the search. For example, in time series problems, values should be passed in for the `date_index`, `gap`, and `max_delay` variables.
- **verbose** (*boolean*) – Whether or not to display semi-real-time updates to stdout while search is running. Defaults to `False`.

Returns The automl search object containing pipelines and rankings, and the results from running the data checks. If the data check results contain errors, automl search will not be run and an automl search object will not be returned.

Return type (*AutoMLSearch*, dict)

Raises **ValueError** – If search configuration is not valid.

```
evalml.search_iterative(X_train=None, y_train=None, problem_type=None, objective='auto',
                        problem_configuration=None, **kwargs)
```

Given data and configuration, run an automl search.

This method will run EvalML's default suite of data checks. If the data checks produce errors, the data check results will be returned before running the automl search. In that case we recommend you alter your data to address these errors and try again. This method is provided for convenience. If you'd like more control over when each of these steps is run, consider making calls directly to the various pieces like the data checks and `AutoMLSearch`, instead of using this method.

Parameters

- **X_train** (*pd.DataFrame*) – The input training data of shape `[n_samples, n_features]`. Required.
- **y_train** (*pd.Series*) – The target training data of length `[n_samples]`. Required for supervised learning tasks.
- **problem_type** (*str* or *ProblemTypes*) – Type of supervised learning problem. See `evalml.problem_types.ProblemType.all_problem_types` for a full list.
- **objective** (*str*, *ObjectiveBase*) – The objective to optimize for. Used to propose and rank pipelines, but not for optimizing each pipeline during fit-time. When set to 'auto', chooses: - `LogLossBinary` for binary classification problems, - `LogLossMulticlass` for multiclass classification problems, and - `R2` for regression problems.

- **problem_configuration** (*dict*) – Additional parameters needed to configure the search. For example, in time series problems, values should be passed in for the `date_index`, `gap`, `forecast_horizon`, and `max_delay` variables.
- ****kwargs** – Other keyword arguments which are provided will be passed to `AutoMLSearch`.

Returns the automl search object containing pipelines and rankings, and the results from running the data checks. If the data check results contain errors, automl search will not be run and an automl search object will not be returned.

Return type (*AutoMLSearch*, dict)

Raises **ValueError** – If the search configuration is invalid.

RELEASE NOTES

v0.35.0 Oct. 14, 2021

- **Enhancements**
 - Added human-readable pipeline explanations to model understanding [#2861](#)
 - Updated to support Featuretools 1.0.0 and nlp-primitives 2.0.0 [#2848](#)
- **Fixes**
 - Fixed bug where `long` mode for the top level search method was not respected [#2875](#)
 - Pinned `cmdstan` to `0.28.0` in `cmdstan-builder` to prevent future breaking of support for Prophet [#2880](#)
 - Added Jarque-Bera to the `TargetDistributionDataCheck` [#2891](#)
- **Changes**
 - Updated pipelines to use a label encoder component instead of doing encoding on the pipeline level [#2821](#)
 - Deleted scikit-learn ensembler [#2819](#)
 - Refactored pipeline building logic out of `AutoMLSearch` and into `IterativeAlgorithm` [#2854](#)
 - Refactored names for methods in `ComponentGraph` and `PipelineBase` [#2902](#)
- **Documentation Changes**
 - Updated `install.ipynb` to reflect flexibility for `cmdstan` version installation [#2880](#)
 - Updated the conda section of our contributing guide [#2899](#)
- **Testing Changes**
 - Updated `test_all_estimators` to account for Prophet being allowed for Python 3.9 [#2892](#)
 - Updated linux tests to use `cmdstan-builder==0.0.8` [#2880](#)

Warning:

Breaking Changes

- Updated pipelines to use a label encoder component instead of doing encoding on the pipeline level. This means that pipelines will no longer automatically encode non-numerical targets. Please use a label encoder if working with classification problems and non-numeric targets. [#2821](#)
- Deleted scikit-learn ensembler [#2819](#)

- IterativeAlgorithm now requires X, y, problem_type as required arguments as well as sampler_name, allowed_model_families, allowed_component_graphs, max_batches, and verbose as optional arguments #2854
- Changed method names of fit_features and compute_final_component_features to fit_and_transform_all_but_final and transform_all_but_final in ComponentGraph, and compute_estimator_features to transform_all_but_final in pipeline classes #2902

v0.34.0 Sep. 30, 2021

• Enhancements

- Updated to work with Woodwork 0.8.1 #2783
- Added validation that training_data and training_target are not None in prediction explanations #2787
- Added support for training-only components in pipelines and component graphs #2776
- Added default argument for the parameters value for ComponentGraph.instantiate #2796
- Added TIME_SERIES_REGRESSION to LightGBMRegressor's supported problem types #2793
- Provided a JSON representation of a pipeline's DAG structure #2812
- Added validation to holdout data passed to predict and predict_proba for time series #2804
- Added information about which row indices are outliers in OutliersDataCheck #2818
- Added verbose flag to top level search() method #2813
- Added support for linting jupyter notebooks and clearing the executed cells and empty cells #2829 #2837
- Added “DROP_ROWS” action to output of OutliersDataCheck.validate() #2820
- Added the ability of AutoMLSearch to accept a SequentialEngine instance as engine input #2838
- Added new label encoder component to EvalML #2853
- Added our own partial dependence implementation #2834

• Fixes

- Fixed bug where calculate_permutation_importance was not calculating the right value for pipelines with target transformers #2782
- Fixed bug where transformed target values were not used in fit for time series pipelines #2780
- Fixed bug where score_pipelines method of AutoMLSearch would not work for time series problems #2786
- Removed TargetTransformer class #2833
- Added tests to verify ComponentGraph support by pipelines #2830
- Fixed incorrect parameter for baseline regression pipeline in AutoMLSearch #2847

• Changes

- Changed woodwork initialization to use partial schemas [#2774](#)
- Made `Transformer.transform()` an abstract method [#2744](#)
- Deleted `EmptyDataChecks` class [#2794](#)
- Removed data check for checking log distributions in `make_pipeline` [#2806](#)
- Changed the minimum woodwork version to 0.8.0 [#2783](#)
- Pinned woodwork version to 0.8.0 [#2832](#)
- Removed `model_family` attribute from `ComponentBase` and transformers [#2828](#)
- Limited `scikit-learn` until new features and errors can be addressed [#2842](#)
- Show `DeprecationWarning` when Sklearn Ensemblers are called [#2859](#)
- **Testing Changes**
 - Updated matched assertion message regarding monotonic indices in polynomial detrender tests [#2811](#)
 - Added a test to make sure pip versions match conda versions [#2851](#)

Warning:**Breaking Changes**

- Made `Transformer.transform()` an abstract method [#2744](#)
- Deleted `EmptyDataChecks` class [#2794](#)
- Removed data check for checking log distributions in `make_pipeline` [#2806](#)

v0.33.0 Sep. 15, 2021

- Enhancements
- **Fixes**
 - Fixed bug where warnings during `make_pipeline` were not being raised to the user [#2765](#)
- **Changes**
 - Refactored and removed `SamplerBase` class [#2775](#)
- **Documentation Changes**
 - Added docstring linting packages `pydocstyle` and `darglint` to `make-lint` command [#2670](#)
- Testing Changes

Warning: Breaking Changes**v0.32.1 Sep. 10, 2021**

- **Enhancements**
 - Added `verbose` flag to `AutoMLSearch` to run search in silent mode by default [#2645](#)
 - Added label encoder to `XGBoostClassifier` to remove the warning [#2701](#)
 - Set `eval_metric` to `logloss` for `XGBoostClassifier` [#2741](#)
 - Added support for woodwork versions 0.7.0 and 0.7.1 [#2743](#)

- Changed `explain_predictions` functions to display original feature values [#2759](#)
- Added `X_train` and `y_train` to `graph_prediction_vs_actual_over_time` and `get_prediction_vs_actual_over_time_data` [#2762](#)
- Added `forecast_horizon` as a required parameter to time series pipelines and `AutoMLSearch` [#2697](#)
- Added `predict_in_sample` and `predict_proba_in_sample` methods to time series pipelines to predict on data where the target is known, e.g. cross-validation [#2697](#)
- **Fixes**
 - Fixed bug where `_catch_warnings` assumed all warnings were `PipelineNotUsed` [#2753](#)
 - Fixed bug where `Imputer.transform` would erase `ww` typing information prior to handing data to the `SimpleImputer` [#2752](#)
 - Fixed bug where `Oversampler` could not be copied [#2755](#)
- **Changes**
 - Deleted `drop_nan_target_rows` utility method [#2737](#)
 - Removed default logging setup and debugging log file [#2645](#)
 - Changed the default `n_jobs` value for `XGBoostClassifier` and `XGBoostRegressor` to 12 [#2757](#)
 - Changed `TimeSeriesBaselineEstimator` to only work on a time series pipeline with a `DelayedFeaturesTransformer` [#2697](#)
 - Added `X_train` and `y_train` as optional parameters to pipeline `predict`, `predict_proba`. Only used for time series pipelines [#2697](#)
 - Added `training_data` and `training_target` as optional parameters to `explain_predictions` and `explain_predictions_best_worst` to support time series pipelines [#2697](#)
 - Changed time series pipeline predictions to no longer output series/dataframes padded with NaNs. A prediction will be returned for every row in the `X` input [#2697](#)
- **Documentation Changes**
 - Specified installation steps for Prophet [#2713](#)
 - Added documentation for data exploration on data check actions [#2696](#)
 - Added a user guide entry for time series modelling [#2697](#)
- **Testing Changes**
 - Fixed flaky `TargetDistributionDataCheck` test for `very_lognormal` distribution [#2748](#)

Warning:**Breaking Changes**

- Removed default logging setup and debugging log file [#2645](#)
- Added `X_train` and `y_train` to `graph_prediction_vs_actual_over_time` and `get_prediction_vs_actual_over_time_data` [#2762](#)
- Added `forecast_horizon` as a required parameter to time series pipelines and `AutoMLSearch` [#2697](#)

- Changed `TimeSeriesBaselineEstimator` to only work on a time series pipeline with a `DelayedFeaturesTransformer` #2697
- Added `X_train` and `y_train` as required parameters for `predict` and `predict_proba` in time series pipelines #2697
- Added `training_data` and `training_target` as required parameters to `explain_predictions` and `explain_predictions_best_worst` for time series pipelines #2697

v0.32.0 Aug. 31, 2021• **Enhancements**

- Allow string for engine parameter for `AutoMLSearch` #2667
- Add `ProphetRegressor` to `AutoML` #2619
- Integrated `DefaultAlgorithm` into `AutoMLSearch` #2634
- Removed SVM “linear” and “precomputed” kernel hyperparameter options, and improved default parameters #2651
- Updated `ComponentGraph` initialization to raise `ValueError` when user attempts to use `.y` for a component that does not produce a tuple output #2662
- Updated to support Woodwork 0.6.0 #2690
- Updated pipeline `graph()` to distinguish X and y edges #2654
- Added `DropRowsTransformer` component #2692
- Added `DROP_ROWS` to `_make_component_list_from_actions` and clean up metadata #2694
- Add new ensembler component #2653

• **Fixes**

- Updated `Oversampler` logic to select best SMOTE based on component input instead of pipeline input #2695
- Added ability to explicitly close `DaskEngine` resources to improve runtime and reduce Dask warnings #2667
- Fixed partial dependence bug for ensemble pipelines #2714
- Updated `TargetLeakageDataCheck` to maintain user-selected logical types #2711

• **Changes**

- Replaced `SMOTEOverSampler`, `SMOTENOverSampler` and `SMOTENCOverSampler` with consolidated `OverSampler` component #2695
- Removed `LinearRegressor` from the list of default `AutoMLSearch` estimators due to poor performance #2660

• **Documentation Changes**

- Added user guide documentation for using `ComponentGraph` and added `ComponentGraph` to API reference #2673
- Updated documentation to make parallelization of `AutoML` clearer #2667

• **Testing Changes**

- Removes the process-level parallelism from the `test_cancel_job` test #2666
- Installed numba 0.53 in windows CI to prevent problems installing version 0.54 #2710

Warning:

Breaking Changes

- Renamed the current top level search method to `search_iterative` and defined a new search method for the `DefaultAlgorithm` #2634
- Replaced `SMOTEOversampler`, `SMOTENOWersampler` and `SMOTENCOverSampler` with consolidated `Oversampler` component #2695
- Removed `LinearRegressor` from the list of default `AutoMLSearch` estimators due to poor performance #2660

v0.31.0 Aug. 19, 2021

• **Enhancements**

- Updated the high variance check in `AutoMLSearch` to be robust to a variety of objectives and cv scores #2622
- Use Woodwork’s outlier detection for the `OutliersDataCheck` #2637
- Added ability to utilize instantiated components when creating a pipeline #2643
- Sped up the all Nan and unknown check in `infer_feature_types` #2661

• **Fixes**

• **Changes**

- Deleted `_put_into_original_order` helper function #2639
- Refactored time series pipeline code using a time series pipeline base class #2649
- Renamed `dask_tests` to `parallel_tests` #2657
- Removed commented out code in `pipeline_meta.py` #2659

• **Documentation Changes**

- Add complete install command to README and Install section #2627
- Cleaned up documentation for `MulticollinearityDataCheck` #2664

• **Testing Changes**

- Speed up CI by splitting Prophet tests into a separate workflow in GitHub #2644

Warning:

Breaking Changes

- `TimeSeriesRegressionPipeline` no longer inherits from `TimeSeriesRegressionPipeline` #2649

v0.30.2 Aug. 16, 2021

• **Fixes**

- Updated changelog and version numbers to match the release. Release 0.30.1 was release erroneously without a change to the version numbers. 0.30.2 replaces it.

v0.30.1 Aug. 12, 2021

- **Enhancements**

- Added `DatetimeFormatDataCheck` for time series problems [#2603](#)
- Added `ProphetRegressor` to estimators [#2242](#)
- Updated `ComponentGraph` to handle not calling samplers' transform during predict, and updated samplers' transform methods s.t. `fit_transform` is equivalent to `fit(X, y).transform(X, y)` [#2583](#)
- Updated `ComponentGraph_validate_component_dict` logic to be stricter about input values [#2599](#)
- Patched bug in `xgboost` estimators where predicting on a feature matrix of only booleans would throw an exception. [#2602](#)
- Updated `ARIMAREgressor` to use relative forecasting to predict values [#2613](#)
- Added support for creating pipelines without an estimator as the final component and added `transform(X, y)` method to pipelines and component graphs [#2625](#)
- Updated to support Woodwork 0.5.1 [#2610](#)

- **Fixes**

- Updated `AutoMLSearch` to drop `ARIMAREgressor` from `allowed_estimators` if an incompatible frequency is detected [#2632](#)
- Updated `get_best_sampler_for_data` to consider all non-numeric datatypes as categorical for SMOTE [#2590](#)
- Fixed inconsistent test results from `TargetDistributionDataCheck` [#2608](#)
- Adopted vectorized `pd.NA` checking for Woodwork 0.5.1 support [#2626](#)
- Pinned upper version of `astroid` to 2.6.6 to keep `ReadTheDocs` working. [#2638](#)

- **Changes**

- Renamed SMOTE samplers to SMOTE oversampler [#2595](#)
- Changed `partial_dependence` and `graph_partial_dependence` to raise a `PartialDependenceError` instead of `ValueError`. This is not a breaking change because `PartialDependenceError` is a subclass of `ValueError` [#2604](#)
- Cleaned up code duplication in `ComponentGraph` [#2612](#)
- Stored `predict_proba` results in `.x` for intermediate estimators in `ComponentGraph` [#2629](#)

- **Documentation Changes**

- To avoid local docs build error, only add warning disable and download headers on `ReadTheDocs` builds, not locally [#2617](#)

- **Testing Changes**

- Updated `partial_dependence` tests to change the element-wise comparison per the Plotly 5.2.1 upgrade [#2638](#)
- Changed the lint CI job to only check against python 3.9 via the `-t` flag [#2586](#)
- Installed Prophet in linux nightlies test and fixed `test_all_components` [#2598](#)
- Refactored and fixed all `make_pipeline` tests to assert correct order and address new Woodwork Unknown type inference [#2572](#)

- Removed `component_graphs` as a global variable in `test_component_graphs.py` [#2609](#)

Warning:

Breaking Changes

- Renamed SMOTE samplers to SMOTE oversampler. Please use `SMOTEOversampler`, `SMOTENCoversampler`, `SMOTENOVersampler` instead of `SMOTESampler`, `SMOTENCSampler`, and `SMOTENSampler` [#2595](#)

v0.30.0 Aug. 3, 2021

- **Enhancements**

- Added `LogTransformer` and `TargetDistributionDataCheck` [#2487](#)
- Issue a warning to users when a pipeline parameter passed in isn't used in the pipeline [#2564](#)
- Added Gini coefficient as an objective [#2544](#)
- Added `repr` to `ComponentGraph` [#2565](#)
- Added components to extract features from URL and EmailAddress Logical Types [#2550](#)
- Added support for *NaN* values in `TextFeaturizer` [#2532](#)
- Added `SelectByType` transformer [#2531](#)
- Added separate thresholds for percent null rows and columns in `HighlyNullDataCheck` [#2562](#)
- Added support for *NaN* natural language values [#2577](#)

- **Fixes**

- Raised error message for types URL, NaturalLanguage, and EmailAddress in `partial_dependence` [#2573](#)

- **Changes**

- Updated `PipelineBase` implementation for creating pipelines from a list of components [#2549](#)
- Moved `get_hyperparameter_ranges` to `PipelineBase` class from `automl/utils` module [#2546](#)
- Renamed `ComponentGraph`'s `get_parents` to `get_inputs` [#2540](#)
- Removed `ComponentGraph.linearized_component_graph` and `ComponentGraph.from_list` [#2556](#)
- Updated `ComponentGraph` to enforce requiring `.x` and `.y` inputs for each component in the graph [#2563](#)
- Renamed existing ensembler implementation from `StackedEnsemblers` to `SklearnStackedEnsemblers` [#2578](#)

- **Documentation Changes**

- Added documentation for `DaskEngine` and `CFEngine` parallel engines [#2560](#)
- Improved detail of `TextFeaturizer` docstring and tutorial [#2568](#)

- **Testing Changes**

- Added test that makes sure `split_data` does not shuffle for time series problems [#2552](#)

Warning:**Breaking Changes**

- Moved `get_hyperparameter_ranges` to `PipelineBase` class from `automl/utils` module [#2546](#)
- Renamed `ComponentGraph`'s `get_parents` to `get_inputs` [#2540](#)
- Removed `ComponentGraph.linearized_component_graph` and `ComponentGraph.from_list` [#2556](#)
- Updated `ComponentGraph` to enforce requiring `.x` and `.y` inputs for each component in the graph [#2563](#)

v0.29.0 Jul. 21, 2021• **Enhancements**

- Updated 1-way partial dependence support for datetime features [#2454](#)
- Added details on how to fix error caused by broken ww schema [#2466](#)
- Added ability to use built-in pickle for saving `AutoMLSearch` [#2463](#)
- Updated our components and component graphs to use latest features of ww 0.4.1, e.g. `concat_columns` and `drop in-place`. [#2465](#)
- Added new, concurrent.futures based engine for parallel `AutoML` [#2506](#)
- Added support for new Woodwork `Unknown` type in `AutoMLSearch` [#2477](#)
- Updated our components with an attribute that describes if they modify features or targets and can be used in list API for pipeline initialization [#2504](#)
- Updated `ComponentGraph` to accept `X` and `y` as inputs [#2507](#)
- Removed unused `TARGET_BINARY_INVALID_VALUES` from `DataCheckMessageCode` enum and fixed formatting of objective documentation [#2520](#)
- Added `EvalMLAlgorithm` [#2525](#)
- Added support for `NaN` values in `TextFeaturizer` [#2532](#)

• **Fixes**

- Fixed `FraudCost` objective and reverted threshold optimization method for binary classification to `Golden` [#2450](#)
- Added custom exception message for partial dependence on features with scales that are too small [#2455](#)
- Ensures the typing for `Ordinal` and `Datetime` ltypes are passed through `_retain_custom_types_and_initialize_woodwork` [#2461](#)
- Updated to work with Pandas 1.3.0 [#2442](#)
- Updated to work with sktime 0.7.0 [#2499](#)

• **Changes**

- Updated XGBoost dependency to `>=1.4.2` [#2484](#), [#2498](#)

- Added a DeprecationWarning about deprecating the list API for ComponentGraph #2488
- Updated make_pipeline for AutoML to create dictionaries, not lists, to initialize pipelines #2504
- No longer installing graphviz on windows in our CI pipelines because release 0.17 breaks windows 3.7 #2516

- **Documentation Changes**

- Moved docstrings from `__init__` to class pages, added missing docstrings for missing classes, and updated missing default values #2452
- Build documentation with sphinx-autoapi #2458
- Change autoapi_ignore to only ignore files in evalml/tests/* #2530

- **Testing Changes**

- Fixed flaky dask tests #2471
- Removed shellcheck action from build_conda_pkg action #2514
- Added a tmp_dir fixture that deletes its contents after tests run #2505
- Added a test that makes sure all pipelines in AutoMLSearch get the same data splits #2513
- Condensed warning output in test logs #2521

Warning:

Breaking Changes

- *NaN* values in the *Natural Language* type are no longer supported by the Imputer with the pandas upgrade. #2477

v0.28.0 Jul. 2, 2021

- **Enhancements**

- Added support for showing a Individual Conditional Expectations plot when graphing Partial Dependence #2386
- Exposed thread_count for Catboost estimators as n_jobs parameter #2410
- Updated Objectives API to allow for sample weighting #2433

- **Fixes**

- Deleted unreachable line from IterativeAlgorithm #2464

- **Changes**

- Pinned Woodwork version between 0.4.1 and 0.4.2 #2460
- Updated psutils minimum version in requirements #2438
- Updated log_error_callback to not include filepath in logged message #2429

- **Documentation Changes**

- Sped up docs #2430
- Removed mentions of DataTable and DataColumn from the docs #2445

- **Testing Changes**

- Added slack integration for nightlies tests #2436
- Changed `build_conda_pkg` CI job to run only when dependencies are updates #2446
- Updated workflows to store pytest runtimes as test artifacts #2448
- Added `AutoMLTestEnv` test fixture for making it easy to mock automl tests #2406

v0.27.0 Jun. 22, 2021

• Enhancements

- Adds force plots for prediction explanations #2157
- Removed self-reference from `AutoMLSearch` #2304
- Added support for nonlinear pipelines for `generate_pipeline_code` #2332
- Added `inverse_transform` method to pipelines #2256
- Add optional automatic update checker #2350
- Added `search_order` to `AutoMLSearch`'s rankings and `full_rankings` tables #2345
- Updated threshold optimization method for binary classification #2315
- Updated demos to pull data from S3 instead of including demo data in package #2387
- Upgrade woodwork version to v0.4.1 #2379

• Fixes

- Preserve user-specified woodwork types throughout pipeline fit/predict #2297
- Fixed `ComponentGraph` appending target to `final_component_features` if there is a component that returns both X and y #2358
- Fixed partial dependence graph method failing on multiclass problems when the class labels are numeric #2372
- Added `thresholding_objective` argument to `AutoMLSearch` for binary classification problems #2320
- Added change for `k_neighbors` parameter in SMOTE Oversamplers to automatically handle small samples #2375
- Changed naming for Logistic Regression Classifier file #2399
- Pinned `pytest-timeout` to fix minimum dependence checker #2425
- Replaced Elastic Net Classifier base class with Logistic Regression to avoid NaN outputs #2420

• Changes

- Cleaned up `PipelineBase`'s `component_graph` and `_component_graph` attributes. Updated `PipelineBase` `__repr__` and added `__eq__` for `ComponentGraph` #2332
- Added and applied `black` linting package to the EvalML repo in place of `autopep8` #2306
- Separated `custom_hyperparameters` from pipelines and added them as an argument to `AutoMLSearch` #2317
- Replaced `allowed_pipelines` with `allowed_component_graphs` #2364
- Removed private method `_compute_features_during_fit` from `PipelineBase` #2359

- Updated `compute_order` in `ComponentGraph` to be a read-only property #2408
- Unpinned PyZMQ version in `requirements.txt` #2389
- Uncapping LightGBM version in `requirements.txt` #2405
- Updated minimum version of `plotly` #2415
- Removed `SensitivityLowAlert` objective from core objectives #2418
- **Documentation Changes**
 - Fixed lead scoring weights in the demos documentation #2315
 - Fixed start page code and description dataset naming discrepancy #2370
- **Testing Changes**
 - Update minimum unit tests to run on all pull requests #2314
 - Pass token to authorize uploading of codecov reports #2344
 - Add `pytest-timeout`. All tests that run longer than 6 minutes will fail. #2374
 - Separated the dask tests out into separate github action jobs to isolate dask failures. #2376
 - Refactored dask tests #2377
 - Added the combined dask/non-dask unit tests back and renamed the dask only unit tests. #2382
 - Sped up unit tests and split into separate jobs #2365
 - Change CI job names, run lint for python 3.9, run nightlies on python 3.8 at 3am EST #2395 #2398
 - Set fail-fast to false for CI jobs that run for PRs #2402

Warning:

Breaking Changes

- `AutoMLSearch` will accept `allowed_component_graphs` instead of `allowed_pipelines` #2364
- Removed `PipelineBase`'s `_component_graph` attribute. Updated `PipelineBase` `__repr__` and added `__eq__` for `ComponentGraph` #2332
- `pipeline_parameters` will no longer accept `skopt.space` variables since hyperparameter ranges will now be specified through `custom_hyperparameters` #2317

v0.25.0 Jun. 01, 2021

- **Enhancements**
 - Upgraded minimum `woodwork` to version 0.3.1. Previous versions will not be supported #2181
 - Added a new callback parameter for `explain_predictions_best_worst` #2308
- Fixes
- **Changes**
 - Deleted the `return_pandas` flag from our demo data loaders #2181
 - Moved `default_parameters` to `ComponentGraph` from `PipelineBase` #2307
- **Documentation Changes**
 - Updated the release procedure documentation #2230

- **Testing Changes**

- Ignoring `test_saving_png_file` while building conda package #2323

Warning:**Breaking Changes**

- Deleted the `return_pandas` flag from our demo data loaders #2181
- Upgraded minimum woodwork to version 0.3.1. Previous versions will not be supported #2181
- Due to the weak-ref in woodwork, set the result of `infer_feature_types` to a variable before accessing woodwork #2181

v0.24.2 May. 24, 2021

- **Enhancements**

- Added oversamplers to `AutoMLSearch` #2213 #2286
- Added dictionary input functionality for `Undersampler` component #2271
- Changed the default parameter values for `Elastic Net Classifier` and `Elastic Net Regressor` #2269
- Added dictionary input functionality for the `Oversampler` components #2288

- **Fixes**

- Set default `n_jobs` to 1 for `StackedEnsembleClassifier` and `StackedEnsembleRegressor` until fix for text-based parallelism in sklearn stacking can be found #2295

- **Changes**

- Updated `start_iteration_callback` to accept a pipeline instance instead of a pipeline class and no longer accept pipeline parameters as a parameter #2290
- Refactored `calculate_permutation_importance` method and add per-column permutation importance method #2302
- Updated logging information in `AutoMLSearch.__init__` to clarify pipeline generation #2263

- **Documentation Changes**

- Minor changes to the release procedure #2230

- **Testing Changes**

- Use codecov action to update coverage reports #2238
- Removed MarkupSafe dependency version pin from requirements.txt and moved instead into RTD docs build CI #2261

Warning:**Breaking Changes**

- Updated `start_iteration_callback` to accept a pipeline instance instead of a pipeline class and no longer accept pipeline parameters as a parameter #2290

- Moved `default_parameters` to `ComponentGraph` from `PipelineBase`. A pipeline's `default_parameters` is now accessible via `pipeline.component_graph.default_parameters` #2307

v0.24.1 May. 16, 2021

- **Enhancements**
 - Integrated `ARIMAREgressor` into `AutoML` #2009
 - Updated `HighlyNullDataCheck` to also perform a null row check #2222
 - Set `max_depth` to 1 in calls to `featuretools dfs` #2231
- **Fixes**
 - Removed data splitter sampler calls during training #2253
 - Set minimum required version for `pyzmq`, `colorama`, and `docutils` #2254
 - Changed `BaseSampler` to return `None` instead of `y` #2272
- **Changes**
 - Removed ensemble split and indices in `AutoMLSearch` #2260
 - Updated pipeline `repr()` and `generate_pipeline_code` to return pipeline instances without generating custom pipeline class #2227
- **Documentation Changes**
 - Capped Sphinx version under 4.0.0 #2244
- **Testing Changes**
 - Change number of cores for `pytest` from 4 to 2 #2266
 - Add minimum dependency checker to generate minimum requirement files #2267
 - Add unit tests with minimum dependencies #2277

v0.24.0 May. 04, 2021

- **Enhancements**
 - Added `date_index` as a required parameter for `TimeSeries` problems #2217
 - Have the `OneHotEncoder` return the transformed columns as booleans rather than floats #2170
 - Added `Oversampler` transformer component to `EvalML` #2079
 - Added `Undersampler` to `AutoMLSearch`, as well as arguments `_sampler_method` and `sampler_balanced_ratio` #2128
 - Updated prediction explanations functions to allow pipelines with `XGBoost` estimators #2162
 - Added partial dependence for `datetime` columns #2180
 - Update precision-recall curve with positive label index argument, and fix for 2d predicted probabilities #2090
 - Add `pct_null_rows` to `HighlyNullDataCheck` #2211
 - Added a standalone `AutoML search` method for convenience, which runs data checks and then runs `automl` #2152

- Make the first batch of AutoML have a predefined order, with linear models first and complex models last [#2223](#) [#2225](#)
- Added sampling dictionary support to `BalancedClassificationSampler` [#2235](#)
- **Fixes**
 - Fixed partial dependence not respecting grid resolution parameter for numerical features [#2180](#)
 - Enable prediction explanations for catboost for multiclass problems [#2224](#)
- **Changes**
 - Deleted baseline pipeline classes [#2202](#)
 - Reverting user specified date feature PR [#2155](#) until *pmdarima* installation fix is found [#2214](#)
 - Updated pipeline API to accept component graph and other class attributes as instance parameters. Old pipeline API still works but will not be supported long-term. [#2091](#)
 - Removed all old datasplitters from EvalML [#2193](#)
 - Deleted `make_pipeline_from_components` [#2218](#)
- **Documentation Changes**
 - Renamed dataset to clarify that its gzipped but not a tarball [#2183](#)
 - Updated documentation to use pipeline instances instead of pipeline subclasses [#2195](#)
 - Updated contributing guide with a note about GitHub Actions permissions [#2090](#)
 - Updated automl and model understanding user guides [#2090](#)
- **Testing Changes**
 - Use machineFL user token for dependency update bot, and add more reviewers [#2189](#)

Warning:**Breaking Changes**

- All `baseline` `pipeline` `classes` (`BaselineBinaryPipeline`, `BaselineMulticlassPipeline`, `BaselineRegressionPipeline`, etc.) have been deleted [#2202](#)
- Updated pipeline API to accept component graph and other class attributes as instance parameters. Old pipeline API still works but will not be supported long-term. Pipelines can now be initialized by specifying the component graph as the first parameter, and then passing in optional arguments such as `custom_name`, `parameters`, etc. For example, `BinaryClassificationPipeline(["Random Forest Classifier"], parameters={})`. [#2091](#)
- Removed all old datasplitters from EvalML [#2193](#)
- Deleted utility method `make_pipeline_from_components` [#2218](#)

v0.23.0 Apr. 20, 2021

- **Enhancements**
 - Refactored `EngineBase` and `SequentialEngine` api. Adding `DaskEngine` [#1975](#).
 - Added optional `engine` argument to `AutoMLSearch` [#1975](#)
 - Added a warning about how time series support is still in beta when a user passes in a time series problem to `AutoMLSearch` [#2118](#)

- Added `NaturalLanguageNaNDataCheck` data check [#2122](#)
- Added `ValueError` to `partial_dependence` to prevent users from computing partial dependence on columns with all NaNs [#2120](#)
- Added standard deviation of cv scores to rankings table [#2154](#)
- **Fixes**
 - Fixed `BalancedClassificationDataCVSplit`, `BalancedClassificationDataTVSplit`, and `BalancedClassificationSampler` to use `minority:majority` ratio instead of `majority:minority` [#2077](#)
 - Fixed bug where two-way partial dependence plots with categorical variables were not working correctly [#2117](#)
 - Fixed bug where hyperparameters were not displaying properly for pipelines with a list `component_graph` and duplicate components [#2133](#)
 - Fixed bug where `pipeline_parameters` argument in `AutoMLSearch` was not applied to pipelines passed in as `allowed_pipelines` [#2133](#)
 - Fixed bug where `AutoMLSearch` was not applying custom hyperparameters to pipelines with a list `component_graph` and duplicate components [#2133](#)
- **Changes**
 - Removed `hyperparameter_ranges` from `Undersampler` and renamed `balanced_ratio` to `sampling_ratio` for samplers [#2113](#)
 - Renamed `TARGET_BINARY_NOT_TWO_EXAMPLES_PER_CLASS` data check message code to `TARGET_MULTICLASS_NOT_TWO_EXAMPLES_PER_CLASS` [#2126](#)
 - Modified one-way partial dependence plots of categorical features to display data with a bar plot [#2117](#)
 - Renamed `score` column for `automl.rankings` as `mean_cv_score` [#2135](#)
 - Remove ‘warning’ from docs tool output [#2031](#)
- **Documentation Changes**
 - Fixed `conf.py` file [#2112](#)
 - Added a sentence to the automl user guide stating that our support for time series problems is still in beta. [#2118](#)
 - Fixed documentation demos [#2139](#)
 - Update test badge in README to use GitHub Actions [#2150](#)
- **Testing Changes**
 - Fixed `test_describe_pipeline` for pandas v1.2.4 [#2129](#)
 - Added a GitHub Action for building the conda package [#1870](#) [#2148](#)

Warning:**Breaking Changes**

- Renamed `balanced_ratio` to `sampling_ratio` for the `BalancedClassificationDataCVSplit`, `BalancedClassificationDataTVSplit`, `BalancedClassificationSampler`, and `Undersampler` [#2113](#)

- Deleted the “errors” key from automl results [#1975](#)
- Deleted the `raise_and_save_error_callback` and the `log_and_save_error_callback` [#1975](#)
- Fixed `BalancedClassificationDataCVSplit`, `BalancedClassificationDataTVSplit`, and `BalancedClassificationSampler` to use `minority:majority` ratio instead of `majority:minority` [#2077](#)

v0.22.0 Apr. 06, 2021• **Enhancements**

- Added a GitHub Action for `linux_unit_tests` [#2013](#)
- Added recommended actions for `InvalidTargetDataCheck`, updated `_make_component_list_from_actions` to address new action, and added `TargetImputer` component [#1989](#)
- Updated `AutoMLSearch._check_for_high_variance` to not emit `RuntimeWarning` [#2024](#)
- Added exception when pipeline passed to `explain_predictions` is a `Stacked Ensemble` pipeline [#2033](#)
- Added sensitivity at low alert rates as an objective [#2001](#)
- Added `Undersampler` transformer component [#2030](#)

• **Fixes**

- Updated Engine’s `train_batch` to apply undersampling [#2038](#)
- Fixed bug in where Time Series Classification pipelines were not encoding targets in `predict` and `predict_proba` [#2040](#)
- Fixed data splitting errors if target is float for classification problems [#2050](#)
- Pinned `docutils` to `<0.17` to fix `ReadtheDocs` warning issues [#2088](#)

• **Changes**

- Removed lists as acceptable hyperparameter ranges in `AutoMLSearch` [#2028](#)
- Renamed “details” to “metadata” for data check actions [#2008](#)

• **Documentation Changes**

- Catch and suppress warnings in documentation [#1991](#) [#2097](#)
- Change spacing in `start.ipynb` to provide clarity for `AutoMLSearch` [#2078](#)
- Fixed start code on README [#2108](#)

• **Testing Changes****v0.21.0 Mar. 24, 2021**• **Enhancements**

- Changed `AutoMLSearch` to default `optimize_thresholds` to `True` [#1943](#)
- Added multiple oversampling and undersampling sampling methods as data splitters for imbalanced classification [#1775](#)
- Added params to balanced classification data splitters for visibility [#1966](#)

- Updated `make_pipeline` to not add `Imputer` if input data does not have numeric or categorical columns [#1967](#)
- Updated `ClassImbalanceDataCheck` to better handle multiclass imbalances [#1986](#)
- Added recommended actions for the output of data check's `validate` method [#1968](#)
- Added error message for `partial_dependence` when features are mostly the same value [#1994](#)
- Updated `OneHotEncoder` to drop one redundant feature by default for features with two categories [#1997](#)
- Added a `PolynomialDetrender` component [#1992](#)
- Added `DateTimeNaNDataCheck` data check [#2039](#)
- **Fixes**
 - Changed best pipeline to train on the entire dataset rather than just ensemble indices for ensemble problems [#2037](#)
 - Updated binary classification pipelines to use objective decision function during scoring of custom objectives [#1934](#)
- **Changes**
 - Removed `data_checks` parameter, `data_check_results` and data checks logic from `AutoMLSearch` [#1935](#)
 - Deleted `random_state` argument [#1985](#)
 - Updated Woodwork version requirement to `v0.0.11` [#1996](#)
- Documentation Changes
- **Testing Changes**
 - Removed `build_docs` CI job in favor of RTD GH builder [#1974](#)
 - Added tests to confirm support for Python 3.9 [#1724](#)
 - Added tests to support Dask AutoML/Engine [#1990](#)
 - Changed `build_conda_pkg` job to use `latest_release_changes` branch in the feedstock. [#1979](#)

Warning:

Breaking Changes

- Changed `AutoMLSearch` to default `optimize_thresholds` to `True` [#1943](#)
- Removed `data_checks` parameter, `data_check_results` and data checks logic from `AutoMLSearch`. To run the data checks which were previously run by default in `AutoMLSearch`, please call `DefaultDataChecks().validate(X_train, y_train)` or take a look at our documentation for more examples. [#1935](#)
- Deleted `random_state` argument [#1985](#)

v0.20.0 Mar. 10, 2021

- **Enhancements**
 - Added a GitHub Action for Detecting dependency changes [#1933](#)

- Create a separate CV split to train stacked ensembler on for AutoMLSearch #1814
- Added a GitHub Action for Linux unit tests #1846
- Added ARIMAREgressor estimator #1894
- Added DataCheckAction class and DataCheckActionCode enum #1896
- Updated Woodwork requirement to v0.0.10 #1900
- Added `BalancedClassificationDataCVSplit` and `BalancedClassificationDataTVSplit` to AutoMLSearch #1875
- Update default classification data splitter to use downsampling for highly imbalanced data #1875
- Updated `describe_pipeline` to return more information, including id of pipelines used for ensemble models #1909
- Added utility method to create list of components from a list of DataCheckAction #1907
- Updated `validate` method to include a action key in returned dictionary for all DataCheck and DataChecks #1916
- Aggregating the shap values for predictions that we know the provenance of, e.g. OHE, text, and date-time. #1901
- Improved error message when custom objective is passed as a string in `pipeline.score` #1941
- Added `score_pipelines` and `train_pipelines` methods to AutoMLSearch #1913
- Added support for pandas version 1.2.0 #1708
- Added `score_batch` and `train_batch` abstract methods to EngineBase and implementations in SequentialEngine #1913
- Added ability to handle index columns in AutoMLSearch and DataChecks #2138

- **Fixes**

- Removed CI check for `check_dependencies_updated_linux` #1950
- Added metaclass for time series pipelines and fix binary classification pipeline predict not using objective if it is passed as a named argument #1874
- Fixed stack trace in prediction explanation functions caused by mixed string/numeric pandas column names #1871
- Fixed stack trace caused by passing pipelines with duplicate names to AutoMLSearch #1932
- Fixed AutoMLSearch.get_pipelines returning pipelines with the same attributes #1958

- **Changes**

- Reversed GitHub Action for Linux unit tests until a fix for report generation is found #1920
- Updated `add_results` in AutoMLAlgorithm to take in entire pipeline results dictionary from AutoMLSearch #1891
- Updated `ClassImbalanceDataCheck` to look for severe class imbalance scenarios #1905
- Deleted the `explain_prediction` function #1915
- Removed `HighVarianceCVDataCheck` and converted it to an AutoMLSearch method instead #1928
- Removed warning in `InvalidTargetDataCheck` returned when numeric binary classification targets are not (0, 1) #1959

- **Documentation Changes**

- Updated `model_understanding.ipynb` to demo the two-way partial dependence capability [#1919](#)

- **Testing Changes**

Warning:

Breaking Changes

- Deleted the `explain_prediction` function [#1915](#)
- Removed `HighVarianceCVDataCheck` and converted it to an `AutoMLSearch` method instead [#1928](#)
- Added `score_batch` and `train_batch` abstract methods to `EngineBase`. These need to be implemented in `Engine` subclasses [#1913](#)

v0.19.0 Feb. 23, 2021

- **Enhancements**

- Added a GitHub Action for Python windows unit tests [#1844](#)
- Added a GitHub Action for checking updated release notes [#1849](#)
- Added a GitHub Action for Python lint checks [#1837](#)
- Adjusted `explain_prediction`, `explain_predictions` and `explain_predictions_best_worst` to handle timeseries problems. [#1818](#)
- Updated `InvalidTargetDataCheck` to check for mismatched indices in target and features [#1816](#)
- Updated `Woodwork` structures returned from components to support `Woodwork` logical type overrides set by the user [#1784](#)
- Updated estimators to keep track of input feature names during `fit()` [#1794](#)
- Updated `visualize_decision_tree` to include feature names in output [#1813](#)
- Added `is_bounded_like_percentage` property for objectives. If true, the `calculate_percent_difference` method will return the absolute difference rather than relative difference [#1809](#)
- Added full error traceback to `AutoMLSearch` logger file [#1840](#)
- Changed `TargetEncoder` to preserve custom indices in the data [#1836](#)
- Refactored `explain_predictions` and `explain_predictions_best_worst` to only compute features once for all rows that need to be explained [#1843](#)
- Added custom random undersampler data splitter for classification [#1857](#)
- Updated `OutliersDataCheck` implementation to calculate the probability of having no outliers [#1855](#)
- Added `Engines` pipeline processing API [#1838](#)

- **Fixes**

- Changed `EngineBase` `random_state` arg to `random_seed` and same for user guide docs [#1889](#)

- **Changes**

- Modified `calculate_percent_difference` so that division by 0 is now `inf` rather than `nan` [#1809](#)
- Removed `text_columns` parameter from `LSA` and `TextFeaturizer` components [#1652](#)
- Added `random_seed` as an argument to our `automl/pipeline/component` API. Using `random_state` will raise a warning [#1798](#)
- Added `DataCheckError` message in `InvalidTargetDataCheck` if input target is `None` and removed exception raised [#1866](#)
- Documentation Changes
- Testing Changes
 - Added back coverage for `_get_feature_provenance` in `TextFeaturizer` after `text_columns` was removed [#1842](#)
 - Pin `graphviz` version for windows builds [#1847](#)
 - Unpin `graphviz` version for windows builds [#1851](#)

Warning:**Breaking Changes**

- Added a deprecation warning to `explain_prediction`. It will be deleted in the next release. [#1860](#)

v0.18.2 Feb. 10, 2021

- Enhancements
 - Added uniqueness score data check [#1785](#)
 - Added “dataframe” output format for prediction explanations [#1781](#)
 - Updated `LightGBM` estimators to handle `pandas.MultiIndex` [#1770](#)
 - Sped up permutation importance for some pipelines [#1762](#)
 - Added sparsity data check [#1797](#)
 - Confirmed support for threshold tuning for binary time series classification problems [#1803](#)
- Fixes
- Changes
- Documentation Changes
 - Added section on `conda` to the contributing guide [#1771](#)
 - Updated release process to reflect freezing `main` before perf tests [#1787](#)
 - Moving some prs to the right section of the release notes [#1789](#)
 - Tweak `README.md`. [#1800](#)
 - Fixed back arrow on install page docs [#1795](#)
 - Fixed docstring for `ClassImbalanceDataCheck.validate()` [#1817](#)
- Testing Changes

v0.18.1 Feb. 1, 2021

- Enhancements

- Added `graph_t_sne` as a visualization tool for high dimensional data [#1731](#)
- Added the ability to see the linear coefficients of features in linear models terms [#1738](#)
- Added support for `scikit-learn v0.24.0` [#1733](#)
- Added support for `scipy v1.6.0` [#1752](#)
- Added SVM Classifier and Regressor to estimators [#1714](#) [#1761](#)
- **Fixes**
 - Addressed bug with `partial_dependence` and categorical data with more categories than grid resolution [#1748](#)
 - Removed `random_state` arg from `get_pipelines` in `AutoMLSearch` [#1719](#)
 - Pinned `pyzmq` at less than 22.0.0 till we add support [#1756](#)
- **Changes**
 - Updated components and pipelines to return `Woodwork` data structures [#1668](#)
 - Updated `clone()` for pipelines and components to copy over random state automatically [#1753](#)
 - Dropped support for Python version 3.6 [#1751](#)
 - Removed deprecated `verbose` flag from `AutoMLSearch` parameters [#1772](#)
- **Documentation Changes**
 - Add Twitter and Github link to documentation toolbar [#1754](#)
 - Added Open Graph info to documentation [#1758](#)
- **Testing Changes**

Warning:

Breaking Changes

- Components and pipelines return `Woodwork` data structures instead of `pandas` data structures [#1668](#)
- Python 3.6 will not be actively supported due to discontinued support from EvalML dependencies.
- Deprecated `verbose` flag is removed for `AutoMLSearch` [#1772](#)

v0.18.0 Jan. 26, 2021

- **Enhancements**
 - Added RMSLE, MSLE, and MAPE to core objectives while checking for negative target values in `invalid_targets_data_check` [#1574](#)
 - Added validation checks for binary problems with regression-like datasets and multiclass problems without true multiclass targets in `invalid_targets_data_check` [#1665](#)
 - Added time series support for `make_pipeline` [#1566](#)
 - Added target name for output of pipeline `predict` method [#1578](#)
 - Added multiclass check to `InvalidTargetDataCheck` for two examples per class [#1596](#)
 - Added support for `graphviz v0.16` [#1657](#)
 - Enhanced time series pipelines to accept empty features [#1651](#)
 - Added KNN Classifier to estimators. [#1650](#)

- Added support for list inputs for objectives [#1663](#)
- Added support for `AutoMLSearch` to handle time series classification pipelines [#1666](#)
- Enhanced `DelayedFeaturesTransformer` to encode categorical features and targets before delaying them [#1691](#)
- Added 2-way dependence plots. [#1690](#)
- Added ability to directly iterate through components within Pipelines [#1583](#)

- **Fixes**

- Fixed inconsistent attributes and added Exceptions to docs [#1673](#)
- Fixed `TargetLeakageDataCheck` to use Woodwork `mutual_information` rather than using Pandas' Pearson Correlation [#1616](#)
- Fixed thresholding for pipelines in `AutoMLSearch` to only threshold binary classification pipelines [#1622](#) [#1626](#)
- Updated `load_data` to return Woodwork structures and update default parameter value for `index` to `None` [#1610](#)
- Pinned `scipy` at `< 1.6.0` while we work on adding support [#1629](#)
- Fixed data check message formatting in `AutoMLSearch` [#1633](#)
- Addressed stacked ensemble component for `scikit-learn` v0.24 support by setting `shuffle=True` for default CV [#1613](#)
- Fixed bug where `Imputer` reset the index on `X` [#1590](#)
- Fixed `AutoMLSearch` stacktrace when a custom objective was passed in as a primary objective or additional objective [#1575](#)
- Fixed custom index bug for MAPE objective [#1641](#)
- Fixed index bug for `TextFeaturizer` and `LSA` components [#1644](#)
- Limited `load_fraud` dataset loaded into `automl.ipynb` [#1646](#)
- `add_to_rankings` updates `AutoMLSearch.best_pipeline` when necessary [#1647](#)
- Fixed bug where time series baseline estimators were not receiving `gap` and `max_delay` in `AutoMLSearch` [#1645](#)
- Fixed jupyter notebooks to help the RTD buildtime [#1654](#)
- Added `positive_only` objectives to `non_core_objectives` [#1661](#)
- Fixed stacking argument `n_jobs` for `IterativeAlgorithm` [#1706](#)
- Updated `CatBoost` estimators to return self in `.fit()` rather than the underlying model for consistency [#1701](#)
- Added ability to initialize pipeline parameters in `AutoMLSearch` constructor [#1676](#)

- **Changes**

- Added labeling to `graph_confusion_matrix` [#1632](#)
- Rerunning search for `AutoMLSearch` results in a message thrown rather than failing the search, and removed `has_searched` property [#1647](#)
- Changed tuner class to allow and ignore single parameter values as input [#1686](#)
- Capped `LightGBM` version limit to remove bug in docs [#1711](#)

- Removed support for `np.random.RandomState` in EvalML [#1727](#)
- **Documentation Changes**
 - Update Model Understanding in the user guide to include `visualize_decision_tree` [#1678](#)
 - Updated docs to include information about `AutoMLSearch` callback parameters and methods [#1577](#)
 - Updated docs to prompt users to install `graphviz` on Mac [#1656](#)
 - Added `infer_feature_types` to the `start.ipynb` guide [#1700](#)
 - Added multicollinearity data check to API reference and docs [#1707](#)
- **Testing Changes**

Warning:

Breaking Changes

- Removed `has_searched` property from `AutoMLSearch` [#1647](#)
- Components and pipelines return `Woodwork` data structures instead of `pandas` data structures [#1668](#)
- Removed support for `np.random.RandomState` in EvalML. Rather than passing `np.random.RandomState` as component and pipeline `random_state` values, we use `int random_seed` [#1727](#)

v0.17.0 Dec. 29, 2020

- **Enhancements**
 - Added `save_plot` that allows for saving figures from different backends [#1588](#)
 - Added `LightGBM Regressor` to regression components [#1459](#)
 - Added `visualize_decision_tree` for tree visualization with `decision_tree_data_from_estimator` and `decision_tree_data_from_pipeline` to reformat tree structure output [#1511](#)
 - Added `DFS Transformer` component into transformer components [#1454](#)
 - Added `MAPE` to the standard metrics for time series problems and update objectives [#1510](#)
 - Added `graph_prediction_vs_actual_over_time` and `get_prediction_vs_actual_over_time_data` to the model understanding module for time series problems [#1483](#)
 - Added a `ComponentGraph` class that will support future pipelines as directed acyclic graphs [#1415](#)
 - Updated data checks to accept `Woodwork` data structures [#1481](#)
 - Added parameter to `InvalidTargetDataCheck` to show only top unique values rather than all unique values [#1485](#)
 - Added multicollinearity data check [#1515](#)
 - Added baseline pipeline and components for time series regression problems [#1496](#)
 - Added more information to users about ensembling behavior in `AutoMLSearch` [#1527](#)
 - Add `woodwork` support for more utility and graph methods [#1544](#)
 - Changed `DateTimeFeaturizer` to encode features as `int` [#1479](#)

- Return trained pipelines from `AutoMLSearch.best_pipeline` #1547
- Added utility method so that users can set feature types without having to learn about Woodwork directly #1555
- Added Linear Discriminant Analysis transformer for dimensionality reduction #1331
- Added multiclass support for `partial_dependence` and `graph_partial_dependence` #1554
- Added `TimeSeriesBinaryClassificationPipeline` and `TimeSeriesMulticlassClassificationPipeline` classes #1528
- Added `make_data_splitter` method for easier automl data split customization #1568
- Integrated `ComponentGraph` class into Pipelines for full non-linear pipeline support #1543
- Update `AutoMLSearch` constructor to take training data instead of search and `add_to_leaderboard` #1597
- Update `split_data` helper args #1597
- Add problem type utils `is_regression`, `is_classification`, `is_timeseries` #1597
- Rename `AutoMLSearch` `data_split` arg to `data_splitter` #1569

- **Fixes**

- Fix AutoML not passing CV folds to `DefaultDataChecks` for usage by `ClassImbalanceDataCheck` #1619
- Fix Windows CI jobs: install numba via conda, required for shap #1490
- Added custom-index support for *reset-index-get_prediction_vs_actual_over_time_data* #1494
- Fix `generate_pipeline_code` to account for boolean and None differences between Python and JSON #1524 #1531
- Set max value for plotly and xgboost versions while we debug CI failures with newer versions #1532
- Undo version pinning for plotly #1533
- Fix ReadTheDocs build by updating the version of `setuptools` #1561
- Set `random_state` of data splitter in `AutoMLSearch` to take int to keep consistency in the resulting splits #1579
- Pin sklearn version while we work on adding support #1594
- Pin pandas at <1.2.0 while we work on adding support #1609
- Pin graphviz at < 0.16 while we work on adding support #1609

- **Changes**

- Reverting `save_graph` #1550 to resolve kaleido build issues #1585
- Update circleci badge to apply to main #1489
- Added script to generate github markdown for releases #1487
- Updated selection using pandas dtypes to selecting using Woodwork logical types #1551
- Updated dependencies to fix `ImportError: cannot import name 'MaskedArray' from 'sklearn.utils.fixes'` error and to address Woodwork and Featuretool dependencies #1540

- Made `get_prediction_vs_actual_data()` a public method [#1553](#)
- Updated Woodwork version requirement to v0.0.7 [#1560](#)
- Move data splitters from `evalml automl data splitters` to `evalml.preprocessing data splitters` [#1597](#)
- Rename “# Testing” in automl log output to “# Validation” [#1597](#)
- **Documentation Changes**
 - Added partial dependence methods to API reference [#1537](#)
 - Updated documentation for confusion matrix methods [#1611](#)
- **Testing Changes**
 - Set `n_jobs=1` in most unit tests to reduce memory [#1505](#)

Warning:**Breaking Changes**

- Updated minimal dependencies: `numpy>=1.19.1`, `pandas>=1.1.0`, `scikit-learn>=0.23.1`, `scikit-optimize>=0.8.1`
- Updated `AutoMLSearch.best_pipeline` to return a trained pipeline. Pass in `train_best_pipeline=False` to `AutoMLSearch` in order to return an untrained pipeline.
- Pipeline component instances can no longer be iterated through using `Pipeline.component_graph` [#1543](#)
- Update `AutoMLSearch` constructor to take training data instead of search and `add_to_leaderboard` [#1597](#)
- Update `split_data` helper args [#1597](#)
- Move data splitters from `evalml automl data splitters` to `evalml.preprocessing data splitters` [#1597](#)
- Rename `AutoMLSearch data_split` arg to `data_splitter` [#1569](#)

v0.16.1 Dec. 1, 2020

- **Enhancements**
 - Pin woodwork version to v0.0.6 to avoid breaking changes [#1484](#)
 - Updated Woodwork to `>=0.0.5` in `core-requirements.txt` [#1473](#)
 - Removed `copy_dataframe` parameter for Woodwork, updated Woodwork to `>=0.0.6` in `core-requirements.txt` [#1478](#)
 - Updated `detect_problem_type` to use `pandas.api.is_numeric_dtype` [#1476](#)
- **Changes**
 - Changed `make_clean` to delete coverage reports as a convenience for developers [#1464](#)
 - Set `n_jobs=-1` by default for stacked ensemble components [#1472](#)
- **Documentation Changes**
 - Updated pipeline and component documentation and demos to use Woodwork [#1466](#)
- **Testing Changes**

- Update dependency update checker to use everything from core and optional dependencies #1480

v0.16.0 Nov. 24, 2020

- **Enhancements**

- Updated pipelines and `make_pipeline` to accept Woodwork inputs #1393
- Updated components to accept Woodwork inputs #1423
- Added ability to freeze hyperparameters for `AutoMLSearch` #1284
- Added `Target Encoder` into transformer components #1401
- Added callback for error handling in `AutoMLSearch` #1403
- Added the index id to the `explain_predictions_best_worst` output to help users identify which rows in their data are included #1365
- The `top_k` features displayed in `explain_predictions_*` functions are now determined by the magnitude of shap values as opposed to the `top_k` largest and smallest shap values. #1374
- Added a problem type for time series regression #1386
- Added a `is_defined_for_problem_type` method to `ObjectiveBase` #1386
- Added a `random_state` parameter to `make_pipeline_from_components` function #1411
- Added `DelayedFeaturesTransformer` #1396
- Added a `TimeSeriesRegressionPipeline` class #1418
- Removed `core-requirements.txt` from the package distribution #1429
- Updated data check messages to include a “*code*” and “*details*” fields #1451, #1462
- Added a `TimeSeriesSplit` data splitter for time series problems #1441
- Added a `problem_configuration` parameter to `AutoMLSearch` #1457

- **Fixes**

- Fixed `IndexError` raised in `AutoMLSearch` when `ensembling = True` but only one pipeline to iterate over #1397
- Fixed stacked ensemble input bug and `LightGBM` warning and bug in `AutoMLSearch` #1388
- Updated enum classes to show possible enum values as attributes #1391
- Updated calls to Woodwork’s `to_pandas()` to `to_series()` and `to_dataframe()` #1428
- Fixed bug in OHE where column names were not guaranteed to be unique #1349
- Fixed bug with percent improvement of `ExpVariance` objective on data with highly skewed target #1467
- Fix `SimpleImputer` error which occurs when all features are bool type #1215

- **Changes**

- Changed `OutliersDataCheck` to return the list of columns, rather than rows, that contain outliers #1377
- Simplified and cleaned output for Code Generation #1371
- Reverted changes from #1337 #1409

- Updated data checks to return dictionary of warnings and errors instead of a list [#1448](#)
- Updated `AutoMLSearch` to pass Woodwork data structures to every pipeline (instead of pandas DataFrames) [#1450](#)
- Update `AutoMLSearch` to default to `max_batches=1` instead of `max_iterations=5` [#1452](#)
- Updated `_evaluate_pipelines` to consolidate side effects [#1410](#)
- **Documentation Changes**
 - Added description of CLA to contributing guide, updated description of draft PRs [#1402](#)
 - Updated documentation to include all data checks, `DataChecks`, and usage of data checks in AutoML [#1412](#)
 - Updated docstrings from `np.array` to `np.ndarray` [#1417](#)
 - Added section on stacking ensembles in `AutoMLSearch` documentation [#1425](#)
- **Testing Changes**
 - Removed `category_encoders` from `test-requirements.txt` [#1373](#)
 - Tweak codecov.io settings again to avoid flakes [#1413](#)
 - Modified `make lint` to check notebook versions in the docs [#1431](#)
 - Modified `make lint-fix` to standardize notebook versions in the docs [#1431](#)
 - Use new version of pull request Github Action for dependency check ([#1443](#))
 - Reduced number of workers for tests to 4 [#1447](#)

Warning:**Breaking Changes**

- The `top_k` and `top_k_features` parameters in `explain_predictions_*` functions now return `k` features as opposed to `2 * k` features [#1374](#)
- Renamed `problem_type` to `problem_types` in `RegressionObjective`, `BinaryClassificationObjective`, and `MulticlassClassificationObjective` [#1319](#)
- Data checks now return a dictionary of warnings and errors instead of a list [#1448](#)

v0.15.0 Oct. 29, 2020

- **Enhancements**
 - Added stacked ensemble component classes (`StackedEnsembleClassifier`, `StackedEnsembleRegressor`) [#1134](#)
 - Added stacked ensemble components to `AutoMLSearch` [#1253](#)
 - Added `DecisionTreeClassifier` and `DecisionTreeRegressor` to AutoML [#1255](#)
 - Added `graph_prediction_vs_actual` in `model_understanding` for regression problems [#1252](#)
 - Added parameter to `OneHotEncoder` to enable filtering for features to encode for [#1249](#)
 - Added `percent-better-than-baseline` for all objectives to `automl.results` [#1244](#)

- Added `HighVarianceCVDDataCheck` and replaced synonymous warning in `AutoMLSearch` [#1254](#)
- Added *PCA Transformer* component for dimensionality reduction [#1270](#)
- Added `generate_pipeline_code` and `generate_component_code` to allow for code generation given a pipeline or component instance [#1306](#)
- Added *PCA Transformer* component for dimensionality reduction [#1270](#)
- Updated `AutoMLSearch` to support Woodwork data structures [#1299](#)
- Added `cv_folds` to `ClassImbalanceDataCheck` and added this check to `DefaultDataChecks` [#1333](#)
- Make `max_batches` argument to `AutoMLSearch.search` public [#1320](#)
- Added text support to automl search [#1062](#)
- Added `_pipelines_per_batch` as a private argument to `AutoMLSearch` [#1355](#)

- **Fixes**

- Fixed ML performance issue with ordered datasets: always shuffle data in automl's default CV splits [#1265](#)
- Fixed broken `evalml info` CLI command [#1293](#)
- Fixed boosting `type='rf'` for `LightGBM Classifier`, as well as `num_leaves` error [#1302](#)
- Fixed bug in `explain_predictions_best_worst` where a custom index in the target variable would cause a `ValueError` [#1318](#)
- Added stacked ensemble estimators to `evalml.pipelines.__init__` file [#1326](#)
- Fixed bug in OHE where calls to transform were not deterministic if `top_n` was less than the number of categories in a column [#1324](#)
- Fixed `LightGBM` warning messages during `AutoMLSearch` [#1342](#)
- Fix warnings thrown during `AutoMLSearch` in `HighVarianceCVDDataCheck` [#1346](#)
- Fixed bug where `TrainingValidationSplit` would return invalid location indices for dataframes with a custom index [#1348](#)
- Fixed bug where the `AutoMLSearch.random_state` was not being passed to the created pipelines [#1321](#)

- **Changes**

- Allow `add_to_rankings` to be called before `AutoMLSearch` is called [#1250](#)
- Removed `Graphviz` from test-requirements to add to requirements.txt [#1327](#)
- Removed `max_pipelines` parameter from `AutoMLSearch` [#1264](#)
- Include editable installs in all install make targets [#1335](#)
- Made pip dependencies *featuretools* and *nlp_primitives* core dependencies [#1062](#)
- Removed *PartOfSpeechCount* from *TextFeaturizer* transform primitives [#1062](#)
- Added warning for `partial_dependency` when the feature includes null values [#1352](#)

- **Documentation Changes**

- Fixed and updated code blocks in Release Notes [#1243](#)
- Added `DecisionTree` estimators to API Reference [#1246](#)

- Changed class inheritance display to flow vertically #1248
- Updated cost-benefit tutorial to use a holdout/test set #1159
- Added `evalml info` command to documentation #1293
- Miscellaneous doc updates #1269
- Removed conda pre-release testing from the release process document #1282
- Updates to contributing guide #1310
- Added Alteryx footer to docs with Twitter and Github link #1312
- Added documentation for evalml installation for Python 3.6 #1322
- Added documentation changes to make the API Docs easier to understand #1323
- Fixed documentation for `feature_importance` #1353
- Added tutorial for running *AutoML* with text data #1357
- Added documentation for woodwork integration with automl search #1361
- **Testing Changes**
 - Added tests for `jupyter_check` to handle IPython #1256
 - Cleaned up `make_pipeline` tests to test for all estimators #1257
 - Added a test to check conda build after merge to main #1247
 - Removed code that was lacking codecov for `__main__.py` and unnecessary #1293
 - Codecov: round coverage up instead of down #1334
 - Add DockerHub credentials to CI testing environment #1356
 - Add DockerHub credentials to conda testing environment #1363

Warning:

Breaking Changes

- Renamed `LabelLeakageDataCheck` to `TargetLeakageDataCheck` #1319
- `max_pipelines` parameter has been removed from `AutoMLSearch`. Please use `max_iterations` instead. #1264
- `AutoMLSearch.search()` will now log a warning if the input is not a `Woodwork` data structure (`pandas`, `numpy`) #1299
- Make `max_batches` argument to `AutoMLSearch.search` public #1320
- Removed unused argument `feature_types` from `AutoMLSearch.search` #1062

v0.14.1 Sep. 29, 2020

- **Enhancements**
 - Updated partial dependence methods to support calculating numeric columns in a dataset with non-numeric columns #1150
 - Added `get_feature_names` on `OneHotEncoder` #1193
 - Added `detect_problem_type` to `problem_type/utils.py` to automatically detect the problem type given targets #1194

- Added LightGBM to AutoMLSearch #1199
- Updated scikit-learn and scikit-optimize to use latest versions - 0.23.2 and 0.8.1 respectively #1141
- Added `__str__` and `__repr__` for pipelines and components #1218
- Included internal target check for both training and validation data in AutoMLSearch #1226
- Added `ProblemTypes.all_problem_types` helper to get list of supported problem types #1219
- Added `DecisionTreeClassifier` and `DecisionTreeRegressor` classes #1223
- Added `ProblemTypes.all_problem_types` helper to get list of supported problem types #1219
- `DataChecks` can now be parametrized by passing a list of `DataCheck` classes and a parameter dictionary #1167
- Added first CV fold score as validation score in `AutoMLSearch.rankings` #1221
- Updated flake8 configuration to enable linting on `__init__.py` files #1234
- Refined `make_pipeline_from_components` implementation #1204

- **Fixes**

- Updated GitHub URL after migration to Alteryx GitHub org #1207
- Changed Problem Type enum to be more similar to the string name #1208
- Wrapped call to scikit-learn's partial dependence method in a `try/finally` block #1232

- **Changes**

- Added `allow_writing_files` as a named argument to CatBoost estimators. #1202
- Added `solver` and `multi_class` as named arguments to `LogisticRegressionClassifier` #1202
- Replaced pipeline's `._transform` method to evaluate all the preprocessing steps of a pipeline with `.compute_estimator_features` #1231
- Changed default large dataset train/test splitting behavior #1205

- **Documentation Changes**

- Included description of how to access the component instances and features for pipeline user guide #1163
- Updated API docs to refer to target as "target" instead of "labels" for non-classification tasks and minor docs cleanup #1160
- Added Class Imbalance Data Check to `api_reference.rst` #1190 #1200
- Added pipeline properties to API reference #1209
- Clarified what the objective parameter in AutoML is used for in AutoML API reference and AutoML user guide #1222
- Updated API docs to include `skopt.space.Categorical` option for component hyperparameter range definition #1228
- Added install documentation for `libomp` in order to use LightGBM on Mac #1233
- Improved description of `max_iterations` in documentation #1212

- Removed unused code from sphinx conf [#1235](#)
- Testing Changes

Warning:

Breaking Changes

- `DefaultDataChecks` now accepts a `problem_type` parameter that must be specified [#1167](#)
- Pipeline's `._transform` method to evaluate all the preprocessing steps of a pipeline has been replaced with `.compute_estimator_features` [#1231](#)
- `get_objectives` has been renamed to `get_core_objectives`. This function will now return a list of valid objective instances [#1230](#)

v0.13.2 Sep. 17, 2020

- **Enhancements**

- Added `output_format` field to explain predictions functions [#1107](#)
- Modified `get_objective` and `get_objectives` to be able to return any objective in `evalml.objectives` [#1132](#)
- Added a `return_instance` boolean parameter to `get_objective` [#1132](#)
- Added `ClassImbalanceDataCheck` to determine whether target imbalance falls below a given threshold [#1135](#)
- Added label encoder to `LightGBM` for binary classification [#1152](#)
- Added labels for the row index of confusion matrix [#1154](#)
- Added `AutoMLSearch` object as another parameter in search callbacks [#1156](#)
- Added the corresponding probability threshold for each point displayed in `graph_roc_curve` [#1161](#)
- Added `__eq__` for `ComponentBase` and `PipelineBase` [#1178](#)
- Added support for multiclass classification for `roc_curve` [#1164](#)
- Added `categories` accessor to `OneHotEncoder` for listing the categories associated with a feature [#1182](#)
- Added utility function to create pipeline instances from a list of component instances [#1176](#)

- **Fixes**

- Fixed `XGBoost` column names for partial dependence methods [#1104](#)
- Removed dead code validating column type from `TextFeaturizer` [#1122](#)
- Fixed issue where `Imputer` cannot fit when there is `None` in a categorical or boolean column [#1144](#)
- `OneHotEncoder` preserves the custom index in the input data [#1146](#)
- Fixed representation for `ModelFamily` [#1165](#)
- Removed duplicate `nbsphinx` dependency in `dev-requirements.txt` [#1168](#)
- Users can now pass in any valid kwargs to all estimators [#1157](#)

- Remove broken accessor `OneHotEncoder.get_feature_names` and unneeded base class [#1179](#)
- Removed LightGBM Estimator from AutoML models [#1186](#)
- **Changes**
 - Pinned `scikit-optimize` version to 0.7.4 [#1136](#)
 - Removed `tqdm` as a dependency [#1177](#)
 - Added `lightgbm` version 3.0.0 to `latest_dependency_versions.txt` [#1185](#)
 - Rename `max_pipelines` to `max_iterations` [#1169](#)
- **Documentation Changes**
 - Fixed API docs for `AutoMLSearch.add_result_callback` [#1113](#)
 - Added a step to our release process for pushing our latest version to conda-forge [#1118](#)
 - Added warning for missing `ipywidgets` dependency for using `PipelineSearchPlots` on Jupyterlab [#1145](#)
 - Updated `README.md` example to load demo dataset [#1151](#)
 - Swapped mapping of breast cancer targets in `model_understanding.ipynb` [#1170](#)
- **Testing Changes**
 - Added test confirming `TextFeaturizer` never outputs null values [#1122](#)
 - Changed Python version of `Update Dependencies` action to 3.8.x [#1137](#)
 - Fixed release notes check-in test for `Update Dependencies` actions [#1172](#)

Warning:**Breaking Changes**

- `get_objective` will now return a class definition rather than an instance by default [#1132](#)
- Deleted `OPTIONS` dictionary in `evalml.objectives.utils.py` [#1132](#)
- If specifying an objective by string, the string must now match the objective's name field, case-insensitive [#1132](#)
- Passing “Cost Benefit Matrix”, “Fraud Cost”, “Lead Scoring”, “Mean Squared Log Error”, “Recall”, “Recall Macro”, “Recall Micro”, “Recall Weighted”, or “Root Mean Squared Log Error” to `AutoMLSearch` will now result in a `ValueError` rather than an `ObjectiveNotFoundError` [#1132](#)
- Search callbacks `start_iteration_callback` and `add_results_callback` have changed to include a copy of the `AutoMLSearch` object as a third parameter [#1156](#)
- Deleted `OneHotEncoder.get_feature_names` method which had been broken for a while, in favor of pipelines' `input_feature_names` [#1179](#)
- Deleted empty base class `CategoricalEncoder` which `OneHotEncoder` component was inheriting from [#1176](#)
- Results from `roc_curve` will now return as a list of dictionaries with each dictionary representing a class [#1164](#)
- `max_pipelines` now raises a `DeprecationWarning` and will be removed in the next release. `max_iterations` should be used instead. [#1169](#)

v0.13.1 Aug. 25, 2020

- **Enhancements**

- Added Cost-Benefit Matrix objective for binary classification [#1038](#)
- Split `fill_value` into `categorical_fill_value` and `numeric_fill_value` for `Imputer` [#1019](#)
- Added `explain_predictions` and `explain_predictions_best_worst` for explaining multiple predictions with SHAP [#1016](#)
- Added new LSA component for text featurization [#1022](#)
- Added guide on installing with conda [#1041](#)
- Added a “cost-benefit curve” util method to graph cost-benefit matrix scores vs. binary classification thresholds [#1081](#)
- Standardized error when calling transform/predict before fit for pipelines [#1048](#)
- Added `percent_better_than_baseline` to AutoML search rankings and full rankings table [#1050](#)
- Added one-way partial dependence and partial dependence plots [#1079](#)
- Added “Feature Value” column to prediction explanation reports. [#1064](#)
- Added LightGBM classification estimator [#1082](#), [#1114](#)
- Added `max_batches` parameter to `AutoMLSearch` [#1087](#)

- **Fixes**

- Updated `TextFeaturizer` component to no longer require an internet connection to run [#1022](#)
- Fixed non-deterministic element of `TextFeaturizer` transformations [#1022](#)
- Added a `StandardScaler` to all `ElasticNet` pipelines [#1065](#)
- Updated cost-benefit matrix to normalize score [#1099](#)
- Fixed logic in `calculate_percent_difference` so that it can handle negative values [#1100](#)

- **Changes**

- Added `needs_fitting` property to `ComponentBase` [#1044](#)
- Updated references to data types to use datatype lists defined in `evalml.utils.gen_utils` [#1039](#)
- Remove maximum version limit for SciPy dependency [#1051](#)
- Moved `all_components` and other component importers into runtime methods [#1045](#)
- Consolidated graphing utility methods under `evalml.utils.graph_utils` [#1060](#)
- Made slight tweaks to how `TextFeaturizer` uses `featuretools`, and did some refactoring of that and of LSA [#1090](#)
- Changed `show_all_features` parameter into `importance_threshold`, which allows for thresholding feature importance [#1097](#), [#1103](#)

- **Documentation Changes**

- Update `setup.py` URL to point to the github repo #1037
- Added tutorial for using the cost-benefit matrix objective #1088
- Updated `model_understanding.ipynb` to include documentation for using plotly on Jupyter Lab #1108
- **Testing Changes**
 - Refactor CircleCI tests to use matrix jobs (#1043)
 - Added a test to check that all test directories are included in evalml package #1054

Warning:**Breaking Changes**

- `confusion_matrix` and `normalize_confusion_matrix` have been moved to `evalml.utils` #1038
- All graph utility methods previously under `evalml.pipelines.graph_utils` have been moved to `evalml.utils.graph_utils` #1060

v0.12.2 Aug. 6, 2020

- **Enhancements**
 - Add save/load method to components #1023
 - Expose pickle protocol as optional arg to save/load #1023
 - Updated estimators used in AutoML to include ExtraTrees and ElasticNet estimators #1030
- Fixes
- **Changes**
 - Removed DeprecationWarning for SimpleImputer #1018
- **Documentation Changes**
 - Add note about version numbers to release process docs #1034
- **Testing Changes**
 - Test files are now included in the evalml package #1029

v0.12.0 Aug. 3, 2020

- **Enhancements**
 - Added string and categorical targets support for binary and multiclass pipelines and check for numeric targets for DetectLabelLeakage data check #932
 - Added clear exception for regression pipelines if target datatype is string or categorical #960
 - Added target column names and class labels in `predict` and `predict_proba` output for pipelines #951
 - Added `_compute_shap_values` and `normalize_values` to `pipelines/explanations` module #958
 - Added `explain_prediction` feature which explains single predictions with SHAP #974
 - Added Imputer to allow different imputation strategies for numerical and categorical dtypes #991

- Added support for configuring logfile path using env var, and don't create logger if there are filesystem errors [#975](#)
- Updated catboost estimators' default parameters and automl hyperparameter ranges to speed up fit time [#998](#)
- **Fixes**
 - Fixed ReadtheDocs warning failure regarding embedded gif [#943](#)
 - Removed incorrect parameter passed to pipeline classes in `_add_baseline_pipelines` [#941](#)
 - Added universal error for calling `predict`, `predict_proba`, `transform`, and `feature_importances` before fitting [#969](#), [#994](#)
 - Made `TextFeaturizer` component and pip dependencies `featuretools` and `nlp_primitives` optional [#976](#)
 - Updated imputation strategy in automl to no longer limit impute strategy to `most_frequent` for all features if there are any categorical columns [#991](#)
 - Fixed `UnboundLocalError` for `cv_pipeline` when automl search errors [#996](#)
 - Fixed `Imputer` to reset dataframe index to preserve behavior expected from `SimpleImputer` [#1009](#)
- **Changes**
 - Moved `get_estimators` to `evalml.pipelines.components.utils` [#934](#)
 - Modified Pipelines to raise `PipelineScoreError` when they encounter an error during scoring [#936](#)
 - Moved `evalml.model_families.list_model_families` to `evalml.pipelines.components.allowed_model_families` [#959](#)
 - Renamed `DateTimeFeaturization` to `DateTimeFeaturizer` [#977](#)
 - Added check to stop search and raise an error if all pipelines in a batch return NaN scores [#1015](#)
- **Documentation Changes**
 - Updated `README.md` [#963](#)
 - Reworded message when errors are returned from data checks in search [#982](#)
 - Added section on understanding model predictions with `explain_prediction` to User Guide [#981](#)
 - Added a section to the user guide and api reference about how XGBoost and CatBoost are not fully supported. [#992](#)
 - Added custom components section in user guide [#993](#)
 - Updated FAQ section formatting [#997](#)
 - Updated release process documentation [#1003](#)
- **Testing Changes**
 - Moved `predict_proba` and `predict` tests regarding string / categorical targets to `test_pipelines.py` [#972](#)
 - Fixed dependency update bot by updating python version to 3.7 to avoid frequent github version updates [#1002](#)

Warning:**Breaking Changes**

- `get_estimators` has been moved to `evalml.pipelines.components.utils` (previously was under `evalml.pipelines.utils`) #934
- Removed the `raise_errors` flag in AutoML search. All errors during pipeline evaluation will be caught and logged. #936
- `evalml.model_families.list_model_families` has been moved to `evalml.pipelines.components.allowed_model_families` #959
- `TextFeaturizer`: the `featuretools` and `nlp_primitives` packages must be installed after installing evalml in order to use this component #976
- Renamed `DateTimeFeaturization` to `DateTimeFeaturizer` #977

v0.11.2 July 16, 2020• **Enhancements**

- Added `NoVarianceDataCheck` to `DefaultDataChecks` #893
- Added text processing and featurization component `TextFeaturizer` #913, #924
- Added additional checks to `InvalidTargetDataCheck` to handle invalid target data types #929
- `AutoMLSearch` will now handle `KeyboardInterrupt` and prompt user for confirmation #915

• **Fixes**

- Makes `automl` results a read-only property #919

• **Changes**

- Deleted static pipelines and refactored tests involving static pipelines, removed `all_pipelines()` and `get_pipelines()` #904
- Moved `list_model_families` to `evalml.model_family.utils` #903
- Updated `all_pipelines`, `all_estimators`, `all_components` to use the same mechanism for dynamically generating their elements #898
- Rename master branch to main #918
- Add pypi release github action #923
- Updated `AutoMLSearch.search` stdout output and logging and removed tqdm progress bar #921
- Moved `automl` config checks previously in `search()` to `init` #933

• **Documentation Changes**

- Reorganized and rewrote documentation #937
- Updated to use pydata sphinx theme #937
- Updated docs to use `release_notes` instead of `changelog` #942

• **Testing Changes**

- Cleaned up fixture names and usages in tests #895

Warning:**Breaking Changes**

- `list_model_families` has been moved to `evalml.model_family.utils` (previously was under `evalml.pipelines.utils`) #903
- `get_estimators` has been moved to `evalml.pipelines.components.utils` (previously was under `evalml.pipelines.utils`) #934
- Static pipeline definitions have been removed, but similar pipelines can still be constructed via creating an instance of `PipelineBase` #904
- `all_pipelines()` and `get_pipelines()` utility methods have been removed #904

v0.11.0 June 30, 2020**• Enhancements**

- Added multiclass support for ROC curve graphing #832
- Added preprocessing component to drop features whose percentage of NaN values exceeds a specified threshold #834
- Added data check to check for problematic target labels #814
- Added `PerColumnImputer` that allows imputation strategies per column #824
- Added transformer to drop specific columns #827
- Added support for `categories`, `handle_error`, and `drop` parameters in `OneHotEncoder` #830 #897
- Added preprocessing component to handle `DateTime` columns featurization #838
- Added ability to clone pipelines and components #842
- Define getter method for component parameters #847
- Added utility methods to calculate and graph permutation importances #860, #880
- Added new utility functions necessary for generating dynamic preprocessing pipelines #852
- Added kwargs to all components #863
- Updated `AutoSearchBase` to use dynamically generated preprocessing pipelines #870
- Added `SelectColumns` transformer #873
- Added ability to evaluate additional pipelines for automl search #874
- Added `default_parameters` class property to components and pipelines #879
- Added better support for disabling data checks in automl search #892
- Added ability to save and load AutoML objects to file #888
- Updated `AutoSearchBase.get_pipelines` to return an untrained pipeline instance #876
- Saved learned binary classification thresholds in automl results cv data dict #876

• Fixes

- Fixed bug where `SimpleImputer` cannot handle dropped columns #846
- Fixed bug where `PerColumnImputer` cannot handle dropped columns #855
- Enforce requirement that builtin components save all inputted values in their parameters dict #847

- Don’t list base classes in `all_components` output [#847](#)
- Standardize all components to output pandas data structures, and accept either pandas or numpy [#853](#)
- Fixed rankings and `full_rankings` error when search has not been run [#894](#)

- **Changes**

- Update `all_pipelines` and `all_components` to try initializing pipelines/components, and on failure exclude them [#849](#)
- Refactor `handle_components` to `handle_components_class`, standardize to `ComponentBase` subclass instead of instance [#850](#)
- Refactor “blacklist”/“whitelist” to “allow”/“exclude” lists [#854](#)
- Replaced `AutoClassificationSearch` and `AutoRegressionSearch` with `AutoMLSearch` [#871](#)
- Renamed `feature_importances` and `permutation_importances` methods to use singular names (`feature_importance` and `permutation_importance`) [#883](#)
- Updated `automl` default data splitter to train/validation split for large datasets [#877](#)
- Added open source license, update some repo metadata [#887](#)
- Removed dead code in `_get_preprocessing_components` [#896](#)

- **Documentation Changes**

- Fix some typos and update the EvalML logo [#872](#)

- **Testing Changes**

- Update the changelog check job to expect the new branching pattern for the deps update bot [#836](#)
- Check that all components output pandas datastructures, and can accept either pandas or numpy [#853](#)
- Replaced `AutoClassificationSearch` and `AutoRegressionSearch` with `AutoMLSearch` [#871](#)

Warning:
Breaking Changes

- Pipelines’ static `component_graph` field must contain either `ComponentBase` subclasses or `str`, instead of `ComponentBase` subclass instances [#850](#)
- Rename `handle_component` to `handle_component_class`. Now standardizes to `ComponentBase` subclasses instead of `ComponentBase` subclass instances [#850](#)
- Renamed `automl`’s `cv` argument to `data_split` [#877](#)
- Pipelines’ and classifiers’ `feature_importances` is renamed `feature_importance`, `graph_feature_importances` is renamed `graph_feature_importance` [#883](#)
- Passing `data_checks=None` to `automl` search will not perform any data checks as opposed to default checks. [#892](#)
- Pipelines to search for in `AutoML` are now determined automatically, rather than using the statically-defined pipeline classes. [#870](#)

- Updated `AutoSearchBase.get_pipelines` to return an untrained pipeline instance, instead of one which happened to be trained on the final cross-validation fold [#876](#)

v0.10.0 May 29, 2020**• Enhancements**

- Added baseline models for classification and regression, add functionality to calculate baseline models before searching in AutoML [#746](#)
- Port over highly-null guardrail as a data check and define `DefaultDataChecks` and `DisableDataChecks` classes [#745](#)
- Update `Tuner` classes to work directly with pipeline parameters dicts instead of flat parameter lists [#779](#)
- Add Elastic Net as a pipeline option [#812](#)
- Added new Pipeline option `ExtraTrees` [#790](#)
- Added precision-recall curve metrics and plot for binary classification problems in `evalml.pipeline.graph_utils` [#794](#)
- Update the default automl algorithm to search in batches, starting with default parameters for each pipeline and iterating from there [#793](#)
- Added `AutoMLAlgorithm` class and `IterativeAlgorithm` impl, separated from `AutoSearchBase` [#793](#)

• Fixes

- Update pipeline score to return nan score for any objective which throws an exception during scoring [#787](#)
- Fixed bug introduced in [#787](#) where binary classification metrics requiring predicted probabilities error in scoring [#798](#)
- CatBoost and XGBoost classifiers and regressors can no longer have a learning rate of 0 [#795](#)

• Changes

- Cleanup pipeline score code, and cleanup codecov [#711](#)
- Remove pass for abstract methods for codecov [#730](#)
- Added `__str__` for `AutoSearch` object [#675](#)
- Add util methods to graph ROC and confusion matrix [#720](#)
- Refactor `AutoBase` to `AutoSearchBase` [#758](#)
- Updated `AutoBase` with `data_checks` parameter, removed previous `detect_label_leakage` parameter, and added functionality to run data checks before search in AutoML [#765](#)
- Updated our logger to use Python’s logging utils [#763](#)
- Refactor most of `AutoSearchBase._do_iteration` impl into `AutoSearchBase._evaluate` [#762](#)
- Port over all guardrails to use the new `DataCheck` API [#789](#)
- Expanded `import_or_raise` to catch all exceptions [#759](#)
- Adds RMSE, MSLE, RMSLE as standard metrics [#788](#)

- Don't allow `Recall` to be used as an objective for AutoML #784
- Removed feature selection from pipelines #819
- Update default estimator parameters to make automl search faster and more accurate #793
- **Documentation Changes**
 - Add instructions to freeze master on release.md #726
 - Update release instructions with more details #727 #733
 - Add objective base classes to API reference #736
 - Fix components API to match other modules #747
- **Testing Changes**
 - Delete codecov.yml, use codecov.io's default #732
 - Added unit tests for fraud cost, lead scoring, and standard metric objectives #741
 - Update codecov client #782
 - Updated AutoBase `__str__` test to include no parameters case #783
 - Added unit tests for ExtraTrees pipeline #790
 - If codecov fails to upload, fail build #810
 - Updated Python version of dependency action #816
 - Update the dependency update bot to use a suffix when creating branches #817

Warning:**Breaking Changes**

- The `detect_label_leakage` parameter for AutoML classes has been removed and replaced by a `data_checks` parameter #765
- Moved ROC and confusion matrix methods from `evalml.pipeline.plot_utils` to `evalml.pipeline.graph_utils` #720
- Tuner classes require a pipeline hyperparameter range dict as an init arg instead of a space definition #779
- `Tuner.propose` and `Tuner.add` work directly with pipeline parameters dicts instead of flat parameter lists #779
- `PipelineBase.hyperparameters` and `custom_hyperparameters` use pipeline parameters dict format instead of being represented as a flat list #779
- All guardrail functions previously under `evalml.guardrails.utils` will be removed and replaced by data checks #789
- `Recall` disallowed as an objective for AutoML #784
- AutoSearchBase parameter `tuner` has been renamed to `tuner_class` #793
- AutoSearchBase parameter `possible_pipelines` and `possible_model_families` have been renamed to `allowed_pipelines` and `allowed_model_families` #793

v0.9.0 Apr. 27, 2020

- **Enhancements**

- Added `Accuracy` as a standard objective #624
- Added `verbose` parameter to `load_fraud` #560
- Added `Balanced Accuracy` metric for binary, multiclass #612 #661
- Added `XGBoost` regressor and `XGBoost` regression pipeline #666
- Added `Accuracy` metric for multiclass #672
- Added objective name in `AutoBase.describe_pipeline` #686
- Added `DataCheck` and `DataChecks`, `Message` classes and relevant subclasses #739

- **Fixes**

- Removed direct access to `cls.component_graph` #595
- Add testing files to `.gitignore` #625
- Remove circular dependencies from `Makefile` #637
- Add error case for `normalize_confusion_matrix()` #640
- Fixed `XGBoostClassifier` and `XGBoostRegressor` bug with feature names that contain `[,],` or `<` #659
- Update `make_pipeline_graph` to not accidentally create empty file when testing if path is valid #649
- Fix pip installation warning about `docsutils` version, from `boto` dependency #664
- Removed zero division warning for `F1/precision/recall` metrics #671
- Fixed `summary` for pipelines without estimators #707

- **Changes**

- Updated default objective for binary/multiclass classification to `log loss` #613
- Created classification and regression pipeline subclasses and removed objective as an attribute of pipeline classes #405
- Changed the output of `score` to return one dictionary #429
- Created binary and multiclass objective subclasses #504
- Updated objectives API #445
- Removed call to `get_plot_data` from `AutoML` #615
- Set `raise_error` to default to `True` for `AutoML` classes #638
- Remove unnecessary “u” prefixes on some unicode strings #641
- Changed one-hot encoder to return `uint8` dtypes instead of `ints` #653
- Pipeline `_name` field changed to `custom_name` #650
- Removed `graphs.py` and moved methods into `PipelineBase` #657, #665
- Remove `s3fs` as a dev dependency #664
- Changed `requirements-parser` to be a core dependency #673
- Replace `supported_problem_types` field on pipelines with `problem_type` attribute on base classes #678
- Changed `AutoML` to only show best results for a given pipeline template in rankings, added `full_rankings` property to show all #682

- Update `ModelFamily` values: don't list `xgboost/catboost` as classifiers now that we have regression pipelines for them #677
- Changed AutoML's `describe_pipeline` to get problem type from pipeline instead #685
- Standardize `import_or_raise` error messages #683
- Updated argument order of objectives to align with sklearn's #698
- Renamed `pipeline.feature_importance_graph` to `pipeline.graph_feature_importances` #700
- Moved ROC and confusion matrix methods to `evalml.pipelines.plot_utils` #704
- Renamed `MultiClassificationObjective` to `MulticlassClassificationObjective`, to align with pipeline naming scheme #715

- **Documentation Changes**

- Fixed some sphinx warnings #593
- Fixed docstring for `AutoClassificationSearch` with correct command #599
- Limit `readthedocs` formats to pdf, not htmlzip and epub #594 #600
- Clean up objectives API documentation #605
- Fixed function on Exploring search results page #604
- Update release process doc #567
- `AutoClassificationSearch` and `AutoRegressionSearch` show inherited methods in API reference #651
- Fixed improperly formatted code in breaking changes for changelog #655
- Added configuration to treat Sphinx warnings as errors #660
- Removed separate plotting section for pipelines in API reference #657, #665
- Have leads example notebook load S3 files using https, so we can delete s3fs dev dependency #664
- Categorized components in API reference and added descriptions for each category #663
- Fixed Sphinx warnings about `BalancedAccuracy` objective #669
- Updated API reference to include missing components and clean up pipeline docstrings #689
- Reorganize API ref, and clarify pipeline sub-titles #688
- Add and update preprocessing utils in API reference #687
- Added inheritance diagrams to API reference #695
- Documented which default objective AutoML optimizes for #699
- Create separate install page #701
- Include more utils in API ref, like `import_or_raise` #704
- Add more color to pipeline documentation #705

- **Testing Changes**

- Matched install commands of `check_latest_dependencies` test and it's GitHub action #578
- Added Github app to auto assign PR author as assignee #477

- Removed unneeded conda installation of xgboost in windows checkin tests [#618](#)
- Update graph tests to always use tmpfile dir [#649](#)
- Changelog checkin test workaround for release PRs: If ‘future release’ section is empty of PR refs, pass check [#658](#)
- Add changelog checkin test exception for dep-update branch [#723](#)

Warning: Breaking Changes

- Pipelines will now no longer take an objective parameter during instantiation, and will no longer have an objective attribute.
- `fit()` and `predict()` now use an optional objective parameter, which is only used in binary classification pipelines to fit for a specific objective.
- `score()` will now use a required `objectives` parameter that is used to determine all the objectives to score on. This differs from the previous behavior, where the pipeline’s objective was scored on regardless.
- `score()` will now return one dictionary of all objective scores.
- ROC and ConfusionMatrix plot methods via `Auto(*).plot` have been removed by [#615](#) and are replaced by `roc_curve` and `confusion_matrix` in `evalml.pipelines.plot_utils` in [#704](#)
- `normalize_confusion_matrix` has been moved to `evalml.pipelines.plot_utils` [#704](#)
- Pipelines `_name` field changed to `custom_name`
- Pipelines `supported_problem_types` field is removed because it is no longer necessary [#678](#)
- Updated argument order of objectives’ `objective_function` to align with sklearn [#698](#)
- `pipeline.feature_importance_graph` has been renamed to `pipeline.graph_feature_importances` in [#700](#)
- Removed unsupported MSLE objective [#704](#)

v0.8.0 Apr. 1, 2020**• Enhancements**

- Add normalization option and information to confusion matrix [#484](#)
- Add util function to drop rows with NaN values [#487](#)
- Renamed `PipelineBase.name` as `PipelineBase.summary` and redefined `PipelineBase.name` as class property [#491](#)
- Added access to parameters in Pipelines with `PipelineBase.parameters` (used to be return of `PipelineBase.describe`) [#501](#)
- Added `fill_value` parameter for `SimpleImputer` [#509](#)
- Added functionality to override component hyperparameters and made pipelines take hyperparameters from components [#516](#)
- Allow `numpy.random.RandomState` for `random_state` parameters [#556](#)

• Fixes

- Removed unused dependency matplotlib, and move `category_encoders` to test reqs [#572](#)

• Changes

- Undo version cap in XGBoost placed in #402 and allowed all released of XGBoost #407
- Support pandas 1.0.0 #486
- Made all references to the logger static #503
- Refactored `model_type` parameter for components and pipelines to `model_family` #507
- Refactored `problem_types` for pipelines and components into `supported_problem_types` #515
- Moved `pipelines/utils.save_pipeline` and `pipelines/utils.load_pipeline` to `PipelineBase.save` and `PipelineBase.load` #526
- Limit number of categories encoded by `OneHotEncoder` #517

- **Documentation Changes**

- Updated API reference to remove `PipelinePlot` and added moved `PipelineBase` plotting methods #483
- Add code style and github issue guides #463 #512
- Updated API reference for to surface class variables for pipelines and components #537
- Fixed README documentation link #535
- Unhid PR references in changelog #656

- **Testing Changes**

- Added automated dependency check PR #482, #505
- Updated automated dependency check comment #497
- Have `build_docs` job use python executor, so that env vars are set properly #547
- Added simple test to make sure `OneHotEncoder`'s `top_n` works with large number of categories #552
- Run windows unit tests on PRs #557

Warning: Breaking Changes

- `AutoClassificationSearch` and `AutoRegressionSearch`'s `model_types` parameter has been refactored into `allowed_model_families`
- `ModelTypes` enum has been changed to `ModelFamily`
- Components and Pipelines now have a `model_family` field instead of `model_type`
- `get_pipelines` utility function now accepts `model_families` as an argument instead of `model_types`
- `PipelineBase.name` no longer returns structure of pipeline and has been replaced by `PipelineBase.summary`
- `PipelineBase.problem_types` and `Estimator.problem_types` has been renamed to `supported_problem_types`
- `pipelines/utils.save_pipeline` and `pipelines/utils.load_pipeline` moved to `PipelineBase.save` and `PipelineBase.load`

v0.7.0 Mar. 9, 2020

- **Enhancements**

- Added emacs buffers to .gitignore #350
- Add CatBoost (gradient-boosted trees) classification and regression components and pipelines #247
- Added Tuner abstract base class #351
- Added `n_jobs` as parameter for `AutoClassificationSearch` and `AutoRegressionSearch` #403
- Changed colors of confusion matrix to shades of blue and updated axis order to match scikit-learn's #426
- Added `PipelineBase` `.graph` and `.feature_importance_graph` methods, moved from previous location #423
- Added support for python 3.8 #462
- **Fixes**
 - Fixed ROC and confusion matrix plots not being calculated if user passed own additional_objectives #276
 - Fixed `ReadtheDocs` `FileNotFoundError` exception for fraud dataset #439
- **Changes**
 - Added `n_estimators` as a tunable parameter for `XGBoost` #307
 - Remove unused parameter `ObjectiveBase.fit_needs_proba` #320
 - Remove extraneous parameter `component_type` from all components #361
 - Remove unused `rankings.csv` file #397
 - Downloaded demo and test datasets so unit tests can run offline #408
 - Remove `_needs_fitting` attribute from `Components` #398
 - Changed `plot.feature_importance` to show only non-zero feature importances by default, added optional parameter to show all #413
 - Refactored `PipelineBase` to take in parameter dictionary and moved pipeline metadata to class attribute #421
 - Dropped support for Python 3.5 #438
 - Removed unused `apply.py` file #449
 - Clean up `requirements.txt` to remove unused deps #451
 - Support installation without all required dependencies #459
- **Documentation Changes**
 - Update `release.md` with instructions to release to internal license key #354
- **Testing Changes**
 - Added tests for utils (and moved current utils to `gen_utils`) #297
 - Moved `XGBoost` install into it's own separate step on Windows using `Conda` #313
 - Rewind `pandas` version to before 1.0.0, to diagnose test failures for that version #325
 - Added dependency update checkin test #324
 - Rewind `XGBoost` version to before 1.0.0 to diagnose test failures for that version #402

- Update dependency check to use a whitelist [#417](#)
- Update unit test jobs to not install dev deps [#455](#)

Warning: Breaking Changes

- Python 3.5 will not be actively supported.

v0.6.0 Dec. 16, 2019

• **Enhancements**

- Added ability to create a plot of feature importances [#133](#)
- Add early stopping to AutoML using patience and tolerance parameters [#241](#)
- Added ROC and confusion matrix metrics and plot for classification problems and introduce PipelineSearchPlots class [#242](#)
- Enhanced AutoML results with search order [#260](#)
- Added utility function to show system and environment information [#300](#)

• **Fixes**

- Lower botocore requirement [#235](#)
- Fixed decision_function calculation for FraudCost objective [#254](#)
- Fixed return value of Recall metrics [#264](#)
- Components return self on fit [#289](#)

• **Changes**

- Renamed automl classes to AutoRegressionSearch and AutoClassificationSearch [#287](#)
- Updating demo datasets to retain column names [#223](#)
- Moving pipeline visualization to PipelinePlot class [#228](#)
- Standarizing inputs as pd.DataFrame / pd.Series [#130](#)
- Enforcing that pipelines must have an estimator as last component [#277](#)
- Added ipywidgets as a dependency in requirements.txt [#278](#)
- Added Random and Grid Search Tuners [#240](#)

• **Documentation Changes**

- Adding class properties to API reference [#244](#)
- Fix and filter FutureWarnings from scikit-learn [#249](#), [#257](#)
- Adding Linear Regression to API reference and cleaning up some Sphinx warnings [#227](#)

• **Testing Changes**

- Added support for testing on Windows with CircleCI [#226](#)
- Added support for doctests [#233](#)

Warning: Breaking Changes

- The `fit()` method for `AutoClassifier` and `AutoRegressor` has been renamed to `search()`.
- `AutoClassifier` has been renamed to `AutoClassificationSearch`
- `AutoRegressor` has been renamed to `AutoRegressionSearch`
- `AutoClassificationSearch.results` and `AutoRegressionSearch.results` now is a dictionary with `pipeline_results` and `search_order` keys. `pipeline_results` can be used to access a dictionary that is identical to the old `.results` dictionary. Whereas, `search_order` returns a list of the search order in terms of `pipeline_id`.
- Pipelines now require an estimator as the last component in `component_list`. Slicing pipelines now throws an `NotImplementedError` to avoid returning pipelines without an estimator.

v0.5.2 Nov. 18, 2019

- **Enhancements**
 - Adding basic pipeline structure visualization [#211](#)
- **Documentation Changes**
 - Added notebooks to build process [#212](#)

v0.5.1 Nov. 15, 2019

- **Enhancements**
 - Added basic outlier detection guardrail [#151](#)
 - Added basic ID column guardrail [#135](#)
 - Added support for unlimited pipelines with a `max_time` limit [#70](#)
 - Updated `.readthedocs.yaml` to successfully build [#188](#)
- **Fixes**
 - Removed MSLE from default additional objectives [#203](#)
 - Fixed `random_state` passed in pipelines [#204](#)
 - Fixed slow down in `RFRegressor` [#206](#)
- **Changes**
 - Pulled information for `describe_pipeline` from pipeline's new `describe` method [#190](#)
 - Refactored pipelines [#108](#)
 - Removed guardrails from `Auto(*)` [#202](#), [#208](#)
- **Documentation Changes**
 - Updated documentation to show `max_time` enhancements [#189](#)
 - Updated release instructions for RTD [#193](#)
 - Added notebooks to build process [#212](#)
 - Added contributing instructions [#213](#)
 - Added new content [#222](#)

v0.5.0 Oct. 29, 2019

- **Enhancements**

- Added basic one hot encoding [#73](#)
- Use enums for `model_type` [#110](#)
- Support for splitting regression datasets [#112](#)
- Auto-infer multiclass classification [#99](#)
- Added support for other units in `max_time` [#125](#)
- Detect highly null columns [#121](#)
- Added additional regression objectives [#100](#)
- Show an interactive iteration vs. score plot when using `fit()` [#134](#)
- **Fixes**
 - Reordered `describe_pipeline` [#94](#)
 - Added type check for `model_type` [#109](#)
 - Fixed `s` units when setting string `max_time` [#132](#)
 - Fix objectives not appearing in API documentation [#150](#)
- **Changes**
 - Reorganized tests [#93](#)
 - Moved logging to its own module [#119](#)
 - Show progress bar history [#111](#)
 - Using `cloudpickle` instead of `pickle` to allow unloading of custom objectives [#113](#)
 - Removed `render.py` [#154](#)
- **Documentation Changes**
 - Update release instructions [#140](#)
 - Include `additional_objectives` parameter [#124](#)
 - Added Changelog [#136](#)
- **Testing Changes**
 - Code coverage [#90](#)
 - Added CircleCI tests for other Python versions [#104](#)
 - Added doc notebooks as tests [#139](#)
 - Test metadata for CircleCI and 2 core parallelism [#137](#)

v0.4.1 Sep. 16, 2019

- **Enhancements**
 - Added AutoML for classification and regressor using Autobase and Skopt [#7](#) [#9](#)
 - Implemented standard classification and regression metrics [#7](#)
 - Added logistic regression, random forest, and XGBoost pipelines [#7](#)
 - Implemented support for custom objectives [#15](#)
 - Feature importance for pipelines [#18](#)
 - Serialization for pipelines [#19](#)

- Allow fitting on objectives for optimal threshold #27
 - Added detect label leakage #31
 - Implemented callbacks #42
 - Allow for multiclass classification #21
 - Added support for additional objectives #79
- **Fixes**
 - Fixed feature selection in pipelines #13
 - Made `random_seed` usage consistent #45
- **Documentation Changes**
 - Documentation Changes
 - Added docstrings #6
 - Created notebooks for docs #6
 - Initialized readthedocs EvalML #6
 - Added favicon #38
- **Testing Changes**
 - Added testing for loading data #39

v0.2.0 Aug. 13, 2019

- **Enhancements**
 - Created fraud detection objective #4

v0.1.0 July. 31, 2019

- *First Release*
- **Enhancements**
 - Added lead scoring objective #1
 - Added basic classifier #1
- **Documentation Changes**
 - Initialized Sphinx for docs #1

PYTHON MODULE INDEX

e

`evalml`, 166
`evalml.automl`, 166
`evalml.automl.automl_algorithm`, 166
`evalml.automl.automl_algorithm.automl_algorithm`, 166
`evalml.automl.automl_algorithm.default_algorithm`, 168
`evalml.automl.automl_algorithm.iterative_algorithm`, 170
`evalml.automl.automl_search`, 197
`evalml.automl.callbacks`, 204
`evalml.automl.engine`, 179
`evalml.automl.engine.cf_engine`, 179
`evalml.automl.engine.dask_engine`, 182
`evalml.automl.engine.engine_base`, 184
`evalml.automl.engine.sequential_engine`, 188
`evalml.automl.pipeline_search_plots`, 205
`evalml.automl.utils`, 206
`evalml.data_checks`, 218
`evalml.data_checks.class_imbalance_data_check`, 218
`evalml.data_checks.data_check`, 220
`evalml.data_checks.data_check_action`, 221
`evalml.data_checks.data_check_action_code`, 222
`evalml.data_checks.data_check_message`, 223
`evalml.data_checks.data_check_message_code`, 224
`evalml.data_checks.data_check_message_type`, 226
`evalml.data_checks.data_checks`, 227
`evalml.data_checks.datetime_format_data_check`, 228
`evalml.data_checks.datetime_nan_data_check`, 229
`evalml.data_checks.default_data_checks`, 230
`evalml.data_checks.highly_null_data_check`, 232
`evalml.data_checks.id_columns_data_check`, 233
`evalml.data_checks.invalid_targets_data_check`, 235
`evalml.data_checks.multicollinearity_data_check`, 236
`evalml.data_checks.natural_language_nan_data_check`, 237
`evalml.data_checks.no_variance_data_check`, 239
`evalml.data_checks.outliers_data_check`, 239
`evalml.data_checks.sparsity_data_check`, 241
`evalml.data_checks.target_distribution_data_check`, 243
`evalml.data_checks.target_leakage_data_check`, 244
`evalml.data_checks.uniqueness_data_check`, 245
`evalml.demos`, 268
`evalml.demos.breast_cancer`, 268
`evalml.demos.churn`, 268
`evalml.demos.diabetes`, 269
`evalml.demos.fraud`, 269
`evalml.demos.weather`, 270
`evalml.demos.wine`, 270
`evalml.exceptions`, 272
`evalml.exceptions.exceptions`, 272
`evalml.model_family`, 276
`evalml.model_family.model_family`, 276
`evalml.model_family.utils`, 278
`evalml.model_understanding`, 280
`evalml.model_understanding.feature_explanations`, 286
`evalml.model_understanding.force_plots`, 288
`evalml.model_understanding.graphs`, 289
`evalml.model_understanding.permutation_importance`, 300
`evalml.model_understanding.prediction_explanations`, 300

280
evalml.model_understanding.prediction_explanations, 505
280
evalml.objectives, 314
evalml.objectives.binary_classification_objective, 509
314
evalml.objectives.cost_benefit_matrix, 512
317
evalml.objectives.fraud_cost, 320
evalml.objectives.lead_scoring, 323
evalml.objectives.multiclass_classification_objective, 516
326
evalml.objectives.objective_base, 328
evalml.objectives.regression_objective, 519
330
evalml.objectives.sensitivity_low_alert, 636
333
evalml.objectives.standard_metrics, 335
evalml.objectives.time_series_regression_objective, 559
393
evalml.objectives.utils, 396
evalml.pipelines, 475
evalml.pipelines.binary_classification_pipeline, 563
1098
evalml.pipelines.binary_classification_pipeline_base, 566
1104
evalml.pipelines.classification_pipeline, 569
1106
evalml.pipelines.component_graph, 1111
evalml.pipelines.components, 475
evalml.pipelines.components.component_base, 572
942
evalml.pipelines.components.component_base_abstract, 575
945
evalml.pipelines.components.ensemble, 579
476
evalml.pipelines.components.ensemble.stacked_ensemble_base, 582
476
evalml.pipelines.components.ensemble.stacked_ensemble_classifier, 585
479
evalml.pipelines.components.ensemble.stacked_ensemble_regressor, 588
482
evalml.pipelines.components.estimators, 591
492
evalml.pipelines.components.estimators.classifier, 594
492
evalml.pipelines.components.estimators.classifier_base, 597
492
evalml.pipelines.components.estimators.classifier_transformers, 709
492
evalml.pipelines.components.estimators.classifier_transformers.column_selector, 858
495
evalml.pipelines.components.estimators.classifier_transformers.dimensionality_reducer, 709
499
evalml.pipelines.components.estimators.classifier_transformers.dimensionality_reducer.base, 709
502
evalml.pipelines.components.estimators.classifier_transformers.dimensionality_reducer.elasticnet, 712

```

evalml.pipelines.components.transformers.sequential_pipeline_base, 841
719
evalml.pipelines.components.transformers.sequential_pipeline_base.components.transformers.samplers, 844
719
evalml.pipelines.components.transformers.sequential_pipeline_base.components.transformers.scalers, 853
722
evalml.pipelines.components.transformers.sequential_pipeline_base.components.transformers.scalers.st, 853
726
evalml.pipelines.components.transformers.sequential_pipeline_base.components.transformers.transform, 867
738
evalml.pipelines.components.transformers.sequential_pipeline_base.components.transformers.transformers, 846
738
evalml.pipelines.components.transformers.feature_selection.rf_classifier_feature_selector, 115
741
evalml.pipelines.components.transformers.feature_selection.pipeline_base, 1121
744
evalml.pipelines.components.transformers.feature_selection.pipeline_base.feature_selector, 1127
744
evalml.pipelines.components.transformers.imputer, 1138
756
evalml.pipelines.components.transformers.imputer.imputer, 1133
756
evalml.pipelines.components.transformers.imputer.per_column_imputer, 1153
759
evalml.pipelines.components.transformers.imputer.simple_imputer, 1159
762
evalml.pipelines.components.transformers.imputer.preprocessing_utils, 1162
764
evalml.pipelines.components.transformers.preprocessing.data_splitters, 1142
778
evalml.pipelines.components.transformers.preprocessing.data_splitters.time_series_splitter, 1143
778
evalml.pipelines.components.transformers.preprocessing.datetime_featurizer, 1143
778
evalml.pipelines.components.transformers.preprocessing.delayed_feature_transformer, 1144
781
evalml.pipelines.components.transformers.preprocessing_utils, 1137
784
evalml.pipelines.components.transformers.problem_types, 1122
784
evalml.pipelines.components.transformers.problem_types.problem_types, 1322
786
evalml.pipelines.components.transformers.problem_types.rows_transformer, 1323
786
evalml.pipelines.components.transformers.problem_types.rows_transformer, 1327
789
evalml.pipelines.components.transformers.problem_types.rows_transformer, 1327
792
evalml.pipelines.components.transformers.problem_types.rows_transformer, 1327
792
evalml.pipelines.components.transformers.problem_types.rows_transformer, 1332
794
evalml.pipelines.components.transformers.problem_types.rows_transformer, 1333
794
evalml.pipelines.components.transformers.problem_types.rows_transformer, 1338
797
evalml.pipelines.components.transformers.problem_types.rows_transformer, 1339
800
evalml.pipelines.components.transformers.problem_types.rows_transformer, 1340
800
evalml.pipelines.components.transformers.problem_types.rows_transformer, 1344
802
evalml.pipelines.components.transformers.problem_types.rows_transformer, 1345
802
evalml.pipelines.components.transformers.preprocessing.transform_primitive_components, 1144
805
evalml.pipelines.components.transformers.samplers, 838
838
evalml.pipelines.components.transformers.samplers.base_sampler, 838
838

```


A

- `abs_error()` (in module `evalml.pipelines.components.utils`), 947
- `all_components()` (in module `evalml.pipelines.components.utils`), 947
- `all_problem_types()` (in module `evalml.problem_types.problem_types`), 1322
- `AccuracyBinary` (class in `evalml.objectives`), 399
- `AccuracyBinary` (class in `evalml.objectives.standard_metrics`), 337
- `AccuracyMulticlass` (class in `evalml.objectives`), 401
- `AccuracyMulticlass` (class in `evalml.objectives.standard_metrics`), 339
- `add()` (`evalml.tuners.grid_search_tuner.GridSearchTuner` method), 1328
- `add()` (`evalml.tuners.GridSearchTuner` method), 1334
- `add()` (`evalml.tuners.random_search_tuner.RandomSearchTuner` method), 1330
- `add()` (`evalml.tuners.RandomSearchTuner` method), 1336
- `add()` (`evalml.tuners.skopt_tuner.SKOptTuner` method), 1331
- `add()` (`evalml.tuners.SKOptTuner` method), 1336
- `add()` (`evalml.tuners.Tuner` method), 1337
- `add()` (`evalml.tuners.tuner.Tuner` method), 1333
- `add_result()` (`evalml.automl.automl_algorithm.automl_algorithm.AutoMLAlgorithm` method), 167
- `add_result()` (`evalml.automl.automl_algorithm.AutoMLAlgorithm` method), 174
- `add_result()` (`evalml.automl.automl_algorithm.default_algorithm.DefaultAlgorithm` method), 170
- `add_result()` (`evalml.automl.automl_algorithm.DefaultAlgorithm` method), 176
- `add_result()` (`evalml.automl.automl_algorithm.iterative_algorithm.IterativeAlgorithm` method), 173
- `add_result()` (`evalml.automl.automl_algorithm.IterativeAlgorithm` method), 178
- `add_to_rankings()` (`evalml.automl.automl_search.AutoMLSearch` method), 200
- `add_to_rankings()` (`evalml.automl.AutoMLSearch` method), 212
- `add_to_rankings()` (`evalml.AutoMLSearch` method), 1353
- `all_problem_types()` (in module `evalml.problem_types.problem_types`), 1322
- `all_problem_types()` (in module `evalml.problem_types.problem_types`), 1327
- `allowed_model_families()` (in module `evalml.pipelines.components.utils`), 947
- `ARIMAREgressor` (class in `evalml.pipelines`), 1168
- `ARIMAREgressor` (class in `evalml.pipelines.components`), 953
- `ARIMAREgressor` (class in `evalml.pipelines.components.estimators`), 641
- `ARIMAREgressor` (class in `evalml.pipelines.components.estimators.regressors`), 601
- `ARIMAREgressor` (class in `evalml.pipelines.components.estimators.regressors.arima_regressors`), 560
- `AUC` (class in `evalml.objectives`), 402
- `AUC` (class in `evalml.objectives.standard_metrics`), 340
- `AUCMacro` (class in `evalml.objectives`), 404
- `AUCMacro` (class in `evalml.objectives.standard_metrics`), 342
- `AUCMicro` (class in `evalml.objectives`), 406
- `AUCMicro` (class in `evalml.objectives.standard_metrics`), 344
- `AUCWeighted` (class in `evalml.objectives`), 407
- `AUCWeighted` (class in `evalml.objectives.standard_metrics`), 345
- `AutoMLAlgorithm` (class in `evalml.automl.automl_algorithm`), 174
- `AutoMLAlgorithm` (class in `evalml.automl.automl_algorithm.automl_algorithm`), 167
- `AutoMLAlgorithmException`, 168, 175
- `AutoMLConfig` (in module `evalml.automl.utils`), 207
- `AutoMLSearch` (class in `evalml`), 1350
- `AutoMLSearch` (class in `evalml.automl`), 209

AutoMLSearch (class
evalml.automl.automl_search), 197
 AutoMLSearchException, 272, 274

B

BalancedAccuracyBinary (class
evalml.objectives), 409
 BalancedAccuracyBinary (class
evalml.objectives.standard_metrics), 346
 BalancedAccuracyMulticlass (class
evalml.objectives), 411
 BalancedAccuracyMulticlass (class
evalml.objectives.standard_metrics), 349
 BaselineClassifier (class
evalml.pipelines.components), 956
 BaselineClassifier (class
evalml.pipelines.components.estimators),
 644
 BaselineClassifier (class
evalml.pipelines.components.estimators.classifiers),
 528
 BaselineClassifier (class
evalml.pipelines.components.estimators.classifiers.baseline_classifier),
 493
 BaselineRegressor (class
evalml.pipelines.components), 958
 BaselineRegressor (class
evalml.pipelines.components.estimators),
 646
 BaselineRegressor (class
evalml.pipelines.components.estimators.regressors),
 604
 BaselineRegressor (class
evalml.pipelines.components.estimators.regressors.baseline_regressor),
 563
 BaseMeta (class in *evalml.utils.base_meta*), 1338
 BaseSampler (class
evalml.pipelines.components.transformers.samplers.base_sampler),
 839

batch_number() (*evalml.automl.automl_algorithm.AutoMLAlgorithm*
property), 168
 batch_number() (*evalml.automl.automl_algorithm.AutoMLAlgorithm*
property), 175
 batch_number() (*evalml.automl.automl_algorithm.default_algorithm.DefaultAlgorithm*
property), 170
 batch_number() (*evalml.automl.automl_algorithm.DefaultAlgorithm*
property), 176
 batch_number() (*evalml.automl.automl_algorithm.iterative_algorithm.IterativeAlgorithm*
property), 173
 batch_number() (*evalml.automl.automl_algorithm.IterativeAlgorithm*
property), 178
 best_pipeline() (*evalml.automl.automl_search.AutoMLSearch*
property), 200
 best_pipeline() (*evalml.automl.AutoMLSearch*
property), 212
 best_pipeline() (*evalml.AutoMLSearch* *property*),
 1353
 binary_objective_vs_threshold() (in mod-
ule evalml.model_understanding), 303
 binary_objective_vs_threshold() (in mod-
ule evalml.model_understanding.graphs), 290
 BinaryClassificationObjective (class in
evalml.objectives), 412
 BinaryClassificationObjective (class in
evalml.objectives.binary_classification_objective),
 314
 BinaryClassificationPipeline (class in
evalml.pipelines), 1171
 BinaryClassificationPipeline (class in
evalml.pipelines.binary_classification_pipeline),
 1098
 BinaryClassificationPipelineMixin (class
 in *evalml.pipelines.binary_classification_pipeline_mixin*),
 1105
 build_engine_from_str() (in module
evalml.automl_search), 202
 build_prophet_df() (in
evalml.pipelines.components.estimators.ProphetRegressor
static method), 690
 build_prophet_df() (in
evalml.pipelines.components.estimators.regressors.prophet_regressor
static method), 587
 build_prophet_df() (in
evalml.pipelines.components.estimators.regressors.ProphetRegressor
static method), 625
 build_prophet_df() (in
evalml.pipelines.components.ProphetRegressor
static method), 1045
 build_prophet_df() (in
evalml.pipelines.ProphetRegressor *static*
method), 1247

C

calculate_percent_difference() (*evalml.objectives.AccuracyBinary* *class*
method), 400
 calculate_percent_difference() (*evalml.objectives.AccuracyMulticlass* *class*
method), 401
 calculate_percent_difference() (*evalml.objectives.AUC* *class method*), 403
 calculate_percent_difference() (*evalml.objectives.AUCMacro* *class method*),
 405
 calculate_percent_difference() (*evalml.objectives.AUCMicro* *class method*),
 407

`calculate_percent_difference()`
 (`evalml.objectives.AUCWeighted` *class method*), 408

`calculate_percent_difference()`
 (`evalml.objectives.BalancedAccuracyBinary` *class method*), 410

`calculate_percent_difference()`
 (`evalml.objectives.BalancedAccuracyMulticlass` *class method*), 412

`calculate_percent_difference()`
 (`evalml.objectives.binary_classification_objective.BinaryClassificationObjective` *class method*), 315

`calculate_percent_difference()`
 (`evalml.objectives.BinaryClassificationObjective` *class method*), 413

`calculate_percent_difference()`
 (`evalml.objectives.cost_benefit_matrix.CostBenefitMatrix` *class method*), 318

`calculate_percent_difference()`
 (`evalml.objectives.CostBenefitMatrix` *class method*), 416

`calculate_percent_difference()`
 (`evalml.objectives.ExpVariance` *class method*), 418

`calculate_percent_difference()`
 (`evalml.objectives.F1` *class method*), 420

`calculate_percent_difference()`
 (`evalml.objectives.F1Macro` *class method*), 422

`calculate_percent_difference()`
 (`evalml.objectives.F1Micro` *class method*), 423

`calculate_percent_difference()`
 (`evalml.objectives.F1Weighted` *class method*), 425

`calculate_percent_difference()`
 (`evalml.objectives.fraud_cost.FraudCost` *class method*), 321

`calculate_percent_difference()`
 (`evalml.objectives.FraudCost` *class method*), 426

`calculate_percent_difference()`
 (`evalml.objectives.Gini` *class method*), 430

`calculate_percent_difference()`
 (`evalml.objectives.lead_scoring.LeadScoring` *class method*), 324

`calculate_percent_difference()`
 (`evalml.objectives.LeadScoring` *class method*), 432

`calculate_percent_difference()`
 (`evalml.objectives.LogLossBinary` *class method*), 434

`calculate_percent_difference()`
 (`evalml.objectives.LogLossMulticlass` *class method*), 436

`calculate_percent_difference()`
 (`evalml.objectives.MAE` *class method*), 438

`calculate_percent_difference()`
 (`evalml.objectives.MAPE` *class method*), 439

`calculate_percent_difference()`
 (`evalml.objectives.MaxError` *class method*), 440

`calculate_percent_difference()`
 (`evalml.objectives.MCCBinary` *class method*), 442

`calculate_percent_difference()`
 (`evalml.objectives.MCCMulticlass` *class method*), 444

`calculate_percent_difference()`
 (`evalml.objectives.MeanSquaredLogError` *class method*), 446

`calculate_percent_difference()`
 (`evalml.objectives.MedianAE` *class method*), 447

`calculate_percent_difference()`
 (`evalml.objectives.MSE` *class method*), 448

`calculate_percent_difference()`
 (`evalml.objectives.multiclass_classification_objective.MulticlassClassificationObjective` *class method*), 326

`calculate_percent_difference()`
 (`evalml.objectives.MulticlassClassificationObjective` *class method*), 450

`calculate_percent_difference()`
 (`evalml.objectives.objective_base.ObjectiveBase` *class method*), 329

`calculate_percent_difference()`
 (`evalml.objectives.ObjectiveBase` *class method*), 452

`calculate_percent_difference()`
 (`evalml.objectives.Precision` *class method*), 454

`calculate_percent_difference()`
 (`evalml.objectives.PrecisionMacro` *class method*), 456

`calculate_percent_difference()`
 (`evalml.objectives.PrecisionMicro` *class method*), 458

`calculate_percent_difference()`
 (`evalml.objectives.PrecisionWeighted` *class method*), 459

`calculate_percent_difference()`
 (`evalml.objectives.R2` *class method*), 460

`calculate_percent_difference()`
 (`evalml.objectives.Recall` *class method*), 462

`calculate_percent_difference()`
 (`evalml.objectives.RecallMacro` *class method*), 464

464
`calculate_percent_difference()`
(evalml.objectives.RecallMicro class method),
466
`calculate_percent_difference()`
(evalml.objectives.RecallWeighted class
method), 467
`calculate_percent_difference()`
(evalml.objectives.regression_objective.RegressionObjective
class method), 331
`calculate_percent_difference()`
(evalml.objectives.RegressionObjective class
method), 468
`calculate_percent_difference()`
(evalml.objectives.RootMeanSquaredError
class method), 470
`calculate_percent_difference()`
(evalml.objectives.RootMeanSquaredLogError
class method), 472
`calculate_percent_difference()`
(evalml.objectives.sensitivity_low_alert.SensitivityLowAlert
class method), 334
`calculate_percent_difference()`
(evalml.objectives.SensitivityLowAlert class
method), 474
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.AccuracyBinary
class method), 337
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.AccuracyMulticlass
class method), 339
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.AUC
class method), 341
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.AUCMacro
class method), 343
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.AUCMicro
class method), 344
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.AUCWeighted
class method), 346
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.BalancedAccuracyBinary
class method), 347
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.BalancedAccuracyMulticlass
class method), 349
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.ExpVariance
class method), 351
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.F1 class
method), 352
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.F1Macro
class method), 354
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.F1Micro
class method), 356
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.F1Weighted
class method), 357
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.Gini
class method), 359
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.LogLossBinary
class method), 361
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.LogLossMulticlass
class method), 363
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.MAE
class method), 364
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.MAPE
class method), 366
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.MaxError
class method), 367
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.MCCBinary
class method), 369
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.MCCMulticlass
class method), 371
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.MeanSquaredLogError
class method), 372
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.MedianAE
class method), 374
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.MSE
class method), 375
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.Precision
class method), 377
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.PrecisionMacro
class method), 379
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.PrecisionMicro
class method), 380
`calculate_percent_difference()`
(evalml.objectives.standard_metrics.PrecisionWeighted

class method), 382
 calculate_percent_difference() (evalml.objectives.standard_metrics.R2 *class method*), 383
 calculate_percent_difference() (evalml.objectives.standard_metrics.Recall *class method*), 385
 calculate_percent_difference() (evalml.objectives.standard_metrics.RecallMacro *class method*), 387
 calculate_percent_difference() (evalml.objectives.standard_metrics.RecallMicro *class method*), 388
 calculate_percent_difference() (evalml.objectives.standard_metrics.RecallWeighted *class method*), 390
 calculate_percent_difference() (evalml.objectives.standard_metrics.RootMeanSquaredError *class method*), 391
 calculate_percent_difference() (evalml.objectives.standard_metrics.RootMeanSquaredLogError *class method*), 392
 calculate_percent_difference() (evalml.objectives.time_series_regression_objective.TimeSeriesRegressionObjective *class method*), 394
 calculate_permutation_importance() (in module evalml.model_understanding), 303
 calculate_permutation_importance() (in module evalml.model_understanding.permutation_importance), 300
 calculate_permutation_importance_one_column() (in module evalml.model_understanding), 303
 calculate_permutation_importance_one_column() (in module evalml.model_understanding.permutation_importance_one_column), 300
 can_optimize_threshold() (evalml.objectives.AccuracyBinary *property*), 400
 can_optimize_threshold() (evalml.objectives.AUC *property*), 403
 can_optimize_threshold() (evalml.objectives.BalancedAccuracyBinary *property*), 410
 can_optimize_threshold() (evalml.objectives.binary_classification_objective.BinaryClassificationObjective *property*), 315
 can_optimize_threshold() (evalml.objectives.BinaryClassificationObjective *property*), 414
 can_optimize_threshold() (evalml.objectives.cost_benefit_matrix.CostBenefitMatrix *property*), 319
 can_optimize_threshold() (evalml.objectives.CostBenefitMatrix *property*), 416
 can_optimize_threshold() (evalml.objectives.F1 *property*), 420
 can_optimize_threshold() (evalml.objectives.fraud_cost.FraudCost *property*), 321
 can_optimize_threshold() (evalml.objectives.FraudCost *property*), 427
 can_optimize_threshold() (evalml.objectives.Gini *property*), 430
 can_optimize_threshold() (evalml.objectives.lead_scoring.LeadScoring *property*), 324
 can_optimize_threshold() (evalml.objectives.LeadScoring *property*), 432
 can_optimize_threshold() (evalml.objectives.LogLossBinary *property*), 434
 can_optimize_threshold() (evalml.objectives.MCCBinary *property*), 442
 can_optimize_threshold() (evalml.objectives.time_series_regression_objective.TimeSeriesRegressionObjective *property*), 454
 can_optimize_threshold() (evalml.objectives.Precision *property*), 454
 can_optimize_threshold() (evalml.objectives.Recall *property*), 462
 can_optimize_threshold() (evalml.objectives.sensitivity_low_alert.SensitivityLowAlert *property*), 334
 can_optimize_threshold() (evalml.objectives.SensitivityLowAlert *property*), 474
 can_optimize_threshold() (evalml.objectives.standard_metrics.AccuracyBinary *property*), 338
 can_optimize_threshold() (evalml.objectives.standard_metrics.AUC *property*), 341
 can_optimize_threshold() (evalml.objectives.standard_metrics.BalancedAccuracyBinary *property*), 347
 can_optimize_threshold() (evalml.objectives.standard_metrics.F1 *property*), 359
 can_optimize_threshold() (evalml.objectives.standard_metrics.Gini *property*), 359
 can_optimize_threshold() (evalml.objectives.standard_metrics.LogLossBinary *property*), 361
 can_optimize_threshold() (evalml.objectives.standard_metrics.MCCBinary *property*), 369

`can_optimize_threshold()`
 (`evalml.objectives.standard_metrics.Precision`
 property), 377
`can_optimize_threshold()`
 (`evalml.objectives.standard_metrics.Recall`
 property), 385
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline`
 method), 1100
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.BinaryClassificationPipeline`
 method), 1172
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.classification_pipeline.ClassificationPipeline`
 method), 1107
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.ClassificationPipeline`
 method), 1183
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline`
 method), 1117
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.MulticlassClassificationPipeline`
 method), 1232
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.pipeline_base.PipelineBase`
 method), 1123
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.PipelineBase` method), 1243
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.regression_pipeline.RegressionPipeline`
 method), 1129
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.RegressionPipeline` method),
 1255
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline`
 method), 1135
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline`
 method), 1142
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline`
 method), 1148
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase`
 method), 1155
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline`
 method), 1160
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.TimeSeriesBinaryClassificationPipeline`
 method), 1282
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.TimeSeriesClassificationPipeline`
 method), 1289
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.TimeSeriesMulticlassClassificationPipeline`
 method), 1295
`can_tune_threshold_with_objective()`
 (`evalml.pipelines.TimeSeriesRegressionPipeline`
 method), 1301
`cancel()` (`evalml.automl.engine.cf_engine.CFComputation`
 method), 180
`cancel()` (`evalml.automl.engine.dask_engine.DaskComputation`
 method), 182
`cancel()` (`evalml.automl.engine.engine_base.EngineComputation`
 method), 186
`cancel()` (`evalml.automl.engine.EngineComputation`
 method), 194
`cancel()` (`evalml.automl.engine.sequential_engine.SequentialComputation`
 method), 189
`CatBoostClassifier` (class in `evalml.pipelines`),
 961
`CatBoostClassifier` (class in
`evalml.pipelines.components`), 961
`CatBoostClassifier` (class in
`evalml.pipelines.components.estimators`),
 649
`CatBoostClassifier` (class in
`evalml.pipelines.components.estimators.classifiers`),
 530
`CatBoostClassifier` (class in
`evalml.pipelines.components.estimators.classifiers.catboost_class`
 496
`CatBoostRegressor` (class in `evalml.pipelines`),
 1179
`CatBoostRegressor` (class in
`evalml.pipelines.components`), 963
`CatBoostRegressor` (class in
`evalml.pipelines.components.estimators`),
 651
`CatBoostRegressor` (class in
`evalml.pipelines.components.estimators.regressors`),
 606
`CatBoostRegressor` (class in
`evalml.pipelines.components.estimators.regressors.catboost_regre`
 566
`categories()` (`evalml.pipelines.components.OneHotEncoder`
 method), 1033
`categories()` (`evalml.pipelines.components.transformers.encoders.one`
 method), 724
`categories()` (`evalml.pipelines.components.transformers.encoders.One`
 method), 733
`categories()` (`evalml.pipelines.components.transformers.OneHotEncod`
 method), 902
`categories()` (`evalml.pipelines.OneHotEncoder`
 method), 1237

CFClient (class in evalml.automl.engine.cf_engine), 179
 CFComputation (class in evalml.automl.engine.cf_engine), 180
 CFEngine (class in evalml.automl.engine), 191
 CFEngine (class in evalml.automl.engine.cf_engine), 180
 check_all_pipeline_names_unique() (in module evalml.automl.utils), 207
 check_for_fit() (evalml.pipelines.components.component_base.BaseComponentBase class method), 945
 check_for_fit() (evalml.pipelines.components.ComponentBase class method), 968
 check_for_fit() (evalml.pipelines.components.transformers.BaseTransformer class method), 726
 check_for_fit() (evalml.pipelines.components.transformers.BaseTransformer class method), 767
 check_for_fit() (evalml.pipelines.pipeline_meta.PipelineMeta class method), 1128
 classes_() (evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline property), 1100
 classes_() (evalml.pipelines.BinaryClassificationPipeline property), 1172
 classes_() (evalml.pipelines.classification_pipeline.ClassificationPipeline property), 1107
 classes_() (evalml.pipelines.ClassificationPipeline property), 1183
 classes_() (evalml.pipelines.components.BaselineClassifier clone() (evalml.pipelines.components.BaselineClassifier method), 957
 classes_() (evalml.pipelines.components.BaselineClassifier clone() (evalml.pipelines.components.BaselineRegressor method), 959
 classes_() (evalml.pipelines.components.estimators.BaselineClassifier clone() (evalml.pipelines.components.CatBoostClassifier method), 962
 classes_() (evalml.pipelines.components.estimators.classifiers.BaselineClassifier clone() (evalml.pipelines.components.CatBoostRegressor method), 964
 classes_() (evalml.pipelines.components.estimators.classifiers.BaselineClassifier clone() (evalml.pipelines.components.component_base.ComponentBase method), 943
 classes_() (evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline property), 1117
 classes_() (evalml.pipelines.MulticlassClassificationPipeline property), 1232
 classes_() (evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline property), 1135
 classes_() (evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline property), 1142
 classes_() (evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline property), 1148
 classes_() (evalml.pipelines.TimeSeriesBinaryClassificationPipeline property), 1282
 classes_() (evalml.pipelines.TimeSeriesClassificationPipeline property), 1289
 classes_() (evalml.pipelines.TimeSeriesMulticlassClassificationPipeline property), 1295
 ClassificationPipeline (class in evalml.pipelines), 1182
 ClassificationPipeline (class in evalml.pipelines.classification_pipeline), 1106
 ClassImbalanceDataCheck (class in evalml.data_checks), 249
 ClassImbalanceDataCheck (class in evalml.data_checks.class_imbalance_data_check), 219
 classproperty (class in evalml.utils), 1347
 classproperty (class in evalml.utils.gen_utils), 1341
 clone() (evalml.pipelines.BinaryClassificationPipeline method), 1107
 clone() (evalml.pipelines.ClassificationPipeline method), 1183
 clone() (evalml.pipelines.components.ARIMAREgressor method), 954
 clone() (evalml.pipelines.components.BaselineClassifier method), 957
 clone() (evalml.pipelines.components.BaselineRegressor method), 959
 clone() (evalml.pipelines.components.CatBoostClassifier method), 962
 clone() (evalml.pipelines.components.CatBoostRegressor method), 964
 clone() (evalml.pipelines.components.component_base.ComponentBase method), 943
 clone() (evalml.pipelines.components.DateTimeFeaturizer method), 969
 clone() (evalml.pipelines.components.DecisionTreeClassifier method), 972
 clone() (evalml.pipelines.components.DecisionTreeRegressor method), 975
 clone() (evalml.pipelines.components.DropColumnsTransformer method), 982
 clone() (evalml.pipelines.components.DropNullColumnsTransformer method), 984
 clone() (evalml.pipelines.components.DropRowsTransformer method), 987
 clone() (evalml.pipelines.components.ElasticNetClassifier

method), 989

clone() (evalml.pipelines.components.ElasticNetRegressor method), 992

clone() (evalml.pipelines.components.EmailFeaturizer method), 994

clone() (evalml.pipelines.components.ensemble.stacked_ensemble method), 477

clone() (evalml.pipelines.components.ensemble.stacked_ensemble method), 480

clone() (evalml.pipelines.components.ensemble.stacked_ensemble method), 483

clone() (evalml.pipelines.components.ensemble.StackedEnsemble method), 486

clone() (evalml.pipelines.components.ensemble.StackedEnsemble method), 488

clone() (evalml.pipelines.components.ensemble.StackedEnsemble method), 491

clone() (evalml.pipelines.components.Estimator method), 997

clone() (evalml.pipelines.components.estimators.ARIMARegressor method), 642

clone() (evalml.pipelines.components.estimators.BaselineClassifier method), 645

clone() (evalml.pipelines.components.estimators.BaselineRegressor method), 647

clone() (evalml.pipelines.components.estimators.CatBoostClassifier method), 650

clone() (evalml.pipelines.components.estimators.CatBoostRegressor method), 653

clone() (evalml.pipelines.components.estimators.classifiers.baseline_classifier method), 494

clone() (evalml.pipelines.components.estimators.classifiers.baseline_classifier method), 529

clone() (evalml.pipelines.components.estimators.classifiers.catboost_classifier method), 497

clone() (evalml.pipelines.components.estimators.classifiers.CatBoostClassifier method), 532

clone() (evalml.pipelines.components.estimators.classifiers.decision_tree_classifier method), 500

clone() (evalml.pipelines.components.estimators.classifiers.DecisionTreeClassifier method), 535

clone() (evalml.pipelines.components.estimators.classifiers.elasticnet_classifier method), 504

clone() (evalml.pipelines.components.estimators.classifiers.ElasticNetClassifier method), 538

clone() (evalml.pipelines.components.estimators.classifiers.elm_classifier method), 507

clone() (evalml.pipelines.components.estimators.classifiers.ExtraTreesClassifier method), 541

clone() (evalml.pipelines.components.estimators.classifiers.kneighbors_classifier method), 511

clone() (evalml.pipelines.components.estimators.classifiers.KNeighborsClassifier method), 544

clone() (evalml.pipelines.components.estimators.classifiers.lightgbm_classifier method), 514

clone() (evalml.pipelines.components.estimators.classifiers.LightGBMClassifier method), 547

clone() (evalml.pipelines.components.estimators.classifiers.logistic_regression method), 517

clone() (evalml.pipelines.components.estimators.classifiers.LogisticRegression method), 550

clone() (evalml.pipelines.components.estimators.classifiers.RandomForestClassifier method), 552

clone() (evalml.pipelines.components.estimators.classifiers.rf_classifier method), 520

clone() (evalml.pipelines.components.estimators.classifiers.svm_classifier method), 523

clone() (evalml.pipelines.components.estimators.classifiers.SVMClassifier method), 555

clone() (evalml.pipelines.components.estimators.classifiers.xgboost_classifier method), 526

clone() (evalml.pipelines.components.estimators.classifiers.XGBoostClassifier method), 557

clone() (evalml.pipelines.components.estimators.DecisionTreeClassifier method), 656

clone() (evalml.pipelines.components.estimators.DecisionTreeRegressor method), 659

clone() (evalml.pipelines.components.estimators.ElasticNetClassifier method), 662

clone() (evalml.pipelines.components.estimators.ElasticNetRegressor method), 664

clone() (evalml.pipelines.components.estimators.Estimator method), 667

clone() (evalml.pipelines.components.estimators.estimator.estimator method), 638

clone() (evalml.pipelines.components.estimators.ExtraTreesClassifier method), 670

clone() (evalml.pipelines.components.estimators.ExtraTreesRegressor method), 673

clone() (evalml.pipelines.components.estimators.KNeighborsClassifier method), 676

clone() (evalml.pipelines.components.estimators.LightGBMClassifier method), 679

clone() (evalml.pipelines.components.estimators.LightGBMRegressor method), 682

clone() (evalml.pipelines.components.estimators.LinearRegressor method), 684

clone() (evalml.pipelines.components.estimators.LogisticRegressionClassifier method), 687

clone() (evalml.pipelines.components.estimators.ProphetRegressor method), 690

clone() (evalml.pipelines.components.estimators.RandomForestClassifier method), 692

clone() (evalml.pipelines.components.estimators.RandomForestRegressor method), 695

clone() (evalml.pipelines.components.estimators.regressors.arima_regressor method), 561

clone() (evalml.pipelines.components.estimators.regressors.ARIMARegressor method), 561

method), 602

clone () (evalml.pipelines.components.estimators.regressor_ensemble.XGBoostClassifier method), 564

clone () (evalml.pipelines.components.estimators.regressor_ensemble.XGBoostRegressor method), 605

clone () (evalml.pipelines.components.estimators.regressor_ensemble.ExtraTreesClassifier method), 567

clone () (evalml.pipelines.components.estimators.regressor_ensemble.ExtraTreesRegressor method), 608

clone () (evalml.pipelines.components.estimators.regressor_ensemble.DecisionTreeRegressor method), 571

clone () (evalml.pipelines.components.estimators.regressor_ensemble.Imputer method), 611

clone () (evalml.pipelines.components.estimators.regressor_ensemble.ElasticNet method), 574

clone () (evalml.pipelines.components.estimators.regressor_ensemble.LabelEncoder method), 613

clone () (evalml.pipelines.components.estimators.regressor_ensemble.LightGBMClassifier method), 577

clone () (evalml.pipelines.components.estimators.regressor_ensemble.LightGBMRegressor method), 616

clone () (evalml.pipelines.components.estimators.regressor_ensemble.LinearDiscriminantAnalysis method), 581

clone () (evalml.pipelines.components.estimators.regressor_ensemble.LinearRegressor method), 619

clone () (evalml.pipelines.components.estimators.regressor_ensemble.LogisticRegressionClassifier method), 584

clone () (evalml.pipelines.components.estimators.regressor_ensemble.LogTransformer method), 622

clone () (evalml.pipelines.components.estimators.regressor_ensemble.LSA method), 587

clone () (evalml.pipelines.components.estimators.regressor_ensemble.OneHotEncoder method), 625

clone () (evalml.pipelines.components.estimators.regressor_ensemble.Oversampler method), 627

clone () (evalml.pipelines.components.estimators.regressor_ensemble.PCA method), 590

clone () (evalml.pipelines.components.estimators.regressor_ensemble.PerColumnImputer method), 593

clone () (evalml.pipelines.components.estimators.regressor_ensemble.PolynomialDetrender method), 630

clone () (evalml.pipelines.components.estimators.regressor_ensemble.Spline method), 596

clone () (evalml.pipelines.components.estimators.regressor_ensemble.RandomForestClassifier method), 632

clone () (evalml.pipelines.components.estimators.regressor_ensemble.RandomForestRegressor method), 599

clone () (evalml.pipelines.components.estimators.regressor_ensemble.RFClassifierSelectFromModel method), 635

clone () (evalml.pipelines.components.estimators.SVMClassifier method), 697

clone () (evalml.pipelines.components.estimators.SVMRegressor method), 700

clone () (evalml.pipelines.components.estimators.TimeSeriesBaseline method), 702

clone () (evalml.pipelines.components.estimators.XGBoostRegressor method), 705

clone () (evalml.pipelines.components.estimators.XGBoostClassifier method), 707

clone () (evalml.pipelines.components.estimators.ExtraTreesRegressor method), 1000

clone () (evalml.pipelines.components.ExtraTreesRegressor method), 1003

clone () (evalml.pipelines.components.DecisionTreeRegressor method), 1005

clone () (evalml.pipelines.components.Imputer method), 1008

clone () (evalml.pipelines.components.ElasticNet method), 1011

clone () (evalml.pipelines.components.LabelEncoder method), 1013

clone () (evalml.pipelines.components.LightGBMClassifier method), 1016

clone () (evalml.pipelines.components.LightGBMRegressor method), 1019

clone () (evalml.pipelines.components.LinearDiscriminantAnalysis method), 1021

clone () (evalml.pipelines.components.LinearRegressor method), 1023

clone () (evalml.pipelines.components.LogisticRegressionClassifier method), 1026

clone () (evalml.pipelines.components.LogTransformer method), 1028

clone () (evalml.pipelines.components.LSA method), 1031

clone () (evalml.pipelines.components.OneHotEncoder method), 1033

clone () (evalml.pipelines.components.Oversampler method), 1036

clone () (evalml.pipelines.components.PCA method), 1038

clone () (evalml.pipelines.components.PerColumnImputer method), 1041

clone () (evalml.pipelines.components.PolynomialDetrender method), 1043

clone () (evalml.pipelines.components.Spline method), 1046

clone () (evalml.pipelines.components.RandomForestClassifier method), 1048

clone () (evalml.pipelines.components.RandomForestRegressor method), 1051

clone () (evalml.pipelines.components.RFClassifierSelectFromModel method), 1053

clone () (evalml.pipelines.components.RFRegressorSelectFromModel method), 1056

clone () (evalml.pipelines.components.SelectByType method), 1058

clone () (evalml.pipelines.components.SelectColumns method), 1061

`method`), 1060
`clone()` (`evalml.pipelines.components.SimpleImputer` `method`), 1063
`clone()` (`evalml.pipelines.components.StackedEnsembleClassifier` `method`), 1065
`clone()` (`evalml.pipelines.components.StackedEnsembleRegressor` `method`), 1068
`clone()` (`evalml.pipelines.components.StandardScaler` `method`), 1070
`clone()` (`evalml.pipelines.components.SVMClassifier` `method`), 1072
`clone()` (`evalml.pipelines.components.SVMRegressor` `method`), 1075
`clone()` (`evalml.pipelines.components.TargetEncoder` `method`), 1077
`clone()` (`evalml.pipelines.components.TargetImputer` `method`), 1079
`clone()` (`evalml.pipelines.components.TextFeaturizer` `method`), 1082
`clone()` (`evalml.pipelines.components.TimeSeriesBaselineEstimator` `method`), 1084
`clone()` (`evalml.pipelines.components.Transformer` `method`), 1087
`clone()` (`evalml.pipelines.components.transformers.column_selector.ColumnSelector` `method`), 859
`clone()` (`evalml.pipelines.components.transformers.column_selector.DropColumnSelector` `method`), 861
`clone()` (`evalml.pipelines.components.transformers.column_selector.SelectByType` `method`), 863
`clone()` (`evalml.pipelines.components.transformers.column_selector.SelectByType` `method`), 865
`clone()` (`evalml.pipelines.components.transformers.DateTimeFeaturizer` `method`), 872
`clone()` (`evalml.pipelines.components.transformers.DelayedFeatureTransformer` `method`), 875
`clone()` (`evalml.pipelines.components.transformers.DFSTransformer` `method`), 877
`clone()` (`evalml.pipelines.components.transformers.dimensionality_reduction.PCA` `method`), 710
`clone()` (`evalml.pipelines.components.transformers.dimensionality_reduction.PCA` `method`), 715
`clone()` (`evalml.pipelines.components.transformers.dimensionality_reduction.PCA` `method`), 718
`clone()` (`evalml.pipelines.components.transformers.dimensionality_reduction.PCA` `method`), 713
`clone()` (`evalml.pipelines.components.transformers.DropColumns` `method`), 879
`clone()` (`evalml.pipelines.components.transformers.DropSubColumns` `method`), 881
`clone()` (`evalml.pipelines.components.transformers.DropRowsFromFeatureSet` `method`), 883
`clone()` (`evalml.pipelines.components.transformers.EmailFeaturizer` `method`), 886
`clone()` (`evalml.pipelines.components.transformers.encoded_label_encoder.EncodedLabelEncoder` `method`), 720
`clone()` (`evalml.pipelines.components.transformers.encoded_label_encoder.EncodedLabelEncoder` `method`), 730
`clone()` (`evalml.pipelines.components.transformers.encoded_label_encoder.one_hot_encoder.OneHotEncoder` `method`), 724
`clone()` (`evalml.pipelines.components.transformers.encoded_label_encoder.OneHotEncoder` `method`), 733
`clone()` (`evalml.pipelines.components.transformers.encoded_label_encoder.target_encoder.TargetEncoder` `method`), 728
`clone()` (`evalml.pipelines.components.transformers.encoded_label_encoder.TargetEncoder` `method`), 736
`clone()` (`evalml.pipelines.components.transformers.feature_selection.feature_selector.FeatureSelector` `method`), 739
`clone()` (`evalml.pipelines.components.transformers.feature_selection.FeatureSelector` `method`), 748
`clone()` (`evalml.pipelines.components.transformers.feature_selection.rf_feature_selector.RFFeatureSelector` `method`), 742
`clone()` (`evalml.pipelines.components.transformers.feature_selection.rf_feature_selector.RFFeatureSelector` `method`), 745
`clone()` (`evalml.pipelines.components.transformers.feature_selection.RFFeatureSelector` `method`), 751
`clone()` (`evalml.pipelines.components.transformers.feature_selection.RFFeatureSelector` `method`), 754
`clone()` (`evalml.pipelines.components.transformers.FeatureSelector` `method`), 888
`clone()` (`evalml.pipelines.components.transformers.Imputer` `method`), 891
`clone()` (`evalml.pipelines.components.transformers.imputers.Imputer` `method`), 769
`clone()` (`evalml.pipelines.components.transformers.imputers.imputer.Imputer` `method`), 757
`clone()` (`evalml.pipelines.components.transformers.imputers.per_column.PerColumnImputer` `method`), 760
`clone()` (`evalml.pipelines.components.transformers.imputers.PerColumnImputer` `method`), 771
`clone()` (`evalml.pipelines.components.transformers.imputers.simple_imputer.SimpleImputer` `method`), 763
`clone()` (`evalml.pipelines.components.transformers.imputers.SimpleImputer` `method`), 774
`clone()` (`evalml.pipelines.components.transformers.imputers.target_imputer.TargetImputer` `method`), 765
`clone()` (`evalml.pipelines.components.transformers.imputers.TargetImputer` `method`), 776
`clone()` (`evalml.pipelines.components.transformers.LabelEncoder` `method`), 893
`clone()` (`evalml.pipelines.components.transformers.LinearDiscriminantAnalysis` `method`), 895
`clone()` (`evalml.pipelines.components.transformers.LogTransformer` `method`), 897
`clone()` (`evalml.pipelines.components.transformers.LSA` `method`), 899
`clone()` (`evalml.pipelines.components.transformers.OneHotEncoder` `method`), 902
`clone()` (`evalml.pipelines.components.transformers.Oversampler` `method`), 902

`method`), 905
`clone()` (`evalml.pipelines.components.transformers.PCA` `clone()` (`evalml.pipelines.components.transformers.RFClassifierSelectFeaturizer` `method`), 907
`clone()` (`evalml.pipelines.components.transformers.PerColumnImputer` `method`), 910
`clone()` (`evalml.pipelines.components.transformers.PolynomialDegreeReducer` `method`), 912
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 779
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 811
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 782
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 814
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 816
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 785
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 787
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 819
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 821
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 823
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 790
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 792
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 825
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 827
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 795
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 798
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 830
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 801
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 803
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 832
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 834
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 806
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 808
`clone()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer` `method`), 836
`clone()` (`evalml.pipelines.components.transformers.RFClassifierSelectFeaturizer` `method`), 915
`clone()` (`evalml.pipelines.components.transformers.RFRegressorSelectFeaturizer` `method`), 918
`clone()` (`evalml.pipelines.components.transformers.samplers.base_sampler` `method`), 839
`clone()` (`evalml.pipelines.components.transformers.samplers.Oversampler` `method`), 848
`clone()` (`evalml.pipelines.components.transformers.samplers.oversampler` `method`), 842
`clone()` (`evalml.pipelines.components.transformers.samplers.undersampler` `method`), 851
`clone()` (`evalml.pipelines.components.transformers.samplers.undersampler` `method`), 845
`clone()` (`evalml.pipelines.components.transformers.scalers.standard_scaler` `method`), 854
`clone()` (`evalml.pipelines.components.transformers.scalers.StandardScaler` `method`), 856
`clone()` (`evalml.pipelines.components.transformers.SelectByType` `method`), 920
`clone()` (`evalml.pipelines.components.transformers.SelectColumns` `method`), 922
`clone()` (`evalml.pipelines.components.transformers.SimpleImputer` `method`), 924
`clone()` (`evalml.pipelines.components.transformers.StandardScaler` `method`), 926
`clone()` (`evalml.pipelines.components.transformers.TargetEncoder` `method`), 929
`clone()` (`evalml.pipelines.components.transformers.TargetImputer` `method`), 931
`clone()` (`evalml.pipelines.components.transformers.TextFeaturizer` `method`), 933
`clone()` (`evalml.pipelines.components.transformers.Transformer` `method`), 936
`clone()` (`evalml.pipelines.components.transformers.transformer.Transformer` `method`), 868
`clone()` (`evalml.pipelines.components.transformers.undersampler` `method`), 939
`clone()` (`evalml.pipelines.components.transformers.URLFeaturizer` `method`), 941
`clone()` (`evalml.pipelines.components.undersampler` `method`), 1089
`clone()` (`evalml.pipelines.components.URLFeaturizer` `method`), 1092
`clone()` (`evalml.pipelines.components.XGBoostClassifier` `method`), 1094
`clone()` (`evalml.pipelines.components.XGBoostRegressor` `method`), 1097
`clone()` (`evalml.pipelines.components.XGBoostRegressor` `method`), 1192
`clone()` (`evalml.pipelines.components.XGBoostRegressor` `method`), 1195
`clone()` (`evalml.pipelines.DelayedFeatureTransformer` `method`), 1195

`method)`, 1197
`clone()` (`evalml.pipelines.DFSTransformer` `method`), 1199
`clone()` (`evalml.pipelines.ElasticNetClassifier` `method`), 1202
`clone()` (`evalml.pipelines.ElasticNetRegressor` `method`), 1205
`clone()` (`evalml.pipelines.Estimator` `method`), 1207
`clone()` (`evalml.pipelines.ExtraTreesClassifier` `method`), 1210
`clone()` (`evalml.pipelines.ExtraTreesRegressor` `method`), 1213
`clone()` (`evalml.pipelines.FeatureSelector` `method`), 1215
`clone()` (`evalml.pipelines.KNeighborsClassifier` `method`), 1218
`clone()` (`evalml.pipelines.LightGBMClassifier` `method`), 1221
`clone()` (`evalml.pipelines.LightGBMRegressor` `method`), 1224
`clone()` (`evalml.pipelines.LinearRegressor` `method`), 1227
`clone()` (`evalml.pipelines.LogisticRegressionClassifier` `method`), 1229
`clone()` (`evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline` `method`), 1117
`clone()` (`evalml.pipelines.MulticlassClassificationPipeline` `method`), 1232
`clone()` (`evalml.pipelines.OneHotEncoder` `method`), 1237
`clone()` (`evalml.pipelines.PerColumnImputer` `method`), 1240
`clone()` (`evalml.pipelines.pipeline_base.PipelineBase` `method`), 1123
`clone()` (`evalml.pipelines.PipelineBase` `method`), 1243
`clone()` (`evalml.pipelines.ProphetRegressor` `method`), 1247
`clone()` (`evalml.pipelines.RandomForestClassifier` `method`), 1250
`clone()` (`evalml.pipelines.RandomForestRegressor` `method`), 1252
`clone()` (`evalml.pipelines.regression_pipeline.RegressionPipeline` `method`), 1130
`clone()` (`evalml.pipelines.RegressionPipeline` `method`), 1255
`clone()` (`evalml.pipelines.RFClassifierSelectFromModel` `method`), 1260
`clone()` (`evalml.pipelines.RFRegressorSelectFromModel` `method`), 1263
`clone()` (`evalml.pipelines.SimpleImputer` `method`), 1265
`clone()` (`evalml.pipelines.StackedEnsembleClassifier` `method`), 1267
`clone()` (`evalml.pipelines.StackedEnsembleRegressor` `method`), 1270
`clone()` (`evalml.pipelines.StandardScaler` `method`), 1272
`clone()` (`evalml.pipelines.SVMClassifier` `method`), 1274
`clone()` (`evalml.pipelines.SVMRegressor` `method`), 1277
`clone()` (`evalml.pipelines.TargetEncoder` `method`), 1279
`clone()` (`evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline` `method`), 1135
`clone()` (`evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline` `method`), 1142
`clone()` (`evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline` `method`), 1148
`clone()` (`evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase` `method`), 1155
`clone()` (`evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline` `method`), 1160
`clone()` (`evalml.pipelines.TimeSeriesBinaryClassificationPipeline` `method`), 1282
`clone()` (`evalml.pipelines.TimeSeriesClassificationPipeline` `method`), 1289
`clone()` (`evalml.pipelines.TimeSeriesMulticlassClassificationPipeline` `method`), 1295
`clone()` (`evalml.pipelines.TimeSeriesRegressionPipeline` `method`), 1301
`clone()` (`evalml.pipelines.Transformer` `method`), 1306
`clone()` (`evalml.pipelines.XGBoostClassifier` `method`), 1308
`clone()` (`evalml.pipelines.XGBoostRegressor` `method`), 1311
`close()` (`evalml.automl.engine.cf_engine.CFClient` `method`), 179
`close()` (`evalml.automl.engine.cf_engine.CFEngine` `method`), 181
`close()` (`evalml.automl.engine.CFEngine` `method`), 191
`close()` (`evalml.automl.engine.dask_engine.DaskEngine` `method`), 183
`close()` (`evalml.automl.engine.DaskEngine` `method`), 192
`close()` (`evalml.automl.engine.sequential_engine.SequentialEngine` `method`), 189
`close()` (`evalml.automl.engine.SequentialEngine` `method`), 195
`close()` (`evalml.automl.SequentialEngine` `method`), 217
`close_engine()` (`evalml.automl.automl_search.AutoMLSearch` `method`), 201
`close_engine()` (`evalml.automl.AutoMLSearch` `method`), 213
`close_engine()` (`evalml.AutoMLSearch` `method`), 1353

ColumnSelector (class in create_objectives() *evalml.pipelines.components.transformers.column_selector*), 858

ComponentBase (class in create_objectives() *evalml.pipelines.components*), 966

ComponentBase (class in static method), 1130 *evalml.pipelines.components.component_base*, create_objectives() (evalml.pipelines.RegressionPipeline static method), 1255

ComponentBaseMeta (class in create_objectives() *evalml.pipelines.components*), 968

ComponentBaseMeta (class in static method), 1136 *evalml.pipelines.components.component_base_meta*, create_objectives() (evalml.pipelines.time_series_classification_pipelines.TimeSeries static method), 1142

ComponentGraph (class in *evalml.pipelines*), 1187

ComponentGraph (class in static method), 1142 *evalml.pipelines.component_graph*, create_objectives() (evalml.pipelines.time_series_classification_pipelines.TimeSeries static method), 1148

ComponentNotYetFittedError, 272, 274

compute_order() (evalml.pipelines.component_graph.ComponentGraph property), 1113

compute_order() (evalml.pipelines.ComponentGraph property), 1188

confusion_matrix() (in module create_objectives() *evalml.model_understanding*), 304

confusion_matrix() (in module static method), 1161 *evalml.model_understanding.graphs*, 291

convert_to_seconds() (in module *evalml.utils*), 1347

convert_to_seconds() (in module create_objectives() *evalml.utils.gen_utils*), 1341

CostBenefitMatrix (class in *evalml.objectives*), 415

CostBenefitMatrix (class in static method), 1295 *evalml.objectives.cost_benefit_matrix*, 317

create_objectives() create_objectives() (evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline static method), 1100

create_objectives() cross_entropy() (in module *evalml.pipelines.BinaryClassificationPipeline* static method), 1172 *evalml.model_understanding.prediction_explanations.explainers*, 281

create_objectives() custom_name() (evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline property), 1100

create_objectives() custom_name() (evalml.pipelines.BinaryClassificationPipeline property), 1172

create_objectives() custom_name() (evalml.pipelines.classification_pipeline.ClassificationPipeline static method), 1183

create_objectives() custom_name() (evalml.pipelines.classification_pipeline.ClassificationPipeline property), 1108

create_objectives() custom_name() (evalml.pipelines.ClassificationPipeline static method), 1117

create_objectives() custom_name() (evalml.pipelines.MulticlassClassificationPipeline static method), 1232

create_objectives() custom_name() (evalml.pipelines.MulticlassClassificationPipeline static method), 1232

create_objectives() custom_name() (evalml.pipelines.pipeline_base.PipelineBase property), 1123 *evalml.pipelines.pipeline_base.PipelineBase* static method), 1123

create_objectives() custom_name() (evalml.pipelines.PipelineBase property), 1123

erty), 1243
 custom_name() (evalml.pipelines.regression_pipeline.RegressionPipeline in
 property), 1130
 custom_name() (evalml.pipelines.RegressionPipeline in
 property), 1255
 custom_name() (evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline in
 property), 1136
 custom_name() (evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline in
 property), 1142
 custom_name() (evalml.pipelines.time_series_classification_pipeline.TimeSeriesMulticlassClassificationPipeline in
 property), 1148
 custom_name() (evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase in evalml.data_checks),
 property), 1155
 custom_name() (evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline in
 property), 1161
 custom_name() (evalml.pipelines.TimeSeriesBinaryClassificationPipeline in
 property), 1282
 custom_name() (evalml.pipelines.TimeSeriesClassificationPipeline in
 property), 1289
 custom_name() (evalml.pipelines.TimeSeriesMulticlassClassificationPipeline in
 property), 1295
 custom_name() (evalml.pipelines.TimeSeriesRegressionPipeline in
 property), 1301
 DataCheckActionCode (class in evalml.data_checks), 251
 DataCheckActionCode (class in evalml.data_checks.data_check_action_code),
 222
 DataCheckError (class in evalml.data_checks), 251
 DataCheckError (class in evalml.data_checks.data_check_message),
 223
 DataCheckInitError, 272, 274
 DataCheckMessage (class in evalml.data_checks),
 251
 DataCheckMessage (class in evalml.data_checks.data_check_message),
 223
 DataCheckMessageCode (class in evalml.data_checks), 252
 DataCheckMessageType (class in evalml.data_checks), 253
 DataChecks (class in evalml.data_checks), 254
 DateTimeFeaturizer (class in evalml.pipelines.components), 968
 DateTimeFeaturizer (class in evalml.pipelines.components.transformers),
 871
 DateTimeFeaturizer (class in evalml.pipelines.components.transformers.preprocessing),
 810
 DateTimeFeaturizer (class in evalml.pipelines.components.transformers.preprocessing.datetime),
 778
 DateTimeFormatDataCheck (class in evalml.data_checks), 254
 DateTimeFormatDataCheck (class in evalml.data_checks.datetime_format_data_check),
 228
 DateTimeNaNDataCheck (class in evalml.data_checks), 255
 DateTimeNaNDataCheck (class in evalml.data_checks.datetime_nan_data_check),
 229
 debug() (evalml.automl.engine.engine_base.JobLogger method), 186
 decision_function() (evalml.objectives.AccuracyBinary method),
 400
 decision_function() (evalml.objectives.AUC method), 404
 decision_function() (evalml.objectives.BalancedAccuracyBinary method), 410
 decision_function() (evalml.objectives.binary_classification_objective.BinaryClassificationObjective method), 316
 decision_function() (evalml.objectives.BinaryClassificationObjective method), 414
 decision_function()

`(evalml.objectives.cost_benefit_matrix.CostBenefitMatrix`
`method)`, 319
`decision_function()`
`(evalml.objectives.CostBenefitMatrix` `method)`,
417
`decision_function()` `(evalml.objectives.F1`
`method)`, 420
`decision_function()`
`(evalml.objectives.fraud_cost.FraudCost`
`method)`, 322
`decision_function()`
`(evalml.objectives.FraudCost` `method)`, 427
`decision_function()` `(evalml.objectives.Gini`
`method)`, 430
`decision_function()`
`(evalml.objectives.lead_scoring.LeadScoring`
`method)`, 324
`decision_function()`
`(evalml.objectives.LeadScoring` `method)`,
432
`decision_function()`
`(evalml.objectives.LogLossBinary` `method)`,
435
`decision_function()`
`(evalml.objectives.MCCBinary` `method)`,
443
`decision_function()` `(evalml.objectives.Precision`
`method)`, 455
`decision_function()` `(evalml.objectives.Recall`
`method)`, 463
`decision_function()`
`(evalml.objectives.sensitivity_low_alert.SensitivityLowAlert`
`method)`, 334
`decision_function()`
`(evalml.objectives.SensitivityLowAlert`
`method)`, 474
`decision_function()`
`(evalml.objectives.standard_metrics.AccuracyBinary`
`method)`, 338
`decision_function()`
`(evalml.objectives.standard_metrics.AUC`
`method)`, 341
`decision_function()`
`(evalml.objectives.standard_metrics.BalancedAccuracyBinary`
`method)`, 348
`decision_function()`
`(evalml.objectives.standard_metrics.F1`
`method)`, 353
`decision_function()`
`(evalml.objectives.standard_metrics.Gini`
`method)`, 359
`decision_function()`
`(evalml.objectives.standard_metrics.LogLossBinary`
`method)`, 361
`decision_function()`
`(evalml.objectives.standard_metrics.MCCBinary`
`method)`, 369
`decision_function()`
`(evalml.objectives.standard_metrics.Precision`
`method)`, 377
`decision_function()`
`(evalml.objectives.standard_metrics.Recall`
`method)`, 385
`decision_tree_data_from_estimator()` (in
`module` `evalml.model_understanding.graphs`),
291
`decision_tree_data_from_pipeline()` (in
`module` `evalml.model_understanding.graphs`),
291
`DecisionTreeClassifier` (class in
`evalml.pipelines`), 1190
`DecisionTreeClassifier` (class in
`evalml.pipelines.components`), 971
`DecisionTreeClassifier` (class in
`evalml.pipelines.components.estimators`),
654
`DecisionTreeClassifier` (class in
`evalml.pipelines.components.estimators.classifiers`),
533
`DecisionTreeClassifier` (class in
`evalml.pipelines.components.estimators.classifiers.decision_tree`),
499
`DecisionTreeRegressor` (class in
`evalml.pipelines`), 1193
`DecisionTreeRegressor` (class in
`evalml.pipelines.components`), 974
`DecisionTreeRegressor` (class in
`evalml.pipelines.components.estimators`),
657
`DecisionTreeRegressor` (class in
`evalml.pipelines.components.estimators.regressors`),
609
`DecisionTreeRegressor` (class in
`evalml.pipelines.components.estimators.regressors.decision_tree`),
569
`DEFAULT_METRICS` (in `module`
`evalml.model_understanding.prediction_explanations.explainers`),
281
`default_parameters()`
`(evalml.pipelines.ARIMARegressor` `method)`,
1169
`default_parameters()`
`(evalml.pipelines.CatBoostClassifier` `method)`,
1178
`default_parameters()`
`(evalml.pipelines.CatBoostRegressor` `method)`,
1180
`default_parameters()`

<code>(evalml.pipelines.component_graph.ComponentGraph property), 1113</code>	<code>(evalml.pipelines.components.ElasticNetRegressor method), 992</code>
<code>default_parameters() (evalml.pipelines.ComponentGraph property), 1188</code>	<code>default_parameters() (evalml.pipelines.components.EmailFeaturizer method), 994</code>
<code>default_parameters() (evalml.pipelines.components.ARIMARegressor method), 954</code>	<code>default_parameters() (evalml.pipelines.components.ensemble.stacked_ensemble_base.StackedEnsembleBase method), 477</code>
<code>default_parameters() (evalml.pipelines.components.BaselineClassifier method), 957</code>	<code>default_parameters() (evalml.pipelines.components.ensemble.stacked_ensemble_classifier.StackedEnsembleClassifier method), 480</code>
<code>default_parameters() (evalml.pipelines.components.BaselineRegressor method), 959</code>	<code>default_parameters() (evalml.pipelines.components.ensemble.stacked_ensemble_regressor.StackedEnsembleRegressor method), 483</code>
<code>default_parameters() (evalml.pipelines.components.CatBoostClassifier method), 962</code>	<code>default_parameters() (evalml.pipelines.components.ensemble.StackedEnsembleBase method), 486</code>
<code>default_parameters() (evalml.pipelines.components.CatBoostRegressor method), 964</code>	<code>default_parameters() (evalml.pipelines.components.ensemble.StackedEnsembleClassifier method), 488</code>
<code>default_parameters() (evalml.pipelines.components.component_base.ComponentBase method), 943</code>	<code>default_parameters() (evalml.pipelines.components.ensemble.StackedEnsembleRegressor method), 491</code>
<code>default_parameters() (evalml.pipelines.components.ComponentBase method), 966</code>	<code>default_parameters() (evalml.pipelines.components.Estimator method), 997</code>
<code>default_parameters() (evalml.pipelines.components.DateTimeFeaturizer method), 969</code>	<code>default_parameters() (evalml.pipelines.components.estimators.ARIMARegressor method), 642</code>
<code>default_parameters() (evalml.pipelines.components.DecisionTreeClassifier method), 972</code>	<code>default_parameters() (evalml.pipelines.components.estimators.BaselineClassifier method), 645</code>
<code>default_parameters() (evalml.pipelines.components.DecisionTreeRegressor method), 975</code>	<code>default_parameters() (evalml.pipelines.components.estimators.BaselineRegressor method), 647</code>
<code>default_parameters() (evalml.pipelines.components.DelayedFeatureTransformer method), 978</code>	<code>default_parameters() (evalml.pipelines.components.estimators.CatBoostClassifier method), 650</code>
<code>default_parameters() (evalml.pipelines.components.DFSTransformer method), 980</code>	<code>default_parameters() (evalml.pipelines.components.estimators.CatBoostRegressor method), 653</code>
<code>default_parameters() (evalml.pipelines.components.DropColumns method), 982</code>	<code>default_parameters() (evalml.pipelines.components.estimators.classifiers.baseline_classifier.BaselineClassifier method), 494</code>
<code>default_parameters() (evalml.pipelines.components.DropNullColumns method), 985</code>	<code>default_parameters() (evalml.pipelines.components.estimators.classifiers.BaselineClassifier method), 529</code>
<code>default_parameters() (evalml.pipelines.components.DropRowsTransformer method), 987</code>	<code>default_parameters() (evalml.pipelines.components.estimators.classifiers.catboost_classifier.CatBoostClassifier method), 497</code>
<code>default_parameters() (evalml.pipelines.components.ElasticNetClassifier method), 990</code>	<code>default_parameters() (evalml.pipelines.components.estimators.classifiers.CatBoostClassifier method), 532</code>
<code>default_parameters()</code>	<code>default_parameters()</code>

<code>(evalml.pipelines.components.estimators.classifiers.decision_tree_classifier.DecisionTreeClassifier</code> <code>method), 500</code>	<code>(evalml.pipelines.components.estimators.classifiers.decision_tree_classifier.DecisionTreeClassifier</code> <code>method), 656</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.DecisionTreeClassifier</code> <code>method), 535</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.DecisionTreeRegressor</code> <code>method), 659</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.elasticnet_classifier.ElasticNetClassifier</code> <code>method), 504</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.ElasticNetClassifier</code> <code>method), 662</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.ElasticNetClassifier</code> <code>method), 538</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.ElasticNetRegressor</code> <code>method), 664</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.et_classifier.ExtraTreesClassifier</code> <code>method), 507</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.Estimator</code> <code>method), 667</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.ExtraTreesClassifier</code> <code>method), 541</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimator.Estimator</code> <code>method), 638</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.kneighbors_classifier.KNeighborsClassifier</code> <code>method), 511</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.ExtraTreesClassifier</code> <code>method), 670</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.KNeighborsClassifier</code> <code>method), 544</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.ExtraTreesRegressor</code> <code>method), 673</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.lightgbm_classifier.LightGBMClassifier</code> <code>method), 514</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.KNeighborsClassifier</code> <code>method), 676</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.LightGBMClassifier</code> <code>method), 547</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.LightGBMClassifier</code> <code>method), 679</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.logistic_regression_classifier.LogisticRegressionClassifier</code> <code>method), 517</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.LogisticRegressionClassifier</code> <code>method), 682</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.LogisticRegressionClassifier</code> <code>method), 550</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.LinearRegressor</code> <code>method), 684</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.RandomForestClassifier</code> <code>method), 552</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.LogisticRegressionClassifier</code> <code>method), 687</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.rf_classifier.RandomForestClassifier</code> <code>method), 520</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.ProphetRegressor</code> <code>method), 690</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.svm_classifier.SVMClassifier</code> <code>method), 523</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.RandomForestClassifier</code> <code>method), 692</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.SVMClassifier</code> <code>method), 555</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.RandomForestRegressor</code> <code>method), 695</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.xgboost_classifier.XGBoostClassifier</code> <code>method), 526</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.arima_regressor.ArimaRegressor</code> <code>method), 561</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.classifiers.XGBoostClassifier</code> <code>method), 558</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.ARIMARegressor</code> <code>method), 602</code>
<code>default_parameters()</code>	<code>default_parameters()</code>

<code>(evalml.pipelines.components.estimators.regressors.baseline_regression_pipeline.BaselineRegressor</code> <code>method), 564</code>	<code>(evalml.pipelines.components.estimators.regressors.svm_regressor</code> <code>method), 593</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.BaselineRegressor</code> <code>method), 605</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.SVMRegressor</code> <code>method), 630</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.catboost_regression_pipeline.CatBoostRegressor</code> <code>method), 567</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.time_series_baseline_estimator.TimeSeriesBaselineEstimator</code> <code>method), 596</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.CatBoostRegressor</code> <code>method), 608</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.TimeSeriesBaselineEstimator</code> <code>method), 632</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.decision_tree_pipeline.DecisionTreeRegressor</code> <code>method), 571</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.xgboost_regressor.XGBoostRegressor</code> <code>method), 599</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.DecisionTreeRegressor</code> <code>method), 611</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.XGBoostRegressor</code> <code>method), 635</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.elastic_net_pipeline.ElasticNetRegressor</code> <code>method), 574</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.SVMClassifier</code> <code>method), 697</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.ElasticNetRegressor</code> <code>method), 613</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.SVMRegressor</code> <code>method), 700</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.et_regression_pipeline.ExtraTreesRegressor</code> <code>method), 577</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.TimeSeriesBaselineEstimator</code> <code>method), 702</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.ExtraTreesRegressor</code> <code>method), 616</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.XGBoostClassifier</code> <code>method), 705</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.lightgbm_regression_pipeline.LightGBMRegressor</code> <code>method), 581</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.XGBoostRegressor</code> <code>method), 707</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.LightGBMRegressor</code> <code>method), 619</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.ExtraTreesClassifier</code> <code>method), 1000</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.linear_regression_pipeline.LinearRegressor</code> <code>method), 584</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.ExtraTreesRegressor</code> <code>method), 1003</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.LinearRegressor</code> <code>method), 622</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.FeatureSelector</code> <code>method), 1005</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.prophet_regression_pipeline.ProphetRegressor</code> <code>method), 587</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.Imputer</code> <code>method), 1008</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.ProphetRegressor</code> <code>method), 625</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.KNeighborsClassifier</code> <code>method), 1011</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.RandomForestRegressor</code> <code>method), 627</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.LabelEncoder</code> <code>method), 1013</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.estimators.regressors.rf_regression_pipeline.RandomForestRegressor</code> <code>method), 590</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.LightGBMClassifier</code> <code>method), 1016</code>
<code>default_parameters()</code>	<code>default_parameters()</code>

<i>(evalml.pipelines.components.LightGBMRegressor method), 1019</i>	<i>(evalml.pipelines.components.SimpleImputer method), 1063</i>
<i>default_parameters() (evalml.pipelines.components.LinearDiscriminantAnalysis method), 1021</i>	<i>default_parameters() (evalml.pipelines.components.StackedEnsembleClassifier method), 1065</i>
<i>default_parameters() (evalml.pipelines.components.LinearRegressor method), 1024</i>	<i>default_parameters() (evalml.pipelines.components.StackedEnsembleRegressor method), 1068</i>
<i>default_parameters() (evalml.pipelines.components.LogisticRegressionClassifier method), 1026</i>	<i>default_parameters() (evalml.pipelines.components.StandardScaler method), 1070</i>
<i>default_parameters() (evalml.pipelines.components.LogTransformer method), 1028</i>	<i>default_parameters() (evalml.pipelines.components.SVMClassifier method), 1072</i>
<i>default_parameters() (evalml.pipelines.components.LSA method), 1031</i>	<i>default_parameters() (evalml.pipelines.components.SVMRegressor method), 1075</i>
<i>default_parameters() (evalml.pipelines.components.OneHotEncoder method), 1034</i>	<i>default_parameters() (evalml.pipelines.components.TargetEncoder method), 1077</i>
<i>default_parameters() (evalml.pipelines.components.Oversampler method), 1036</i>	<i>default_parameters() (evalml.pipelines.components.TargetImputer method), 1080</i>
<i>default_parameters() (evalml.pipelines.components.PCA method), 1038</i>	<i>default_parameters() (evalml.pipelines.components.TextFeaturizer method), 1082</i>
<i>default_parameters() (evalml.pipelines.components.PerColumnImputer method), 1041</i>	<i>default_parameters() (evalml.pipelines.components.TimeSeriesBaselineEstimator method), 1084</i>
<i>default_parameters() (evalml.pipelines.components.PolynomialDetrender method), 1043</i>	<i>default_parameters() (evalml.pipelines.components.Transformer method), 1087</i>
<i>default_parameters() (evalml.pipelines.components.ProphetRegressor method), 1046</i>	<i>default_parameters() (evalml.pipelines.components.transformers.column_selectors.ColumnSelector method), 859</i>
<i>default_parameters() (evalml.pipelines.components.RandomForestClassifier method), 1048</i>	<i>default_parameters() (evalml.pipelines.components.transformers.column_selectors.DropColumnSelector method), 861</i>
<i>default_parameters() (evalml.pipelines.components.RandomForestRegressor method), 1051</i>	<i>default_parameters() (evalml.pipelines.components.transformers.column_selectors.SelectColumnSelector method), 863</i>
<i>default_parameters() (evalml.pipelines.components.RFClassifierSelectFromModel method), 1053</i>	<i>default_parameters() (evalml.pipelines.components.transformers.column_selectors.SelectFromModel method), 865</i>
<i>default_parameters() (evalml.pipelines.components.RFRegressorSelectFromModel method), 1056</i>	<i>default_parameters() (evalml.pipelines.components.transformers.DateTimeFeaturizer method), 872</i>
<i>default_parameters() (evalml.pipelines.components.SelectByType method), 1058</i>	<i>default_parameters() (evalml.pipelines.components.transformers.DelayedFeatureTransformer method), 875</i>
<i>default_parameters() (evalml.pipelines.components.SelectColumns method), 1060</i>	<i>default_parameters() (evalml.pipelines.components.transformers.DFSTransformer method), 877</i>
<i>default_parameters()</i>	<i>default_parameters()</i>

([evalml.pipelines.components.transformers.dimensionality_reduction.transformers.FeatureSelector](#).feature_selection.RFC method), 710

([evalml.pipelines.components.transformers.dimensionality_reduction.transformers.FeatureSelector](#).feature_selection.RF method), 751

default_parameters() ([evalml.pipelines.components.transformers.dimensionality_reduction.transformers.FeatureSelector](#).feature_selection.RFC method), 715

default_parameters() ([evalml.pipelines.components.transformers.dimensionality_reduction.transformers.FeatureSelector](#).feature_selection.RF method), 754

default_parameters() ([evalml.pipelines.components.transformers.FeatureSelector](#) method), 718

default_parameters() ([evalml.pipelines.components.transformers.FeatureSelector](#) method), 888

default_parameters() ([evalml.pipelines.components.transformers.Imputer](#) method), 713

default_parameters() ([evalml.pipelines.components.transformers.imputers.Imputer](#) method), 891

default_parameters() ([evalml.pipelines.components.transformers.imputers.Imputer](#) method), 879

default_parameters() ([evalml.pipelines.components.transformers.imputers.Imputer](#) method), 769

default_parameters() ([evalml.pipelines.components.transformers.imputers.imputer.Imputer](#) method), 881

default_parameters() ([evalml.pipelines.components.transformers.imputers.imputer.Imputer](#) method), 757

default_parameters() ([evalml.pipelines.components.transformers.imputers.per_column.Imputer](#) method), 884

default_parameters() ([evalml.pipelines.components.transformers.imputers.per_column.Imputer](#) method), 760

default_parameters() ([evalml.pipelines.components.transformers.imputers.PerColumnImputer](#) method), 886

default_parameters() ([evalml.pipelines.components.transformers.imputers.PerColumnImputer](#) method), 772

default_parameters() ([evalml.pipelines.components.transformers.imputers.simple_imputer.Imputer](#) method), 720

default_parameters() ([evalml.pipelines.components.transformers.imputers.SimpleImputer](#) method), 763

default_parameters() ([evalml.pipelines.components.transformers.imputers.SimpleImputer](#) method), 730

default_parameters() ([evalml.pipelines.components.transformers.imputers.SimpleImputer](#) method), 774

default_parameters() ([evalml.pipelines.components.transformers.imputers.target_imputer.Imputer](#) method), 724

default_parameters() ([evalml.pipelines.components.transformers.imputers.target_imputer.Imputer](#) method), 766

default_parameters() ([evalml.pipelines.components.transformers.imputers.TargetImputer](#) method), 733

default_parameters() ([evalml.pipelines.components.transformers.imputers.TargetImputer](#) method), 776

default_parameters() ([evalml.pipelines.components.transformers.LabelEncoder](#) method), 728

default_parameters() ([evalml.pipelines.components.transformers.LabelEncoder](#) method), 893

default_parameters() ([evalml.pipelines.components.transformers.LinearDiscriminantAnalysis](#) method), 736

default_parameters() ([evalml.pipelines.components.transformers.LinearDiscriminantAnalysis](#) method), 895

default_parameters() ([evalml.pipelines.components.transformers.LogTransformer](#) method), 739

default_parameters() ([evalml.pipelines.components.transformers.LSA](#) method), 897

default_parameters() ([evalml.pipelines.components.transformers.LSA](#) method), 748

default_parameters() ([evalml.pipelines.components.transformers.LSA](#) method), 899

default_parameters() ([evalml.pipelines.components.transformers.LSA](#) method), 742

default_parameters() ([evalml.pipelines.components.transformers.LSA](#) method), 902

default_parameters() ([evalml.pipelines.components.transformers.LSA](#) method), 745

default_parameters() ([evalml.pipelines.components.transformers.LSA](#) method), 905

default_parameters() ([evalml.pipelines.components.transformers.LSA](#) method), 905

<code>(evalml.pipelines.components.transformers.PCA</code> <code>method), 907</code>	<code>(evalml.pipelines.components.transformers.preprocessing.polynomial</code> <code>method), 798</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.PerColumnImputer</code> <code>method), 910</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.Polynomial</code> <code>method), 830</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.PolynomialDetrender</code> <code>method), 912</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.text_featurizer</code> <code>method), 801</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.datetime_feature_extractor</code> <code>method), 779</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.text_transformer</code> <code>method), 803</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer</code> <code>method), 811</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.TextFeaturizer</code> <code>method), 832</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer</code> <code>method), 782</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.TextTransformer</code> <code>method), 834</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer</code> <code>method), 814</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.transformer</code> <code>method), 806</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer</code> <code>method), 816</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.transformer</code> <code>method), 808</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.DropNullColumns</code> <code>method), 785</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.URLFeaturizer</code> <code>method), 836</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.DropNullColumns</code> <code>method), 788</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.URLFeaturizer</code> <code>method), 915</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.DropNullColumns</code> <code>method), 819</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.RFRegressorSelectFromModel</code> <code>method), 918</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.DropNullColumns</code> <code>method), 821</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.samplers.base_sampler</code> <code>method), 839</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.DropNullColumns</code> <code>method), 823</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.samplers.Oversample</code> <code>method), 848</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.DropNullColumns</code> <code>method), 790</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.samplers.oversampler</code> <code>method), 842</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.DropNullColumns</code> <code>method), 792</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.samplers.Undersampler</code> <code>method), 851</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.DropNullColumns</code> <code>method), 825</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.samplers.undersampler</code> <code>method), 845</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.DropNullColumns</code> <code>method), 827</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.scalers.standard_scaler</code> <code>method), 854</code>
<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.preprocessing.DropNullColumns</code> <code>method), 795</code>	<code>default_parameters()</code> <code>(evalml.pipelines.components.transformers.scalers.StandardScaler</code> <code>method), 856</code>
<code>default_parameters()</code>	<code>default_parameters()</code>

<code>(evalml.pipelines.components.transformers.SelectByType</code>	<code>(evalml.pipelines.DFSTransformer</code>
<code>method), 920</code>	<code>method), 1200</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.components.transformers.SelectColumns</code>	<code>(evalml.pipelines.ElasticNetClassifier</code>
<code>method), 922</code>	<code>method), 1202</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.components.transformers.SimpleImputer</code>	<code>(evalml.pipelines.ElasticNetRegressor</code>
<code>method), 924</code>	<code>method), 1205</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.components.transformers.StandardScaler</code>	<code>(evalml.pipelines.Estimator</code>
<code>method), 926</code>	<code>method), 1207</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.components.transformers.TargetEncoder</code>	<code>(evalml.pipelines.ExtraTreesClassifier</code>
<code>method), 929</code>	<code>method), 1210</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.components.transformers.TargetImputer</code>	<code>(evalml.pipelines.ExtraTreesRegressor</code>
<code>method), 931</code>	<code>method), 1213</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.components.transformers.TextFeaturizer</code>	<code>(evalml.pipelines.FeatureSelector</code>
<code>method), 933</code>	<code>method), 1216</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.components.transformers.Transformer</code>	<code>(evalml.pipelines.KNeighborsClassifier</code>
<code>method), 936</code>	<code>method), 1219</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.components.transformers.transformer.Transformer</code>	<code>(evalml.pipelines.LightGBMClassifier</code>
<code>method), 868</code>	<code>method), 1221</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.components.transformers.Undersampler</code>	<code>(evalml.pipelines.LightGBMRegressor</code>
<code>method), 939</code>	<code>method), 1224</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.components.transformers.URLFeaturizer</code>	<code>(evalml.pipelines.LinearRegressor</code>
<code>method), 941</code>	<code>method), 1227</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.components.Undersampler</code>	<code>(evalml.pipelines.LogisticRegressionClassifier</code>
<code>method), 1089</code>	<code>method), 1229</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.components.URLFeaturizer</code>	<code>(evalml.pipelines.OneHotEncoder</code>
<code>method), 1092</code>	<code>method), 1238</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.components.XGBoostClassifier</code>	<code>(evalml.pipelines.PerColumnImputer</code>
<code>method), 1094</code>	<code>method), 1240</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.components.XGBoostRegressor</code>	<code>(evalml.pipelines.ProphetRegressor</code>
<code>method), 1097</code>	<code>method), 1248</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.DecisionTreeClassifier</code>	<code>(evalml.pipelines.RandomForestClassifier</code>
<code>method), 1192</code>	<code>method), 1250</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.DecisionTreeRegressor</code>	<code>(evalml.pipelines.RandomForestRegressor</code>
<code>method), 1195</code>	<code>method), 1252</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
<code>(evalml.pipelines.DelayedFeatureTransformer</code>	<code>(evalml.pipelines.RFClassifierSelectFromModel</code>
<code>method), 1197</code>	<code>method), 1260</code>
<code>default_parameters()</code>	<code>default_parameters()</code>
	<code>(evalml.pipelines.RFRegressorSelectFromModel</code>

[method](#)), 1263
[default_parameters\(\)](#) ([evalml.pipelines.SimpleImputer](#) [method](#)), 1265
[default_parameters\(\)](#) ([evalml.pipelines.StackedEnsembleClassifier](#) [method](#)), 1268
[default_parameters\(\)](#) ([evalml.pipelines.StackedEnsembleRegressor](#) [method](#)), 1270
[default_parameters\(\)](#) ([evalml.pipelines.StandardScaler](#) [method](#)), 1272
[default_parameters\(\)](#) ([evalml.pipelines.SVMClassifier](#) [method](#)), 1274
[default_parameters\(\)](#) ([evalml.pipelines.SVMRegressor](#) [method](#)), 1277
[default_parameters\(\)](#) ([evalml.pipelines.TargetEncoder](#) [method](#)), 1279
[default_parameters\(\)](#) ([evalml.pipelines.Transformer](#) [method](#)), 1306
[default_parameters\(\)](#) ([evalml.pipelines.XGBoostClassifier](#) [method](#)), 1308
[default_parameters\(\)](#) ([evalml.pipelines.XGBoostRegressor](#) [method](#)), 1311
[DefaultAlgorithm](#) ([class](#) [in](#) [evalml.automl.automl_algorithm](#)), 175
[DefaultAlgorithm](#) ([class](#) [in](#) [evalml.automl.automl_algorithm.default_algorithm](#)), 168
[DefaultDataChecks](#) ([class](#) [in](#) [evalml.data_checks](#)), 256
[DefaultDataChecks](#) ([class](#) [in](#) [evalml.data_checks.default_data_checks](#)), 231
[DelayedFeatureTransformer](#) ([class](#) [in](#) [evalml.pipelines](#)), 1196
[DelayedFeatureTransformer](#) ([class](#) [in](#) [evalml.pipelines.components](#)), 977
[DelayedFeatureTransformer](#) ([class](#) [in](#) [evalml.pipelines.components.transformers](#)), 873
[DelayedFeatureTransformer](#) ([class](#) [in](#) [evalml.pipelines.components.transformers.preprocessing](#)), 813
[DelayedFeatureTransformer](#) ([class](#) [in](#) [evalml.pipelines.components.transformers.preprocessing.delayed_feature_transformer](#)), 781
[deprecate_arg\(\)](#) ([in](#) [module](#) [evalml.utils](#)), 1347
[deprecate_arg\(\)](#) ([in](#) [module](#) [evalml.utils.gen_utils](#)), 1341
[describe\(\)](#) ([evalml.pipelines.ARIMARegressor](#) [method](#)), 1169
[describe\(\)](#) ([evalml.pipelines.binary_classification_pipeline.BinaryClassifier](#) [method](#)), 1100
[describe\(\)](#) ([evalml.pipelines.BinaryClassificationPipeline](#) [method](#)), 1173
[describe\(\)](#) ([evalml.pipelines.CatBoostClassifier](#) [method](#)), 1178
[describe\(\)](#) ([evalml.pipelines.CatBoostRegressor](#) [method](#)), 1180
[describe\(\)](#) ([evalml.pipelines.classification_pipeline.ClassificationPipeline](#) [method](#)), 1108
[describe\(\)](#) ([evalml.pipelines.ClassificationPipeline](#) [method](#)), 1183
[describe\(\)](#) ([evalml.pipelines.component_graph.ComponentGraph](#) [method](#)), 1113
[describe\(\)](#) ([evalml.pipelines.ComponentGraph](#) [method](#)), 1188
[describe\(\)](#) ([evalml.pipelines.components.ARIMARegressor](#) [method](#)), 954
[describe\(\)](#) ([evalml.pipelines.components.BaselineClassifier](#) [method](#)), 957
[describe\(\)](#) ([evalml.pipelines.components.BaselineRegressor](#) [method](#)), 959
[describe\(\)](#) ([evalml.pipelines.components.CatBoostClassifier](#) [method](#)), 962
[describe\(\)](#) ([evalml.pipelines.components.CatBoostRegressor](#) [method](#)), 965
[describe\(\)](#) ([evalml.pipelines.components.component_base.ComponentBase](#) [method](#)), 944
[describe\(\)](#) ([evalml.pipelines.components.ComponentBase](#) [method](#)), 967
[describe\(\)](#) ([evalml.pipelines.components.DateTimeFeaturizer](#) [method](#)), 969
[describe\(\)](#) ([evalml.pipelines.components.DecisionTreeClassifier](#) [method](#)), 972
[describe\(\)](#) ([evalml.pipelines.components.DecisionTreeRegressor](#) [method](#)), 976
[describe\(\)](#) ([evalml.pipelines.components.DelayedFeatureTransformer](#) [method](#)), 978
[describe\(\)](#) ([evalml.pipelines.components.DFSTransformer](#) [method](#)), 980
[describe\(\)](#) ([evalml.pipelines.components.DropColumns](#) [method](#)), 983
[describe\(\)](#) ([evalml.pipelines.components.DropNullColumns](#) [method](#)), 985
[describe\(\)](#) ([evalml.pipelines.components.DropRowsTransformer](#) [method](#)), 987
[describe\(\)](#) ([evalml.pipelines.components.ElasticNetClassifier](#) [method](#)), 992
[describe\(\)](#) ([evalml.pipelines.components.ElasticNetRegressor](#) [method](#)), 992

`describe()` (`evalml.pipelines.components.EmailFeaturizer` method), 994

`describe()` (`evalml.pipelines.components.ensemble.stacked_ensemble_base` method), 477

`describe()` (`evalml.pipelines.components.ensemble.stacked_ensemble_classifier` method), 480

`describe()` (`evalml.pipelines.components.ensemble.stacked_ensemble_regressor` method), 483

`describe()` (`evalml.pipelines.components.ensemble.StackedEnsembleBase` method), 486

`describe()` (`evalml.pipelines.components.ensemble.StackedEnsembleClassifier` method), 488

`describe()` (`evalml.pipelines.components.ensemble.StackedEnsembleRegressor` method), 491

`describe()` (`evalml.pipelines.components.Estimator` method), 997

`describe()` (`evalml.pipelines.components.estimators.ARIMARegressor` method), 642

`describe()` (`evalml.pipelines.components.estimators.BaselineClassifier` method), 645

`describe()` (`evalml.pipelines.components.estimators.BaselineRegressor` method), 647

`describe()` (`evalml.pipelines.components.estimators.CatBoostClassifier` method), 650

`describe()` (`evalml.pipelines.components.estimators.CatBoostRegressor` method), 653

`describe()` (`evalml.pipelines.components.estimators.classifiers.base` method), 494

`describe()` (`evalml.pipelines.components.estimators.classifiers.BaselineClassifier` method), 529

`describe()` (`evalml.pipelines.components.estimators.classifiers.catboost` method), 497

`describe()` (`evalml.pipelines.components.estimators.classifiers.CatBoostClassifier` method), 532

`describe()` (`evalml.pipelines.components.estimators.classifiers.decision_tree` method), 500

`describe()` (`evalml.pipelines.components.estimators.classifiers.DecisionTreeClassifier` method), 535

`describe()` (`evalml.pipelines.components.estimators.classifiers.elasticnet` method), 504

`describe()` (`evalml.pipelines.components.estimators.classifiers.ElasticNetClassifier` method), 538

`describe()` (`evalml.pipelines.components.estimators.classifiers.extra_trees` method), 507

`describe()` (`evalml.pipelines.components.estimators.classifiers.ExtraTreesClassifier` method), 541

`describe()` (`evalml.pipelines.components.estimators.classifiers.kneighbors` method), 511

`describe()` (`evalml.pipelines.components.estimators.classifiers.KNeighborsClassifier` method), 544

`describe()` (`evalml.pipelines.components.estimators.classifiers.lightgbm` method), 514

`describe()` (`evalml.pipelines.components.estimators.classifiers.LightGBMClassifier` method), 547

`describe()` (`evalml.pipelines.components.estimators.classifiers.logistic_regression` method), 518

`describe()` (`evalml.pipelines.components.estimators.classifiers.LogisticRegression` method), 550

`describe()` (`evalml.pipelines.components.estimators.classifiers.RandomForestClassifier` method), 552

`describe()` (`evalml.pipelines.components.estimators.classifiers.rf_classifier` method), 520

`describe()` (`evalml.pipelines.components.estimators.classifiers.svm_classifier` method), 523

`describe()` (`evalml.pipelines.components.estimators.classifiers.SVMClassifier` method), 555

`describe()` (`evalml.pipelines.components.estimators.classifiers.xgboost` method), 526

`describe()` (`evalml.pipelines.components.estimators.classifiers.XGBoostClassifier` method), 558

`describe()` (`evalml.pipelines.components.estimators.DecisionTreeRegressor` method), 656

`describe()` (`evalml.pipelines.components.estimators.DecisionTreeRegressor` method), 659

`describe()` (`evalml.pipelines.components.estimators.ElasticNetClassifier` method), 662

`describe()` (`evalml.pipelines.components.estimators.ElasticNetRegressor` method), 664

`describe()` (`evalml.pipelines.components.estimators.Estimator` method), 667

`describe()` (`evalml.pipelines.components.estimators.estimator.BaselineClassifier` method), 638

`describe()` (`evalml.pipelines.components.estimators.ExtraTreesClassifier` method), 670

`describe()` (`evalml.pipelines.components.estimators.ExtraTreesClassifier` method), 673

`describe()` (`evalml.pipelines.components.estimators.KNeighborsClassifier` method), 676

`describe()` (`evalml.pipelines.components.estimators.LightGBMClassifier` method), 679

`describe()` (`evalml.pipelines.components.estimators.LightGBMRegressor` method), 682

`describe()` (`evalml.pipelines.components.estimators.LinearRegressor` method), 684

`describe()` (`evalml.pipelines.components.estimators.LogisticRegression` method), 687

`describe()` (`evalml.pipelines.components.estimators.ProphetRegressor` method), 690

`describe()` (`evalml.pipelines.components.estimators.RandomForestClassifier` method), 692

`describe()` (`evalml.pipelines.components.estimators.RandomForestRegressor` method), 695

`describe()` (`evalml.pipelines.components.estimators.regressors.arima_regressor` method), 561

`describe()` (`evalml.pipelines.components.estimators.regressors.ARIMARegressor` method), 603

`describe()` (`evalml.pipelines.components.estimators.regressors.baseline_regressor` method), 564

`describe()` (`evalml.pipelines.components.StackedEnsembleClassifier`), 1065
`method`, 1065
`describe()` (`evalml.pipelines.components.StackedEnsembleRegressor`), 1068
`method`, 1068
`describe()` (`evalml.pipelines.components.StandardScaler`), 1070
`method`, 1070
`describe()` (`evalml.pipelines.components.SVMClassifier`), 1072
`method`, 1072
`describe()` (`evalml.pipelines.components.SVMRegressor`), 1075
`method`, 1075
`describe()` (`evalml.pipelines.components.TargetEncoder`), 1077
`method`, 1077
`describe()` (`evalml.pipelines.components.TargetImputer`), 1080
`method`, 1080
`describe()` (`evalml.pipelines.components.TextFeaturizer`), 1082
`method`, 1082
`describe()` (`evalml.pipelines.components.TimeSeriesBaselineEstimator`), 1084
`method`, 1084
`describe()` (`evalml.pipelines.components.Transformer`), 1087
`method`, 1087
`describe()` (`evalml.pipelines.components.transformers.ColumnSelector`), 859
`method`, 859
`describe()` (`evalml.pipelines.components.transformers.ColumnSelectorByType`), 861
`method`, 861
`describe()` (`evalml.pipelines.components.transformers.ColumnSelectorByType`), 863
`method`, 863
`describe()` (`evalml.pipelines.components.transformers.ColumnSelectorByType`), 865
`method`, 865
`describe()` (`evalml.pipelines.components.transformers.DateTimeFeaturizer`), 872
`method`, 872
`describe()` (`evalml.pipelines.components.transformers.DelayedFeatureTransformer`), 875
`method`, 875
`describe()` (`evalml.pipelines.components.transformers.DESTransformer`), 877
`method`, 877
`describe()` (`evalml.pipelines.components.transformers.DimensionalityReductionPipeline`), 710
`method`, 710
`describe()` (`evalml.pipelines.components.transformers.DimensionalityReductionPipeline`), 716
`method`, 716
`describe()` (`evalml.pipelines.components.transformers.DimensionalityReductionPipeline`), 718
`method`, 718
`describe()` (`evalml.pipelines.components.transformers.DimensionalityReductionPipeline`), 713
`method`, 713
`describe()` (`evalml.pipelines.components.transformers.DropColumn`), 879
`method`, 879
`describe()` (`evalml.pipelines.components.transformers.DropNullColumns`), 882
`method`, 882
`describe()` (`evalml.pipelines.components.transformers.DropRowsTransformer`), 884
`method`, 884
`describe()` (`evalml.pipelines.components.transformers.EmailFeaturizer`), 886
`method`, 886
`describe()` (`evalml.pipelines.components.transformers.EncoderLabel`), 720
`method`, 720
`describe()` (`evalml.pipelines.components.transformers.EncoderLabel`), 730
`method`, 730
`describe()` (`evalml.pipelines.components.transformers.encoders.onehot`), 724
`method`, 724
`describe()` (`evalml.pipelines.components.transformers.encoders.OneHot`), 734
`method`, 734
`describe()` (`evalml.pipelines.components.transformers.encoders.target`), 728
`method`, 728
`describe()` (`evalml.pipelines.components.transformers.encoders.Target`), 736
`method`, 736
`describe()` (`evalml.pipelines.components.transformers.feature_selection`), 739
`method`, 739
`describe()` (`evalml.pipelines.components.transformers.feature_selection`), 748
`method`, 748
`describe()` (`evalml.pipelines.components.transformers.feature_selection`), 742
`method`, 742
`describe()` (`evalml.pipelines.components.transformers.feature_selection`), 745
`method`, 745
`describe()` (`evalml.pipelines.components.transformers.feature_selection`), 751
`method`, 751
`describe()` (`evalml.pipelines.components.transformers.feature_selection`), 754
`method`, 754
`describe()` (`evalml.pipelines.components.transformers.FeatureSelector`), 888
`method`, 888
`describe()` (`evalml.pipelines.components.transformers.Imputer`), 891
`method`, 891
`describe()` (`evalml.pipelines.components.transformers.imputers.Impute`), 769
`method`, 769
`describe()` (`evalml.pipelines.components.transformers.imputers.impute`), 757
`method`, 757
`describe()` (`evalml.pipelines.components.transformers.imputers.per_col`), 760
`method`, 760
`describe()` (`evalml.pipelines.components.transformers.imputers.PerCol`), 772
`method`, 772
`describe()` (`evalml.pipelines.components.transformers.imputers.simple`), 763
`method`, 763
`describe()` (`evalml.pipelines.components.transformers.imputers.Simple`), 774
`method`, 774
`describe()` (`evalml.pipelines.components.transformers.imputers.target`), 766
`method`, 766
`describe()` (`evalml.pipelines.components.transformers.imputers.Target`), 776
`method`, 776
`describe()` (`evalml.pipelines.components.transformers.LabelEncoder`), 893
`method`, 893
`describe()` (`evalml.pipelines.components.transformers.LinearDiscrimin`), 895
`method`, 895
`describe()` (`evalml.pipelines.components.transformers.LogTransformer`), 897
`method`, 897
`describe()` (`evalml.pipelines.components.transformers.LSA`), 900
`method`, 900
`describe()` (`evalml.pipelines.components.transformers.OneHotEncoder`), 903
`method`, 903
`describe()` (`evalml.pipelines.components.transformers.Oversampler`), 905
`method`, 905
`describe()` (`evalml.pipelines.components.transformers.PCA`), 907
`method`, 907

`describe()` (`evalml.pipelines.components.transformers.PreColumnInput`), 910
`describe()` (`evalml.pipelines.components.transformers.PreColumnInput`), 918
`describe()` (`evalml.pipelines.components.transformers.PolynomialDegree`), 840
`describe()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer`), 848
`describe()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer`), 842
`describe()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer`), 851
`describe()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer`), 845
`describe()` (`evalml.pipelines.components.transformers.preprocessing.DFSTransformer`), 854
`describe()` (`evalml.pipelines.components.transformers.preprocessing.DropNullColumns`), 856
`describe()` (`evalml.pipelines.components.transformers.preprocessing.DropNullColumns`), 920
`describe()` (`evalml.pipelines.components.transformers.preprocessing.DropNullColumns`), 922
`describe()` (`evalml.pipelines.components.transformers.preprocessing.DropNullColumns`), 924
`describe()` (`evalml.pipelines.components.transformers.preprocessing.ElasticNet`), 927
`describe()` (`evalml.pipelines.components.transformers.preprocessing.FeatureSelector`), 929
`describe()` (`evalml.pipelines.components.transformers.preprocessing.LogTransform`), 931
`describe()` (`evalml.pipelines.components.transformers.preprocessing.LogTransform`), 934
`describe()` (`evalml.pipelines.components.transformers.preprocessing.LSA`), 936
`describe()` (`evalml.pipelines.components.transformers.preprocessing.LSA`), 868
`describe()` (`evalml.pipelines.components.transformers.preprocessing.PolynomialDegree`), 939
`describe()` (`evalml.pipelines.components.transformers.preprocessing.PolynomialDegree`), 941
`describe()` (`evalml.pipelines.components.transformers.preprocessing.RelatedFeatureTransformer`), 1090
`describe()` (`evalml.pipelines.components.transformers.preprocessing.RelatedFeatureTransformer`), 1092
`describe()` (`evalml.pipelines.components.transformers.preprocessing.XGBoostClassifier`), 1094
`describe()` (`evalml.pipelines.components.transformers.preprocessing.XGBoostRegressor`), 1097
`describe()` (`evalml.pipelines.components.transformers.preprocessing.FeatureTransformer`), 1192
`describe()` (`evalml.pipelines.components.transformers.preprocessing.FeatureTransformer`), 1195
`describe()` (`evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer`), 1198
`describe()` (`evalml.pipelines.components.transformers.RFClassifier`), 1200

<code>describe()</code> (<code>evalml.pipelines.ElasticNetClassifier</code> method), 1202	<code>describe()</code> (<code>evalml.pipelines.StandardScaler</code> method), 1272
<code>describe()</code> (<code>evalml.pipelines.ElasticNetRegressor</code> method), 1205	<code>describe()</code> (<code>evalml.pipelines.SVMClassifier</code> method), 1274
<code>describe()</code> (<code>evalml.pipelines.Estimator</code> method), 1207	<code>describe()</code> (<code>evalml.pipelines.SVMRegressor</code> method), 1277
<code>describe()</code> (<code>evalml.pipelines.ExtraTreesClassifier</code> method), 1210	<code>describe()</code> (<code>evalml.pipelines.TargetEncoder</code> method), 1279
<code>describe()</code> (<code>evalml.pipelines.ExtraTreesRegressor</code> method), 1213	<code>describe()</code> (<code>evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline</code> method), 1136
<code>describe()</code> (<code>evalml.pipelines.FeatureSelector</code> method), 1216	<code>describe()</code> (<code>evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline</code> method), 1142
<code>describe()</code> (<code>evalml.pipelines.KNeighborsClassifier</code> method), 1219	<code>describe()</code> (<code>evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline</code> method), 1148
<code>describe()</code> (<code>evalml.pipelines.LightGBMClassifier</code> method), 1221	<code>describe()</code> (<code>evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase</code> method), 1155
<code>describe()</code> (<code>evalml.pipelines.LightGBMRegressor</code> method), 1224	<code>describe()</code> (<code>evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline</code> method), 1161
<code>describe()</code> (<code>evalml.pipelines.LinearRegressor</code> method), 1227	<code>describe()</code> (<code>evalml.pipelines.TimeSeriesBinaryClassificationPipeline</code> method), 1282
<code>describe()</code> (<code>evalml.pipelines.LogisticRegressionClassifier</code> method), 1230	<code>describe()</code> (<code>evalml.pipelines.TimeSeriesClassificationPipeline</code> method), 1289
<code>describe()</code> (<code>evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline</code> method), 1118	<code>describe()</code> (<code>evalml.pipelines.TimeSeriesClassificationPipeline</code> method), 1295
<code>describe()</code> (<code>evalml.pipelines.MulticlassClassificationPipeline</code> method), 1233	<code>describe()</code> (<code>evalml.pipelines.TimeSeriesRegressionPipeline</code> method), 1301
<code>describe()</code> (<code>evalml.pipelines.OneHotEncoder</code> method), 1238	<code>describe()</code> (<code>evalml.pipelines.Transformer</code> method), 1306
<code>describe()</code> (<code>evalml.pipelines.PerColumnImputer</code> method), 1240	<code>describe()</code> (<code>evalml.pipelines.XGBoostClassifier</code> method), 1309
<code>describe()</code> (<code>evalml.pipelines.pipeline_base.PipelineBase</code> method), 1123	<code>describe()</code> (<code>evalml.pipelines.XGBoostRegressor</code> method), 1311
<code>describe()</code> (<code>evalml.pipelines.PipelineBase</code> method), 1243	<code>describe_pipeline()</code> (<code>evalml.automl.automl_search.AutoMLSearch</code> method), 201
<code>describe()</code> (<code>evalml.pipelines.ProphetRegressor</code> method), 1248	<code>describe_pipeline()</code> (<code>evalml.automl.AutoMLSearch</code> method), 213
<code>describe()</code> (<code>evalml.pipelines.RandomForestClassifier</code> method), 1250	<code>describe_pipeline()</code> (<code>evalml.AutoMLSearch</code> method), 1353
<code>describe()</code> (<code>evalml.pipelines.RandomForestRegressor</code> method), 1252	<code>detect_problem_type()</code> (in module <code>evalml.problem_types</code>), 1325
<code>describe()</code> (<code>evalml.pipelines.regression_pipeline.RegressionPipeline</code> method), 1130	<code>detect_problem_type()</code> (in module <code>evalml.problem_types.utils</code>), 1323
<code>describe()</code> (<code>evalml.pipelines.RegressionPipeline</code> method), 1255	<code>DFSTransformer</code> (class in <code>evalml.pipelines</code>), 1199
<code>describe()</code> (<code>evalml.pipelines.RFClassifierSelectFromModel</code> method), 1260	<code>DFSTransformer</code> (class in <code>evalml.pipelines.components</code>), 979
<code>describe()</code> (<code>evalml.pipelines.RFRegressorSelectFromModel</code> method), 1263	<code>DFSTransformer</code> (class in <code>evalml.pipelines.components.transformers</code>), 876
<code>describe()</code> (<code>evalml.pipelines.SimpleImputer</code> method), 1265	<code>DFSTransformer</code> (class in <code>evalml.pipelines.components.transformers.preprocessing</code>), 815
<code>describe()</code> (<code>evalml.pipelines.StackedEnsembleClassifier</code> method), 1268	<code>DFSTransformer</code> (class in <code>evalml.pipelines.components.transformers.preprocessing</code>), 815
<code>describe()</code> (<code>evalml.pipelines.StackedEnsembleRegressor</code> method), 1270	<code>DFSTransformer</code> (class in <code>evalml.pipelines.components.transformers.preprocessing</code>), 815

[evalml.pipelines.components.transformers.preprocessing.featuretools](#), 666
[ElasticNetClassifier](#) (class in [evalml.pipelines](#)), 1201
[done\(\)](#) ([evalml.automl.engine.cf_engine.CFComputation](#) method), 180
[done\(\)](#) ([evalml.automl.engine.dask_engine.DaskComputation](#) method), 182
[done\(\)](#) ([evalml.automl.engine.engine_base.EngineComputation](#) method), 186
[done\(\)](#) ([evalml.automl.engine.EngineComputation](#) method), 194
[done\(\)](#) ([evalml.automl.engine.sequential_engine.SequentialComputation](#) method), 189
[drop_rows_with_nans\(\)](#) (in module [evalml.utils](#)), 1347
[drop_rows_with_nans\(\)](#) (in module [evalml.utils.gen_utils](#)), 1341
[DropColumns](#) (class in [evalml.pipelines.components](#)), 982
[DropColumns](#) (class in [evalml.pipelines.components.transformers](#)), 878
[DropColumns](#) (class in [evalml.pipelines.components.transformers.column_selectors](#)), 860
[DropNullColumns](#) (class in [evalml.pipelines.components](#)), 984
[DropNullColumns](#) (class in [evalml.pipelines.components.transformers](#)), 880
[DropNullColumns](#) (class in [evalml.pipelines.components.transformers.preprocessing](#)), 818
[DropNullColumns](#) (class in [evalml.pipelines.components.transformers.preprocessing.dropping_columns](#)), 784
[DropRowsTransformer](#) (class in [evalml.pipelines.components](#)), 986
[DropRowsTransformer](#) (class in [evalml.pipelines.components.transformers](#)), 883
[DropRowsTransformer](#) (class in [evalml.pipelines.components.transformers.preprocessing](#)), 820
[DropRowsTransformer](#) (class in [evalml.pipelines.components.transformers.preprocessing.dropping_rows_transformer](#)), 787
E
[ElasticNetClassifier](#) (class in [evalml.pipelines](#)), 1201
[ElasticNetClassifier](#) (class in [evalml.pipelines.components](#)), 988
[ElasticNetClassifier](#) (class in [evalml.pipelines.components.estimators](#)), 666
[ElasticNetClassifier](#) (class in [evalml.pipelines.components.estimators.classifiers](#)), 536
[ElasticNetClassifier](#) (class in [evalml.pipelines.components.estimators.classifiers.elasticnet_classifier](#)), 502
[ElasticNetRegressor](#) (class in [evalml.pipelines](#)), 1204
[ElasticNetRegressor](#) (class in [evalml.pipelines.components](#)), 991
[ElasticNetRegressor](#) (class in [evalml.pipelines.components.estimators](#)), 663
[ElasticNetRegressor](#) (class in [evalml.pipelines.components.estimators.regressors](#)), 612
[ElasticNetRegressor](#) (class in [evalml.pipelines.components.estimators.regressors.elasticnet_regressor](#)), 573
[EmailFeaturizer](#) (class in [evalml.pipelines.components](#)), 994
[EmailFeaturizer](#) (class in [evalml.pipelines.components.transformers](#)), 885
[EmailFeaturizer](#) (class in [evalml.pipelines.components.transformers.preprocessing](#)), 822
[EmailFeaturizer](#) (class in [evalml.pipelines.components.transformers.preprocessing.transformers](#)), 805
[EngineBase](#) (class in [evalml.automl](#)), 214
[EngineBase](#) (class in [evalml.automl.engine](#)), 194
[EnsembleMissingPipelineError](#), 272, 274
[error\(\)](#) ([evalml.automl.engine.engine_base.JobLogger](#) method), 186
[error_contains_nan](#) (in module [evalml.data_checks.datetime_nan_data_check](#)), 780
[error_contains_nan](#) (in module [evalml.data_checks.natural_language_nan_data_check](#)), 238
[Estimator](#) (class in [evalml.pipelines](#)), 1206
[Estimator](#) (class in [evalml.pipelines.components](#)), 996
[Estimator](#) (class in [evalml.pipelines.components.estimators](#)), 666
[Estimator](#) (class in [evalml.pipelines.components.estimators.classifiers](#)), 536
[Estimator](#) (class in [evalml.pipelines.components.estimators.classifiers.elasticnet_classifier](#)), 502
[Estimator](#) (class in [evalml.pipelines.components.estimators.regressors](#)), 612
[Estimator](#) (class in [evalml.pipelines.components.estimators.regressors.elasticnet_regressor](#)), 573

evalml.pipelines.components.estimators.estimator
 637

evalml
 module, 166

evalml.automl
 module, 166

evalml.automl.automl_algorithm
 module, 166

evalml.automl.automl_algorithm.automl_algorithm
 module, 166

evalml.automl.automl_algorithm.default_algorithm
 module, 168

evalml.automl.automl_algorithm.iterative_algorithm
 module, 170

evalml.automl.automl_search
 module, 197

evalml.automl.callbacks
 module, 204

evalml.automl.engine
 module, 179

evalml.automl.engine.cf_engine
 module, 179

evalml.automl.engine.dask_engine
 module, 182

evalml.automl.engine.engine_base
 module, 184

evalml.automl.engine.sequential_engine
 module, 188

evalml.automl.pipeline_search_plots
 module, 205

evalml.automl.utils
 module, 206

evalml.data_checks
 module, 218

evalml.data_checks.class_imbalance_data_check
 module, 218

evalml.data_checks.data_check
 module, 220

evalml.data_checks.data_check_action
 module, 221

evalml.data_checks.data_check_action_code
 module, 222

evalml.data_checks.data_check_message
 module, 223

evalml.data_checks.data_check_message_code
 module, 224

evalml.data_checks.data_check_message_type
 module, 226

evalml.data_checks.data_checks
 module, 227

evalml.data_checks.datetime_format_data_check
 module, 228

evalml.data_checks.datetime_nan_data_check
 module, 229

evalml.data_checks.default_data_checks
 module, 230

evalml.data_checks.highly_null_data_check
 module, 232

evalml.data_checks.id_columns_data_check
 module, 233

evalml.data_checks.invalid_targets_data_check
 module, 235

evalml.data_checks.multicollinearity_data_check
 module, 236

evalml.data_checks.natural_language_nan_data_check
 module, 237

evalml.data_checks.no_variance_data_check
 module, 239

evalml.data_checks.outliers_data_check
 module, 239

evalml.data_checks.sparsity_data_check
 module, 241

evalml.data_checks.target_distribution_data_check
 module, 243

evalml.data_checks.target_leakage_data_check
 module, 244

evalml.data_checks.uniqueness_data_check
 module, 245

evalml.demos
 module, 268

evalml.demos.breast_cancer
 module, 268

evalml.demos.churn
 module, 268

evalml.demos.diabetes
 module, 269

evalml.demos.fraud
 module, 269

evalml.demos.weather
 module, 270

evalml.demos.wine
 module, 270

evalml.exceptions
 module, 272

evalml.exceptions.exceptions
 module, 272

evalml.model_family
 module, 276

evalml.model_family.model_family
 module, 276

evalml.model_family.utils
 module, 278

evalml.model_understanding
 module, 280

evalml.model_understanding.feature_explanations
 module, 286

evalml.model_understanding.force_plots
 module, 288

<code>evalml.model_understanding.graphs</code>	<code>evalml.pipelines.components.ensemble.stacked_ensemble</code>
module, 289	module, 482
<code>evalml.model_understanding.permutation_importance</code>	<code>evalml.pipelines.components.estimators</code>
module, 300	module, 492
<code>evalml.model_understanding.prediction_explanations</code>	<code>evalml.pipelines.components.estimators.classifiers</code>
module, 280	module, 492
<code>evalml.model_understanding.prediction_explanations</code>	<code>evalml.pipelines.components.estimators.classifiers</code>
module, 280	module, 492
<code>evalml.objectives</code>	<code>evalml.pipelines.components.estimators.classifiers</code>
module, 314	module, 495
<code>evalml.objectives.binary_classification_objective</code>	<code>evalml.pipelines.components.estimators.classifiers</code>
module, 314	module, 499
<code>evalml.objectives.cost_benefit_matrix</code>	<code>evalml.pipelines.components.estimators.classifiers</code>
module, 317	module, 502
<code>evalml.objectives.fraud_cost</code>	<code>evalml.pipelines.components.estimators.classifiers</code>
module, 320	module, 505
<code>evalml.objectives.lead_scoring</code>	<code>evalml.pipelines.components.estimators.classifiers</code>
module, 323	module, 509
<code>evalml.objectives.multiclass_classification_objective</code>	<code>evalml.pipelines.components.estimators.classifiers</code>
module, 326	module, 512
<code>evalml.objectives.objective_base</code>	<code>evalml.pipelines.components.estimators.classifiers</code>
module, 328	module, 516
<code>evalml.objectives.regression_objective</code>	<code>evalml.pipelines.components.estimators.classifiers</code>
module, 330	module, 519
<code>evalml.objectives.sensitivity_low_alert</code>	<code>evalml.pipelines.components.estimators.classifiers</code>
module, 333	module, 522
<code>evalml.objectives.standard_metrics</code>	<code>evalml.pipelines.components.estimators.classifiers</code>
module, 335	module, 525
<code>evalml.objectives.time_series_regression_objective</code>	<code>evalml.pipelines.components.estimators.estimator</code>
module, 393	module, 636
<code>evalml.objectives.utils</code>	<code>evalml.pipelines.components.estimators.regressors</code>
module, 396	module, 559
<code>evalml.pipelines</code>	<code>evalml.pipelines.components.estimators.regressors</code>
module, 475	module, 559
<code>evalml.pipelines.binary_classification_pipeline</code>	<code>evalml.pipelines.components.estimators.regressors.k</code>
module, 1098	module, 563
<code>evalml.pipelines.binary_classification_pipeline</code>	<code>evalml.pipelines.components.estimators.regressors.k</code>
module, 1104	module, 566
<code>evalml.pipelines.classification_pipeline</code>	<code>evalml.pipelines.components.estimators.regressors.k</code>
module, 1106	module, 569
<code>evalml.pipelines.component_graph</code>	<code>evalml.pipelines.components.estimators.regressors.k</code>
module, 1111	module, 572
<code>evalml.pipelines.components</code>	<code>evalml.pipelines.components.estimators.regressors.k</code>
module, 475	module, 575
<code>evalml.pipelines.components.component_base</code>	<code>evalml.pipelines.components.estimators.regressors.k</code>
module, 942	module, 579
<code>evalml.pipelines.components.component_base</code>	<code>evalml.pipelines.components.estimators.regressors.k</code>
module, 945	module, 582
<code>evalml.pipelines.components.ensemble</code>	<code>evalml.pipelines.components.estimators.regressors.k</code>
module, 476	module, 585
<code>evalml.pipelines.components.ensemble.stacked_ensemble_base</code>	<code>evalml.pipelines.components.estimators.regressors.k</code>
module, 476	module, 588
<code>evalml.pipelines.components.ensemble.stacked_ensemble_base</code>	<code>evalml.pipelines.components.estimators.regressors.k</code>
module, 479	module, 591

F1Micro (class in evalml.objectives.standard_metrics), 355
 F1Weighted (class in evalml.objectives), 424
 F1Weighted (class in evalml.objectives.standard_metrics), 356
 feature_importance() (evalml.pipelines.ARIMAREgressor property), 1170
 feature_importance() (evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline property), 1100
 feature_importance() (evalml.pipelines.BinaryClassificationPipeline property), 1173
 feature_importance() (evalml.pipelines.CatBoostClassifier property), 1178
 feature_importance() (evalml.pipelines.CatBoostRegressor property), 1181
 feature_importance() (evalml.pipelines.classification_pipeline.ClassificationPipeline property), 1108
 feature_importance() (evalml.pipelines.ClassificationPipeline property), 1183
 feature_importance() (evalml.pipelines.components.ARIMAREgressor property), 955
 feature_importance() (evalml.pipelines.components.BaselineClassifier property), 957
 feature_importance() (evalml.pipelines.components.BaselineRegressor property), 960
 feature_importance() (evalml.pipelines.components.CatBoostClassifier property), 962
 feature_importance() (evalml.pipelines.components.CatBoostRegressor property), 965
 feature_importance() (evalml.pipelines.components.DecisionTreeClassifier property), 973
 feature_importance() (evalml.pipelines.components.DecisionTreeRegressor property), 976
 feature_importance() (evalml.pipelines.components.ElasticNetClassifier property), 990
 feature_importance() (evalml.pipelines.components.ElasticNetRegressor property), 993
 feature_importance() (evalml.pipelines.components.ensemble.stacked_ensemble_base.StackedEnsembleBase property), 477
 feature_importance() (evalml.pipelines.components.ensemble.stacked_ensemble_classifier.StackedEnsembleClassifier property), 481
 feature_importance() (evalml.pipelines.components.ensemble.stacked_ensemble_regressor.StackedEnsembleRegressor property), 484
 feature_importance() (evalml.pipelines.components.ensemble.StackedEnsembleBase property), 486
 feature_importance() (evalml.pipelines.components.ensemble.StackedEnsembleClassifier property), 489
 feature_importance() (evalml.pipelines.components.ensemble.StackedEnsembleRegressor property), 491
 feature_importance() (evalml.pipelines.components.Estimator property), 997
 feature_importance() (evalml.pipelines.components.estimators.ARIMAREgressor property), 643
 feature_importance() (evalml.pipelines.components.estimators.BaselineClassifier property), 645
 feature_importance() (evalml.pipelines.components.estimators.BaselineRegressor property), 648
 feature_importance() (evalml.pipelines.components.estimators.CatBoostClassifier property), 651
 feature_importance() (evalml.pipelines.components.estimators.CatBoostRegressor property), 653
 feature_importance() (evalml.pipelines.components.estimators.classifiers.baseline_classifier.BaselineClassifier property), 494
 feature_importance() (evalml.pipelines.components.estimators.classifiers.BaselineClassifier property), 529
 feature_importance() (evalml.pipelines.components.estimators.classifiers.catboost_classifier.CatBoostClassifier property), 498
 feature_importance() (evalml.pipelines.components.estimators.classifiers.CatBoostClassifier property), 532
 feature_importance() (evalml.pipelines.components.estimators.classifiers.decision_tree.DecisionTreeClassifier property), 501
 feature_importance() (evalml.pipelines.components.estimators.classifiers.DecisionTreeClassifier property), 535
 feature_importance()

`(evalml.pipelines.components.estimators.classifiers.elasticnet_classifier.ElasticNetClassifier`
`property), 504`
`(evalml.pipelines.components.estimators.classifiers.elasticnet_classifier.ElasticNetClassifier`
`property), 662`

`feature_importance()`
`(evalml.pipelines.components.estimators.classifiers.ElasticNetClassifier`
`property), 538`
`(evalml.pipelines.components.estimators.classifiers.ElasticNetRegressor`
`property), 665`

`feature_importance()`
`(evalml.pipelines.components.estimators.classifiers.et_classifier.ExtraTreesClassifier`
`property), 508`
`(evalml.pipelines.components.estimators.estimator.Estimator`
`property), 667`

`feature_importance()`
`(evalml.pipelines.components.estimators.classifiers.ExtraTreesClassifier`
`property), 541`
`(evalml.pipelines.components.estimator.Estimator`
`property), 638`

`feature_importance()`
`(evalml.pipelines.components.estimators.classifiers.kneighbors_classifier.KNeighborsClassifier`
`property), 511`
`(evalml.pipelines.components.estimators.ExtraTreesClassifier`
`property), 670`

`feature_importance()`
`(evalml.pipelines.components.estimators.classifiers.KNeighborsClassifier`
`property), 544`
`(evalml.pipelines.components.estimators.ExtraTreesRegressor`
`property), 673`

`feature_importance()`
`(evalml.pipelines.components.estimators.classifiers.lightgbm_classifier.LightGBMClassifier`
`property), 515`
`(evalml.pipelines.components.estimators.KNeighborsClassifier`
`property), 676`

`feature_importance()`
`(evalml.pipelines.components.estimators.classifiers.LightGBMClassifier`
`property), 547`
`(evalml.pipelines.components.estimators.LightGBMClassifier`
`property), 679`

`feature_importance()`
`(evalml.pipelines.components.estimators.classifiers.logistic_regression_classifier.LogisticRegressionClassifier`
`property), 518`
`(evalml.pipelines.components.estimators.LogisticRegressionRegressor`
`property), 682`

`feature_importance()`
`(evalml.pipelines.components.estimators.classifiers.LogisticRegressionClassifier`
`property), 550`
`(evalml.pipelines.components.estimators.LinearRegressor`
`property), 685`

`feature_importance()`
`(evalml.pipelines.components.estimators.classifiers.RandomForestClassifier`
`property), 553`
`(evalml.pipelines.components.estimators.LogisticRegressionClassifier`
`property), 688`

`feature_importance()`
`(evalml.pipelines.components.estimators.classifiers.rf_classifier.RandomForestClassifier`
`property), 521`
`(evalml.pipelines.components.estimators.ProphetRegressor`
`property), 690`

`feature_importance()`
`(evalml.pipelines.components.estimators.classifiers.svm_classifier.SVMClassifier`
`property), 524`
`(evalml.pipelines.components.estimators.RandomForestClassifier`
`property), 693`

`feature_importance()`
`(evalml.pipelines.components.estimators.classifiers.SVMClassifier`
`property), 555`
`(evalml.pipelines.components.estimators.RandomForestRegressor`
`property), 695`

`feature_importance()`
`(evalml.pipelines.components.estimators.classifiers.xgboost_classifier.XGBoostClassifier`
`property), 527`
`(evalml.pipelines.components.estimators.regressors.arima_regressor`
`property), 562`

`feature_importance()`
`(evalml.pipelines.components.estimators.classifiers.XGBoostClassifier`
`property), 558`
`(evalml.pipelines.components.estimators.regressors.ARIMARegressor`
`property), 603`

`feature_importance()`
`(evalml.pipelines.components.estimators.DecisionTreeClassifier`
`property), 656`
`(evalml.pipelines.components.estimators.regressors.baseline_regressor`
`property), 565`

`feature_importance()`
`(evalml.pipelines.components.estimators.DecisionTreeRegressor`
`property), 659`
`(evalml.pipelines.components.estimators.regressors.BaselineRegressor`
`property), 605`

`feature_importance()`
`feature_importance()`

`(evalml.pipelines.components.estimators.regressors.catboost_regressor.CatBoostRegressor, estimators.regressors.time_series_baseline_estimator.TimeSeriesBaselineEstimator, property), 568`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.CatBoostRegressor, estimators.regressors.TimeSeriesBaselineEstimator, property), 608`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.decision_tree.DecisionTreeRegressor, estimators.regressors.xgboost_regressor.XGBoostRegressor, property), 571`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.DecisionTreeRegressor, estimators.regressors.XGBoostRegressor, property), 611`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.elasticnet_regressor.ElasticNetRegressor, estimators.SVMClassifier, property), 574`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.ElasticNetRegressor, estimators.SVMRegressor, property), 614`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.et_regressor.ExtraTreesRegressor, estimators.TimeSeriesBaselineEstimator, property), 578`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.ExtraTreesRegressor, estimators.XGBoostClassifier, property), 617`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.lightgbm_regressor.LightGBMRegressor, estimators.XGBoostRegressor, property), 581`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.LightGBMRegressor, estimators.ExtraTreesClassifier, property), 620`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.linear_regressor.LinearRegressor, estimators.ExtraTreesRegressor, property), 584`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.LinearRegressor, estimators.KNeighborsClassifier, property), 623`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.prophet_regressor.ProphetRegressor, estimators.LightGBMClassifier, property), 587`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.ProphetRegressor, estimators.LightGBMRegressor, property), 625`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.RandomForestRegressor, estimators.LinearRegressor, property), 628`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.rf_regressor.RandomForestRegressor, estimators.LogisticRegressionClassifier, property), 590`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.svm_regressor.SVMRegressor, estimators.ProphetRegressor, property), 593`
`feature_importance()`
`(evalml.pipelines.components.estimators.regressors.SVMRegressor, estimators.RandomForestClassifier, property), 630`
`feature_importance()`

(*evalml.pipelines.components.RandomForestRegressor* *property*), 1051
 feature_importance() (*evalml.pipelines.LogisticRegressionClassifier* *property*), 1230
 feature_importance() (*evalml.pipelines.components.StackedEnsembleClassifier* *property*), 1066
 feature_importance() (*evalml.pipelines.multiclass_classification_pipeline.MulticlassClassifier* *property*), 1118
 feature_importance() (*evalml.pipelines.components.StackedEnsembleRegressor* *property*), 1068
 feature_importance() (*evalml.pipelines.MulticlassClassificationPipeline* *property*), 1233
 feature_importance() (*evalml.pipelines.components.SVMClassifier* *property*), 1073
 feature_importance() (*evalml.pipelines.pipeline_base.PipelineBase* *property*), 1124
 feature_importance() (*evalml.pipelines.components.SVMRegressor* *property*), 1075
 feature_importance() (*evalml.pipelines.PipelineBase* *property*), 1243
 feature_importance() (*evalml.pipelines.components.TimeSeriesBaselineEstimator* *property*), 1085
 feature_importance() (*evalml.pipelines.ProphetRegressor* *property*), 1248
 feature_importance() (*evalml.pipelines.components.XGBoostClassifier* *property*), 1095
 feature_importance() (*evalml.pipelines.RandomForestClassifier* *property*), 1250
 feature_importance() (*evalml.pipelines.components.XGBoostRegressor* *property*), 1097
 feature_importance() (*evalml.pipelines.RandomForestRegressor* *property*), 1253
 feature_importance() (*evalml.pipelines.DecisionTreeClassifier* *property*), 1192
 feature_importance() (*evalml.pipelines.regression_pipeline.RegressionPipeline* *property*), 1130
 feature_importance() (*evalml.pipelines.DecisionTreeRegressor* *property*), 1195
 feature_importance() (*evalml.pipelines.RegressionPipeline* *property*), 1255
 feature_importance() (*evalml.pipelines.ElasticNetClassifier* *property*), 1203
 feature_importance() (*evalml.pipelines.StackedEnsembleClassifier* *property*), 1268
 feature_importance() (*evalml.pipelines.ElasticNetRegressor* *property*), 1205
 feature_importance() (*evalml.pipelines.StackedEnsembleRegressor* *property*), 1270
 feature_importance() (*evalml.pipelines.Estimator* *property*), 1208
 feature_importance() (*evalml.pipelines.SVMClassifier* *property*), 1275
 feature_importance() (*evalml.pipelines.ExtraTreesClassifier* *property*), 1211
 feature_importance() (*evalml.pipelines.SVMRegressor* *property*), 1277
 feature_importance() (*evalml.pipelines.ExtraTreesRegressor* *property*), 1214
 feature_importance() (*evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassifier* *property*), 1136
 feature_importance() (*evalml.pipelines.KNeighborsClassifier* *property*), 1219
 feature_importance() (*evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassifier* *property*), 1142
 feature_importance() (*evalml.pipelines.LightGBMClassifier* *property*), 1222
 feature_importance() (*evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassifier* *property*), 1149
 feature_importance() (*evalml.pipelines.LightGBMRegressor* *property*), 1225
 feature_importance() (*evalml.pipelines.time_series_classification_pipelines.TimeSeriesRegressor* *property*), 1149
 feature_importance() (*evalml.pipelines.LinearRegressor* *property*), 1227
 feature_importance() (*evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase* *property*), 1227

property), 1155

feature_importance() (evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline property), 1161

feature_importance() (evalml.pipelines.TimeSeriesBinaryClassificationPipeline property), 1283

feature_importance() (evalml.pipelines.TimeSeriesClassificationPipeline property), 1289

feature_importance() (evalml.pipelines.TimeSeriesMulticlassClassificationPipeline property), 1295

feature_importance() (evalml.pipelines.TimeSeriesRegressionPipeline property), 1301

feature_importance() (evalml.pipelines.XGBoostClassifier property), 1309

feature_importance() (evalml.pipelines.XGBoostRegressor property), 1311

FeatureSelector (class in evalml.pipelines), 1215

FeatureSelector (class in evalml.pipelines.components), 1004

FeatureSelector (class in evalml.pipelines.components.transformers), 887

FeatureSelector (class in evalml.pipelines.components.transformers.feature_selection), 747

FeatureSelector (class in evalml.pipelines.components.transformers.feature_selection.feature_selection), 738

fit() (evalml.pipelines.ARIMARegressor method), 1170

fit() (evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline method), 1101

fit() (evalml.pipelines.BinaryClassificationPipeline method), 1173

fit() (evalml.pipelines.CatBoostClassifier method), 1178

fit() (evalml.pipelines.CatBoostRegressor method), 1181

fit() (evalml.pipelines.classification_pipeline.ClassificationPipeline method), 1108

fit() (evalml.pipelines.ClassificationPipeline method), 1184

fit() (evalml.pipelines.component_graph.ComponentGraph method), 1113

fit() (evalml.pipelines.ComponentGraph method), 1188

fit() (evalml.pipelines.components.ARIMARegressor method), 955

fit() (evalml.pipelines.components.BaselineClassifier method), 957

fit() (evalml.pipelines.components.BaselineRegressor method), 960

fit() (evalml.pipelines.components.CatBoostClassifier method), 962

fit() (evalml.pipelines.components.CatBoostRegressor method), 965

fit() (evalml.pipelines.components.component_base.ComponentBase method), 944

fit() (evalml.pipelines.components.ComponentBase method), 967

fit() (evalml.pipelines.components.DateTimeFeaturizer method), 970

fit() (evalml.pipelines.components.DecisionTreeClassifier method), 973

fit() (evalml.pipelines.components.DecisionTreeRegressor method), 976

fit() (evalml.pipelines.components.DelayedFeatureTransformer method), 978

fit() (evalml.pipelines.components.DFSTransformer method), 981

fit() (evalml.pipelines.components.DropColumns method), 983

fit() (evalml.pipelines.components.DropNullColumns method), 985

fit() (evalml.pipelines.components.DropRowsTransformer method), 987

fit() (evalml.pipelines.components.ElasticNetClassifier method), 990

fit() (evalml.pipelines.components.ElasticNetRegressor method), 993

fit() (evalml.pipelines.components.EmailFeaturizer method), 995

fit() (evalml.pipelines.components.ensemble.stacked_ensemble_base.StackedEnsembleBase method), 478

fit() (evalml.pipelines.components.ensemble.stacked_ensemble_classifier.StackedEnsembleClassifier method), 481

fit() (evalml.pipelines.components.ensemble.stacked_ensemble_regressor.StackedEnsembleRegressor method), 484

fit() (evalml.pipelines.components.ensemble.StackedEnsembleBase method), 486

fit() (evalml.pipelines.components.ensemble.StackedEnsembleClassifier method), 489

fit() (evalml.pipelines.components.ensemble.StackedEnsembleRegressor method), 491

fit() (evalml.pipelines.components.Estimator method), 997

fit() (evalml.pipelines.components.estimators.ARIMARegressor method), 643

fit() (evalml.pipelines.components.estimators.BaselineClassifier method), 645

fit() (evalml.pipelines.components.estimators.BaselineRegressor method), 648

[fit \(\) \(evalml.pipelines.components.estimators.CatBoostClassifier \(evalml.pipelines.components.estimators.ElasticNetRegressor method\), 651](#)
[fit \(\) \(evalml.pipelines.components.estimators.CatBoostRegressor \(evalml.pipelines.components.estimators.Estimator method\), 653](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.baseline \(evalml.pipelines.components.estimators.estimator.Estimator method\), 494](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.BaselineClassifier \(evalml.pipelines.components.estimators.ExtraTreesClassifier method\), 530](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.CatBoostClassifier \(evalml.pipelines.components.estimators.ExtraTreesRegressor method\), 498](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.CatBoostClassifier \(evalml.pipelines.components.estimators.KNeighborsClassifier method\), 532](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.DecisionTreeClassifier \(evalml.pipelines.components.estimators.LightGBMClassifier method\), 501](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.DecisionTreeClassifier \(evalml.pipelines.components.estimators.LightGBMRegressor method\), 535](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.ElasticNetClassifier \(evalml.pipelines.components.estimators.LinearRegressor method\), 504](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.ElasticNetClassifier \(evalml.pipelines.components.estimators.LogisticRegressionClassifier method\), 538](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.et_classifier \(evalml.pipelines.components.estimators.ProphetRegressor method\), 508](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.ExtraTreesClassifier \(evalml.pipelines.components.estimators.RandomForestClassifier method\), 541](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.KNeighborsClassifier \(evalml.pipelines.components.estimators.RandomForestRegressor method\), 511](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.KNeighborsClassifier \(evalml.pipelines.components.estimators.regressors.arima_regressor method\), 544](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.lightgbm_classifier \(evalml.pipelines.components.estimators.regressors.ARIMARegressor method\), 515](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.LightGBMClassifier \(evalml.pipelines.components.estimators.regressors.baseline_regressor method\), 547](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.LogisticRegressionClassifier \(evalml.pipelines.components.estimators.regressors.BaselineRegressor method\), 518](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.LogisticRegressionClassifier \(evalml.pipelines.components.estimators.regressors.catboost_regressor method\), 550](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.RandomForestClassifier \(evalml.pipelines.components.estimators.regressors.CatBoostRegressor method\), 553](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.et_classifier \(evalml.pipelines.components.estimators.regressors.decision_tree_regressor method\), 521](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.et_classifier \(evalml.pipelines.components.estimators.regressors.DecisionTreeRegressor method\), 524](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.SVMClassifier \(evalml.pipelines.components.estimators.regressors.elasticnet_regressor method\), 555](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.XGBoostClassifier \(evalml.pipelines.components.estimators.regressors.ElasticNetRegressor method\), 527](#)
[fit \(\) \(evalml.pipelines.components.estimators.classifiers.XGBoostClassifier \(evalml.pipelines.components.estimators.regressors.et_regressor method\), 558](#)
[fit \(\) \(evalml.pipelines.components.estimators.DecisionTreeClassifier \(evalml.pipelines.components.estimators.regressors.ExtraTreesRegressor method\), 656](#)
[fit \(\) \(evalml.pipelines.components.estimators.DecisionTreeRegressor \(evalml.pipelines.components.estimators.regressors.lightgbm_regressor method\), 659](#)
[fit \(\) \(evalml.pipelines.components.estimators.ElasticNetClassifier \(evalml.pipelines.components.estimators.regressors.LightGBMRegressor method\), 662](#)

`fit()` (`evalml.pipelines.components.estimators.regressors.LinearRegression` method), 584
`fit()` (`evalml.pipelines.components.estimators.regressors.LogisticRegressionClassifier` method), 1027
`fit()` (`evalml.pipelines.components.estimators.regressors.LogTransformer` method), 623
`fit()` (`evalml.pipelines.components.estimators.regressors.LogTransformer` method), 1029
`fit()` (`evalml.pipelines.components.estimators.regressors.LSA` method), 1031
`fit()` (`evalml.pipelines.components.estimators.regressors.LSA` method), 1031
`fit()` (`evalml.pipelines.components.estimators.regressors.OneHotEncoder` method), 1034
`fit()` (`evalml.pipelines.components.estimators.regressors.Oversampler` method), 625
`fit()` (`evalml.pipelines.components.estimators.regressors.Oversampler` method), 1037
`fit()` (`evalml.pipelines.components.estimators.regressors.PCA` method), 628
`fit()` (`evalml.pipelines.components.estimators.regressors.PCA` method), 1037
`fit()` (`evalml.pipelines.components.estimators.regressors.RandomForestRegressor` method), 590
`fit()` (`evalml.pipelines.components.estimators.regressors.RandomForestRegressor` method), 1037
`fit()` (`evalml.pipelines.components.estimators.regressors.svm_regressor` method), 593
`fit()` (`evalml.pipelines.components.estimators.regressors.svm_regressor` method), 1037
`fit()` (`evalml.pipelines.components.estimators.regressors.SVMRegressor` method), 630
`fit()` (`evalml.pipelines.components.estimators.regressors.SVMRegressor` method), 1043
`fit()` (`evalml.pipelines.components.estimators.regressors.time_series_baseline_estimator` method), 596
`fit()` (`evalml.pipelines.components.estimators.regressors.time_series_baseline_estimator` method), 1046
`fit()` (`evalml.pipelines.components.estimators.regressors.TimeSeriesBaselineEstimator` method), 633
`fit()` (`evalml.pipelines.components.estimators.regressors.TimeSeriesBaselineEstimator` method), 1046
`fit()` (`evalml.pipelines.components.estimators.regressors.xgboost_regressor` method), 599
`fit()` (`evalml.pipelines.components.estimators.regressors.xgboost_regressor` method), 1054
`fit()` (`evalml.pipelines.components.estimators.regressors.XGBoostRegressor` method), 635
`fit()` (`evalml.pipelines.components.estimators.regressors.XGBoostRegressor` method), 1054
`fit()` (`evalml.pipelines.components.estimators.SVMClassifier` method), 698
`fit()` (`evalml.pipelines.components.estimators.SVMClassifier` method), 1057
`fit()` (`evalml.pipelines.components.estimators.SVMRegressor` method), 700
`fit()` (`evalml.pipelines.components.estimators.SVMRegressor` method), 1059
`fit()` (`evalml.pipelines.components.estimators.TimeSeriesBaselineEstimator` method), 703
`fit()` (`evalml.pipelines.components.estimators.TimeSeriesBaselineEstimator` method), 1061
`fit()` (`evalml.pipelines.components.estimators.XGBoostClassifier` method), 705
`fit()` (`evalml.pipelines.components.estimators.XGBoostClassifier` method), 1063
`fit()` (`evalml.pipelines.components.estimators.XGBoostRegressor` method), 708
`fit()` (`evalml.pipelines.components.estimators.XGBoostRegressor` method), 1066
`fit()` (`evalml.pipelines.components.ExtraTreesClassifier` method), 1000
`fit()` (`evalml.pipelines.components.ExtraTreesClassifier` method), 1068
`fit()` (`evalml.pipelines.components.ExtraTreesRegressor` method), 1003
`fit()` (`evalml.pipelines.components.ExtraTreesRegressor` method), 1070
`fit()` (`evalml.pipelines.components.FeatureSelector` method), 1005
`fit()` (`evalml.pipelines.components.FeatureSelector` method), 1073
`fit()` (`evalml.pipelines.components.Imputer` method), 1008
`fit()` (`evalml.pipelines.components.Imputer` method), 1075
`fit()` (`evalml.pipelines.components.KNeighborsClassifier` method), 1011
`fit()` (`evalml.pipelines.components.KNeighborsClassifier` method), 1078
`fit()` (`evalml.pipelines.components.LabelEncoder` method), 1013
`fit()` (`evalml.pipelines.components.LabelEncoder` method), 1080
`fit()` (`evalml.pipelines.components.LightGBMClassifier` method), 1016
`fit()` (`evalml.pipelines.components.LightGBMClassifier` method), 1082
`fit()` (`evalml.pipelines.components.LightGBMRegressor` method), 1019
`fit()` (`evalml.pipelines.components.LightGBMRegressor` method), 1085
`fit()` (`evalml.pipelines.components.LinearDiscriminantAnalysis` method), 1021
`fit()` (`evalml.pipelines.components.LinearDiscriminantAnalysis` method), 1087
`fit()` (`evalml.pipelines.components.LinearRegressor` method), 1024
`fit()` (`evalml.pipelines.components.LinearRegressor` method), 859
`fit()` (`evalml.pipelines.components.transformers.column_selectors.ColumnSelector` method), 859
`fit()` (`evalml.pipelines.components.transformers.column_selectors.DropColumnSelector` method), 859

- method), 861
- fit () (evalml.pipelines.components.transformers.column_selector.SelectedByType method), 864
- fit () (evalml.pipelines.components.transformers.column_selector.SelectedPipeline method), 866
- fit () (evalml.pipelines.components.transformers.DateTimeFeatureTransformer method), 872
- fit () (evalml.pipelines.components.transformers.DelayedFeatureTransformer method), 875
- fit () (evalml.pipelines.components.transformers.DFSTransformer method), 877
- fit () (evalml.pipelines.components.transformers.dimensionality_reduction.LinearDiscriminantAnalysis method), 710
- fit () (evalml.pipelines.components.transformers.dimensionality_reduction.LinearDiscriminantAnalysis method), 716
- fit () (evalml.pipelines.components.transformers.dimensionality_reduction.LinearDiscriminantAnalysis method), 718
- fit () (evalml.pipelines.components.transformers.dimensionality_reduction.LinearDiscriminantAnalysis method), 713
- fit () (evalml.pipelines.components.transformers.DropColumns method), 880
- fit () (evalml.pipelines.components.transformers.DropNullColumns method), 882
- fit () (evalml.pipelines.components.transformers.DropRowsTransformer method), 884
- fit () (evalml.pipelines.components.transformers.EmailFeatureTransformer method), 886
- fit () (evalml.pipelines.components.transformers.encoders.LabelEncoder method), 721
- fit () (evalml.pipelines.components.transformers.encoders.LabelEncoder method), 731
- fit () (evalml.pipelines.components.transformers.encoders.OneHotEncoder method), 724
- fit () (evalml.pipelines.components.transformers.encoders.OneHotEncoder method), 734
- fit () (evalml.pipelines.components.transformers.encoders.TargetEncoder method), 728
- fit () (evalml.pipelines.components.transformers.encoders.TargetEncoder method), 736
- fit () (evalml.pipelines.components.transformers.feature_selection.FeatureSelector method), 739
- fit () (evalml.pipelines.components.transformers.feature_selection.FeatureSelector method), 748
- fit () (evalml.pipelines.components.transformers.feature_selection.FeatureSelector method), 743
- fit () (evalml.pipelines.components.transformers.feature_selection.FeatureSelector method), 746
- fit () (evalml.pipelines.components.transformers.feature_selection.FeatureSelector method), 752
- fit () (evalml.pipelines.components.transformers.feature_selection.FeatureSelector method), 755
- fit () (evalml.pipelines.components.transformers.FeatureSelector method), 888
- fit () (evalml.pipelines.components.transformers.Imputer method), 891
- fit () (evalml.pipelines.components.transformers.imputers.Imputer method), 770
- fit () (evalml.pipelines.components.transformers.imputers.imputer.Imputer method), 758
- fit () (evalml.pipelines.components.transformers.imputers.per_column_imputer.PerColumnImputer method), 760
- fit () (evalml.pipelines.components.transformers.imputers.PerColumnImputer method), 772
- fit () (evalml.pipelines.components.transformers.imputers.simple_imputer.SimpleImputer method), 763
- fit () (evalml.pipelines.components.transformers.imputers.SimpleImputer method), 774
- fit () (evalml.pipelines.components.transformers.imputers.target_imputer.TargetImputer method), 766
- fit () (evalml.pipelines.components.transformers.imputers.TargetImputer method), 777
- fit () (evalml.pipelines.components.transformers.LabelEncoder method), 893
- fit () (evalml.pipelines.components.transformers.LinearDiscriminantAnalysis method), 896
- fit () (evalml.pipelines.components.transformers.LogTransformer method), 898
- fit () (evalml.pipelines.components.transformers.LSA method), 900
- fit () (evalml.pipelines.components.transformers.OneHotEncoder method), 903
- fit () (evalml.pipelines.components.transformers.Oversampler method), 905
- fit () (evalml.pipelines.components.transformers.PCA method), 908
- fit () (evalml.pipelines.components.transformers.PerColumnImputer method), 910
- fit () (evalml.pipelines.components.transformers.PolynomialDetrender method), 912
- fit () (evalml.pipelines.components.transformers.preprocessing.datetime.DateTimeTransformer method), 780
- fit () (evalml.pipelines.components.transformers.preprocessing.DateTransformer method), 812
- fit () (evalml.pipelines.components.transformers.preprocessing.delayed_delayed_feature_transformer.DelayedFeatureTransformer method), 783
- fit () (evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer method), 814
- fit () (evalml.pipelines.components.transformers.preprocessing.DropNullColumns method), 817
- fit () (evalml.pipelines.components.transformers.preprocessing.DropNullColumns method), 785
- fit () (evalml.pipelines.components.transformers.preprocessing.drop_row_drop_row_transformer.DropRowTransformer method), 788
- fit () (evalml.pipelines.components.transformers.preprocessing.DropNullColumns method), 819
- fit () (evalml.pipelines.components.transformers.preprocessing.DropRowTransformer method), 821
- fit () (evalml.pipelines.components.transformers.preprocessing.EmailFeatureTransformer method), 886

- method), 823
- fit () (evalml.pipelines.components.transformers.preprocessing.FeatureHasher method), 790
- fit () (evalml.pipelines.components.transformers.preprocessing.LogTransform method), 793
- fit () (evalml.pipelines.components.transformers.preprocessing.LogTransformPipeline method), 826
- fit () (evalml.pipelines.components.transformers.preprocessing.LSA method), 828
- fit () (evalml.pipelines.components.transformers.preprocessing.LSML method), 795
- fit () (evalml.pipelines.components.transformers.preprocessing.PolynomialDefenders method), 798
- fit () (evalml.pipelines.components.transformers.preprocessing.PolynomialDefenders method), 830
- fit () (evalml.pipelines.components.transformers.preprocessing.TextFeaturizer method), 801
- fit () (evalml.pipelines.components.transformers.preprocessing.TextFeaturizer method), 804
- fit () (evalml.pipelines.components.transformers.preprocessing.TextFeaturizer method), 833
- fit () (evalml.pipelines.components.transformers.preprocessing.TextFeaturizer method), 835
- fit () (evalml.pipelines.components.transformers.preprocessing.Transformers method), 806
- fit () (evalml.pipelines.components.transformers.preprocessing.Transformers method), 808
- fit () (evalml.pipelines.components.transformers.preprocessing.URLFeaturizer method), 837
- fit () (evalml.pipelines.components.transformers.RFClassifier method), 915
- fit () (evalml.pipelines.components.transformers.RFRegressor method), 918
- fit () (evalml.pipelines.components.transformers.samplers.BaseSampler method), 840
- fit () (evalml.pipelines.components.transformers.samplers.Oversampler method), 849
- fit () (evalml.pipelines.components.transformers.samplers.Oversampler method), 843
- fit () (evalml.pipelines.components.transformers.samplers.UnderSampler method), 851
- fit () (evalml.pipelines.components.transformers.samplers.UnderSampler method), 846
- fit () (evalml.pipelines.components.transformers.scalers.StandardScaler method), 854
- fit () (evalml.pipelines.components.transformers.scalers.StandardScaler method), 857
- fit () (evalml.pipelines.components.transformers.SelectByType method), 921
- fit () (evalml.pipelines.components.transformers.SelectColumns method), 923
- fit () (evalml.pipelines.components.transformers.SimpleImputer method), 925
- fit () (evalml.pipelines.components.transformers.StandardScaler method), 927
- fit () (evalml.pipelines.components.transformers.TargetEncoder method), 929
- fit () (evalml.pipelines.components.transformers.TargetImputer method), 932
- fit () (evalml.pipelines.components.transformers.TextFeaturizer method), 934
- fit () (evalml.pipelines.components.transformers.Transformer method), 936
- fit () (evalml.pipelines.components.transformers.transformer.Transformer method), 868
- fit () (evalml.pipelines.components.transformers.Undersampler method), 939
- fit () (evalml.pipelines.components.transformers.URLFeaturizer method), 941
- fit () (evalml.pipelines.components.Undersampler method), 1090
- fit () (evalml.pipelines.components.URLFeaturizer method), 1092
- fit () (evalml.pipelines.components.utils.WrappedSKClassifier method), 948
- fit () (evalml.pipelines.components.utils.WrappedSKRegressor method), 949
- fit () (evalml.pipelines.components.XGBClassifier method), 1095
- fit () (evalml.pipelines.components.XGBRegressor method), 1097
- fit () (evalml.pipelines.DecisionTreeClassifier method), 1192
- fit () (evalml.pipelines.DecisionTreeRegressor method), 1195
- fit () (evalml.pipelines.DelayedFeatureTransformer method), 1198
- fit () (evalml.pipelines.DFSTransformer method), 1200
- fit () (evalml.pipelines.ElasticNetClassifier method), 1203
- fit () (evalml.pipelines.ElasticNetRegressor method), 1205
- fit () (evalml.pipelines.Estimator method), 1208
- fit () (evalml.pipelines.ExtraTreesClassifier method), 1214
- fit () (evalml.pipelines.ExtraTreesRegressor method), 1216
- fit () (evalml.pipelines.FeatureSelector method), 1219
- fit () (evalml.pipelines.KNeighborsClassifier method), 1222
- fit () (evalml.pipelines.LightGBMClassifier method), 1225
- fit () (evalml.pipelines.LightGBMRegressor method), 1227
- fit () (evalml.pipelines.LogisticRegressionClassifier method), 1230

[fit\(\) \(evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline.XGBoostRegressor method\), 1118](#)
[fit\(\) \(evalml.pipelines.MulticlassClassificationPipeline method\), 1233](#)
[fit\(\) \(evalml.pipelines.OneHotEncoder method\), 1238](#)
[fit\(\) \(evalml.pipelines.PerColumnImputer method\), 1240](#)
[fit\(\) \(evalml.pipelines.pipeline_base.PipelineBase method\), 1124](#)
[fit\(\) \(evalml.pipelines.PipelineBase method\), 1243](#)
[fit\(\) \(evalml.pipelines.ProphetRegressor method\), 1248](#)
[fit\(\) \(evalml.pipelines.RandomForestClassifier method\), 1250](#)
[fit\(\) \(evalml.pipelines.RandomForestRegressor method\), 1253](#)
[fit\(\) \(evalml.pipelines.regression_pipeline.RegressionPipeline method\), 1130](#)
[fit\(\) \(evalml.pipelines.RegressionPipeline method\), 1256](#)
[fit\(\) \(evalml.pipelines.RFClassifierSelectFromModel method\), 1260](#)
[fit\(\) \(evalml.pipelines.RFRegressorSelectFromModel method\), 1263](#)
[fit\(\) \(evalml.pipelines.SimpleImputer method\), 1266](#)
[fit\(\) \(evalml.pipelines.StackedEnsembleClassifier method\), 1268](#)
[fit\(\) \(evalml.pipelines.StackedEnsembleRegressor method\), 1270](#)
[fit\(\) \(evalml.pipelines.StandardScaler method\), 1272](#)
[fit\(\) \(evalml.pipelines.SVMClassifier method\), 1275](#)
[fit\(\) \(evalml.pipelines.SVMRegressor method\), 1277](#)
[fit\(\) \(evalml.pipelines.TargetEncoder method\), 1280](#)
[fit\(\) \(evalml.pipelines.time_series_classification_pipelines.TimeSeriesBinaryClassificationPipeline method\), 1136](#)
[fit\(\) \(evalml.pipelines.time_series_classification_pipelines.TimeSeriesMulticlassClassificationPipeline method\), 1142](#)
[fit\(\) \(evalml.pipelines.time_series_classification_pipelines.TimeSeriesMulticlassClassificationPipeline method\), 1149](#)
[fit\(\) \(evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase method\), 1155](#)
[fit\(\) \(evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline method\), 1161](#)
[fit\(\) \(evalml.pipelines.TimeSeriesBinaryClassificationPipeline method\), 1283](#)
[fit\(\) \(evalml.pipelines.TimeSeriesClassificationPipeline method\), 1289](#)
[fit\(\) \(evalml.pipelines.TimeSeriesMulticlassClassificationPipeline method\), 1295](#)
[fit\(\) \(evalml.pipelines.TimeSeriesRegressionPipeline method\), 1302](#)
[fit\(\) \(evalml.pipelines.Transformer method\), 1306](#)
[fit\(\) \(evalml.pipelines.XGBoostClassifier method\), 1309](#)
[fit_and_transform_all_but_final\(\) \(evalml.pipelines.component_graph.ComponentGraph method\), 1113](#)
[fit_and_transform_all_but_final\(\) \(evalml.pipelines.ComponentGraph method\), 1188](#)
[fit_resample\(\) \(evalml.pipelines.components.transformers.samplers.BaseSampler method\), 852](#)
[fit_resample\(\) \(evalml.pipelines.components.transformers.samplers.Undersampler method\), 846](#)
[fit_resample\(\) \(evalml.pipelines.components.transformers.Undersampler method\), 939](#)
[fit_resample\(\) \(evalml.pipelines.components.Undersampler method\), 1090](#)
[fit_transform\(\) \(evalml.pipelines.components.DateTimeFeaturizer method\), 970](#)
[fit_transform\(\) \(evalml.pipelines.components.DelayedFeatureTransformer method\), 979](#)
[fit_transform\(\) \(evalml.pipelines.components.DFSTransformer method\), 981](#)
[fit_transform\(\) \(evalml.pipelines.components.DropColumns method\), 983](#)
[fit_transform\(\) \(evalml.pipelines.components.DropNullColumns method\), 985](#)
[fit_transform\(\) \(evalml.pipelines.components.DropRowsTransformer method\), 987](#)
[fit_transform\(\) \(evalml.pipelines.components.EmailFeaturizer method\), 995](#)
[fit_transform\(\) \(evalml.pipelines.components.FeatureSelector method\), 1006](#)
[fit_transform\(\) \(evalml.pipelines.components.Imputer method\), 1008](#)
[fit_transform\(\) \(evalml.pipelines.components.LabelEncoder method\), 1033](#)
[fit_transform\(\) \(evalml.pipelines.components.LinearDiscriminantAnalysis method\), 1039](#)
[fit_transform\(\) \(evalml.pipelines.components.LogTransformer method\), 1029](#)
[fit_transform\(\) \(evalml.pipelines.components.LSA method\), 1034](#)
[fit_transform\(\) \(evalml.pipelines.components.OneHotEncoder method\), 1037](#)
[fit_transform\(\) \(evalml.pipelines.components.Oversampler method\), 1037](#)
[fit_transform\(\) \(evalml.pipelines.components.PCA method\), 1039](#)
[fit_transform\(\) \(evalml.pipelines.components.PerColumnImputer method\), 1041](#)
[fit_transform\(\) \(evalml.pipelines.components.PolynomialDetrender method\), 1043](#)
[fit_transform\(\) \(evalml.pipelines.components.RFClassifierSelectFromModel method\), 1054](#)

`fit_transform()` (`evalml.pipelines.components.RFRegressorSelectFromModel`), 1057
`method`), 1057
`fit_transform()` (`evalml.pipelines.components.SelectByType`), 1059
`method`), 1059
`fit_transform()` (`evalml.pipelines.components.SelectColumns`), 1061
`method`), 1061
`fit_transform()` (`evalml.pipelines.components.SimpleImputer`), 1063
`method`), 1063
`fit_transform()` (`evalml.pipelines.components.StandardScaler`), 1070
`method`), 1070
`fit_transform()` (`evalml.pipelines.components.TargetEncoder`), 1078
`method`), 1078
`fit_transform()` (`evalml.pipelines.components.TargetImputer`), 1080
`method`), 1080
`fit_transform()` (`evalml.pipelines.components.TextFeaturizer`), 1082
`method`), 1082
`fit_transform()` (`evalml.pipelines.components.Transformer`), 1087
`method`), 1087
`fit_transform()` (`evalml.pipelines.components.transformer_selector.CatMultiSelector`), 859
`method`), 859
`fit_transform()` (`evalml.pipelines.components.transformer_selector.DropCategoricals`), 862
`method`), 862
`fit_transform()` (`evalml.pipelines.components.transformer_selector.SelectByType`), 864
`method`), 864
`fit_transform()` (`evalml.pipelines.components.transformer_selector.SelectCategoricals`), 866
`method`), 866
`fit_transform()` (`evalml.pipelines.components.transformer_selector.DateFeatureSelector`), 872
`method`), 872
`fit_transform()` (`evalml.pipelines.components.transformer_selector.DelayedFeatureTransformer`), 875
`method`), 875
`fit_transform()` (`evalml.pipelines.components.transformer_selector.DESTransformer`), 878
`method`), 878
`fit_transform()` (`evalml.pipelines.components.transformer_selector.DimensionalityReductionPipeline`), 711
`method`), 711
`fit_transform()` (`evalml.pipelines.components.transformer_selector.DimensionalityReductionPipeline`), 716
`method`), 716
`fit_transform()` (`evalml.pipelines.components.transformer_selector.DimensionalityReductionPipeline`), 718
`method`), 718
`fit_transform()` (`evalml.pipelines.components.transformer_selector.DimensionalityReductionPipeline`), 713
`method`), 713
`fit_transform()` (`evalml.pipelines.components.transformer_selector.DropColumns`), 880
`method`), 880
`fit_transform()` (`evalml.pipelines.components.transformer_selector.DropSubColumns`), 882
`method`), 882
`fit_transform()` (`evalml.pipelines.components.transformer_selector.DropRowsTransformer`), 884
`method`), 884
`fit_transform()` (`evalml.pipelines.components.transformer_selector.EmailFeaturizer`), 886
`method`), 886
`fit_transform()` (`evalml.pipelines.components.transformer_selector.LabelEncoder`), 721
`method`), 721
`fit_transform()` (`evalml.pipelines.components.transformer_selector.LabelEncoder`), 731
`method`), 731
`fit_transform()` (`evalml.pipelines.components.transformer_selector.LabelEncoder`), 724
`method`), 724

`fit_transform()` (*evalml.pipelines.SimpleImputer* method), 1266
`fit_transform()` (*evalml.pipelines.StandardScaler* method), 1272
`fit_transform()` (*evalml.pipelines.TargetEncoder* method), 1280
`fit_transform()` (*evalml.pipelines.Transformer* method), 1306
`force_plot()` (in module *evalml.model_understanding.force_plots*), 288
`FraudCost` (class in *evalml.objectives*), 425
`FraudCost` (class in *evalml.objectives.fraud_cost*), 320
`full_rankings()` (*evalml.automl.automl_search.AutoMLSearch* property), 201
`full_rankings()` (*evalml.automl.AutoMLSearch* property), 213
`full_rankings()` (*evalml.AutoMLSearch* property), 1354

G

`generate_component_code()` (in module *evalml.pipelines.components.utils*), 947
`generate_order()` (*evalml.pipelines.component_graph.ComponentGraph* class method), 1113
`generate_order()` (*evalml.pipelines.ComponentGraph* class method), 1189
`generate_pipeline_code()` (in module *evalml.pipelines.utils*), 1165
`get_all_objective_names()` (in module *evalml.objectives*), 428
`get_all_objective_names()` (in module *evalml.objectives.utils*), 396
`get_best_sampler_for_data()` (in module *evalml.automl.utils*), 207
`get_component()` (*evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline* method), 1101
`get_component()` (*evalml.pipelines.BinaryClassificationPipeline* method), 1114
`get_component()` (*evalml.pipelines.BinaryClassificationPipeline* method), 1173
`get_component()` (*evalml.pipelines.classification_pipeline.ClassificationPipeline* method), 1108
`get_component()` (*evalml.pipelines.ClassificationPipeline* method), 1184
`get_component()` (*evalml.pipelines.component_graph.ComponentGraph* method), 1114
`get_component()` (*evalml.pipelines.ComponentGraph* method), 1189
`get_component()` (*evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline* method), 1118
`get_component()` (*evalml.pipelines.MulticlassClassificationPipeline* method), 1034
`get_component()` (*evalml.pipelines.MulticlassClassificationPipeline* method), 1233
`get_component()` (*evalml.pipelines.pipeline_base.PipelineBase* method), 1124
`get_component()` (*evalml.pipelines.PipelineBase* method), 1244
`get_component()` (*evalml.pipelines.regression_pipeline.RegressionPipeline* method), 1130
`get_component()` (*evalml.pipelines.RegressionPipeline* method), 1256
`get_component()` (*evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline* method), 1136
`get_component()` (*evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline* method), 1143
`get_component()` (*evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline* method), 1149
`get_component()` (*evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase* method), 1155
`get_component()` (*evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline* method), 1161
`get_component()` (*evalml.pipelines.TimeSeriesBinaryClassificationPipeline* method), 1283
`get_component()` (*evalml.pipelines.TimeSeriesClassificationPipeline* method), 1289
`get_component()` (*evalml.pipelines.TimeSeriesMulticlassClassificationPipeline* method), 1296
`get_component()` (*evalml.pipelines.TimeSeriesRegressionPipeline* method), 1302
`get_core_objective_names()` (in module *evalml.objectives*), 428
`get_core_objective_names()` (in module *evalml.objectives.utils*), 396
`get_core_objectives()` (in module *evalml.objectives*), 428
`get_core_objectives()` (in module *evalml.objectives.utils*), 396
`get_default_primary_search_objective()` (in module *evalml.automl*), 215
`get_default_primary_search_objective()` (in module *evalml.automl.utils*), 207
`get_estimators()` (*evalml.pipelines.component_graph.ComponentGraph* method), 1114
`get_estimators()` (*evalml.pipelines.ComponentGraph* method), 1189
`get_estimators()` (in module *evalml.pipelines.components.utils*), 947
`get_evalml_root()` (in module *evalml.utils.cli_utils*), 1339
`get_feature_names()` (*evalml.pipelines.components.DateTimeFeaturizer* method), 970
`get_feature_names()` (*evalml.pipelines.MulticlassClassificationPipeline* method), 1034
`get_feature_names()` (*evalml.pipelines.components.OneHotEncoder* method), 1078
`get_feature_names()` (*evalml.pipelines.components.TargetEncoder* method), 1078
`get_feature_names()` (*evalml.pipelines.components.TargetEncoder* method), 1078

([evalml.pipelines.components.transformers.DateTimeFeatureTransformer](#) method), 873

([evalml.pipelines.PipelineBase](#) method), 1244

[get_feature_names\(\)](#) ([evalml.pipelines.components.transformers.encoders.one_hot_encoder.OneHotEncoder](#) method), 725

[get_feature_names\(\)](#) ([evalml.pipelines.components.transformers.encoders.OneHotEncoder](#) method), 734

[get_feature_names\(\)](#) ([evalml.pipelines.components.transformers.encoders.target_encoder.TargetEncoder](#) method), 728

[get_feature_names\(\)](#) ([evalml.pipelines.components.transformers.encoders.TargetEncoder](#) method), 737

[get_feature_names\(\)](#) ([evalml.pipelines.components.transformers.OneHotEncoder](#) method), 903

[get_feature_names\(\)](#) ([evalml.pipelines.components.transformers.preprocessing.datetime_feature_extractor.DateTimeFeatureExtractor](#) method), 780

[get_feature_names\(\)](#) ([evalml.pipelines.components.transformers.preprocessing.DateTimeFeatureExtractor](#) method), 812

[get_feature_names\(\)](#) ([evalml.pipelines.components.transformers.TargetEncoder](#) method), 930

[get_feature_names\(\)](#) ([evalml.pipelines.OneHotEncoder](#) method), 1238

[get_feature_names\(\)](#) ([evalml.pipelines.TargetEncoder](#) method), 1280

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline](#) method), 1101

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.BinaryClassificationPipeline](#) method), 1173

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.classification_pipeline.ClassificationPipeline](#) method), 1108

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.ClassificationPipeline](#) method), 1184

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline](#) method), 1118

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.MulticlassClassificationPipeline](#) method), 1233

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.pipeline_base.PipelineBase](#) method), 1124

[get_hyperparameter_ranges\(\)](#)

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.RegressionPipeline](#) method), 1130

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.RegressionPipeline](#) method), 1256

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline](#) method), 1136

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline](#) method), 1143

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline](#) method), 1149

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline](#) method), 1155

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline](#) method), 1161

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.TimeSeriesBinaryClassificationPipeline](#) method), 1283

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.TimeSeriesClassificationPipeline](#) method), 1290

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.TimeSeriesMulticlassClassificationPipeline](#) method), 1296

[get_hyperparameter_ranges\(\)](#) ([evalml.pipelines.TimeSeriesRegressionPipeline](#) method), 1302

[get_importable_subclasses\(\)](#) (in module [evalml.utils](#)), 1347

[get_importable_subclasses\(\)](#) (in module [evalml.utils.gen_utils](#)), 1341

[get_invariant_features\(\)](#) (in module [evalml.model_understanding.feature_explanations](#)), 287

[get_inputs\(\)](#) ([evalml.pipelines.component_graph.ComponentGraph](#) method), 1114

[get_inputs\(\)](#) ([evalml.pipelines.ComponentGraph](#) method), 1189

[get_installed_packages\(\)](#) (in module [evalml.utils.cli_utils](#)), 1339

[get_last_component\(\)](#) ([evalml.pipelines.component_graph.ComponentGraph](#) method), 1114

[get_last_component\(\)](#) ([evalml.pipelines.ComponentGraph](#) method), 1189

[get_linear_coefficients\(\)](#) (in module [evalml.model_understanding](#)), 307
[get_linear_coefficients\(\)](#) (in module [evalml.model_understanding.graphs](#)), 291
[get_logger\(\)](#) (in module [evalml.utils](#)), 1348
[get_logger\(\)](#) (in module [evalml.utils.logger](#)), 1344
[get_n_splits\(\)](#) ([evalml.preprocessing.data_splitters.time_series_split.TimeSeriesSplit](#) method), 1313
[get_n_splits\(\)](#) ([evalml.preprocessing.data_splitters.TimeSeriesSplit](#) method), 1316
[get_n_splits\(\)](#) ([evalml.preprocessing.data_splitters.training_validation_split.TrainingValidationSplit](#) static method), 1315
[get_n_splits\(\)](#) ([evalml.preprocessing.data_splitters.TrainingValidationSplit](#) static method), 1317
[get_n_splits\(\)](#) ([evalml.preprocessing.TimeSeriesSplit](#) method), 1320
[get_n_splits\(\)](#) ([evalml.preprocessing.TrainingValidationSplit](#) static method), 1321
[get_names\(\)](#) ([evalml.pipelines.components.FeatureSelector](#) method), 1006
[get_names\(\)](#) ([evalml.pipelines.components.RFClassifierSelectFromModel](#) method), 1054
[get_names\(\)](#) ([evalml.pipelines.components.RFRegressorSelectFromModel](#) method), 1057
[get_names\(\)](#) ([evalml.pipelines.components.transformers.feature_selection.feature_selector.FeatureSelector](#) method), 740
[get_names\(\)](#) ([evalml.pipelines.components.transformers.feature_selection.feature_selector.FeatureSelector](#) method), 749
[get_names\(\)](#) ([evalml.pipelines.components.transformers.feature_selection.feature_selector.FeatureSelector](#) method), 743
[get_names\(\)](#) ([evalml.pipelines.components.transformers.feature_selection.feature_selector.FeatureSelector](#) method), 746
[get_names\(\)](#) ([evalml.pipelines.components.transformers.feature_selection.RFClassifierSelectFromModel](#) method), 752
[get_names\(\)](#) ([evalml.pipelines.components.transformers.feature_selection.RFRegressorSelectFromModel](#) method), 755
[get_names\(\)](#) ([evalml.pipelines.components.transformers.FeatureSelector](#) method), 889
[get_names\(\)](#) ([evalml.pipelines.components.transformers.RFClassifierSelectFromModel](#) method), 916
[get_names\(\)](#) ([evalml.pipelines.components.transformers.RFRegressorSelectFromModel](#) method), 919
[get_names\(\)](#) ([evalml.pipelines.FeatureSelector](#) method), 1216
[get_names\(\)](#) ([evalml.pipelines.RFClassifierSelectFromModel](#) method), 1261
[get_names\(\)](#) ([evalml.pipelines.RFRegressorSelectFromModel](#) method), 1263
[get_non_core_objectives\(\)](#) (in module [evalml.objectives](#)), 428
[get_non_core_objectives\(\)](#) (in module [evalml.objectives.utils](#)), 396
[get_objective\(\)](#) (in module [evalml.objectives](#)), 428
[get_objective\(\)](#) (in module [evalml.objectives](#)), 428
[get_params\(\)](#) ([evalml.pipelines.components.estimators.ProphetRegressor](#) method), 690
[get_params\(\)](#) ([evalml.pipelines.components.estimators.regressors.prophet.Regressor](#) method), 587
[get_params\(\)](#) ([evalml.pipelines.components.estimators.regressors.ProphetRegressor](#) method), 587
[get_params\(\)](#) ([evalml.pipelines.components.ProphetRegressor](#) method), 1046
[get_params\(\)](#) ([evalml.pipelines.components.utils.WrappedSKClassifier](#) method), 948
[get_params\(\)](#) ([evalml.pipelines.components.utils.WrappedSKRegressor](#) method), 949
[get_params\(\)](#) ([evalml.pipelines.ProphetRegressor](#) method), 1248
[get_pipeline\(\)](#) ([evalml.automl.automl_search.AutoMLSearch](#) method), 201
[get_pipeline\(\)](#) ([evalml.automl.AutoMLSearch](#) method), 213
[get_pipeline\(\)](#) ([evalml.AutoMLSearch](#) method), 213
[get_pipelines_from_component_graphs\(\)](#) (in module [evalml.automl.utils](#)), 208
[get_prediction_vs_actual_data\(\)](#) (in module [evalml.model_understanding.feature_selector](#)), 107
[get_prediction_vs_actual_data\(\)](#) (in module [evalml.model_understanding.feature_selector](#)), 292
[get_prediction_vs_actual_over_time_data\(\)](#) (in module [evalml.model_understanding.RFClassifierSelectFromModel](#)), 107
[get_prediction_vs_actual_over_time_data\(\)](#) (in module [evalml.model_understanding.RFRegressorSelectFromModel](#)), 107
[get_prediction_vs_actual_over_time_data\(\)](#) (in module [evalml.model_understanding.RFRegressorSelectFromModel](#)), 107
[get_random_seed\(\)](#) (in module [evalml.utils](#)), 1348
[get_random_state\(\)](#) (in module [evalml.utils](#)), 1342
[get_result\(\)](#) ([evalml.engine.cf_engine.CFComputation](#) method), 180
[get_result\(\)](#) ([evalml.engine.dask_engine.DaskComputation](#) method), 182
[get_result\(\)](#) ([evalml.engine.engine_base.EngineComputation](#) method), 186
[get_result\(\)](#) ([evalml.engine.EngineComputation](#) method), 194
[get_result\(\)](#) ([evalml.engine.sequential_engine.SequentialComputation](#) method), 189
[get_sys_info\(\)](#) (in module [evalml.utils.cli_utils](#)), 1339
[Gini](#) (class in [evalml.objectives](#)), 429
[Gini](#) (class in [evalml.objectives.standard_metrics](#)), 358
[graph\(\)](#) ([evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline](#) method), 1101

`graph()` (`evalml.pipelines.BinaryClassificationPipeline` method), 1173
`graph()` (`evalml.pipelines.classification_pipeline.ClassificationPipeline` method), 1109
`graph()` (`evalml.pipelines.classification_pipeline.ClassificationPipeline` method), 1108
`graph()` (`evalml.pipelines.ClassificationPipeline` method), 1184
`graph()` (`evalml.pipelines.ClassificationPipeline` method), 1184
`graph()` (`evalml.pipelines.component_graph.ComponentGraph` method), 1114
`graph()` (`evalml.pipelines.ComponentGraph` method), 1189
`graph()` (`evalml.pipelines.component_graph.ComponentGraph` method), 1114
`graph()` (`evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline` method), 1118
`graph()` (`evalml.pipelines.MulticlassClassificationPipeline` method), 1233
`graph()` (`evalml.pipelines.MulticlassClassificationPipeline` method), 1233
`graph()` (`evalml.pipelines.pipeline_base.PipelineBase` method), 1124
`graph()` (`evalml.pipelines.pipeline_base.PipelineBase` method), 1124
`graph()` (`evalml.pipelines.PipelineBase` method), 1244
`graph()` (`evalml.pipelines.PipelineBase` method), 1244
`graph()` (`evalml.pipelines.regression_pipeline.RegressionPipeline` method), 1131
`graph()` (`evalml.pipelines.RegressionPipeline` method), 1256
`graph()` (`evalml.pipelines.RegressionPipeline` method), 1131
`graph()` (`evalml.pipelines.time_series_classification_pipeline.TimeSeriesBinaryClassificationPipeline` method), 1136
`graph()` (`evalml.pipelines.time_series_classification_pipeline.TimeSeriesBinaryClassificationPipeline` method), 1143
`graph()` (`evalml.pipelines.time_series_classification_pipeline.TimeSeriesMulticlassClassificationPipeline` method), 1149
`graph()` (`evalml.pipelines.time_series_classification_pipeline.TimeSeriesMulticlassClassificationPipeline` method), 1137
`graph()` (`evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase` method), 1156
`graph()` (`evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase` method), 1156
`graph()` (`evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline` method), 1161
`graph()` (`evalml.pipelines.TimeSeriesBinaryClassificationPipeline` method), 1283
`graph()` (`evalml.pipelines.TimeSeriesBinaryClassificationPipeline` method), 1149
`graph()` (`evalml.pipelines.TimeSeriesClassificationPipeline` method), 1290
`graph()` (`evalml.pipelines.TimeSeriesClassificationPipeline` method), 1156
`graph()` (`evalml.pipelines.TimeSeriesMulticlassClassificationPipeline` method), 1296
`graph()` (`evalml.pipelines.TimeSeriesMulticlassClassificationPipeline` method), 1296
`graph()` (`evalml.pipelines.TimeSeriesRegressionPipeline` method), 1302
`graph()` (`evalml.pipelines.TimeSeriesRegressionPipeline` method), 1162
`graph_binary_objective_vs_threshold()` (in module `evalml.model_understanding`), 308
`graph_binary_objective_vs_threshold()` (in module `evalml.model_understanding.graphs`), 293
`graph_confusion_matrix()` (in module `evalml.model_understanding`), 308
`graph_confusion_matrix()` (in module `evalml.model_understanding.graphs`), 293
`graph_feature_importance()` (`evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline` method), 1101
`graph_feature_importance()` (`evalml.pipelines.BinaryClassificationPipeline` method), 1173
`graph_feature_importance()` (`evalml.pipelines.classification_pipeline.ClassificationPipeline` method), 1109
`graph_feature_importance()` (`evalml.pipelines.classification_pipeline.ClassificationPipeline` method), 1108
`graph_feature_importance()` (`evalml.pipelines.ClassificationPipeline` method), 1184
`graph_feature_importance()` (`evalml.pipelines.ClassificationPipeline` method), 1184
`graph_feature_importance()` (`evalml.pipelines.component_graph.ComponentGraph` method), 1114
`graph_feature_importance()` (`evalml.pipelines.ComponentGraph` method), 1189
`graph_feature_importance()` (`evalml.pipelines.component_graph.ComponentGraph` method), 1114
`graph_feature_importance()` (`evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline` method), 1118
`graph_feature_importance()` (`evalml.pipelines.MulticlassClassificationPipeline` method), 1233
`graph_feature_importance()` (`evalml.pipelines.MulticlassClassificationPipeline` method), 1233
`graph_feature_importance()` (`evalml.pipelines.pipeline_base.PipelineBase` method), 1124
`graph_feature_importance()` (`evalml.pipelines.pipeline_base.PipelineBase` method), 1124
`graph_feature_importance()` (`evalml.pipelines.PipelineBase` method), 1244
`graph_feature_importance()` (`evalml.pipelines.PipelineBase` method), 1244
`graph_feature_importance()` (`evalml.pipelines.regression_pipeline.RegressionPipeline` method), 1131
`graph_feature_importance()` (`evalml.pipelines.RegressionPipeline` method), 1256
`graph_feature_importance()` (`evalml.pipelines.RegressionPipeline` method), 1131
`graph_feature_importance()` (`evalml.pipelines.time_series_classification_pipeline.TimeSeriesBinaryClassificationPipeline` method), 1136
`graph_feature_importance()` (`evalml.pipelines.time_series_classification_pipeline.TimeSeriesBinaryClassificationPipeline` method), 1143
`graph_feature_importance()` (`evalml.pipelines.time_series_classification_pipeline.TimeSeriesMulticlassClassificationPipeline` method), 1149
`graph_feature_importance()` (`evalml.pipelines.time_series_classification_pipeline.TimeSeriesMulticlassClassificationPipeline` method), 1137
`graph_feature_importance()` (`evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase` method), 1156
`graph_feature_importance()` (`evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase` method), 1156
`graph_feature_importance()` (`evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline` method), 1161
`graph_feature_importance()` (`evalml.pipelines.TimeSeriesBinaryClassificationPipeline` method), 1283
`graph_feature_importance()` (`evalml.pipelines.TimeSeriesBinaryClassificationPipeline` method), 1149
`graph_feature_importance()` (`evalml.pipelines.TimeSeriesClassificationPipeline` method), 1290
`graph_feature_importance()` (`evalml.pipelines.TimeSeriesClassificationPipeline` method), 1156
`graph_feature_importance()` (`evalml.pipelines.TimeSeriesMulticlassClassificationPipeline` method), 1296
`graph_feature_importance()` (`evalml.pipelines.TimeSeriesMulticlassClassificationPipeline` method), 1296
`graph_feature_importance()` (`evalml.pipelines.TimeSeriesRegressionPipeline` method), 1302
`graph_feature_importance()` (`evalml.pipelines.TimeSeriesRegressionPipeline` method), 1162
`graph_force_plot()` (in module `evalml.model_understanding.force_plots`), 289

[graph_json\(\)](#) ([evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline](#) [method](#)), 1101
 ([in module evalml.model_understanding](#)), 310
[graph_json\(\)](#) ([evalml.pipelines.BinaryClassificationPipeline](#) [method](#)), 1174
 ([in module evalml.model_understanding.graphs](#)), 297
[graph_json\(\)](#) ([evalml.pipelines.classification_pipeline.ClassificationPipeline](#) [method](#)), 1109
[graph_roc_curve\(\)](#) ([in module evalml.model_understanding](#)), 310
[graph_json\(\)](#) ([evalml.pipelines.ClassificationPipeline](#) [method](#)), 1184
[graph_roc_curve\(\)](#) ([in module evalml.model_understanding.graphs](#)), 295
[graph_json\(\)](#) ([evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline](#) [method](#)), 1119
[graph_t_sne\(\)](#) ([in module evalml.model_understanding](#)), 311
[graph_json\(\)](#) ([evalml.pipelines.MulticlassClassificationPipeline](#) [method](#)), 1234
[graph_t_sne\(\)](#) ([in module evalml.model_understanding.graphs](#)), 296
[graph_json\(\)](#) ([evalml.pipelines.pipeline_base.PipelineBase](#) [method](#)), 1125
[greater_is_better\(\)](#) ([evalml.objectives.binary_classification_objective.BinaryClassificationObjective](#) [property](#)), 316
[graph_json\(\)](#) ([evalml.pipelines.PipelineBase](#) [method](#)), 1244
[greater_is_better\(\)](#) ([evalml.objectives.BinaryClassificationObjective](#) [property](#)), 414
[graph_json\(\)](#) ([evalml.pipelines.regression_pipeline.RegressionPipeline](#) [method](#)), 1131
[greater_is_better\(\)](#) ([evalml.objectives.BinaryClassificationObjective](#) [property](#)), 414
[graph_json\(\)](#) ([evalml.pipelines.RegressionPipeline](#) [method](#)), 1256
[greater_is_better\(\)](#) ([evalml.objectives.time_series_binary_classification_objective.MulticlassClassificationObjective](#) [property](#)), 327
[graph_json\(\)](#) ([evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline](#) [method](#)), 1137
[greater_is_better\(\)](#) ([evalml.objectives.MulticlassClassificationObjective](#) [property](#)), 458
[graph_json\(\)](#) ([evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline](#) [method](#)), 1143
[greater_is_better\(\)](#) ([evalml.objectives.MulticlassClassificationPipeline](#) [property](#)), 329
[graph_json\(\)](#) ([evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline](#) [method](#)), 1150
[greater_is_better\(\)](#) ([evalml.objectives.time_series_regression_objective.TimeSeriesRegressionObjective](#) [property](#)), 329
[graph_json\(\)](#) ([evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase](#) [method](#)), 1156
[greater_is_better\(\)](#) ([evalml.objectives.ObjectiveBase](#) [property](#)), 329
[graph_json\(\)](#) ([evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline](#) [method](#)), 1162
[greater_is_better\(\)](#) ([evalml.objectives.ObjectiveBase](#) [property](#)), 329
[graph_json\(\)](#) ([evalml.pipelines.TimeSeriesBinaryClassificationPipeline](#) [method](#)), 1284
[greater_is_better\(\)](#) ([evalml.objectives.regression_objective.RegressionObjective](#) [property](#)), 332
[graph_json\(\)](#) ([evalml.pipelines.TimeSeriesClassificationPipeline](#) [method](#)), 1290
[greater_is_better\(\)](#) ([evalml.objectives.RegressionObjective](#) [property](#)), 469
[graph_json\(\)](#) ([evalml.pipelines.TimeSeriesMulticlassClassificationPipeline](#) [method](#)), 1296
[greater_is_better\(\)](#) ([evalml.objectives.time_series_regression_objective.TimeSeriesRegressionObjective](#) [property](#)), 395
[graph_json\(\)](#) ([evalml.pipelines.TimeSeriesRegressionPipeline](#) [method](#)), 1302
[greater_is_better\(\)](#) ([evalml.objectives.time_series_regression_objective.TimeSeriesRegressionObjective](#) [property](#)), 395
[graph_partial_dependence\(\)](#) ([in module evalml.model_understanding](#)), 308
[graph_partial_dependence\(\)](#) ([in module evalml.model_understanding.graphs](#)), 293
[grid_search_tuner.GridSearchTuner](#) ([class in evalml.tuners](#)), 1334
[grid_search_tuner.GridSearchTuner](#) ([class in evalml.tuners.grid_search_tuner](#)), 1328
[graph_permutation_importance\(\)](#) ([in module evalml.model_understanding](#)), 309
[graph_permutation_importance\(\)](#) ([in module evalml.model_understanding.graphs](#)), 294
[graph_permutation_importance\(\)](#) ([in module evalml.model_understanding.graphs](#)), 294
[graph_precision_recall_curve\(\)](#) ([in module evalml.model_understanding](#)), 309
[graph_precision_recall_curve\(\)](#) ([in module evalml.model_understanding.graphs](#)), 294
[graph_prediction_vs_actual\(\)](#) ([in module evalml.model_understanding](#)), 310
[graph_prediction_vs_actual\(\)](#) ([in module evalml.model_understanding.graphs](#)), 295

H

[handle_component_class\(\)](#) ([in module evalml.pipelines.components.utils](#)), 947
[handle_model_family\(\)](#) ([in module evalml.model_family](#)), 278
[handle_model_family\(\)](#) ([in module evalml.model_family.utils](#)), 278
[handle_problem_types\(\)](#) ([in module evalml.problem_types](#)), 1326

handle_problem_types() (in module <i>evalml.problem_types.utils</i>), 1324	inverse_transform() (evalml.pipelines.ComponentGraph method), 1190
HighlyNullDataCheck (class in <i>evalml.data_checks</i>), 257	inverse_transform() (evalml.pipelines.components.LabelEncoder method), 1014
HighlyNullDataCheck (class in <i>evalml.data_checks.highly_null_data_check</i>), 232	inverse_transform() (evalml.pipelines.components.LogTransformer method), 1029
I	inverse_transform() (evalml.pipelines.components.PolynomialDetrender method), 1044
IDColumnsDataCheck (class in <i>evalml.data_checks</i>), 258	inverse_transform() (evalml.pipelines.components.transformers.encoders.label_encoder method), 721
IDColumnsDataCheck (class in <i>evalml.data_checks.id_columns_data_check</i>), 234	inverse_transform() (evalml.pipelines.components.transformers.encoders.LabelEncoder method), 731
import_or_raise() (in module <i>evalml.utils</i>), 1348	inverse_transform() (evalml.pipelines.components.transformers.LabelEncoder method), 894
import_or_raise() (in module <i>evalml.utils.gen_utils</i>), 1342	inverse_transform() (evalml.pipelines.components.transformers.LogTransformer method), 898
Imputer (class in <i>evalml.pipelines.components</i>), 1007	inverse_transform() (evalml.pipelines.components.transformers.preprocessing.log_transformer method), 793
Imputer (class in <i>evalml.pipelines.components.transformers</i>), 890	inverse_transform() (evalml.pipelines.components.transformers.preprocessing.LogTransformer method), 826
Imputer (class in <i>evalml.pipelines.components.transformers.imputers</i>), 768	inverse_transform() (evalml.pipelines.components.transformers.preprocessing.polynomial_detrender method), 798
Imputer (class in <i>evalml.pipelines.components.transformers.imputers.imputer</i>), 756	inverse_transform() (evalml.pipelines.components.transformers.preprocessing.Polynomial method), 831
infer_feature_types() (in module <i>evalml.utils</i>), 1349	inverse_transform() (evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline method), 1102
infer_feature_types() (in module <i>evalml.utils.woodwork_utils</i>), 1345	inverse_transform() (evalml.pipelines.MulticlassClassificationPipeline method), 1234
info() (evalml.automl.engine.engine_base.JobLogger method), 186	inverse_transform() (evalml.pipelines.pipeline_base.PipelineBase method), 1125
instantiate() (evalml.pipelines.component_graph.ComponentGraph method), 1114	inverse_transform() (evalml.pipelines.PipelineBase method), 1244
instantiate() (evalml.pipelines.ComponentGraph method), 1189	inverse_transform() (evalml.pipelines.regression_pipeline.RegressionPipeline method), 1131
InvalidTargetDataCheck (class in <i>evalml.data_checks</i>), 259	
InvalidTargetDataCheck (class in <i>evalml.data_checks.invalid_targets_data_check</i>), 235	
inverse_transform() (evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline method), 1102	
inverse_transform() (evalml.pipelines.BinaryClassificationPipeline method), 1174	
inverse_transform() (evalml.pipelines.classification_pipeline.ClassificationPipeline method), 1109	
inverse_transform() (evalml.pipelines.ClassificationPipeline method), 1185	
inverse_transform() (evalml.pipelines.component_graph.ComponentGraph method), 1114	

[inverse_transform\(\)](#) ([evalml.pipelines.RegressionPipeline](#) method), 1257
[inverse_transform\(\)](#) ([evalml.pipelines.time_series_classification_pipelines.TimeSeriesBinaryClassificationPipeline](#) method), 1137
[inverse_transform\(\)](#) ([evalml.pipelines.time_series_classification_pipelines.TimeSeriesMulticlassClassificationPipeline](#) method), 1143
[inverse_transform\(\)](#) ([evalml.pipelines.time_series_classification_pipelines.TimeSeriesRegressionPipeline](#) method), 1150
[inverse_transform\(\)](#) ([evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase](#) method), 1156
[inverse_transform\(\)](#) ([evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline](#) method), 1162
[inverse_transform\(\)](#) ([evalml.pipelines.TimeSeriesBinaryClassificationPipeline](#) method), 1284
[inverse_transform\(\)](#) ([evalml.pipelines.TimeSeriesClassificationPipeline](#) method), 1290
[inverse_transform\(\)](#) ([evalml.pipelines.TimeSeriesMulticlassClassificationPipeline](#) method), 1297
[inverse_transform\(\)](#) ([evalml.pipelines.TimeSeriesRegressionPipeline](#) method), 1303
[is_all_numeric\(\)](#) (in module [evalml.utils](#)), 1349
[is_all_numeric\(\)](#) (in module [evalml.utils.gen_utils](#)), 1342
[is_binary\(\)](#) (in module [evalml.problem_types](#)), 1326
[is_binary\(\)](#) (in module [evalml.problem_types.utils](#)), 1324
[is_bounded_like_percentage\(\)](#) ([evalml.objectives.binary_classification_objective.BinaryClassificationObjective](#) property), 316
[is_bounded_like_percentage\(\)](#) ([evalml.objectives.BinaryClassificationObjective](#) property), 414
[is_bounded_like_percentage\(\)](#) ([evalml.objectives.multiclass_classification_objective.MulticlassClassificationObjective](#) property), 327
[is_bounded_like_percentage\(\)](#) ([evalml.objectives.MulticlassClassificationObjective](#) property), 450
[is_bounded_like_percentage\(\)](#) ([evalml.objectives.objective_base.ObjectiveBase](#) property), 329
[is_bounded_like_percentage\(\)](#) ([evalml.objectives.ObjectiveBase](#) property), 452
[is_bounded_like_percentage\(\)](#) ([evalml.objectives.regression_objective.RegressionObjective](#) property), 332
[is_bounded_like_percentage\(\)](#) ([evalml.objectives.TimeSeriesRegressionObjective](#) property), 395
[is_cancelled\(\)](#) ([evalml.automl.engine.cf_engine.CFComputation](#) property), 180
[is_cancelled\(\)](#) ([evalml.automl.engine.dask_engine.DaskComputation](#) property), 183
[is_classification\(\)](#) (in module [evalml.problem_types](#)), 1326
[is_classification\(\)](#) (in module [evalml.problem_types.utils](#)), 1324
[is_closed\(\)](#) ([evalml.automl.engine.cf_engine.CFClient](#) property), 180
[is_closed\(\)](#) ([evalml.automl.engine.cf_engine.CFEngine](#) property), 181
[is_closed\(\)](#) ([evalml.automl.engine.CFEngine](#) property), 191
[is_closed\(\)](#) ([evalml.automl.engine.dask_engine.DaskEngine](#) property), 183
[is_closed\(\)](#) ([evalml.automl.engine.DaskEngine](#) property), 192
[is_defined_for_problem_type\(\)](#) ([evalml.objectives.AccuracyBinary](#) class method), 400
[is_defined_for_problem_type\(\)](#) ([evalml.objectives.AccuracyMulticlass](#) class method), 402
[is_defined_for_problem_type\(\)](#) ([evalml.objectives.AUC](#) class method), 404
[is_defined_for_problem_type\(\)](#) ([evalml.objectives.AUCMacro](#) class method), 405
[is_defined_for_problem_type\(\)](#) ([evalml.objectives.AUCMicro](#) class method), 407
[is_defined_for_problem_type\(\)](#) ([evalml.objectives.AUCWeighted](#) class method), 408
[is_defined_for_problem_type\(\)](#) ([evalml.objectives.BalancedAccuracyBinary](#) class method), 410
[is_defined_for_problem_type\(\)](#) ([evalml.objectives.BalancedAccuracyMulticlass](#) class method), 412
[is_defined_for_problem_type\(\)](#) ([evalml.objectives.binary_classification_objective.BinaryClassificationObjective](#) class method), 316
[is_defined_for_problem_type\(\)](#)

(evalml.objectives.BinaryClassificationObjective class method), 414
is_defined_for_problem_type()
(evalml.objectives.cost_benefit_matrix.CostBenefitMatrix class method), 319
is_defined_for_problem_type()
(evalml.objectives.CostBenefitMatrix class method), 417
is_defined_for_problem_type()
(evalml.objectives.ExpVariance class method), 418
is_defined_for_problem_type()
(evalml.objectives.F1 class method), 420
is_defined_for_problem_type()
(evalml.objectives.F1Macro class method), 422
is_defined_for_problem_type()
(evalml.objectives.F1Micro class method), 423
is_defined_for_problem_type()
(evalml.objectives.F1Weighted class method), 425
is_defined_for_problem_type()
(evalml.objectives.fraud_cost.FraudCost class method), 322
is_defined_for_problem_type()
(evalml.objectives.FraudCost class method), 427
is_defined_for_problem_type()
(evalml.objectives.Gini class method), 430
is_defined_for_problem_type()
(evalml.objectives.lead_scoring.LeadScoring class method), 324
is_defined_for_problem_type()
(evalml.objectives.LeadScoring class method), 432
is_defined_for_problem_type()
(evalml.objectives.LogLossBinary class method), 435
is_defined_for_problem_type()
(evalml.objectives.LogLossMulticlass class method), 436
is_defined_for_problem_type()
(evalml.objectives.MAE class method), 438
is_defined_for_problem_type()
(evalml.objectives.MAPE class method), 439
is_defined_for_problem_type()
(evalml.objectives.MaxError class method), 441
is_defined_for_problem_type()
(evalml.objectives.MCCBinary class method), 443
is_defined_for_problem_type()

(evalml.objectives.MCCMulticlass class method), 444
is_defined_for_problem_type()
(evalml.objectives.MeanSquaredLogError class method), 446
is_defined_for_problem_type()
(evalml.objectives.MedianAE class method), 447
is_defined_for_problem_type()
(evalml.objectives.MSE class method), 449
is_defined_for_problem_type()
(evalml.objectives.multiclass_classification_objective.MulticlassClassificationObjective class method), 327
is_defined_for_problem_type()
(evalml.objectives.MulticlassClassificationObjective class method), 450
is_defined_for_problem_type()
(evalml.objectives.objective_base.ObjectiveBase class method), 329
is_defined_for_problem_type()
(evalml.objectives.ObjectiveBase class method), 452
is_defined_for_problem_type()
(evalml.objectives.Precision class method), 455
is_defined_for_problem_type()
(evalml.objectives.PrecisionMacro class method), 456
is_defined_for_problem_type()
(evalml.objectives.PrecisionMicro class method), 458
is_defined_for_problem_type()
(evalml.objectives.PrecisionWeighted class method), 459
is_defined_for_problem_type()
(evalml.objectives.R2 class method), 461
is_defined_for_problem_type()
(evalml.objectives.Recall class method), 463
is_defined_for_problem_type()
(evalml.objectives.RecallMacro class method), 464
is_defined_for_problem_type()
(evalml.objectives.RecallMicro class method), 466
is_defined_for_problem_type()
(evalml.objectives.RecallWeighted class method), 467
is_defined_for_problem_type()
(evalml.objectives.regression_objective.RegressionObjective class method), 332
is_defined_for_problem_type()
(evalml.objectives.RegressionObjective class method), 469

<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.RootMeanSquaredError</code> class method), 471	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.LogLossBinary</code> class method), 361
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.RootMeanSquaredLogError</code> class method), 472	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.LogLossMulticlass</code> class method), 363
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.sensitivity_low_alert.SensitivityLowAlert</code> class method), 334	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.MAE</code> class method), 364
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.SensitivityLowAlert</code> class method), 474	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.MAPE</code> class method), 366
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.AccuracyBinary</code> class method), 338	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.MaxError</code> class method), 367
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.AccuracyMulticlass</code> class method), 340	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.MCCBinary</code> class method), 369
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.AUC</code> class method), 341	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.MCCMulticlass</code> class method), 371
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.AUCMacro</code> class method), 343	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.MeanSquaredLogError</code> class method), 372
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.AUCMicro</code> class method), 344	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.MedianAE</code> class method), 374
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.AUCWeighted</code> class method), 346	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.MSE</code> class method), 375
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.BalancedAccuracyBinary</code> class method), 348	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.Precision</code> class method), 377
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.BalancedAccuracyMulticlass</code> class method), 349	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.PrecisionMacro</code> class method), 379
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.ExpVariance</code> class method), 351	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.PrecisionMicro</code> class method), 380
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.F1</code> class method), 353	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.PrecisionWeighted</code> class method), 382
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.F1Macro</code> class method), 354	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.R2</code> class method), 383
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.F1Micro</code> class method), 356	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.Recall</code> class method), 385
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.F1Weighted</code> class method), 357	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.RecallMacro</code> class method), 387
<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.Gini</code> class method), 359	<code>is_defined_for_problem_type()</code> (<code>evalml.objectives.standard_metrics.RecallMicro</code> class method), 388

[is_defined_for_problem_type\(\)](#)
 (evalml.objectives.standard_metrics.RecallWeighted
 class method), 390

J

[is_defined_for_problem_type\(\)](#)
 (evalml.objectives.standard_metrics.RootMeanSquaredError
 class method), 391

[is_defined_for_problem_type\(\)](#)
 (evalml.objectives.standard_metrics.RootMeanSquaredLogError
 class method), 393

[is_defined_for_problem_type\(\)](#)
 (evalml.objectives.time_series_regression_objective
 class method), 395

[is_multiclass\(\)](#) (in module evalml.problem_types),
 1326

[is_multiclass\(\)](#) (in module
 evalml.problem_types.utils), 1324

[is_regression\(\)](#) (in module evalml.problem_types),
 1326

[is_regression\(\)](#) (in module
 evalml.problem_types.utils), 1324

[is_search_space_exhausted\(\)](#)
 (evalml.tuners.grid_search_tuner.GridSearchTuner
 method), 1328

[is_search_space_exhausted\(\)](#)
 (evalml.tuners.GridSearchTuner method),
 1335

L

[is_search_space_exhausted\(\)](#)
 (evalml.tuners.random_search_tuner.RandomSearchTuner
 method), 1330

[is_search_space_exhausted\(\)](#)
 (evalml.tuners.RandomSearchTuner method),
 1336

[is_search_space_exhausted\(\)](#)
 (evalml.tuners.skopt_tuner.SKOptTuner
 method), 1332

[is_search_space_exhausted\(\)](#)
 (evalml.tuners.SKOptTuner method), 1337

[is_search_space_exhausted\(\)](#)
 (evalml.tuners.Tuner method), 1338

[is_search_space_exhausted\(\)](#)
 (evalml.tuners.tuner.Tuner method), 1333

[is_time_series\(\)](#) (in module
 evalml.problem_types), 1326

[is_time_series\(\)](#) (in module
 evalml.problem_types.utils), 1324

[is_tree_estimator\(\)](#)
 (evalml.model_family.model_family.ModelFamily
 method), 277

[is_tree_estimator\(\)](#)
 (evalml.model_family.ModelFamily method),
 279

[IterativeAlgorithm](#) (class in
 evalml.automl.automl_algorithm), 177

[IterativeAlgorithm](#) (class in
 evalml.automl.automl_algorithm.iterative_algorithm),
 171

[jupyter_check\(\)](#) (in module evalml.utils), 1349

[jupyter_check\(\)](#) (in module evalml.utils.gen_utils),
 1343

K

[KNeighborsClassifier](#) (class in evalml.pipelines),
 1217

[KNeighborsClassifier](#) (class in
 evalml.pipelines.components), 1009

[KNeighborsClassifier](#) (class in
 evalml.pipelines.components.estimators),
 674

[KNeighborsClassifier](#) (class in
 evalml.pipelines.components.estimators.classifiers),
 542

[KNeighborsClassifier](#) (class in
 evalml.pipelines.components.estimators.classifiers.kneighbors_cl
 509

LabelEncoder (class in
 evalml.pipelines.components), 1012

LabelEncoder (class in
 evalml.pipelines.components.transformers),
 892

LabelEncoder (class in
 evalml.pipelines.components.transformers.encoders),
 730

LabelEncoder (class in
 evalml.pipelines.components.transformers.encoders.label_encode
 720

[LeadScoring](#) (class in evalml.objectives), 431

[LeadScoring](#) (class in
 evalml.objectives.lead_scoring), 323

[LightGBMClassifier](#) (class in evalml.pipelines),
 1220

[LightGBMClassifier](#) (class in
 evalml.pipelines.components), 1014

[LightGBMClassifier](#) (class in
 evalml.pipelines.components.estimators),
 677

[LightGBMClassifier](#) (class in
 evalml.pipelines.components.estimators.classifiers),
 545

[LightGBMClassifier](#) (class in
 evalml.pipelines.components.estimators.classifiers.lightgbm_clas
 513

LightGBMRegressor (class in evalml.pipelines), 1223

LightGBMRegressor (class in evalml.pipelines.components), 1017

LightGBMRegressor (class in evalml.pipelines.components.estimators), 680

LightGBMRegressor (class in evalml.pipelines.components.estimators.regressors), 618

LightGBMRegressor (class in evalml.pipelines.components.estimators.regressors.lightgbm_regressor), 579

LinearDiscriminantAnalysis (class in evalml.pipelines.components), 1020

LinearDiscriminantAnalysis (class in evalml.pipelines.components.transformers), 894

LinearDiscriminantAnalysis (class in evalml.pipelines.components.transformers.dimensionality_reduction_transformers), 715

LinearDiscriminantAnalysis (class in evalml.pipelines.components.transformers.dimensionality_reduction_transformers.linear_discriminant_analysis), 709

LinearRegressor (class in evalml.pipelines), 1226

LinearRegressor (class in evalml.pipelines.components), 1022

LinearRegressor (class in evalml.pipelines.components.estimators), 683

LinearRegressor (class in evalml.pipelines.components.estimators.regressors), 621

LinearRegressor (class in evalml.pipelines.components.estimators.regressors.linear_regressor), 583

load() (evalml.automl.automl_search.AutoMLSearch static method), 201

load() (evalml.automl.AutoMLSearch static method), 213

load() (evalml.AutoMLSearch static method), 1354

load() (evalml.pipelines.ARIMARegressor static method), 1170

load() (evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline static method), 1102

load() (evalml.pipelines.BinaryClassificationPipeline static method), 1174

load() (evalml.pipelines.CatBoostClassifier static method), 1178

load() (evalml.pipelines.CatBoostRegressor static method), 1181

load() (evalml.pipelines.classification_pipeline.ClassificationPipeline static method), 1109

load() (evalml.pipelines.ClassificationPipeline static method), 1109

method), 1185

load() (evalml.pipelines.components.ARIMARegressor static method), 955

load() (evalml.pipelines.components.BaselineClassifier static method), 957

load() (evalml.pipelines.components.BaselineRegressor static method), 960

load() (evalml.pipelines.components.CatBoostClassifier static method), 962

load() (evalml.pipelines.components.CatBoostRegressor static method), 965

load() (evalml.pipelines.components.component_base.ComponentBase static method), 944

load() (evalml.pipelines.components.ComponentBase static method), 967

load() (evalml.pipelines.components.DateTimeFeaturizer static method), 970

load() (evalml.pipelines.components.DecisionTreeClassifier static method), 973

load() (evalml.pipelines.components.DecisionTreeRegressor static method), 976

load() (evalml.pipelines.components.DelayedFeatureTransformer static method), 979

load() (evalml.pipelines.components.DFSTransformer static method), 981

load() (evalml.pipelines.components.DropColumns static method), 983

load() (evalml.pipelines.components.DropNullColumns static method), 985

load() (evalml.pipelines.components.DropRowsTransformer static method), 987

load() (evalml.pipelines.components.ElasticNetClassifier static method), 990

load() (evalml.pipelines.components.ElasticNetRegressor static method), 993

load() (evalml.pipelines.components.EmailFeaturizer static method), 995

load() (evalml.pipelines.components.ensemble.stacked_ensemble_base.StackedEnsembleBase static method), 478

load() (evalml.pipelines.components.ensemble.stacked_ensemble_classifier.StackedEnsembleClassifier static method), 481

load() (evalml.pipelines.components.ensemble.stacked_ensemble_regressor.StackedEnsembleRegressor static method), 484

load() (evalml.pipelines.components.ensemble.StackedEnsembleBase static method), 486

load() (evalml.pipelines.components.ensemble.StackedEnsembleClassifier static method), 489

load() (evalml.pipelines.components.ensemble.StackedEnsembleRegressor static method), 491

load() (evalml.pipelines.components.Estimator static method), 997

load() (evalml.pipelines.components.estimators.ARIMARegressor static method), 643

load() (evalml.pipelines.components.estimators.BaselineClassifier static method), 957

static method), 646

load () (evalml.pipelines.components.estimators.BaselineRegressor (evalml.pipelines.components.estimators.ElasticNetClassifier static method), 648 static method), 662

load () (evalml.pipelines.components.estimators.CatBoostClassifier (evalml.pipelines.components.estimators.ElasticNetRegressor static method), 651 static method), 665

load () (evalml.pipelines.components.estimators.CatBoostRegressor (evalml.pipelines.components.estimators.Estimator static method), 653 static method), 667

load () (evalml.pipelines.components.estimators.classifiers.baseline_classifier (evalml.pipelines.components.estimators.estimator.Estimator static method), 495 static method), 638

load () (evalml.pipelines.components.estimators.classifiers.baseline_classifier (evalml.pipelines.components.estimators.ExtraTreesClassifier static method), 530 static method), 671

load () (evalml.pipelines.components.estimators.classifiers.catboost_classifier (evalml.pipelines.components.estimators.ExtraTreesRegressor static method), 498 static method), 674

load () (evalml.pipelines.components.estimators.classifiers.catboost_classifier (evalml.pipelines.components.estimators.KNeighborsClassifier static method), 532 static method), 676

load () (evalml.pipelines.components.estimators.classifiers.decision_tree_classifier (evalml.pipelines.components.estimators.LightGBMClassifier static method), 501 static method), 680

load () (evalml.pipelines.components.estimators.classifiers.decision_tree_classifier (evalml.pipelines.components.estimators.LightGBMRegressor static method), 535 static method), 683

load () (evalml.pipelines.components.estimators.classifiers.elasticnet_classifier (evalml.pipelines.components.estimators.LinearRegressor static method), 504 static method), 685

load () (evalml.pipelines.components.estimators.classifiers.elasticnet_classifier (evalml.pipelines.components.estimators.LogisticRegressionClassifier static method), 538 static method), 688

load () (evalml.pipelines.components.estimators.classifiers.et_classifier (evalml.pipelines.components.estimators.ProphetRegressor static method), 508 static method), 690

load () (evalml.pipelines.components.estimators.classifiers.ExtraTreesClassifier (evalml.pipelines.components.estimators.RandomForestClassifier static method), 541 static method), 693

load () (evalml.pipelines.components.estimators.classifiers.kneighbors_classifier (evalml.pipelines.components.estimators.RandomForestRegressor static method), 511 static method), 695

load () (evalml.pipelines.components.estimators.classifiers.KNeighborsClassifier (evalml.pipelines.components.estimators.regressors.arima_regressor static method), 544 static method), 562

load () (evalml.pipelines.components.estimators.classifiers.lightgbm_classifier (evalml.pipelines.components.estimators.regressors.ARIMARegressor static method), 515 static method), 603

load () (evalml.pipelines.components.estimators.classifiers.LightGBMClassifier (evalml.pipelines.components.estimators.regressors.baseline_regressor static method), 548 static method), 565

load () (evalml.pipelines.components.estimators.classifiers.logistic_regression_classifier (evalml.pipelines.components.estimators.regressors.BaselineRegressor static method), 518 static method), 606

load () (evalml.pipelines.components.estimators.classifiers.LogisticRegressionClassifier (evalml.pipelines.components.estimators.regressors.catboost_regressor static method), 550 static method), 568

load () (evalml.pipelines.components.estimators.classifiers.RandomForestClassifier (evalml.pipelines.components.estimators.regressors.CatBoostRegressor static method), 553 static method), 608

load () (evalml.pipelines.components.estimators.classifiers.rf_classifier (evalml.pipelines.components.estimators.regressors.decision_tree_regressor static method), 521 static method), 571

load () (evalml.pipelines.components.estimators.classifiers.svm_classifier (evalml.pipelines.components.estimators.regressors.DecisionTreeRegressor static method), 524 static method), 612

load () (evalml.pipelines.components.estimators.classifiers.SVMClassifier (evalml.pipelines.components.estimators.regressors.elasticnet_regressor static method), 556 static method), 574

load () (evalml.pipelines.components.estimators.classifiers.xgboost_classifier (evalml.pipelines.components.estimators.regressors.ElasticNetRegressor static method), 527 static method), 614

load () (evalml.pipelines.components.estimators.classifiers.XGBoostClassifier (evalml.pipelines.components.estimators.regressors.et_regressor static method), 558 static method), 578

load () (evalml.pipelines.components.estimators.DecisionTreeClassifier (evalml.pipelines.components.estimators.regressors.ExtraTreesRegressor static method), 656 static method), 617

load () (evalml.pipelines.components.estimators.DecisionTreeRegressor (evalml.pipelines.components.estimators.regressors.lightgbm_regressor static method), 656 static method), 617

static method), 581

load() (evalml.pipelines.components.estimators.regressor.LightGBMRegressor static method), 620

load() (evalml.pipelines.components.estimators.regressor.LinearRegressor static method), 584

load() (evalml.pipelines.components.estimators.regressor.LogisticRegressionClassifier static method), 623

load() (evalml.pipelines.components.estimators.regressor.LogTransformer static method), 587

load() (evalml.pipelines.components.estimators.regressor.LSA static method), 625

load() (evalml.pipelines.components.estimators.regressor.OneHotEncoder static method), 628

load() (evalml.pipelines.components.estimators.regressor.Oversampler static method), 590

load() (evalml.pipelines.components.estimators.regressor.PCA static method), 593

load() (evalml.pipelines.components.estimators.regressor.PerColumnImputer static method), 630

load() (evalml.pipelines.components.estimators.regressor.PolynomialDetrender static method), 596

load() (evalml.pipelines.components.estimators.regressor.PriorBaseEstimator static method), 633

load() (evalml.pipelines.components.estimators.regressor.RandomForestClassifier static method), 599

load() (evalml.pipelines.components.estimators.regressor.RandomForestRegressor static method), 635

load() (evalml.pipelines.components.estimators.regressor.RFClassifierSelectFromModel static method), 698

load() (evalml.pipelines.components.estimators.regressor.RFRegressorSelectFromModel static method), 700

load() (evalml.pipelines.components.estimators.regressor.SelectByType static method), 703

load() (evalml.pipelines.components.estimators.regressor.SelectColumns static method), 705

load() (evalml.pipelines.components.estimators.regressor.SimpleImputer static method), 708

load() (evalml.pipelines.components.estimators.regressor.StackedEnsembleClassifier static method), 1001

load() (evalml.pipelines.components.estimators.regressor.StackedEnsembleRegressor static method), 1004

load() (evalml.pipelines.components.estimators.regressor.StandardScaler static method), 1006

load() (evalml.pipelines.components.FeatureSelector static method), 1009

load() (evalml.pipelines.components.Imputer static method), 1011

load() (evalml.pipelines.components.KNeighborsClassifier static method), 1014

load() (evalml.pipelines.components.LabelEncoder static method), 1017

load() (evalml.pipelines.components.LightGBMClassifier static method), 1019

load() (evalml.pipelines.components.LightGBMRegressor static method), 1022

load() (evalml.pipelines.components.LinearRegressor static method), 1024

load() (evalml.pipelines.components.LogisticRegressionClassifier static method), 1027

load() (evalml.pipelines.components.LogTransformer static method), 1029

load() (evalml.pipelines.components.LSA static method), 1031

load() (evalml.pipelines.components.OneHotEncoder static method), 1034

load() (evalml.pipelines.components.Oversampler static method), 1037

load() (evalml.pipelines.components.PCA static method), 1039

load() (evalml.pipelines.components.PerColumnImputer static method), 1041

load() (evalml.pipelines.components.PolynomialDetrender static method), 1044

load() (evalml.pipelines.components.PriorBaseEstimator static method), 1046

load() (evalml.pipelines.components.RandomForestClassifier static method), 1049

load() (evalml.pipelines.components.RandomForestRegressor static method), 1051

load() (evalml.pipelines.components.RFClassifierSelectFromModel static method), 1054

load() (evalml.pipelines.components.RFRegressorSelectFromModel static method), 1057

load() (evalml.pipelines.components.SelectByType static method), 1059

load() (evalml.pipelines.components.SelectColumns static method), 1061

load() (evalml.pipelines.components.SimpleImputer static method), 1063

load() (evalml.pipelines.components.StackedEnsembleClassifier static method), 1066

load() (evalml.pipelines.components.StackedEnsembleRegressor static method), 1068

load() (evalml.pipelines.components.StandardScaler static method), 1070

load() (evalml.pipelines.components.SVMClassifier static method), 1073

load() (evalml.pipelines.components.SVMRegressor static method), 1075

load() (evalml.pipelines.components.TargetEncoder static method), 1078

load() (evalml.pipelines.components.TargetImputer static method), 1080

load() (evalml.pipelines.components.TextFeaturizer static method), 1082

load() (evalml.pipelines.components.TimeSeriesBaselineEstimator static method), 1085

load() (evalml.pipelines.components.Transformer static method), 1088

Index

static method), 819

load() (evalml.pipelines.components.transformers.preprocessing.Detector, static method), 822

load() (evalml.pipelines.components.transformers.preprocessing.ElasticNet, static method), 824

load() (evalml.pipelines.components.transformers.preprocessing.FeatureSelector, static method), 791

load() (evalml.pipelines.components.transformers.preprocessing.LogTransformer, static method), 793

load() (evalml.pipelines.components.transformers.preprocessing.LSA, static method), 826

load() (evalml.pipelines.components.transformers.preprocessing.LSH, static method), 828

load() (evalml.pipelines.components.transformers.preprocessing.Lstm, static method), 796

load() (evalml.pipelines.components.transformers.preprocessing.Polynomial, static method), 799

load() (evalml.pipelines.components.transformers.preprocessing.Polyomial, static method), 831

load() (evalml.pipelines.components.transformers.preprocessing.TextFeaturizer, static method), 801

load() (evalml.pipelines.components.transformers.preprocessing.TextFeaturizer, static method), 804

load() (evalml.pipelines.components.transformers.preprocessing.TextFeaturizer, static method), 833

load() (evalml.pipelines.components.transformers.preprocessing.TextFeaturizer, static method), 835

load() (evalml.pipelines.components.transformers.preprocessing.Transform, static method), 807

load() (evalml.pipelines.components.transformers.preprocessing.Transform, static method), 809

load() (evalml.pipelines.components.transformers.preprocessing.Transform, static method), 837

load() (evalml.pipelines.components.transformers.RFClassifier, static method), 916

load() (evalml.pipelines.components.transformers.RFRegressor, static method), 919

load() (evalml.pipelines.components.transformers.sampler, static method), 840

load() (evalml.pipelines.components.transformers.sampler, static method), 849

load() (evalml.pipelines.components.transformers.sampler, static method), 843

load() (evalml.pipelines.components.transformers.sampler, static method), 852

load() (evalml.pipelines.components.transformers.sampler, static method), 846

load() (evalml.pipelines.components.transformers.scalers, static method), 855

load() (evalml.pipelines.components.transformers.scalers, static method), 857

load() (evalml.pipelines.components.transformers.SelectByType, static method), 921

load() (evalml.pipelines.components.transformers.SelectColumns, static method), 923

load() (evalml.pipelines.components.transformers.SimpleImputer, static method), 925

load() (evalml.pipelines.components.transformers.StandardScaler, static method), 927

load() (evalml.pipelines.components.transformers.TargetEncoder, static method), 930

load() (evalml.pipelines.components.transformers.TargetImputer, static method), 932

load() (evalml.pipelines.components.transformers.TextFeaturizer, static method), 934

load() (evalml.pipelines.components.transformers.Transformer, static method), 937

load() (evalml.pipelines.components.transformers.transformer.Transform, static method), 869

load() (evalml.pipelines.components.transformers.Undersampler, static method), 940

load() (evalml.pipelines.components.transformers.URLFeaturizer, static method), 942

load() (evalml.pipelines.components.transformers.Undersampler, static method), 1090

load() (evalml.pipelines.components.transformers.URLFeaturizer, static method), 1092

load() (evalml.pipelines.components.XGBoostClassifier, static method), 1095

load() (evalml.pipelines.components.XGBoostRegressor, static method), 1097

load() (evalml.pipelines.components.XGBoostClassifier, static method), 1193

load() (evalml.pipelines.components.XGBoostRegressor, static method), 1196

load() (evalml.pipelines.DelayedFeatureTransformer, static method), 1198

load() (evalml.pipelines.DFSTransformer, static method), 1200

load() (evalml.pipelines.ElasticNetClassifier, static method), 1203

load() (evalml.pipelines.ElasticNetRegressor, static method), 1205

load() (evalml.pipelines.Estimator, static method), 1208

load() (evalml.pipelines.ExtraTreesClassifier, static method), 1211

load() (evalml.pipelines.ExtraTreesRegressor, static method), 1214

load() (evalml.pipelines.FeatureSelector, static method), 1216

load() (evalml.pipelines.KNeighborsClassifier, static method), 1219

load() (evalml.pipelines.LightGBMClassifier, static method), 1222

load() (evalml.pipelines.LightGBMRegressor, static method), 1225

load() (evalml.pipelines.LinearRegressor, static method), 1225

method), 1227

load() (evalml.pipelines.LogisticRegressionClassifier static method), 1230

load() (evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline static method), 1119

load() (evalml.pipelines.MulticlassClassificationPipeline static method), 1234

load() (evalml.pipelines.OneHotEncoder static method), 1239

load() (evalml.pipelines.PerColumnImputer static method), 1241

load() (evalml.pipelines.pipeline_base.PipelineBase static method), 1125

load() (evalml.pipelines.PipelineBase static method), 1245

load() (evalml.pipelines.ProphetRegressor static method), 1248

load() (evalml.pipelines.RandomForestClassifier static method), 1251

load() (evalml.pipelines.RandomForestRegressor static method), 1253

load() (evalml.pipelines.regression_pipeline.RegressionPipeline static method), 1131

load() (evalml.pipelines.RegressionPipeline static method), 1257

load() (evalml.pipelines.RFClassifierSelectFromModel static method), 1261

load() (evalml.pipelines.RFRegressorSelectFromModel static method), 1264

load() (evalml.pipelines.SimpleImputer static method), 1266

load() (evalml.pipelines.StackedEnsembleClassifier static method), 1268

load() (evalml.pipelines.StackedEnsembleRegressor static method), 1270

load() (evalml.pipelines.StandardScaler static method), 1273

load() (evalml.pipelines.SVMClassifier static method), 1275

load() (evalml.pipelines.SVMRegressor static method), 1277

load() (evalml.pipelines.TargetEncoder static method), 1280

load() (evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline static method), 1137

load() (evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline static method), 1144

load() (evalml.pipelines.time_series_classification_pipeline.TimeSeriesMulticlassClassificationPipeline static method), 1150

load() (evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase static method), 1156

load() (evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline static method), 1162

load() (evalml.pipelines.TimeSeriesBinaryClassificationPipeline static method), 1284

load() (evalml.pipelines.TimeSeriesClassificationPipeline static method), 1290

load() (evalml.pipelines.TimeSeriesMulticlassClassificationPipeline static method), 1297

load() (evalml.pipelines.TimeSeriesRegressionPipeline static method), 1303

load() (evalml.pipelines.Transformer static method), 1307

load() (evalml.pipelines.XGBoostClassifier static method), 1309

load() (evalml.pipelines.XGBoostRegressor static method), 1311

load_breast_cancer() (in module evalml.demos), 271

load_breast_cancer() (in module evalml.demos.breast_cancer), 268

load_churn() (in module evalml.demos), 271

load_churn() (in module evalml.demos.churn), 269

load_data() (in module evalml.preprocessing), 1319

load_data() (in module evalml.preprocessing.utils), 1318

load_diabetes() (in module evalml.demos), 271

load_diabetes() (in module evalml.demos.diabetes), 269

load_fraud() (in module evalml.demos), 271

load_fraud() (in module evalml.demos.fraud), 270

load_weather() (in module evalml.demos), 272

load_weather() (in module evalml.demos.weather), 270

load_wine() (in module evalml.demos), 272

load_wine() (in module evalml.demos.wine), 271

log_error_callback() (in module evalml.automl.callbacks), 205

log_subtitle() (in module evalml.utils), 1349

log_subtitle() (in module evalml.utils.logger), 1344

log_title() (in module evalml.utils), 1349

log_title() (in module evalml.utils.logger), 1344

logger (in module evalml.automl.callbacks), 205

logger (in module evalml.objectives.sensitivity_low_alert), 333

logger (in module evalml.pipelines.component_graph), 335

logger (in module evalml.pipelines.pipeline_base), 1123

logger (in module evalml.pipelines.utils), 1165

logger (in module evalml.pipelines.utils.logger), 1331

logger (in module evalml.utils.gen_utils), 1343

LogisticRegressionClassifier (class in evalml.pipelines), 1228

LogisticRegressionClassifier (class in evalml.pipelines.components), 1025

LogisticRegressionClassifier (class in

evalml.pipelines.components.estimators), 686

LogisticRegressionClassifier (class in *evalml.pipelines.components.estimators.classifiers*), 548

LogisticRegressionClassifier (class in *evalml.pipelines.components.estimators.classifiers*), 516

LogLossBinary (class in *evalml.objectives*), 433

LogLossBinary (class in *evalml.objectives.standard_metrics*), 360

LogLossMulticlass (class in *evalml.objectives*), 435

LogLossMulticlass (class in *evalml.objectives.standard_metrics*), 362

LogTransformer (class in *evalml.pipelines.components*), 1028

LogTransformer (class in *evalml.pipelines.components.transformers*), 897

LogTransformer (class in *evalml.pipelines.components.transformers.preprocessing*), 825

LogTransformer (class in *evalml.pipelines.components.transformers.preprocessing*), 792

LSA (class in *evalml.pipelines.components*), 1030

LSA (class in *evalml.pipelines.components.transformers*), 899

LSA (class in *evalml.pipelines.components.transformers.preprocessing*), 827

LSA (class in *evalml.pipelines.components.transformers.preprocessing*), 794

M

MAE (class in *evalml.objectives*), 437

MAE (class in *evalml.objectives.standard_metrics*), 364

make_balancing_dictionary() (in module *evalml.pipelines.components.utils*), 947

make_data_splitter() (in module *evalml.automl*), 215

make_data_splitter() (in module *evalml.automl.utils*), 208

make_pipeline() (in module *evalml.pipelines.utils*), 1165

make_timeseries_baseline_pipeline() (in module *evalml.pipelines.utils*), 1166

MAPE (class in *evalml.objectives*), 438

MAPE (class in *evalml.objectives.standard_metrics*), 365

MaxError (class in *evalml.objectives*), 440

MaxError (class in *evalml.objectives.standard_metrics*), 367

MCCBinary (class in *evalml.objectives*), 441

MCCBinary (class in *evalml.objectives.standard_metrics*), 368

MCCMulticlass (class in *evalml.objectives*), 443

MCCMulticlass (class in *evalml.objectives.standard_metrics*), 370

MeanSquaredLogError (class in *evalml.objectives*), 445

MeanSquaredLogError (class in *evalml.objectives.standard_metrics*), 371

MedianAE (class in *evalml.objectives*), 446

MedianAE (class in *evalml.objectives.standard_metrics*), 373

method (in module *evalml.utils.update_checker*), 1344

MethodPropertyNotFoundError, 272, 274

MissingComponentError, 273, 274

model_family() (*evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline* property), 1102

model_family() (*evalml.pipelines.BinaryClassificationPipeline* property), 1174

model_family() (*evalml.pipelines.classification_pipeline.ClassificationPipeline* property), 1109

model_family() (*evalml.pipelines.ClassificationPipeline* property), 1185

model_family() (*evalml.pipelines.components.Estimator* property), 998

model_family() (*evalml.pipelines.components.estimators.Estimator* property), 667

model_family() (*evalml.pipelines.components.estimators.estimator.Estimator* property), 639

model_family() (*evalml.pipelines.Estimator* property), 1208

model_family() (*evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline* property), 1119

model_family() (*evalml.pipelines.MulticlassClassificationPipeline* property), 1234

model_family() (*evalml.pipelines.pipeline_base.PipelineBase* property), 1125

model_family() (*evalml.pipelines.PipelineBase* property), 1245

model_family() (*evalml.pipelines.regression_pipeline.RegressionPipeline* property), 1131

model_family() (*evalml.pipelines.RegressionPipeline* property), 1257

model_family() (*evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline* property), 1137

model_family() (*evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline* property), 1144

model_family() (*evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline* property), 1150

model_family() (*evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase* property), 1157

model_family() (*evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline* property), 1162

model_family() (*evalml.pipelines.TimeSeriesBinaryClassificationPipeline* property), 1284

model_family() (*evalml.pipelines.TimeSeriesClassificationPipeline* property), 1284

[property](#)), 1291
[model_family\(\)](#) ([evalml.pipelines.TimeSeriesMulticlassClassificationPipeline](#)
[property](#)), 1297
[model_family\(\)](#) ([evalml.pipelines.TimeSeriesRegressionPipeline](#)
[property](#)), 1303
[ModelFamily](#) (class in [evalml.model_family](#)), 279
[ModelFamily](#) (class in [evalml.model_family.model_family](#)), 276
[modifies_features\(\)](#) ([evalml.pipelines.components.component_base.ComponentBase](#)
[property](#)), 944
[modifies_features\(\)](#) ([evalml.pipelines.components.ComponentBase](#)
[property](#)), 967
[modifies_target\(\)](#) ([evalml.pipelines.components.component_base.ComponentBase](#)
[property](#)), 944
[modifies_target\(\)](#) ([evalml.pipelines.components.ComponentBase](#)
[property](#)), 967
[module](#)
[evalml](#), 166
[evalml.automl](#), 166
[evalml.automl.automl_algorithm](#), 166
[evalml.automl.automl_algorithm.automl_algorithm](#), 166
[evalml.automl.automl_algorithm.default_algorithm](#), 168
[evalml.automl.automl_algorithm.iterative_algorithm](#), 170
[evalml.automl.automl_search](#), 197
[evalml.automl.callbacks](#), 204
[evalml.automl.engine](#), 179
[evalml.automl.engine.cf_engine](#), 179
[evalml.automl.engine.dask_engine](#), 182
[evalml.automl.engine.engine_base](#), 184
[evalml.automl.engine.sequential_engine](#), 188
[evalml.automl.pipeline_search_plots](#), 205
[evalml.automl.utils](#), 206
[evalml.data_checks](#), 218
[evalml.data_checks.class_imbalance_data_check](#), 218
[evalml.data_checks.data_check](#), 220
[evalml.data_checks.data_check_action](#), 221
[evalml.data_checks.data_check_action_code](#), 222
[evalml.data_checks.data_check_message](#), 223
[evalml.data_checks.data_check_message_code](#), 300
[evalml.data_checks.data_check_message_type](#), 224
[evalml.data_checks.data_checks](#), 226
[evalml.data_checks.datetime_format_data_check](#), 227
[evalml.data_checks.datetime_nan_data_check](#), 228
[evalml.data_checks.default_data_checks](#), 229
[evalml.data_checks.highly_null_data_check](#), 232
[evalml.data_checks.id_columns_data_check](#), 233
[evalml.data_checks.invalid_targets_data_check](#), 235
[evalml.data_checks.multicollinearity_data_check](#), 236
[evalml.data_checks.natural_language_nan_data_check](#), 237
[evalml.data_checks.no_variance_data_check](#), 239
[evalml.data_checks.outliers_data_check](#), 239
[evalml.data_checks.sparsity_data_check](#), 241
[evalml.data_checks.target_distribution_data_check](#), 243
[evalml.data_checks.target_leakage_data_check](#), 244
[evalml.data_checks.uniqueness_data_check](#), 245
[evalml.demos](#), 268
[evalml.demos.breast_cancer](#), 268
[evalml.demos.churn](#), 268
[evalml.demos.diabetes](#), 269
[evalml.demos.fraud](#), 269
[evalml.demos.weather](#), 270
[evalml.demos.wine](#), 270
[evalml.exceptions](#), 272
[evalml.exceptions.exceptions](#), 272
[evalml.model_family](#), 276
[evalml.model_family.model_family](#), 276
[evalml.model_family.utils](#), 278
[evalml.model_understanding](#), 280
[evalml.model_understanding.feature_explanations](#), 286
[evalml.model_understanding.force_plots](#), 288
[evalml.model_understanding.graphs](#), 289
[evalml.model_understanding.permutation_importance](#), 300

evalml.model_understanding.prediction_explanation,	evalml.pipelines.components.estimators.classifi
280	499
evalml.model_understanding.prediction_explanation,	evalml.pipelines.components.estimators.classifi
280	502
evalml.objectives, 314	evalml.pipelines.components.estimators.classifi
evalml.objectives.binary_classification_objective,	505
314	evalml.pipelines.components.estimators.classifi
evalml.objectives.cost_benefit_matrix,	509
317	evalml.pipelines.components.estimators.classifi
evalml.objectives.fraud_cost, 320	512
evalml.objectives.lead_scoring, 323	evalml.pipelines.components.estimators.classifi
evalml.objectives.multiclass_classification_objective,	516
326	evalml.pipelines.components.estimators.classifi
evalml.objectives.objective_base,	519
328	evalml.pipelines.components.estimators.classifi
evalml.objectives.regression_objective,	522
330	evalml.pipelines.components.estimators.classifi
evalml.objectives.sensitivity_low_alert,	525
333	evalml.pipelines.components.estimators.estimato
evalml.objectives.standard_metrics,	636
335	evalml.pipelines.components.estimators.regresso
evalml.objectives.time_series_regression_objective,	560
393	evalml.pipelines.components.estimators.regresso
evalml.objectives.utils, 396	559
evalml.pipelines, 475	evalml.pipelines.components.estimators.regresso
evalml.pipelines.binary_classification_pipeline,	561
1098	evalml.pipelines.components.estimators.regresso
evalml.pipelines.binary_classification_pipeline,	566
1104	evalml.pipelines.components.estimators.regresso
evalml.pipelines.classification_pipeline,	569
1106	evalml.pipelines.components.estimators.regresso
evalml.pipelines.component_graph,	572
1111	evalml.pipelines.components.estimators.regresso
evalml.pipelines.components, 475	575
evalml.pipelines.components.component_base,	579
942	evalml.pipelines.components.estimators.regresso
evalml.pipelines.components.component_base,	582
945	evalml.pipelines.components.estimators.regresso
evalml.pipelines.components.ensemble,	585
476	evalml.pipelines.components.estimators.regresso
evalml.pipelines.components.ensemble.stacked_ensemble_base,	588
476	evalml.pipelines.components.estimators.regresso
evalml.pipelines.components.ensemble.stacked_ensemble,	591
479	evalml.pipelines.components.estimators.regresso
evalml.pipelines.components.ensemble.stacked_ensemble,	594
482	evalml.pipelines.components.estimators.regresso
evalml.pipelines.components.estimators,	597
492	evalml.pipelines.components.transformers,
evalml.pipelines.components.estimators.classification,	709
492	evalml.pipelines.components.transformers.column
evalml.pipelines.components.estimators.classification,	858
492	evalml.pipelines.components.transformers.dimens
evalml.pipelines.components.estimators.classification,	709
495	

[evalml.pipelines.components.transformers.sequential_pipeline_redemption_data_transformers.sample](#)
 709 [838](#)
[evalml.pipelines.components.transformers.sequential_pipeline_redemption_pca_transformers.sample](#)
 712 [838](#)
[evalml.pipelines.components.transformers.sequential_pipeline_components.transformers.sample](#)
 719 [841](#)
[evalml.pipelines.components.transformers.sequential_pipeline_components.transformers.sample](#)
 719 [844](#)
[evalml.pipelines.components.transformers.sequential_pipeline_components.transformers.scaler](#)
 722 [853](#)
[evalml.pipelines.components.transformers.sequential_pipeline_components.transformers.scaler](#)
 726 [853](#)
[evalml.pipelines.components.transformers.sequential_pipeline_components.transformers.transf](#)
 738 [867](#)
[evalml.pipelines.components.transformers.sequential_pipeline_components.selector,](#)
 738 [946](#)
[evalml.pipelines.components.transformers.sequential_pipeline_multiclass_classification_feature_selector](#)
 741 [1115](#)
[evalml.pipelines.components.transformers.sequential_pipeline_regression_feature_selector](#)
 744 [evalml.pipelines.pipeline_meta, 1127](#)
[evalml.pipelines.components.transformers.sequential_pipeline_regression,](#)
 756 [1128](#)
[evalml.pipelines.components.transformers.sequential_pipeline_time_series_classification_pip](#)
 756 [1133](#)
[evalml.pipelines.components.transformers.sequential_pipeline_time_series_pipeline_base,](#)
 759 [1153](#)
[evalml.pipelines.components.transformers.sequential_pipeline_time_series_regression_pipelin](#)
 762 [1159](#)
[evalml.pipelines.components.transformers.sequential_pipeline_utils.k65](#)
 764 [evalml.preprocessing, 1312](#)
[evalml.pipelines.components.transformers.sequential_pipeline_utils.preprocessing.data_splitters,](#)
 778 [1312](#)
[evalml.pipelines.components.transformers.sequential_pipeline_utils.preprocessing.data_splitters.time_series,](#)
 778 [1313](#)
[evalml.pipelines.components.transformers.sequential_pipeline_utils.preprocessing.data_splitters.transforming_va](#)
 781 [1314](#)
[evalml.pipelines.components.transformers.sequential_pipeline_utils.preprocessing.data_splitters.time_series,](#)
 784 [evalml.problem_types, 1322](#)
[evalml.pipelines.components.transformers.sequential_pipeline_utils.preprocessing.data_splitters.time_series,](#)
 786 [1322](#)
[evalml.pipelines.components.transformers.sequential_pipeline_utils.preprocessing.data_splitters.time_series,](#)
 789 [evalml.tuners, 1327](#)
[evalml.pipelines.components.transformers.sequential_pipeline_utils.preprocessing.data_splitters.time_series,](#)
 792 [1327](#)
[evalml.pipelines.components.transformers.sequential_pipeline_utils.preprocessing.data_splitters.time_series,](#)
 794 [1329](#)
[evalml.pipelines.components.transformers.sequential_pipeline_utils.preprocessing.data_splitters.time_series,](#)
 797 [evalml.tuners.tuner, 1332](#)
[evalml.pipelines.components.transformers.sequential_pipeline_utils.preprocessing.data_splitters.time_series,](#)
 800 [evalml.utils, 1338](#)
[evalml.pipelines.components.transformers.sequential_pipeline_utils.preprocessing.data_splitters.time_series,](#)
 802 [evalml.utils.cli_utils, 1339](#)
[evalml.pipelines.components.transformers.sequential_pipeline_utils.preprocessing.data_splitters.time_series,](#)
 805 [evalml.utils.logger, 1344](#)

[evalml.utils.update_checker](#), 1344
[evalml.utils.woodwork_utils](#), 1345
MSE (class in [evalml.objectives](#)), 448
MSE (class in [evalml.objectives.standard_metrics](#)), 374
[MulticlassClassificationObjective](#) (class in [evalml.objectives](#)), 449
[MulticlassClassificationObjective](#) (class in [evalml.objectives.multiclass_classification_objective](#)), 326
[MulticlassClassificationPipeline](#) (class in [evalml.pipelines](#)), 1231
[MulticlassClassificationPipeline](#) (class in [evalml.pipelines.multiclass_classification_pipeline](#)), 1116
[MulticollinearityDataCheck](#) (class in [evalml.data_checks](#)), 260
[MulticollinearityDataCheck](#) (class in [evalml.data_checks.multicollinearity_data_check](#)), 236

N

[name\(\)](#) ([evalml.data_checks.class_imbalance_data_check.ClassImbalanceDataCheck](#) method), 219
[name\(\)](#) ([evalml.data_checks.ClassImbalanceDataCheck](#) method), 249
[name\(\)](#) ([evalml.data_checks.data_check.DataCheck](#) method), 221
[name\(\)](#) ([evalml.data_checks.data_check_action_code.DataCheckActionCode](#) method), 222
[name\(\)](#) ([evalml.data_checks.data_check_message_code.DataCheckMessageCode](#) method), 226
[name\(\)](#) ([evalml.data_checks.data_check_message_type.DataCheckMessageType](#) method), 227
[name\(\)](#) ([evalml.data_checks.DataCheck](#) method), 250
[name\(\)](#) ([evalml.data_checks.DataCheckActionCode](#) method), 251
[name\(\)](#) ([evalml.data_checks.DataCheckMessageCode](#) method), 253
[name\(\)](#) ([evalml.data_checks.DataCheckMessageType](#) method), 254
[name\(\)](#) ([evalml.data_checks.datetime_format_data_check.DateTimeFormatDataCheck](#) method), 228
[name\(\)](#) ([evalml.data_checks.datetime_nan_data_check.DateTimeNaNDataCheck](#) method), 229
[name\(\)](#) ([evalml.data_checks.DateTimeFormatDataCheck](#) method), 255
[name\(\)](#) ([evalml.data_checks.DateTimeNaNDataCheck](#) method), 255
[name\(\)](#) ([evalml.data_checks.highly_null_data_check.HighlyNullDataCheck](#) method), 232
[name\(\)](#) ([evalml.data_checks.HighlyNullDataCheck](#) method), 257
[name\(\)](#) ([evalml.data_checks.id_columns_data_check.IDColumnsDataCheck](#) method), 234
[name\(\)](#) ([evalml.data_checks.IDColumnsDataCheck](#) method), 258
[name\(\)](#) ([evalml.data_checks.invalid_targets_data_check.InvalidTargetDataCheck](#) method), 235
[name\(\)](#) ([evalml.data_checks.InvalidTargetDataCheck](#) method), 260
[name\(\)](#) ([evalml.data_checks.multicollinearity_data_check.MulticollinearityDataCheck](#) method), 236
[name\(\)](#) ([evalml.data_checks.MulticollinearityDataCheck](#) method), 260
[name\(\)](#) ([evalml.data_checks.natural_language_nan_data_check.NaturalLanguageNaNDataCheck](#) method), 238
[name\(\)](#) ([evalml.data_checks.NaturalLanguageNaNDataCheck](#) method), 261
[name\(\)](#) ([evalml.data_checks.no_variance_data_check.NoVarianceDataCheck](#) method), 239
[name\(\)](#) ([evalml.data_checks.NoVarianceDataCheck](#) method), 262
[name\(\)](#) ([evalml.data_checks.outliers_data_check.OutliersDataCheck](#) method), 240
[name\(\)](#) ([evalml.data_checks.OutliersDataCheck](#) method), 263
[name\(\)](#) ([evalml.data_checks.sparsity_data_check.SparsityDataCheck](#) method), 241
[name\(\)](#) ([evalml.data_checks.SparsityDataCheck](#) method), 263
[name\(\)](#) ([evalml.data_checks.target_distribution_data_check.TargetDistributionDataCheck](#) method), 243
[name\(\)](#) ([evalml.data_checks.target_leakage_data_check.TargetLeakageDataCheck](#) method), 245
[name\(\)](#) ([evalml.data_checks.TargetDistributionDataCheck](#) method), 265
[name\(\)](#) ([evalml.data_checks.TargetLeakageDataCheck](#) method), 265
[name\(\)](#) ([evalml.data_checks.uniqueness_data_check.UniquenessDataCheck](#) method), 246
[name\(\)](#) ([evalml.data_checks.UniquenessDataCheck](#) method), 267
[name\(\)](#) ([evalml.exceptions.exceptions.PartialDependenceErrorCode](#) method), 273
[name\(\)](#) ([evalml.exceptions.exceptions.PartialDependenceErrorCode](#) method), 275
[name\(\)](#) ([evalml.exceptions.exceptions.PartialDependenceErrorCode](#) method), 277
[name\(\)](#) ([evalml.model_family.ModelFamily](#) method), 279
[name\(\)](#) ([evalml.model_family.ModelFamily](#) method), 284
[name\(\)](#) ([evalml.model_understanding.prediction_explanations.explainers.BinaryClassificationObjective](#) property), 316
[name\(\)](#) ([evalml.objectives.BinaryClassificationObjective](#) property), 414
[name\(\)](#) ([evalml.objectives.multiclass_classification_objective.MulticlassClassificationObjective](#) property), 327

method), 960

needs_fitting() (evalml.pipelines.components.CatBoostClassifier method), 963

needs_fitting() (evalml.pipelines.components.CatBoostRegressor method), 965

needs_fitting() (evalml.pipelines.components.component_base.ComponentBase method), 944

needs_fitting() (evalml.pipelines.components.ComponentBase method), 967

needs_fitting() (evalml.pipelines.components.DateTimeFeaturizer method), 970

needs_fitting() (evalml.pipelines.components.DecisionTreeClassifier method), 973

needs_fitting() (evalml.pipelines.components.DecisionTreeRegressor method), 976

needs_fitting() (evalml.pipelines.components.DFSTransformer method), 981

needs_fitting() (evalml.pipelines.components.DropNullColumns method), 985

needs_fitting() (evalml.pipelines.components.DropRowsTransformer method), 988

needs_fitting() (evalml.pipelines.components.ElasticNetClassifier method), 990

needs_fitting() (evalml.pipelines.components.ElasticNetRegressor method), 993

needs_fitting() (evalml.pipelines.components.EmailFeaturizer method), 995

needs_fitting() (evalml.pipelines.components.ensemble_stacked_ensemble.BaseStackedEnsembleBase method), 478

needs_fitting() (evalml.pipelines.components.ensemble_stacked_ensemble.ClassifiedStackedEnsembleClassifier method), 481

needs_fitting() (evalml.pipelines.components.ensemble_stacked_ensemble.RegressedStackedEnsembleRegressor method), 484

needs_fitting() (evalml.pipelines.components.ensemble_stacked_ensemble.BaseStackedEnsembleBase method), 487

needs_fitting() (evalml.pipelines.components.ensemble_stacked_ensemble.ClassifiedStackedEnsembleClassifier method), 489

needs_fitting() (evalml.pipelines.components.ensemble_stacked_ensemble.RegressedStackedEnsembleRegressor method), 491

needs_fitting() (evalml.pipelines.components.Estimator method), 998

needs_fitting() (evalml.pipelines.components.estimator_base.BaseEstimator method), 643

needs_fitting() (evalml.pipelines.components.estimator_base.BaseClassifier method), 646

needs_fitting() (evalml.pipelines.components.estimator_base.BaseRegressor method), 648

needs_fitting() (evalml.pipelines.components.estimator_base.CatBoostClassifier method), 651

needs_fitting() (evalml.pipelines.components.estimator_base.CatBoostRegressor method), 654

needs_fitting() (evalml.pipelines.components.estimator_base.classifier_base.BaseClassifier method), 495

needs_fitting() (evalml.pipelines.components.estimator_base.classifier_base.ClassifiedPipelineClassifier method), 530

needs_fitting() (evalml.pipelines.components.estimators.classifiers.CatBoostClassifier method), 498

needs_fitting() (evalml.pipelines.components.estimators.classifiers.CatBoostRegressor method), 533

needs_fitting() (evalml.pipelines.components.estimators.classifiers.ComponentBase method), 501

needs_fitting() (evalml.pipelines.components.estimators.classifiers.ComponentBase method), 535

needs_fitting() (evalml.pipelines.components.estimators.classifiers.DateTimeFeaturizer method), 504

needs_fitting() (evalml.pipelines.components.estimators.classifiers.DecisionTreeClassifier method), 538

needs_fitting() (evalml.pipelines.components.estimators.classifiers.DecisionTreeRegressor method), 508

needs_fitting() (evalml.pipelines.components.estimators.classifiers.DFSTransformer method), 541

needs_fitting() (evalml.pipelines.components.estimators.classifiers.DropNullColumns method), 511

needs_fitting() (evalml.pipelines.components.estimators.classifiers.DropRowsTransformer method), 545

needs_fitting() (evalml.pipelines.components.estimators.classifiers.ElasticNetClassifier method), 515

needs_fitting() (evalml.pipelines.components.estimators.classifiers.ElasticNetRegressor method), 548

needs_fitting() (evalml.pipelines.components.estimators.classifiers.EmailFeaturizer method), 518

needs_fitting() (evalml.pipelines.components.estimators.classifiers.ensemble_stacked_ensemble.BaseStackedEnsembleBase method), 550

needs_fitting() (evalml.pipelines.components.estimators.classifiers.ensemble_stacked_ensemble.ClassifiedStackedEnsembleClassifier method), 553

needs_fitting() (evalml.pipelines.components.estimators.classifiers.ensemble_stacked_ensemble.RegressedStackedEnsembleRegressor method), 521

needs_fitting() (evalml.pipelines.components.estimators.classifiers.ensemble_stacked_ensemble.BaseStackedEnsembleBase method), 524

needs_fitting() (evalml.pipelines.components.estimators.classifiers.ensemble_stacked_ensemble.ClassifiedStackedEnsembleClassifier method), 556

needs_fitting() (evalml.pipelines.components.estimators.classifiers.ensemble_stacked_ensemble.RegressedStackedEnsembleRegressor method), 527

needs_fitting() (evalml.pipelines.components.estimators.classifiers.Estimator method), 558

needs_fitting() (evalml.pipelines.components.estimators.DecisionTreeARIMARegressor method), 657

needs_fitting() (evalml.pipelines.components.estimators.DecisionTreeBaseLineClassifier method), 660

needs_fitting() (evalml.pipelines.components.estimators.ElasticNetClassifier method), 663

needs_fitting() (evalml.pipelines.components.estimators.ElasticNetRegressor method), 665

needs_fitting() (evalml.pipelines.components.estimators.Estimator method), 668

needs_fitting() (evalml.pipelines.components.estimator_base.classifier_base.BaseClassifier method), 639

needs_fitting() (evalml.pipelines.components.estimator_base.classifier_base.ClassifiedPipelineClassifier method), 530

needs_fitting() (evalml.pipelines.components.estimators.ExtraTreesClassifier method), 639

method), 1035

needs_fitting() (evalml.pipelines.components.Oversampler method), 1037

needs_fitting() (evalml.pipelines.components.PCA method), 1039

needs_fitting() (evalml.pipelines.components.PerColumnImputer method), 1042

needs_fitting() (evalml.pipelines.components.PolynomialDetrender method), 1044

needs_fitting() (evalml.pipelines.components.ProphetRegressor method), 1046

needs_fitting() (evalml.pipelines.components.RandomForestClassifier method), 1049

needs_fitting() (evalml.pipelines.components.RandomForestRegressor method), 1051

needs_fitting() (evalml.pipelines.components.RFClassifier method), 1054

needs_fitting() (evalml.pipelines.components.RFRegressor method), 1057

needs_fitting() (evalml.pipelines.components.SimpleImputer method), 1063

needs_fitting() (evalml.pipelines.components.StackedEnsembleClassifier method), 1066

needs_fitting() (evalml.pipelines.components.StackedEnsembleRegressor method), 1068

needs_fitting() (evalml.pipelines.components.StandardScaler method), 1071

needs_fitting() (evalml.pipelines.components.SVMClassifier method), 1073

needs_fitting() (evalml.pipelines.components.SVMRegressor method), 1075

needs_fitting() (evalml.pipelines.components.TargetEncoder method), 1078

needs_fitting() (evalml.pipelines.components.TargetImputer method), 1080

needs_fitting() (evalml.pipelines.components.TextFeaturizer method), 1083

needs_fitting() (evalml.pipelines.components.TimeSeriesBaselineEstimator method), 1085

needs_fitting() (evalml.pipelines.components.Transformers method), 1088

needs_fitting() (evalml.pipelines.components.transformers.ColumnSelector method), 860

needs_fitting() (evalml.pipelines.components.transformers.DateTimeFeaturizer method), 873

needs_fitting() (evalml.pipelines.components.transformers.DFSTransformer method), 878

needs_fitting() (evalml.pipelines.components.transformers.DimensionalityReducer method), 711

needs_fitting() (evalml.pipelines.components.transformers.DimensionalityReducer method), 716

needs_fitting() (evalml.pipelines.components.transformers.DimensionalityReducer method), 719

needs_fitting() (evalml.pipelines.components.transformers.DimensionalityReducer method), 714

needs_fitting() (evalml.pipelines.components.transformers.DropNull method), 882

needs_fitting() (evalml.pipelines.components.transformers.DropRow method), 884

needs_fitting() (evalml.pipelines.components.transformers.EmailFeaturizer method), 887

needs_fitting() (evalml.pipelines.components.transformers.encoders.OrdinalEncoder method), 721

needs_fitting() (evalml.pipelines.components.transformers.encoders.Regions method), 731

needs_fitting() (evalml.pipelines.components.transformers.encoders.RandomClassifier method), 725

needs_fitting() (evalml.pipelines.components.transformers.encoders.RandomRegressor method), 734

needs_fitting() (evalml.pipelines.components.transformers.encoders.SelectFromModel method), 729

needs_fitting() (evalml.pipelines.components.transformers.encoders.SelectFromModel method), 737

needs_fitting() (evalml.pipelines.components.transformers.feature_selection method), 740

needs_fitting() (evalml.pipelines.components.transformers.feature_selection method), 749

needs_fitting() (evalml.pipelines.components.transformers.feature_selection method), 743

needs_fitting() (evalml.pipelines.components.transformers.feature_selection method), 746

needs_fitting() (evalml.pipelines.components.transformers.feature_selection method), 752

needs_fitting() (evalml.pipelines.components.transformers.feature_selection method), 755

needs_fitting() (evalml.pipelines.components.transformers.FeatureSelector method), 889

needs_fitting() (evalml.pipelines.components.transformers.Imputer method), 892

needs_fitting() (evalml.pipelines.components.transformers.imputers method), 770

needs_fitting() (evalml.pipelines.components.transformers.imputers method), 758

needs_fitting() (evalml.pipelines.components.transformers.imputers method), 761

needs_fitting() (evalml.pipelines.components.transformers.imputers method), 772

needs_fitting() (evalml.pipelines.components.transformers.imputers method), 764

needs_fitting() (evalml.pipelines.components.transformers.imputers method), 775

needs_fitting() (evalml.pipelines.components.transformers.imputers method), 766

needs_fitting() (evalml.pipelines.components.transformers.imputers method), 777

needs_fitting() (evalml.pipelines.components.transformers.LabelEncoder method), 894

needs_fitting() (evalml.pipelines.components.transformers.LinearDiscriminantAnalysis method), 894

Index 1483

[method](#)), 1200
[needs_fitting\(\)](#) ([evalml.pipelines.ElasticNetClassifier](#)
[method](#)), 1203
[needs_fitting\(\)](#) ([evalml.pipelines.ElasticNetRegressor](#)
[method](#)), 1205
[needs_fitting\(\)](#) ([evalml.pipelines.Estimator](#)
[method](#)), 1208
[needs_fitting\(\)](#) ([evalml.pipelines.ExtraTreesClassifier](#)
[method](#)), 1211
[needs_fitting\(\)](#) ([evalml.pipelines.ExtraTreesRegressor](#)
[method](#)), 1214
[needs_fitting\(\)](#) ([evalml.pipelines.FeatureSelector](#)
[method](#)), 1216
[needs_fitting\(\)](#) ([evalml.pipelines.KNeighborsClassifier](#)
[method](#)), 1219
[needs_fitting\(\)](#) ([evalml.pipelines.LightGBMClassifier](#)
[method](#)), 1222
[needs_fitting\(\)](#) ([evalml.pipelines.LightGBMRegressor](#)
[method](#)), 1225
[needs_fitting\(\)](#) ([evalml.pipelines.LinearRegressor](#)
[method](#)), 1227
[needs_fitting\(\)](#) ([evalml.pipelines.LogisticRegressionClassifier](#)
[method](#)), 1230
[needs_fitting\(\)](#) ([evalml.pipelines.OneHotEncoder](#)
[method](#)), 1239
[needs_fitting\(\)](#) ([evalml.pipelines.PerColumnImputer](#)
[method](#)), 1241
[needs_fitting\(\)](#) ([evalml.pipelines.ProphetRegressor](#)
[method](#)), 1248
[needs_fitting\(\)](#) ([evalml.pipelines.RandomForestClassifier](#)
[method](#)), 1251
[needs_fitting\(\)](#) ([evalml.pipelines.RandomForestRegressor](#)
[method](#)), 1253
[needs_fitting\(\)](#) ([evalml.pipelines.RFClassifierSelectFromModel](#)
[method](#)), 1261
[needs_fitting\(\)](#) ([evalml.pipelines.RFRegressorSelectFromModel](#)
[method](#)), 1264
[needs_fitting\(\)](#) ([evalml.pipelines.SimpleImputer](#)
[method](#)), 1266
[needs_fitting\(\)](#) ([evalml.pipelines.StackedEnsembleClassifier](#)
[method](#)), 1268
[needs_fitting\(\)](#) ([evalml.pipelines.StackedEnsembleRegressor](#)
[method](#)), 1270
[needs_fitting\(\)](#) ([evalml.pipelines.StandardScaler](#)
[method](#)), 1273
[needs_fitting\(\)](#) ([evalml.pipelines.SVMClassifier](#)
[method](#)), 1275
[needs_fitting\(\)](#) ([evalml.pipelines.SVMRegressor](#)
[method](#)), 1277
[needs_fitting\(\)](#) ([evalml.pipelines.TargetEncoder](#)
[method](#)), 1280
[needs_fitting\(\)](#) ([evalml.pipelines.Transformer](#)
[method](#)), 1307
[needs_fitting\(\)](#) ([evalml.pipelines.XGBoostClassifier](#)
[method](#)), 1309
[needs_fitting\(\)](#) ([evalml.pipelines.XGBoostRegressor](#)
[method](#)), 1311
[new\(\)](#) ([evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline](#)
[method](#)), 1102
[new\(\)](#) ([evalml.pipelines.BinaryClassificationPipeline](#)
[method](#)), 1174
[new\(\)](#) ([evalml.pipelines.classification_pipeline.ClassificationPipeline](#)
[method](#)), 1109
[new\(\)](#) ([evalml.pipelines.ClassificationPipeline](#) [method](#)),
1185
[new\(\)](#) ([evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline](#)
[method](#)), 1119
[new\(\)](#) ([evalml.pipelines.MulticlassClassificationPipeline](#)
[method](#)), 1234
[new\(\)](#) ([evalml.pipelines.pipeline_base.PipelineBase](#)
[method](#)), 1125
[new\(\)](#) ([evalml.pipelines.PipelineBase](#) [method](#)), 1245
[new\(\)](#) ([evalml.pipelines.regression_pipeline.RegressionPipeline](#)
[method](#)), 1132
[new\(\)](#) ([evalml.pipelines.RegressionPipeline](#) [method](#)),
1257
[new\(\)](#) ([evalml.pipelines.time_series_classification_pipelines.TimeSeriesBinaryClassificationPipeline](#)
[method](#)), 1137
[new\(\)](#) ([evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline](#)
[method](#)), 1144
[new\(\)](#) ([evalml.pipelines.time_series_classification_pipelines.TimeSeriesMulticlassClassificationPipeline](#)
[method](#)), 1150
[new\(\)](#) ([evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase](#)
[method](#)), 1157
[new\(\)](#) ([evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline](#)
[method](#)), 1162
[new\(\)](#) ([evalml.pipelines.TimeSeriesBinaryClassificationPipeline](#)
[method](#)), 1284
[new\(\)](#) ([evalml.pipelines.TimeSeriesClassificationPipeline](#)
[method](#)), 1291
[new\(\)](#) ([evalml.pipelines.TimeSeriesMulticlassClassificationPipeline](#)
[method](#)), 1297
[new\(\)](#) ([evalml.pipelines.TimeSeriesRegressionPipeline](#)
[method](#)), 1303
[next_batch\(\)](#) ([evalml.automl.automl_algorithm.automl_algorithm.AutoMLAlgorithm](#)
[method](#)), 168
[next_batch\(\)](#) ([evalml.automl.automl_algorithm.AutoMLAlgorithm](#)
[method](#)), 175
[next_batch\(\)](#) ([evalml.automl.automl_algorithm.default_algorithm.DefaultAlgorithm](#)
[method](#)), 170
[next_batch\(\)](#) ([evalml.automl.automl_algorithm.DefaultAlgorithm](#)
[method](#)), 177
[next_batch\(\)](#) ([evalml.automl.automl_algorithm.iterative_algorithm.IterativeAlgorithm](#)
[method](#)), 173
[next_batch\(\)](#) ([evalml.automl.automl_algorithm.IterativeAlgorithm](#)
[method](#)), 179
[NoParamsException](#), 1333, 1335
[NoPositiveLabelException](#), 273, 274

[normalize_confusion_matrix\(\)](#) (in module [evalml.model_understanding](#)), 311
[normalize_confusion_matrix\(\)](#) (in module [evalml.model_understanding.graphs](#)), 296
[NoVarianceDataCheck](#) (class in [evalml.data_checks](#)), 262
[NoVarianceDataCheck](#) (class in [evalml.data_checks.no_variance_data_check](#)), 239
[NullsInColumnWarning](#), 273, 275
[number_of_features\(\)](#) (in module [evalml.preprocessing](#)), 1319
[number_of_features\(\)](#) (in module [evalml.preprocessing.utils](#)), 1318
[numeric_and_boolean_ww](#) (in module [evalml.utils.woodwork_utils](#)), 1345

O

[objective_function\(\)](#) ([evalml.objectives.AccuracyBinary](#) method), 400
[objective_function\(\)](#) ([evalml.objectives.AccuracyMulticlass](#) method), 402
[objective_function\(\)](#) ([evalml.objectives.AUC](#) method), 404
[objective_function\(\)](#) ([evalml.objectives.AUCMacro](#) method), 405
[objective_function\(\)](#) ([evalml.objectives.AUCMicro](#) method), 407
[objective_function\(\)](#) ([evalml.objectives.AUCWeighted](#) method), 408
[objective_function\(\)](#) ([evalml.objectives.BalancedAccuracyBinary](#) method), 410
[objective_function\(\)](#) ([evalml.objectives.BalancedAccuracyMulticlass](#) method), 412
[objective_function\(\)](#) ([evalml.objectives.binary_classification_objective.BinaryClassificationObjective](#) class method), 316
[objective_function\(\)](#) ([evalml.objectives.BinaryClassificationObjective](#) class method), 414
[objective_function\(\)](#) ([evalml.objectives.cost_benefit_matrix.CostBenefitMatrix](#) method), 319
[objective_function\(\)](#) ([evalml.objectives.CostBenefitMatrix](#) method), 417
[objective_function\(\)](#) ([evalml.objectives.ExpVariance](#) method), 419
[objective_function\(\)](#) ([evalml.objectives.F1](#) method), 420
[objective_function\(\)](#) ([evalml.objectives.F1Macro](#) method), 422
[objective_function\(\)](#) ([evalml.objectives.F1Micro](#) method), 423
[objective_function\(\)](#) ([evalml.objectives.F1Weighted](#) method), 425
[objective_function\(\)](#) ([evalml.objectives.fraud_cost.FraudCost](#) method), 322
[objective_function\(\)](#) ([evalml.objectives.FraudCost](#) method), 427
[objective_function\(\)](#) ([evalml.objectives.Gini](#) method), 430
[objective_function\(\)](#) ([evalml.objectives.lead_scoring.LeadScoring](#) method), 325
[objective_function\(\)](#) ([evalml.objectives.LeadScoring](#) method), 432
[objective_function\(\)](#) ([evalml.objectives.LogLossBinary](#) method), 435
[objective_function\(\)](#) ([evalml.objectives.LogLossMulticlass](#) method), 436
[objective_function\(\)](#) ([evalml.objectives.MAE](#) method), 438
[objective_function\(\)](#) ([evalml.objectives.MAPE](#) method), 439
[objective_function\(\)](#) ([evalml.objectives.MaxError](#) method), 441
[objective_function\(\)](#) ([evalml.objectives.MCCBinary](#) method), 443
[objective_function\(\)](#) ([evalml.objectives.MCCMulticlass](#) method), 444
[objective_function\(\)](#) ([evalml.objectives.MeanSquaredLogError](#) method), 446
[objective_function\(\)](#) ([evalml.objectives.MedianAE](#) method), 447
[objective_function\(\)](#) ([evalml.objectives.MSE](#) method), 449
[objective_function\(\)](#) ([evalml.objectives.multiclass_classification_objective.MulticlassClassificationObjective](#) class method), 327
[objective_function\(\)](#) ([evalml.objectives.MulticlassClassificationObjective](#) class method), 450
[objective_function\(\)](#)

<code>(evalml.objectives.objective_base.ObjectiveBase</code> <code>class method), 329</code>	<code>(evalml.objectives.standard_metrics.AUC</code> <code>method), 342</code>
<code>objective_function()</code> <code>(evalml.objectives.ObjectiveBase</code> <code>class</code> <code>method), 452</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.AUCMacro</code> <code>method), 343</code>
<code>objective_function()</code> <code>(evalml.objectives.Precision</code> <code>method), 455</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.AUCMicro</code> <code>method), 344</code>
<code>objective_function()</code> <code>(evalml.objectives.PrecisionMacro</code> <code>method),</code> <code>456</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.AUCWeighted</code> <code>method), 346</code>
<code>objective_function()</code> <code>(evalml.objectives.PrecisionMicro</code> <code>method),</code> <code>458</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.BalancedAccuracyBinary</code> <code>method), 348</code>
<code>objective_function()</code> <code>(evalml.objectives.PrecisionWeighted</code> <code>method),</code> <code>459</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.BalancedAccuracyMulticlass</code> <code>method), 349</code>
<code>objective_function()</code> <code>(evalml.objectives.R2</code> <code>method), 461</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.ExpVariance</code> <code>method), 351</code>
<code>objective_function()</code> <code>(evalml.objectives.Recall</code> <code>method), 463</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.F1</code> <code>method), 353</code>
<code>objective_function()</code> <code>(evalml.objectives.RecallMacro</code> <code>method),</code> <code>464</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.F1Macro</code> <code>method), 354</code>
<code>objective_function()</code> <code>(evalml.objectives.RecallMicro</code> <code>method),</code> <code>466</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.F1Micro</code> <code>method), 356</code>
<code>objective_function()</code> <code>(evalml.objectives.RecallWeighted</code> <code>method),</code> <code>467</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.F1Weighted</code> <code>method), 357</code>
<code>objective_function()</code> <code>(evalml.objectives.regression_objective.RegressionObjective</code> <code>class method), 332</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.Gini</code> <code>method), 359</code>
<code>objective_function()</code> <code>(evalml.objectives.RegressionObjective</code> <code>class</code> <code>method), 469</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.LogLossBinary</code> <code>method), 361</code>
<code>objective_function()</code> <code>(evalml.objectives.RootMeanSquaredError</code> <code>method), 471</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.LogLossMulticlass</code> <code>method), 363</code>
<code>objective_function()</code> <code>(evalml.objectives.RootMeanSquaredLogError</code> <code>method), 472</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.MAE</code> <code>method), 364</code>
<code>objective_function()</code> <code>(evalml.objectives.sensitivity_low_alert.SensitivityLowAlert</code> <code>method), 334</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.MAPE</code> <code>method), 366</code>
<code>objective_function()</code> <code>(evalml.objectives.SensitivityLowAlert</code> <code>method), 474</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.MaxError</code> <code>method), 367</code>
<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.AccuracyBinary</code> <code>method), 338</code>	<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.MCCBinary</code> <code>method), 369</code>
<code>objective_function()</code> <code>(evalml.objectives.standard_metrics.AccuracyMulticlass</code> <code>method), 340</code>	<code>objective_function()</code>
<code>objective_function()</code>	<code>objective_function()</code>

([evalml.objectives.standard_metrics.MCCMulticlass](#)
[method](#)), 371
 ([evalml.pipelines.components](#)), 1032

OneHotEncoder (class in [evalml.pipelines.components.transformers](#)),
[901](#)

objective_function() ([evalml.objectives.standard_metrics.MeanSquaredLogError](#)
[method](#)), 372
 OneHotEncoder (class in [evalml.pipelines.components.transformers.encoders](#)),
[732](#)

objective_function() ([evalml.objectives.standard_metrics.MedianAE](#)
[method](#)), 374
 OneHotEncoder (class in [evalml.pipelines.components.transformers.encoders.onehot_encoder](#)),
[722](#)

objective_function() ([evalml.objectives.standard_metrics.MSE](#)
[method](#)), 375
 OneHotEncoderMeta (class in [evalml.pipelines.components.transformers.encoders.onehot_encoder](#)),
[725](#)

objective_function() ([evalml.objectives.standard_metrics.Precision](#)
[method](#)), 377
 optimize_threshold() ([evalml.objectives.AccuracyBinary](#) method),
[400](#)

objective_function() ([evalml.objectives.standard_metrics.PrecisionMacro](#)
[method](#)), 379
 optimize_threshold() ([evalml.objectives.AUC](#) method), 404

objective_function() ([evalml.objectives.standard_metrics.PrecisionMicro](#)
[method](#)), 380
 optimize_threshold() ([evalml.objectives.BalancedAccuracyBinary](#) method), 410

objective_function() ([evalml.objectives.standard_metrics.PrecisionWeighted](#)
[method](#)), 382
 optimize_threshold() ([evalml.objectives.binary_classification_objective.BinaryClassificationObjective](#) method), 316

objective_function() ([evalml.objectives.standard_metrics.R2](#)
[method](#)), 383
 optimize_threshold() ([evalml.objectives.BinaryClassificationObjective](#) method), 414

objective_function() ([evalml.objectives.standard_metrics.Recall](#)
[method](#)), 385
 optimize_threshold() ([evalml.objectives.cost_benefit_matrix.CostBenefitMatrix](#) method), 319

objective_function() ([evalml.objectives.standard_metrics.RecallMacro](#)
[method](#)), 387
 optimize_threshold() ([evalml.objectives.CostBenefitMatrix](#) method), 417

objective_function() ([evalml.objectives.standard_metrics.RecallMicro](#)
[method](#)), 388
 optimize_threshold() ([evalml.objectives.F1](#) method), 421

objective_function() ([evalml.objectives.standard_metrics.RecallWeighted](#)
[method](#)), 390
 optimize_threshold() ([evalml.objectives.fraud_cost.FraudCost](#) method), 322

objective_function() ([evalml.objectives.standard_metrics.RootMeanSquaredError](#)
[method](#)), 391
 optimize_threshold() ([evalml.objectives.FraudCost](#) method), 427

objective_function() ([evalml.objectives.standard_metrics.RootMeanSquaredLogError](#)
[method](#)), 393
 optimize_threshold() ([evalml.objectives.Gini](#) method), 430

objective_function() ([evalml.objectives.standard_metrics.RootMeanSquaredLogError](#)
[method](#)), 393
 optimize_threshold() ([evalml.objectives.lead_scoring.LeadScoring](#) method), 325

objective_function() ([evalml.objectives.time_series_regression_objective.TimeSeriesRegressionObjective](#)
[class method](#)), 395
 optimize_threshold() ([evalml.objectives.LeadScoring](#) method), 433

ObjectiveBase (class in [evalml.objectives](#)), 451

ObjectiveBase (class in [evalml.objectives.objective_base](#)), 328
 optimize_threshold() ([evalml.objectives.LogLossBinary](#) method), 435

ObjectiveCreationError, 273, 275

ObjectiveNotFoundError, 273, 275
 optimize_threshold() ([evalml.objectives.MCCBinary](#) method), 443

OneHotEncoder (class in [evalml.pipelines](#)), 1236

OneHotEncoder (class in [evalml.pipelines.components](#)), 1032

[optimize_threshold\(\)](#) (*evalml.objectives.Precision* method), 455
[optimize_threshold\(\)](#) (*evalml.objectives.Recall* method), 463
[optimize_threshold\(\)](#) (*evalml.objectives.sensitivity_low_alert.SensitivityLowAlert* method), 335
[optimize_threshold\(\)](#) (*evalml.objectives.SensitivityLowAlert* method), 474
[optimize_threshold\(\)](#) (*evalml.objectives.standard_metrics.AccuracyBinary* method), 338
[optimize_threshold\(\)](#) (*evalml.objectives.standard_metrics.AUC* method), 342
[optimize_threshold\(\)](#) (*evalml.objectives.standard_metrics.BalancedAccuracyBinary* method), 348
[optimize_threshold\(\)](#) (*evalml.objectives.standard_metrics.F1* method), 353
[optimize_threshold\(\)](#) (*evalml.objectives.standard_metrics.Gini* method), 359
[optimize_threshold\(\)](#) (*evalml.objectives.standard_metrics.LogLossBinary* method), 362
[optimize_threshold\(\)](#) (*evalml.objectives.standard_metrics.MCCBinary* method), 369
[optimize_threshold\(\)](#) (*evalml.objectives.standard_metrics.Precision* method), 377
[optimize_threshold\(\)](#) (*evalml.objectives.standard_metrics.Recall* method), 385
[optimize_threshold\(\)](#) (*evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline* method), 1102
[optimize_threshold\(\)](#) (*evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipelineMixin* method), 1105
[optimize_threshold\(\)](#) (*evalml.pipelines.BinaryClassificationPipeline* method), 1175
[optimize_threshold\(\)](#) (*evalml.pipelines.time_series_classification_pipeline.TimeSeriesBinaryClassificationPipeline* method), 1138
[optimize_threshold\(\)](#) (*evalml.pipelines.TimeSeriesBinaryClassificationPipeline* method), 1284
[OutliersDataCheck](#) (class in *evalml.data_checks*), 262
[OutliersDataCheck](#) (class in *evalml.data_checks.outliers_data_check*), 240
[Oversampler](#) (class in *evalml.pipelines.components*), 1035
[Oversampler](#) (class in *evalml.pipelines.components.transformers*), 904
[Oversampler](#) (class in *evalml.pipelines.components.transformers.samplers*), 847
[Oversampler](#) (class in *evalml.pipelines.components.transformers.samplers.oversampler*), 841
P
[pad_with_nans\(\)](#) (in module *evalml.utils*), 1349
[pad_with_nans\(\)](#) (in module *evalml.utils.gen_utils*), 1343
[ParameterError](#), 1333, 1335
[ParameterNotUsedWarning](#), 273, 275
[parameters\(\)](#) (*evalml.pipelines.ARIMARegressor* property), 1170
[parameters\(\)](#) (*evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline* property), 1103
[parameters\(\)](#) (*evalml.pipelines.BinaryClassificationPipeline* property), 1175
[parameters\(\)](#) (*evalml.pipelines.CatBoostClassifier* property), 1179
[parameters\(\)](#) (*evalml.pipelines.CatBoostRegressor* property), 1181
[parameters\(\)](#) (*evalml.pipelines.classification_pipeline.ClassificationPipeline* property), 1110
[parameters\(\)](#) (*evalml.pipelines.ClassificationPipeline* property), 1185
[parameters\(\)](#) (*evalml.pipelines.components.ARIMARegressor* property), 955
[parameters\(\)](#) (*evalml.pipelines.components.BaselineClassifier* property), 958
[parameters\(\)](#) (*evalml.pipelines.components.BaselineRegressor* property), 960
[parameters\(\)](#) (*evalml.pipelines.components.BaselineClassifier* property), 963
[parameters\(\)](#) (*evalml.pipelines.components.CatBoostRegressor* property), 965
[parameters\(\)](#) (*evalml.pipelines.components.component_base.ComponentBase* property), 944
[parameters\(\)](#) (*evalml.pipelines.components.ComponentBase* property), 967
[parameters\(\)](#) (*evalml.pipelines.components.DateFeatureizer* property), 970
[parameters\(\)](#) (*evalml.pipelines.components.DecisionTreeClassifier* property), 973

`parameters()` (`evalml.pipelines.components.DecisionTreeRegressor`), 976
`parameters()` (`evalml.pipelines.components.DelayedFeatureTransformer`), 979
`parameters()` (`evalml.pipelines.components.DFSTransformer`), 981
`parameters()` (`evalml.pipelines.components.DropColumns`), 983
`parameters()` (`evalml.pipelines.components.DropNullColumns`), 985
`parameters()` (`evalml.pipelines.components.DropRowsTransformer`), 988
`parameters()` (`evalml.pipelines.components.ElasticNetClassifier`), 990
`parameters()` (`evalml.pipelines.components.ElasticNetRegressor`), 993
`parameters()` (`evalml.pipelines.components.EmailFeaturizer`), 995
`parameters()` (`evalml.pipelines.components.ensemble.stacked_ensemble_base`), 478
`parameters()` (`evalml.pipelines.components.ensemble.stacked_ensemble_classifier`), 481
`parameters()` (`evalml.pipelines.components.ensemble.stacked_ensemble_regressor`), 484
`parameters()` (`evalml.pipelines.components.ensemble.StackedEnsembleBase`), 487
`parameters()` (`evalml.pipelines.components.ensemble.StackedEnsembleClassifier`), 489
`parameters()` (`evalml.pipelines.components.ensemble.StackedEnsembleRegressor`), 491
`parameters()` (`evalml.pipelines.components.Estimator`), 998
`parameters()` (`evalml.pipelines.components.estimators.ArimaRegressor`), 643
`parameters()` (`evalml.pipelines.components.estimators.BaselineClassifier`), 646
`parameters()` (`evalml.pipelines.components.estimators.BaselineRegressor`), 648
`parameters()` (`evalml.pipelines.components.estimators.CatBoostClassifier`), 651
`parameters()` (`evalml.pipelines.components.estimators.CatBoostRegressor`), 654
`parameters()` (`evalml.pipelines.components.estimators.classifier_base`), 495
`parameters()` (`evalml.pipelines.components.estimators.classifier_base_classifier`), 530
`parameters()` (`evalml.pipelines.components.estimators.classifier_catboost_classifier`), 498
`parameters()` (`evalml.pipelines.components.estimators.classifier_catboost_classifier`), 533
`parameters()` (`evalml.pipelines.components.estimators.classifier_decision_tree_classifier`), 501
`parameters()` (`evalml.pipelines.components.estimators.classifier_decision_tree_classifier`), 536
`parameters()` (`evalml.pipelines.components.estimators.classifiers.elasticnet_classifier`), 505
`parameters()` (`evalml.pipelines.components.estimators.classifiers.ElasticNetClassifier`), 539
`parameters()` (`evalml.pipelines.components.estimators.classifiers.et_classifier`), 508
`parameters()` (`evalml.pipelines.components.estimators.classifiers.ExtraTreesClassifier`), 542
`parameters()` (`evalml.pipelines.components.estimators.classifiers.kneighbors_classifier`), 511
`parameters()` (`evalml.pipelines.components.estimators.classifiers.KNeighborsClassifier`), 545
`parameters()` (`evalml.pipelines.components.estimators.classifiers.lightgbm_classifier`), 515
`parameters()` (`evalml.pipelines.components.estimators.classifiers.LightGBMClassifier`), 548
`parameters()` (`evalml.pipelines.components.estimators.classifiers.logistic_regression_classifier`), 518
`parameters()` (`evalml.pipelines.components.estimators.classifiers.LogisticRegressionClassifier`), 551
`parameters()` (`evalml.pipelines.components.estimators.classifiers.RandomForestClassifier`), 553
`parameters()` (`evalml.pipelines.components.estimators.classifiers.rf_classifier`), 521
`parameters()` (`evalml.pipelines.components.estimators.classifiers.svm_classifier`), 524
`parameters()` (`evalml.pipelines.components.estimators.classifiers.SVMClassifier`), 556
`parameters()` (`evalml.pipelines.components.estimators.classifiers.xgboost_classifier`), 527
`parameters()` (`evalml.pipelines.components.estimators.classifiers.XGBClassifier`), 558
`parameters()` (`evalml.pipelines.components.estimators.DecisionTreeClassifier`), 657
`parameters()` (`evalml.pipelines.components.estimators.DecisionTreeRegressor`), 660
`parameters()` (`evalml.pipelines.components.estimators.ElasticNetClassifier`), 663
`parameters()` (`evalml.pipelines.components.estimators.ElasticNetRegressor`), 665
`parameters()` (`evalml.pipelines.components.estimators.Estimator`), 668
`parameters()` (`evalml.pipelines.components.estimators.estimator_base`), 639
`parameters()` (`evalml.pipelines.components.estimators.ExtraTreesClassifier`), 671
`parameters()` (`evalml.pipelines.components.estimators.ExtraTreesRegressor`), 674
`parameters()` (`evalml.pipelines.components.estimators.KNeighborsClassifier`), 677
`parameters()` (`evalml.pipelines.components.estimators.LightGBMClassifier`), 680
`parameters()` (`evalml.pipelines.components.estimators.LightGBMRegressor`), 683

`parameters()` (`evalml.pipelines.components.estimators.linear_regressor`) (`evalml.pipelines.components.estimators.regressors.time_series_regressor`), 685
`parameters()` (`evalml.pipelines.components.estimators.logistic_regression_classifier`) (`evalml.pipelines.components.estimators.regressors.time_series_regressor`), 688
`parameters()` (`evalml.pipelines.components.estimators.prophet_regressor`) (`evalml.pipelines.components.estimators.regressors.xgboost_regressor`), 691
`parameters()` (`evalml.pipelines.components.estimators.random_forest_classifier`) (`evalml.pipelines.components.estimators.regressors.xgboost_regressor`), 693
`parameters()` (`evalml.pipelines.components.estimators.random_forest_regressor`) (`evalml.pipelines.components.estimators.svm_classifier`), 696
`parameters()` (`evalml.pipelines.components.estimators.regressor_arima`) (`evalml.pipelines.components.estimators.svm_regressor`), 701
`parameters()` (`evalml.pipelines.components.estimators.regressor_arima_regressor`) (`evalml.pipelines.components.estimators.time_series_base_regressor`), 703
`parameters()` (`evalml.pipelines.components.estimators.regressor_base_line`) (`evalml.pipelines.components.estimators.xgboost_classifier`), 706
`parameters()` (`evalml.pipelines.components.estimators.regressor_base_line`) (`evalml.pipelines.components.estimators.xgboost_regressor`), 708
`parameters()` (`evalml.pipelines.components.estimators.regressor_catboost`) (`evalml.pipelines.components.extra_trees_classifier`), 1001
`parameters()` (`evalml.pipelines.components.estimators.regressor_catboost`) (`evalml.pipelines.components.extra_trees_regressor`), 1004
`parameters()` (`evalml.pipelines.components.estimators.regressor_decision_tree`) (`evalml.pipelines.components.decision_tree_regressor_selector`), 1006
`parameters()` (`evalml.pipelines.components.estimators.regressor_decision_tree`) (`evalml.pipelines.components.imputer`), 1009
`parameters()` (`evalml.pipelines.components.estimators.regressor_elasticnet`) (`evalml.pipelines.components.k_neighbors_classifier`), 1011
`parameters()` (`evalml.pipelines.components.estimators.regressor_elasticnet`) (`evalml.pipelines.components.label_encoder`), 1014
`parameters()` (`evalml.pipelines.components.estimators.regressor_et_regressor`) (`evalml.pipelines.components.lightgbm_classifier`), 1017
`parameters()` (`evalml.pipelines.components.estimators.regressor_ext_trees_regressor`) (`evalml.pipelines.components.lightgbm_regressor`), 1020
`parameters()` (`evalml.pipelines.components.estimators.regressor_lightgbm`) (`evalml.pipelines.components.linear_discriminant_analysis`), 1022
`parameters()` (`evalml.pipelines.components.estimators.regressor_lightgbm`) (`evalml.pipelines.components.linear_regressor`), 1024
`parameters()` (`evalml.pipelines.components.estimators.regressor_linear`) (`evalml.pipelines.components.logistic_regression_classifier`), 1027
`parameters()` (`evalml.pipelines.components.estimators.regressor_linear`) (`evalml.pipelines.components.log_transformer`), 1029
`parameters()` (`evalml.pipelines.components.estimators.regressor_prophet_reg`) (`evalml.pipelines.components.lsa`), 1032
`parameters()` (`evalml.pipelines.components.estimators.regressor_prophet`) (`evalml.pipelines.components.one_hot_encoder`), 1035
`parameters()` (`evalml.pipelines.components.estimators.regressor_random_forest`) (`evalml.pipelines.components.oversampler`), 1037
`parameters()` (`evalml.pipelines.components.estimators.regressor_eff_regressor`) (`evalml.pipelines.components.pca`), 1039
`parameters()` (`evalml.pipelines.components.estimators.regressor_sum_regressor`) (`evalml.pipelines.components.per_column_imputer`), 1042
`parameters()` (`evalml.pipelines.components.estimators.regressor_svm`) (`evalml.pipelines.components.polynomial_detrender`), 1044

`parameters()` (`evalml.pipelines.components.ProphetRegressor` property), 1046
`parameters()` (`evalml.pipelines.components.RandomForestClassifier` property), 1049
`parameters()` (`evalml.pipelines.components.RandomForestRegressor` property), 1052
`parameters()` (`evalml.pipelines.components.RFClassifierSelectFromModel` property), 1054
`parameters()` (`evalml.pipelines.components.RFRegressorSelectFromModel` property), 1057
`parameters()` (`evalml.pipelines.components.SelectByType` property), 1059
`parameters()` (`evalml.pipelines.components.SelectColumns` property), 1061
`parameters()` (`evalml.pipelines.components.SimpleImputer` property), 1064
`parameters()` (`evalml.pipelines.components.StackedEnsembleClassifier` property), 1066
`parameters()` (`evalml.pipelines.components.StackedEnsembleRegressor` property), 1068
`parameters()` (`evalml.pipelines.components.StandardScaler` property), 1071
`parameters()` (`evalml.pipelines.components.SVMClassifier` property), 1073
`parameters()` (`evalml.pipelines.components.SVMRegressor` property), 1076
`parameters()` (`evalml.pipelines.components.TargetEncoder` property), 1078
`parameters()` (`evalml.pipelines.components.TargetImputer` property), 1081
`parameters()` (`evalml.pipelines.components.TextFeaturizer` property), 1083
`parameters()` (`evalml.pipelines.components.TimeSeriesBaselineEstimator` property), 1085
`parameters()` (`evalml.pipelines.components.Transformer` property), 1088
`parameters()` (`evalml.pipelines.components.transformers.ColumnSelector` property), 860
`parameters()` (`evalml.pipelines.components.transformers.ColumnSelectorExcludingColumns` property), 862
`parameters()` (`evalml.pipelines.components.transformers.ColumnSelectorIncludingColumns` property), 864
`parameters()` (`evalml.pipelines.components.transformers.ColumnSelectorIncludingColumnsExcludingColumns` property), 866
`parameters()` (`evalml.pipelines.components.transformers.DateTimeFeaturizer` property), 873
`parameters()` (`evalml.pipelines.components.transformers.DelayedFeatureTransformer` property), 876
`parameters()` (`evalml.pipelines.components.transformers.DESTransformer` property), 878
`parameters()` (`evalml.pipelines.components.transformers.dimensionality_reduction.CubicSplineDiscretizer` property), 711
`parameters()` (`evalml.pipelines.components.transformers.dimensionality_reduction.CubicSplineDiscretizer` property), 716
`parameters()` (`evalml.pipelines.components.transformers.dimensionality_reduction.CubicSplineDiscretizer` property), 719
`parameters()` (`evalml.pipelines.components.transformers.dimensionality_reduction.CubicSplineDiscretizer` property), 714
`parameters()` (`evalml.pipelines.components.transformers.DropColumn` property), 880
`parameters()` (`evalml.pipelines.components.transformers.DropNullColumns` property), 882
`parameters()` (`evalml.pipelines.components.transformers.DropRowsTransformer` property), 885
`parameters()` (`evalml.pipelines.components.transformers.EmailFeaturizer` property), 887
`parameters()` (`evalml.pipelines.components.transformers.encoders.LabelEncoder` property), 721
`parameters()` (`evalml.pipelines.components.transformers.encoders.LabelEncoder` property), 731
`parameters()` (`evalml.pipelines.components.transformers.encoders.OneHotEncoder` property), 725
`parameters()` (`evalml.pipelines.components.transformers.encoders.OneHotEncoder` property), 735
`parameters()` (`evalml.pipelines.components.transformers.encoders.TargetEncoder` property), 729
`parameters()` (`evalml.pipelines.components.transformers.encoders.TargetEncoder` property), 737
`parameters()` (`evalml.pipelines.components.transformers.feature_selection.CaliforniaHousingSelector` property), 740
`parameters()` (`evalml.pipelines.components.transformers.feature_selection.CaliforniaHousingSelector` property), 749
`parameters()` (`evalml.pipelines.components.transformers.feature_selection.CaliforniaHousingSelector` property), 743
`parameters()` (`evalml.pipelines.components.transformers.feature_selection.CaliforniaHousingSelector` property), 746
`parameters()` (`evalml.pipelines.components.transformers.feature_selection.CaliforniaHousingSelector` property), 752
`parameters()` (`evalml.pipelines.components.transformers.feature_selection.CaliforniaHousingSelector` property), 755
`parameters()` (`evalml.pipelines.components.transformers.FeatureSelector` property), 889
`parameters()` (`evalml.pipelines.components.transformers.Imputer` property), 892
`parameters()` (`evalml.pipelines.components.transformers.imputers.Imputer` property), 770
`parameters()` (`evalml.pipelines.components.transformers.imputers.Imputer` property), 758
`parameters()` (`evalml.pipelines.components.transformers.imputers.PerColumnImputer` property), 761
`parameters()` (`evalml.pipelines.components.transformers.imputers.PerColumnImputer` property), 773
`parameters()` (`evalml.pipelines.components.transformers.imputers.SimpleImputer` property), 764
`parameters()` (`evalml.pipelines.components.transformers.imputers.SimpleImputer` property), 775
`parameters()` (`evalml.pipelines.components.transformers.imputers.TargetImputer` property), 767

`parameters()` (`evalml.pipelines.components.Undersampler` property), 1090
`parameters()` (`evalml.pipelines.components.URLFeaturizer` property), 1093
`parameters()` (`evalml.pipelines.components.XGBoostClassifier` property), 1095
`parameters()` (`evalml.pipelines.components.XGBoostRegressor` property), 1097
`parameters()` (`evalml.pipelines.DecisionTreeClassifier` property), 1193
`parameters()` (`evalml.pipelines.DecisionTreeRegressor` property), 1196
`parameters()` (`evalml.pipelines.DelayedFeatureTransformer` property), 1198
`parameters()` (`evalml.pipelines.DFSTransformer` property), 1201
`parameters()` (`evalml.pipelines.ElasticNetClassifier` property), 1203
`parameters()` (`evalml.pipelines.ElasticNetRegressor` property), 1206
`parameters()` (`evalml.pipelines.Estimator` property), 1208
`parameters()` (`evalml.pipelines.ExtraTreesClassifier` property), 1211
`parameters()` (`evalml.pipelines.ExtraTreesRegressor` property), 1214
`parameters()` (`evalml.pipelines.FeatureSelector` property), 1217
`parameters()` (`evalml.pipelines.KNeighborsClassifier` property), 1219
`parameters()` (`evalml.pipelines.LightGBMClassifier` property), 1222
`parameters()` (`evalml.pipelines.LightGBMRegressor` property), 1225
`parameters()` (`evalml.pipelines.LinearRegressor` property), 1228
`parameters()` (`evalml.pipelines.LogisticRegressionClassifier` property), 1230
`parameters()` (`evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline` property), 1120
`parameters()` (`evalml.pipelines.MulticlassClassificationPipeline` property), 1235
`parameters()` (`evalml.pipelines.OneHotEncoder` property), 1239
`parameters()` (`evalml.pipelines.PerColumnImputer` property), 1241
`parameters()` (`evalml.pipelines.pipeline_base.PipelineBase` property), 1125
`parameters()` (`evalml.pipelines.PipelineBase` property), 1245
`parameters()` (`evalml.pipelines.ProphetRegressor` property), 1248
`parameters()` (`evalml.pipelines.RandomForestClassifier` property), 1251
`parameters()` (`evalml.pipelines.RandomForestRegressor` property), 1253
`parameters()` (`evalml.pipelines.regression_pipeline.RegressionPipeline` property), 1132
`parameters()` (`evalml.pipelines.RegressionPipeline` property), 1257
`parameters()` (`evalml.pipelines.RFClassifierSelectFromModel` property), 1261
`parameters()` (`evalml.pipelines.RFRegressorSelectFromModel` property), 1264
`parameters()` (`evalml.pipelines.SimpleImputer` property), 1266
`parameters()` (`evalml.pipelines.StackedEnsembleClassifier` property), 1268
`parameters()` (`evalml.pipelines.StackedEnsembleRegressor` property), 1271
`parameters()` (`evalml.pipelines.StandardScaler` property), 1273
`parameters()` (`evalml.pipelines.SVMClassifier` property), 1275
`parameters()` (`evalml.pipelines.SVMRegressor` property), 1278
`parameters()` (`evalml.pipelines.TargetEncoder` property), 1280
`parameters()` (`evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline` property), 1138
`parameters()` (`evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline` property), 1144
`parameters()` (`evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline` property), 1150
`parameters()` (`evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase` property), 1157
`parameters()` (`evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline` property), 1163
`parameters()` (`evalml.pipelines.TimeSeriesBinaryClassificationPipeline` property), 1285
`parameters()` (`evalml.pipelines.TimeSeriesClassificationPipeline` property), 1291
`parameters()` (`evalml.pipelines.TimeSeriesClassificationPipeline` property), 1297
`parameters()` (`evalml.pipelines.TimeSeriesRegressionPipeline` property), 1303
`parameters()` (`evalml.pipelines.Transformer` property), 1307
`parameters()` (`evalml.pipelines.XGBoostClassifier` property), 1309
`parameters()` (`evalml.pipelines.XGBoostRegressor` property), 1312
`partial_dependence()` (in module `evalml.model_understanding`), 311
`partial_dependence()` (in module `evalml.model_understanding.graphs`), 297
`PartialDependenceError`, 273, 275
`PartialDependenceErrorCode` (class in

evalml.exceptions), 275

PartialDependenceErrorCode (class in *evalml.exceptions.exceptions*), 273

PCA (class in *evalml.pipelines.components*), 1037

PCA (class in *evalml.pipelines.components.transformers*), 906

PCA (class in *evalml.pipelines.components.transformers.dimensionality_reduction*), 717

PCA (class in *evalml.pipelines.components.transformers.dimensionality_reduction.pipeline_base*), 1122

PCA (class in *evalml.pipelines.components.transformers.dimensionality_reduction.pipeline_meta*), 1127

PerColumnImputer (class in *evalml.pipelines*), 1239

PerColumnImputer (class in *evalml.pipelines.components*), 1040

PerColumnImputer (class in *evalml.pipelines.components.transformers*), 909

PerColumnImputer (class in *evalml.pipelines.components.transformers.imputers*), 771

PerColumnImputer (class in *evalml.pipelines.components.transformers.imputers.per_column_imputer*), 759

perfect_score() (*evalml.objectives.binary_classification_objective* property), 316

perfect_score() (*evalml.objectives.BinaryClassificationObjective* property), 415

perfect_score() (*evalml.objectives.multiclass_classification_objective* property), 327

perfect_score() (*evalml.objectives.MulticlassClassificationObjective* property), 451

perfect_score() (*evalml.objectives.objective_base.ObjectiveBase* property), 330

perfect_score() (*evalml.objectives.ObjectiveBase* property), 453

perfect_score() (*evalml.objectives.regression_objective.RegressionObjective* property), 332

perfect_score() (*evalml.objectives.RegressionObjective* property), 469

perfect_score() (*evalml.objectives.time_series_regression_objective.TimeSeriesRegressionObjective* property), 395

pipeline_number() (*evalml.automl.automl_algorithm.automl_algorithm* property), 168

pipeline_number() (*evalml.automl.automl_algorithm.AutoMLAlgorithm* property), 175

pipeline_number() (*evalml.automl.automl_algorithm.default_algorithm.DefaultAlgorithm* property), 170

pipeline_number() (*evalml.automl.automl_algorithm.DefaultAlgorithm* property), 177

pipeline_number() (*evalml.automl.automl_algorithm.iterative_algorithm.IterativeAlgorithm* property), 173

pipeline_number() (*evalml.automl.automl_algorithm.IterativeAlgorithm* property), 179

PipelineBase (class in *evalml.pipelines*), 1241

PipelineBase (class in *evalml.pipelines.pipeline_base*), 1122

PipelineBaseMeta (class in *evalml.pipelines.pipeline_meta*), 1127

PipelineNotFoundError, 274, 275

PipelineNotYetFittedError, 274, 275

PipelineScoreError, 274, 276

PipelineSearchPlots (class in *evalml.automl.pipeline_search_plots*), 206

plot() (*evalml.automl.automl_search.AutoMLSearch* property), 201

plot() (*evalml.automl.AutoMLSearch* property), 213

plot() (*evalml.AutoMLSearch* property), 1354

PolynomialDetrender (class in *evalml.pipelines.components*), 1042

PolynomialDetrender (class in *evalml.pipelines.components.transformers*), 759

PolynomialDetrender (class in *evalml.pipelines.components.transformers.preprocessing*), 829

PolynomialDetrender (class in *evalml.pipelines.components.transformers.preprocessing.polynomial_detrender*), 829

positive_only() (*evalml.objectives.AccuracyBinary* method), 401

positive_only() (*evalml.objectives.AccuracyMulticlass* method), 402

positive_only() (*evalml.objectives.AUC* method), 404

positive_only() (*evalml.objectives.AUCMacro* method), 405

positive_only() (*evalml.objectives.AUCMicro* method), 406

positive_only() (*evalml.objectives.AUCWeighted* method), 408

positive_only() (*evalml.objectives.BalancedAccuracyBinary* method), 411

positive_only() (*evalml.objectives.BalancedAccuracyMulticlass* method), 412

positive_only() (*evalml.objectives.binary_classification_objective.BinaryClassificationObjective* method), 317

positive_only() (*evalml.objectives.BinaryClassificationObjective* method), 415

positive_only() (*evalml.objectives.cost_benefit_matrix.CostBenefitMatrix* method), 319

positive_only() (*evalml.objectives.CostBenefitMatrix* method), 417

positive_only() (*evalml.objectives.ExpVariance* method), 418

`method`), 419
`positive_only()` (`evalml.objectives.F1` `method`), 421
`positive_only()` (`evalml.objectives.F1Macro` `method`), 422
`positive_only()` (`evalml.objectives.F1Micro` `method`), 424
`positive_only()` (`evalml.objectives.F1Weighted` `method`), 425
`positive_only()` (`evalml.objectives.fraud_cost.FraudCost` `method`), 322
`positive_only()` (`evalml.objectives.FraudCost` `method`), 428
`positive_only()` (`evalml.objectives.Gini` `method`), 431
`positive_only()` (`evalml.objectives.lead_scoring.LeadScoring` `method`), 325
`positive_only()` (`evalml.objectives.LeadScoring` `method`), 433
`positive_only()` (`evalml.objectives.LogLossBinary` `method`), 435
`positive_only()` (`evalml.objectives.LogLossMulticlass` `method`), 436
`positive_only()` (`evalml.objectives.MAE` `method`), 438
`positive_only()` (`evalml.objectives.MAPE` `method`), 439
`positive_only()` (`evalml.objectives.MaxError` `method`), 441
`positive_only()` (`evalml.objectives.MCCBinary` `method`), 443
`positive_only()` (`evalml.objectives.MCCMulticlass` `method`), 444
`positive_only()` (`evalml.objectives.MeanSquaredLogError` `method`), 446
`positive_only()` (`evalml.objectives.MedianAE` `method`), 447
`positive_only()` (`evalml.objectives.MSE` `method`), 449
`positive_only()` (`evalml.objectives.multiclass_classification_objective.MulticlassClassificationObjective` `method`), 327
`positive_only()` (`evalml.objectives.MulticlassClassificationObjective` `method`), 451
`positive_only()` (`evalml.objectives.objective_base.ObjectiveBase` `method`), 330
`positive_only()` (`evalml.objectives.ObjectiveBase` `method`), 453
`positive_only()` (`evalml.objectives.Precision` `method`), 455
`positive_only()` (`evalml.objectives.PrecisionMacro` `method`), 456
`positive_only()` (`evalml.objectives.PrecisionMicro` `method`), 458
`positive_only()` (`evalml.objectives.PrecisionWeighted` `method`), 459
`positive_only()` (`evalml.objectives.R2` `method`), 461
`positive_only()` (`evalml.objectives.Recall` `method`), 463
`positive_only()` (`evalml.objectives.RecallMacro` `method`), 464
`positive_only()` (`evalml.objectives.RecallMicro` `method`), 466
`positive_only()` (`evalml.objectives.RecallWeighted` `method`), 467
`positive_only()` (`evalml.objectives.regression_objective.RegressionObjective` `method`), 332
`positive_only()` (`evalml.objectives.RegressionObjective` `method`), 469
`positive_only()` (`evalml.objectives.RootMeanSquaredError` `method`), 471
`positive_only()` (`evalml.objectives.RootMeanSquaredLogError` `method`), 472
`positive_only()` (`evalml.objectives.sensitivity_low_alert.SensitivityLowAlert` `method`), 335
`positive_only()` (`evalml.objectives.SensitivityLowAlert` `method`), 475
`positive_only()` (`evalml.objectives.standard_metrics.AccuracyBinary` `method`), 338
`positive_only()` (`evalml.objectives.standard_metrics.AccuracyMulticlass` `method`), 340
`positive_only()` (`evalml.objectives.standard_metrics.AUC` `method`), 342
`positive_only()` (`evalml.objectives.standard_metrics.AUCMacro` `method`), 343
`positive_only()` (`evalml.objectives.standard_metrics.AUCMicro` `method`), 345
`positive_only()` (`evalml.objectives.standard_metrics.AUCWeighted` `method`), 346
`positive_only()` (`evalml.objectives.standard_metrics.BalancedAccuracyBinary` `method`), 348
`positive_only()` (`evalml.objectives.standard_metrics.BalancedAccuracyMulticlass` `method`), 349
`positive_only()` (`evalml.objectives.standard_metrics.ExpVariance` `method`), 351
`positive_only()` (`evalml.objectives.standard_metrics.F1` `method`), 353
`positive_only()` (`evalml.objectives.standard_metrics.F1Macro` `method`), 354
`positive_only()` (`evalml.objectives.standard_metrics.F1Micro` `method`), 356
`positive_only()` (`evalml.objectives.standard_metrics.F1Weighted` `method`), 357
`positive_only()` (`evalml.objectives.standard_metrics.Gini` `method`), 360
`positive_only()` (`evalml.objectives.standard_metrics.LogLossBinary` `method`), 362
`positive_only()` (`evalml.objectives.standard_metrics.LogLossMulticlass` `method`), 363

`method`), 363
`positive_only()` (`evalml.objectives.standard_metrics.MAE` `method`), 365
`positive_only()` (`evalml.objectives.standard_metrics.MAPE` `method`), 366
`positive_only()` (`evalml.objectives.standard_metrics.MaxError` `method`), 367
`positive_only()` (`evalml.objectives.standard_metrics.MCCBinary` `method`), 370
`positive_only()` (`evalml.objectives.standard_metrics.MCCMulticlass` `method`), 371
`positive_only()` (`evalml.objectives.standard_metrics.MeanSquaredError` `method`), 372
`positive_only()` (`evalml.objectives.standard_metrics.MedianAE` `method`), 374
`positive_only()` (`evalml.objectives.standard_metrics.MSE` `method`), 375
`positive_only()` (`evalml.objectives.standard_metrics.Precision` `method`), 378
`positive_only()` (`evalml.objectives.standard_metrics.PrecisionMacro` `method`), 379
`positive_only()` (`evalml.objectives.standard_metrics.PrecisionMicro` `method`), 380
`positive_only()` (`evalml.objectives.standard_metrics.PrecisionWeighted` `method`), 382
`positive_only()` (`evalml.objectives.standard_metrics.R2` `method`), 383
`positive_only()` (`evalml.objectives.standard_metrics.Recall` `method`), 386
`positive_only()` (`evalml.objectives.standard_metrics.RecallMacro` `method`), 387
`positive_only()` (`evalml.objectives.standard_metrics.RecallMicro` `method`), 388
`positive_only()` (`evalml.objectives.standard_metrics.RecallWeighted` `method`), 390
`positive_only()` (`evalml.objectives.standard_metrics.RootMeanSquaredError` `method`), 391
`positive_only()` (`evalml.objectives.standard_metrics.RootMeanSquaredLogError` `method`), 393
`positive_only()` (`evalml.objectives.time_series_regression_objective` `method`), 395
`Precision` (class in `evalml.objectives`), 453
`Precision` (class in `evalml.objectives.standard_metrics`), 376
`precision_recall_curve()` (in module `evalml.model_understanding`), 313
`precision_recall_curve()` (in module `evalml.model_understanding.graphs`), 298
`PrecisionMacro` (class in `evalml.objectives`), 455
`PrecisionMacro` (class in `evalml.objectives.standard_metrics`), 378
`PrecisionMicro` (class in `evalml.objectives`), 457
`PrecisionMicro` (class in `evalml.objectives.standard_metrics`), 379
`PrecisionWeighted` (class in `evalml.objectives`), 458
`PrecisionWeighted` (class in `evalml.objectives.standard_metrics`), 381
`predict()` (`evalml.pipelines.ARIMAREgressor` `method`), 1170
`predict()` (`evalml.pipelines.binary_classification_pipeline.BinaryClassifier` `method`), 1103
`predict()` (`evalml.pipelines.BinaryClassificationPipeline` `method`), 1175
`predict()` (`evalml.pipelines.CatBoostClassifier` `method`), 1179
`predict()` (`evalml.pipelines.CatBoostRegressor` `method`), 1181
`predict()` (`evalml.pipelines.classification_pipeline.ClassificationPipeline` `method`), 1110
`predict()` (`evalml.pipelines.ClassificationPipeline` `method`), 1185
`predict()` (`evalml.pipelines.component_graph.ComponentGraph` `method`), 1115
`predict()` (`evalml.pipelines.ComponentGraph` `method`), 1190
`predict()` (`evalml.pipelines.components.ARIMAREgressor` `method`), 955
`predict()` (`evalml.pipelines.components.BaselineClassifier` `method`), 958
`predict()` (`evalml.pipelines.components.BaselineRegressor` `method`), 960
`predict()` (`evalml.pipelines.components.CatBoostClassifier` `method`), 963
`predict()` (`evalml.pipelines.components.CatBoostRegressor` `method`), 965
`predict()` (`evalml.pipelines.components.DecisionTreeClassifier` `method`), 973
`predict()` (`evalml.pipelines.components.DecisionTreeRegressor` `method`), 976
`predict()` (`evalml.pipelines.components.ElasticNetClassifier` `method`), 991
`predict()` (`evalml.pipelines.components.ElasticNetRegressor` `method`), 993
`predict()` (`evalml.pipelines.components.ensemble.stacked_ensemble_base` `method`), 478
`predict()` (`evalml.pipelines.components.ensemble.stacked_ensemble_classifier` `method`), 481
`predict()` (`evalml.pipelines.components.ensemble.stacked_ensemble_regressor` `method`), 484
`predict()` (`evalml.pipelines.components.ensemble.StackedEnsembleBase` `method`), 487
`predict()` (`evalml.pipelines.components.ensemble.StackedEnsembleClassifier` `method`), 489
`predict()` (`evalml.pipelines.components.ensemble.StackedEnsembleRegressor` `method`), 492
`predict()` (`evalml.pipelines.components.Estimator` `method`), 998

`predict()` (`evalml.pipelines.components.estimators.ARIMARegressor`), 643
`predict()` (`evalml.pipelines.components.estimators.BaselineClassifier`), 646
`predict()` (`evalml.pipelines.components.estimators.BaselineRegressor`), 648
`predict()` (`evalml.pipelines.components.estimators.CatBoostClassifier`), 651
`predict()` (`evalml.pipelines.components.estimators.CatBoostRegressor`), 654
`predict()` (`evalml.pipelines.components.estimators.classifiers.baseline_classifier`), 495
`predict()` (`evalml.pipelines.components.estimators.classifiers.baseline_classifier_pipeline`), 530
`predict()` (`evalml.pipelines.components.estimators.classifiers.catboost_classifier`), 498
`predict()` (`evalml.pipelines.components.estimators.classifiers.catboost_classifier_pipeline`), 533
`predict()` (`evalml.pipelines.components.estimators.classifiers.decision_tree_classifier`), 501
`predict()` (`evalml.pipelines.components.estimators.classifiers.decision_tree_classifier_pipeline`), 536
`predict()` (`evalml.pipelines.components.estimators.classifiers.elasticnet_classifier`), 505
`predict()` (`evalml.pipelines.components.estimators.classifiers.elasticnet_classifier_pipeline`), 539
`predict()` (`evalml.pipelines.components.estimators.classifiers.extra_trees_classifier`), 508
`predict()` (`evalml.pipelines.components.estimators.classifiers.extra_trees_classifier_pipeline`), 542
`predict()` (`evalml.pipelines.components.estimators.classifiers.kneighbors_classifier`), 511
`predict()` (`evalml.pipelines.components.estimators.classifiers.kneighbors_classifier_pipeline`), 545
`predict()` (`evalml.pipelines.components.estimators.classifiers.lightgbm_classifier`), 515
`predict()` (`evalml.pipelines.components.estimators.classifiers.lightgbm_classifier_pipeline`), 548
`predict()` (`evalml.pipelines.components.estimators.classifiers.logistic_regression_classifier`), 518
`predict()` (`evalml.pipelines.components.estimators.classifiers.logistic_regression_classifier_pipeline`), 551
`predict()` (`evalml.pipelines.components.estimators.classifiers.random_forest_classifier`), 553
`predict()` (`evalml.pipelines.components.estimators.classifiers.rf_classifier`), 521
`predict()` (`evalml.pipelines.components.estimators.classifiers.svm_classifier`), 524
`predict()` (`evalml.pipelines.components.estimators.classifiers.svm_classifier_pipeline`), 556
`predict()` (`evalml.pipelines.components.estimators.classifiers.xgboost_classifier`), 527
`predict()` (`evalml.pipelines.components.estimators.classifiers.xgboost_classifier_pipeline`), 558
`predict()` (`evalml.pipelines.components.estimators.DecisionTreeClassifier`), 657
`predict()` (`evalml.pipelines.components.estimators.DecisionTreeRegressor`), 660
`predict()` (`evalml.pipelines.components.estimators.ElasticNetClassifier`), 663
`predict()` (`evalml.pipelines.components.estimators.ElasticNetRegressor`), 665
`predict()` (`evalml.pipelines.components.estimators.Estimator`), 668
`predict()` (`evalml.pipelines.components.estimators.estimator.Estimator`), 639
`predict()` (`evalml.pipelines.components.estimators.ExtraTreesClassifier`), 671
`predict()` (`evalml.pipelines.components.estimators.ExtraTreesRegressor`), 674
`predict()` (`evalml.pipelines.components.estimators.KNeighborsClassifier`), 677
`predict()` (`evalml.pipelines.components.estimators.LightGBMClassifier`), 680
`predict()` (`evalml.pipelines.components.estimators.LightGBMRegressor`), 683
`predict()` (`evalml.pipelines.components.estimators.LinearRegressor`), 685
`predict()` (`evalml.pipelines.components.estimators.LogisticRegressionClassifier`), 688
`predict()` (`evalml.pipelines.components.estimators.ProphetRegressor`), 691
`predict()` (`evalml.pipelines.components.estimators.RandomForestClassifier`), 693
`predict()` (`evalml.pipelines.components.estimators.RandomForestRegressor`), 696
`predict()` (`evalml.pipelines.components.estimators.regressors.arima_regressor`), 562
`predict()` (`evalml.pipelines.components.estimators.regressors.ARIMARegressor`), 603
`predict()` (`evalml.pipelines.components.estimators.regressors.baseline_regressor`), 565
`predict()` (`evalml.pipelines.components.estimators.regressors.catboost_regressor`), 606
`predict()` (`evalml.pipelines.components.estimators.regressors.catboost_regressor_pipeline`), 568
`predict()` (`evalml.pipelines.components.estimators.regressors.CatBoostRegressor`), 609
`predict()` (`evalml.pipelines.components.estimators.regressors.decision_tree_regressor`), 572
`predict()` (`evalml.pipelines.components.estimators.regressors.DecisionTreeRegressor`), 612
`predict()` (`evalml.pipelines.components.estimators.regressors.elasticnet_regressor`), 575
`predict()` (`evalml.pipelines.components.estimators.regressors.ElasticNetRegressor`), 614
`predict()` (`evalml.pipelines.components.estimators.regressors.et_regressor`), 578

[predict \(\) \(evalml.pipelines.components.estimators.regressors.ExtraTreesRegressor method\), 617](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.ExtraTreesRegressor method\), 1046](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.LightGBMRegressor method\), 582](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.LightGBMRegressor method\), 1049](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.LightGBMRegressor method\), 620](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.LightGBMRegressor method\), 1052](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.linear_regression_pipeline.Regressor method\), 585](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.linear_regression_pipeline.Regressor method\), 1066](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.LinearRegression method\), 623](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.LinearRegression method\), 1068](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.prophet_regression_pipeline.Regressor method\), 588](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.prophet_regression_pipeline.Regressor method\), 1073](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.ProphetRegressor method\), 626](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.ProphetRegressor method\), 1076](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.RandomForestRegressor method\), 628](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.RandomForestRegressor method\), 1085](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.sif_regression_pipeline.Regressor method\), 591](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.sif_regression_pipeline.Regressor method\), 948](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.svm_regression_pipeline.Regressor method\), 594](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.svm_regression_pipeline.Regressor method\), 950](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.SVMRegressor method\), 631](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.SVMRegressor method\), 1095](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.time_series_baseline_pipeline.TimeSeriesBaselineEstimator method\), 597](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.time_series_baseline_pipeline.TimeSeriesBaselineEstimator method\), 1098](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.time_series_baseline_pipeline.TimeSeriesBaselineEstimator method\), 633](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.time_series_baseline_pipeline.TimeSeriesBaselineEstimator method\), 1193](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.xgboost_regression_pipeline.XGBoostRegressor method\), 600](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.xgboost_regression_pipeline.XGBoostRegressor method\), 1196](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.XGBoostRegressor method\), 636](#)
[predict \(\) \(evalml.pipelines.components.estimators.regressors.XGBoostRegressor method\), 1203](#)
[predict \(\) \(evalml.pipelines.components.estimators.SVMClassifier method\), 698](#)
[predict \(\) \(evalml.pipelines.ElasticNetRegressor method\), 1206](#)
[predict \(\) \(evalml.pipelines.components.estimators.SVMRegressor method\), 701](#)
[predict \(\) \(evalml.pipelines.Estimator method\), 1208](#)
[predict \(\) \(evalml.pipelines.components.estimators.TimeSeriesBaselineEstimator method\), 703](#)
[predict \(\) \(evalml.pipelines.ExtraTreesClassifier method\), 706](#)
[predict \(\) \(evalml.pipelines.ExtraTreesRegressor method\), 1214](#)
[predict \(\) \(evalml.pipelines.components.estimators.XGBoostClassifier method\), 706](#)
[predict \(\) \(evalml.pipelines.KNeighborsClassifier method\), 1219](#)
[predict \(\) \(evalml.pipelines.components.estimators.XGBoostRegressor method\), 708](#)
[predict \(\) \(evalml.pipelines.LightGBMClassifier method\), 1222](#)
[predict \(\) \(evalml.pipelines.components.ExtraTreesClassifier method\), 1001](#)
[predict \(\) \(evalml.pipelines.LightGBMRegressor method\), 1225](#)
[predict \(\) \(evalml.pipelines.components.ExtraTreesRegressor method\), 1004](#)
[predict \(\) \(evalml.pipelines.LinearRegressor method\), 1228](#)
[predict \(\) \(evalml.pipelines.KNeighborsClassifier method\), 1012](#)
[predict \(\) \(evalml.pipelines.LogisticRegressionClassifier method\), 1230](#)
[predict \(\) \(evalml.pipelines.components.LightGBMClassifier method\), 1017](#)
[predict \(\) \(evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline method\), 1235](#)
[predict \(\) \(evalml.pipelines.components.LightGBMRegressor method\), 1020](#)
[predict \(\) \(evalml.pipelines.MulticlassClassificationPipeline method\), 1235](#)
[predict \(\) \(evalml.pipelines.components.LinearRegressor method\), 1024](#)
[predict \(\) \(evalml.pipelines.pipeline_base.PipelineBase method\), 1235](#)
[predict \(\) \(evalml.pipelines.components.LogisticRegressionClassifier method\), 1027](#)
[predict \(\) \(evalml.pipelines.PipelineBase method\), 1235](#)

1245
 predict () (evalml.pipelines.ProphetRegressor method), 1248
 predict () (evalml.pipelines.RandomForestClassifier method), 1251
 predict () (evalml.pipelines.RandomForestRegressor method), 1253
 predict () (evalml.pipelines.regression_pipeline.RegressionPipeline method), 1132
 predict () (evalml.pipelines.RegressionPipeline method), 1257
 predict () (evalml.pipelines.StackedEnsembleClassifier method), 1268
 predict () (evalml.pipelines.StackedEnsembleRegressor method), 1271
 predict () (evalml.pipelines.SVMClassifier method), 1275
 predict () (evalml.pipelines.SVMRegressor method), 1278
 predict () (evalml.pipelines.time_series_classification_pipeline.TimeSeriesBinaryClassificationPipeline method), 1138
 predict () (evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline method), 1144
 predict () (evalml.pipelines.time_series_classification_pipeline.TimeSeriesMulticlassClassificationPipeline method), 1150
 predict () (evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase method), 1157
 predict () (evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline method), 1163
 predict () (evalml.pipelines.TimeSeriesBinaryClassificationPipeline method), 1285
 predict () (evalml.pipelines.TimeSeriesClassificationPipeline method), 1291
 predict () (evalml.pipelines.TimeSeriesMulticlassClassificationPipeline method), 1297
 predict () (evalml.pipelines.TimeSeriesRegressionPipeline method), 1303
 predict () (evalml.pipelines.XGBoostClassifier method), 1309
 predict () (evalml.pipelines.XGBoostRegressor method), 1312
 predict_in_sample ()
 (evalml.pipelines.time_series_classification_pipeline.TimeSeriesBinaryClassificationPipeline method), 1138
 predict_in_sample ()
 (evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline method), 1144
 predict_in_sample ()
 (evalml.pipelines.time_series_classification_pipeline.TimeSeriesMulticlassClassificationPipeline method), 1151
 predict_in_sample ()
 (evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase method), 1157
 predict_in_sample ()
 (evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline method), 1163
 predict_in_sample ()
 (evalml.pipelines.TimeSeriesBinaryClassificationPipeline method), 1285
 predict_in_sample ()
 (evalml.pipelines.TimeSeriesClassificationPipeline method), 1291
 predict_in_sample ()
 (evalml.pipelines.TimeSeriesMulticlassClassificationPipeline method), 1298
 predict_in_sample ()
 (evalml.pipelines.TimeSeriesRegressionPipeline method), 1304
 predict_proba () (evalml.pipelines.ARIMARegressor method), 1170
 predict_proba () (evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline method), 1103
 predict_proba () (evalml.pipelines.BinaryClassificationPipeline method), 1175
 predict_proba () (evalml.pipelines.CatBoostClassifier method), 1180
 predict_proba () (evalml.pipelines.CatBoostRegressor method), 1183
 predict_proba () (evalml.pipelines.classification_pipeline.ClassificationPipeline method), 1186
 predict_proba () (evalml.pipelines.ClassificationPipeline method), 1190
 predict_proba () (evalml.pipelines.components.ARIMARegressor method), 1188
 predict_proba () (evalml.pipelines.components.BaselineClassifier method), 955
 predict_proba () (evalml.pipelines.components.BaselineRegressor method), 958
 predict_proba () (evalml.pipelines.components.CatBoostClassifier method), 960
 predict_proba () (evalml.pipelines.components.CatBoostRegressor method), 963
 predict_proba () (evalml.pipelines.components.CatBoostRegressor method), 965
 predict_proba () (evalml.pipelines.components.DecisionTreeClassifier method), 973
 predict_proba () (evalml.pipelines.components.DecisionTreeRegressor method), 976
 predict_proba () (evalml.pipelines.components.ElasticNetClassifier method), 991
 predict_proba () (evalml.pipelines.components.ElasticNetRegressor method), 996
 predict_proba () (evalml.pipelines.components.ensemble.stacked_ensemble_classifier.StackedEnsembleClassifier method), 478
 predict_proba () (evalml.pipelines.components.ensemble.stacked_ensemble_regressor.StackedEnsembleRegressor method), 481
 predict_proba () (evalml.pipelines.components.ensemble.stacked_ensemble_classifier.StackedEnsembleClassifier method), 484
 predict_proba () (evalml.pipelines.components.ensemble.StackedEnsembleRegressor method), 487

`predict_proba()` (`evalml.pipelines.components.ensemble.StackedEnsembleClassifier`), 489

`predict_proba()` (`evalml.pipelines.components.ensemble.StackedEnsembleRegressor`), 492

`predict_proba()` (`evalml.pipelines.components.Estimator`), 998

`predict_proba()` (`evalml.pipelines.components.estimators.ARIMARegressor`), 643

`predict_proba()` (`evalml.pipelines.components.estimators.BaseClassifier`), 646

`predict_proba()` (`evalml.pipelines.components.estimators.BaseRegressor`), 648

`predict_proba()` (`evalml.pipelines.components.estimators.CatBoostClassifier`), 651

`predict_proba()` (`evalml.pipelines.components.estimators.CatBoostRegressor`), 654

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.BaseClassifier`), 495

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.BaseClassifier`), 530

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.CatBoostClassifier`), 498

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.CatBoostClassifier`), 533

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.DecisionTreeClassifier`), 501

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.DecisionTreeClassifier`), 536

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.elasticnet.ElasticNetClassifier`), 505

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.ElasticNetClassifier`), 539

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.et.ensemble.ExtraTreesClassifier`), 508

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.ExtraTreesClassifier`), 542

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.kneighbors.KNeighborsClassifier`), 512

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.KNeighborsClassifier`), 545

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.lightgbm.LightGBMClassifier`), 515

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.LightGBMClassifier`), 548

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.logistic.LogisticRegressionClassifier`), 518

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.LogisticRegressionClassifier`), 551

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.RandomForestClassifier`), 553

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.rf.ensemble.RandomForestClassifier`), 521

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.svm.SVCClassifier`), 524

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.StackedEnsembleClassifier`), 556

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.StackedEnsembleRegressor`), 527

`predict_proba()` (`evalml.pipelines.components.estimators.classifiers.XGBoostClassifier`), 558

`predict_proba()` (`evalml.pipelines.components.estimators.DecisionTreeClassifier`), 657

`predict_proba()` (`evalml.pipelines.components.estimators.DecisionTreeClassifier`), 660

`predict_proba()` (`evalml.pipelines.components.estimators.ElasticNetClassifier`), 663

`predict_proba()` (`evalml.pipelines.components.estimators.ElasticNetClassifier`), 665

`predict_proba()` (`evalml.pipelines.components.estimators.Estimator`), 668

`predict_proba()` (`evalml.pipelines.components.estimators.estimator.BaseClassifier`), 639

`predict_proba()` (`evalml.pipelines.components.estimators.ExtraTreesClassifier`), 671

`predict_proba()` (`evalml.pipelines.components.estimators.ExtraTreesClassifier`), 674

`predict_proba()` (`evalml.pipelines.components.estimators.KNeighborsClassifier`), 677

`predict_proba()` (`evalml.pipelines.components.estimators.LightGBMClassifier`), 680

`predict_proba()` (`evalml.pipelines.components.estimators.LightGBMClassifier`), 683

`predict_proba()` (`evalml.pipelines.components.estimators.LinearRegression`), 685

`predict_proba()` (`evalml.pipelines.components.estimators.LogisticRegression`), 688

`predict_proba()` (`evalml.pipelines.components.estimators.ProphetRegressor`), 691

`predict_proba()` (`evalml.pipelines.components.estimators.RandomForestClassifier`), 693

`predict_proba()` (`evalml.pipelines.components.estimators.RandomForestClassifier`), 696

`predict_proba()` (`evalml.pipelines.components.estimators.regressors.ARIMARegressor`), 562

`predict_proba()` (`evalml.pipelines.components.estimators.regressors.BaseRegressor`), 604

`predict_proba()` (`evalml.pipelines.components.estimators.regressors.BaseRegressor`), 565

`predict_proba()` (`evalml.pipelines.components.estimators.regressors.logistic.LogisticRegressionRegressor`), 606

`predict_proba()` (`evalml.pipelines.components.estimators.regressors.logistic.LogisticRegressionRegressor`), 568

`predict_proba()` (`evalml.pipelines.components.estimators.regressors.RandomForestRegressor`), 609

`predict_proba()` (`evalml.pipelines.components.estimators.regressors.rf.ensemble.RandomForestRegressor`), 572

`predict_proba()` (`evalml.pipelines.components.estimators.regressors.svm.SVRRegressor`), 612

[predict_proba\(\) \(evalml.pipelines.MulticlassClassificationPipeline method\), 1235](#)
[predict_proba\(\) \(evalml.pipelines.ProphetRegressor method\), 1249](#)
[predict_proba\(\) \(evalml.pipelines.RandomForestClassifier method\), 1251](#)
[predict_proba\(\) \(evalml.pipelines.RandomForestRegressor method\), 1253](#)
[predict_proba\(\) \(evalml.pipelines.StackedEnsembleClassifier method\), 1268](#)
[predict_proba\(\) \(evalml.pipelines.StackedEnsembleRegressor method\), 1271](#)
[predict_proba\(\) \(evalml.pipelines.SVMClassifier method\), 1275](#)
[predict_proba\(\) \(evalml.pipelines.SVMRegressor method\), 1278](#)
[predict_proba\(\) \(evalml.pipelines.time_series_classification_pipelines.TimeSeriesBinaryClassificationPipeline method\), 1139](#)
[predict_proba\(\) \(evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline method\), 1145](#)
[predict_proba\(\) \(evalml.pipelines.time_series_classification_pipelines.TimeSeriesMulticlassClassificationPipeline method\), 1151](#)
[predict_proba\(\) \(evalml.pipelines.TimeSeriesBinaryClassificationPipeline method\), 1285](#)
[predict_proba\(\) \(evalml.pipelines.TimeSeriesClassificationPipeline method\), 1292](#)
[predict_proba\(\) \(evalml.pipelines.TimeSeriesMulticlassClassificationPipeline method\), 1298](#)
[predict_proba\(\) \(evalml.pipelines.XGBoostClassifier method\), 1309](#)
[predict_proba\(\) \(evalml.pipelines.XGBoostRegressor method\), 1312](#)
[predict_proba_in_sample\(\) \(evalml.pipelines.time_series_classification_pipelines.TimeSeriesBinaryClassificationPipeline method\), 1139](#)
[predict_proba_in_sample\(\) \(evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline method\), 1145](#)
[predict_proba_in_sample\(\) \(evalml.pipelines.time_series_classification_pipelines.TimeSeriesMulticlassClassificationPipeline method\), 1151](#)
[predict_proba_in_sample\(\) \(evalml.pipelines.TimeSeriesBinaryClassificationPipeline method\), 1286](#)
[predict_proba_in_sample\(\) \(evalml.pipelines.TimeSeriesClassificationPipeline method\), 1292](#)
[predict_proba_in_sample\(\) \(evalml.pipelines.TimeSeriesMulticlassClassificationPipeline method\), 1298](#)
[print_deps\(\) \(in module evalml.utils.cli_utils\), 1340](#)
[print_info\(\) \(in module evalml.utils.cli_utils\), 1340](#)
[print_sys_info\(\) \(in module evalml.utils.cli_utils\), 1340](#)

[ProblemTypes \(class in evalml.problem_types\), 1327](#)
[ProblemTypes \(class in evalml.problem_types.problem_types\), 1322](#)
[ProphetRegressor \(class in evalml.pipelines\), 1246](#)
[ProphetRegressor \(class in evalml.pipelines.components\), 1044](#)
[ProphetRegressor \(class in evalml.pipelines.components.estimators\), 689](#)
[ProphetRegressor \(class in evalml.pipelines.components.estimators.regressors\), 624](#)
[ProphetRegressor \(class in evalml.pipelines.components.estimators.regressors.prophet_regressor\), 586](#)
[propose\(\) \(evalml.tuners.grid_search_tuner.GridSearchTuner method\), 1330](#)
[propose\(\) \(evalml.tuners.GridSearchTuner method\), 1335](#)
[propose\(\) \(evalml.tuners.random_search_tuner.RandomSearchTuner method\), 1336](#)
[propose\(\) \(evalml.tuners.RandomSearchTuner method\), 1337](#)
[propose\(\) \(evalml.tuners.SKOptTuner method\), 1337](#)
[propose\(\) \(evalml.tuners.SKOptTuner method\), 1338](#)
[propose\(\) \(evalml.tuners.tuner.Tuner method\), 1333](#)

R

[R2 \(class in evalml.objectives\), 460](#)
[R2 \(class in evalml.objectives.standard_metrics\), 382](#)
[raise_error_callback\(\) \(in module evalml.callbacks.callbacks\), 1202](#)
[RandomForestClassifier \(class in evalml.pipelines\), 1249](#)
[RandomForestClassifier \(class in evalml.pipelines.components\), 1047](#)
[RandomForestClassifier \(class in evalml.pipelines.components.estimators\), 691](#)
[RandomForestClassifier \(class in evalml.pipelines.components.estimators.classifiers\), 551](#)
[RandomForestClassifier \(class in evalml.pipelines.components.estimators.classifiers.rf_classifier\), 519](#)
[RandomForestRegressor \(class in evalml.pipelines\), 1251](#)
[RandomForestRegressor \(class in evalml.pipelines.components\), 1050](#)
[RandomForestRegressor \(class in evalml.pipelines.components.estimators\), 694](#)

[RandomForestRegressor](#) (class in [evalml.pipelines.components.estimators.regressors](#)), [626](#)
[RandomForestRegressor](#) (class in [evalml.pipelines.components.estimators.regressor_select_from_model](#)), [589](#)
[RandomSearchTuner](#) (class in [evalml.tuners](#)), [1335](#)
[RandomSearchTuner](#) (class in [evalml.tuners.random_search_tuner](#)), [1329](#)
[rankings\(\)](#) ([evalml.automl.automl_search.AutoMLSearch](#) property), [201](#)
[rankings\(\)](#) ([evalml.AutoMLSearch](#) property), [1354](#)
[readable_explanation\(\)](#) (in module [evalml.model_understanding.feature_explanations](#)), [287](#)
[Recall](#) (class in [evalml.objectives](#)), [461](#)
[Recall](#) (class in [evalml.objectives.standard_metrics](#)), [384](#)
[RecallMacro](#) (class in [evalml.objectives](#)), [463](#)
[RecallMacro](#) (class in [evalml.objectives.standard_metrics](#)), [386](#)
[RecallMicro](#) (class in [evalml.objectives](#)), [465](#)
[RecallMicro](#) (class in [evalml.objectives.standard_metrics](#)), [387](#)
[RecallWeighted](#) (class in [evalml.objectives](#)), [466](#)
[RecallWeighted](#) (class in [evalml.objectives.standard_metrics](#)), [389](#)
[register\(\)](#) ([evalml.pipelines.components.component_base_meta.ComponentBaseMeta](#) method), [946](#)
[register\(\)](#) ([evalml.pipelines.components.ComponentBaseMeta](#) method), [968](#)
[register\(\)](#) ([evalml.pipelines.components.transformers.encoders.one_hot_encoder.OneHotEncoderMeta](#) method), [726](#)
[register\(\)](#) ([evalml.pipelines.components.transformers.imputers.target_imputer.TargetImputerMeta](#) method), [767](#)
[register\(\)](#) ([evalml.pipelines.pipeline_meta.PipelineBaseMeta](#) method), [1128](#)
[register\(\)](#) ([evalml.utils.base_meta.BaseMeta](#) method), [1339](#)
[RegressionObjective](#) (class in [evalml.objectives](#)), [468](#)
[RegressionObjective](#) (class in [evalml.objectives.regression_objective](#)), [331](#)
[RegressionPipeline](#) (class in [evalml.pipelines](#)), [1254](#)
[RegressionPipeline](#) (class in [evalml.pipelines.regression_pipeline](#)), [1128](#)
[results\(\)](#) ([evalml.automl.automl_search.AutoMLSearch](#) property), [201](#)
[results\(\)](#) ([evalml.AutoMLSearch](#) property), [213](#)
[results\(\)](#) ([evalml.AutoMLSearch](#) property), [1354](#)
[RFCClassfierSelectFromModel](#) (class in [evalml.pipelines](#)), [1259](#)
[RFCClassfierSelectFromModel](#) (class in [evalml.pipelines.components](#)), [1052](#)
[RFCRegressorSelectFromModel](#) (class in [evalml.pipelines.components.transformers](#)), [913](#)
[RFCRegressorSelectFromModel](#) (class in [evalml.pipelines.components.transformers.feature_selection](#)), [750](#)
[RFCRegressorSelectFromModel](#) (class in [evalml.pipelines.components.transformers.feature_selection.rf_classifier](#)), [741](#)
[RFRegressorSelectFromModel](#) (class in [evalml.pipelines](#)), [1261](#)
[RFRegressorSelectFromModel](#) (class in [evalml.pipelines.components](#)), [1055](#)
[RFRegressorSelectFromModel](#) (class in [evalml.pipelines.components.transformers](#)), [916](#)
[RFRegressorSelectFromModel](#) (class in [evalml.pipelines.components.transformers.feature_selection](#)), [753](#)
[RFRegressorSelectFromModel](#) (class in [evalml.pipelines.components.transformers.feature_selection.rf_regressor](#)), [744](#)
[roc_curve\(\)](#) (in module [evalml.model_understanding](#)), [313](#)
[roc_curve\(\)](#) (in module [evalml.model_understanding.graphs](#)), [298](#)
[RootMeanSquaredError](#) (class in [evalml.objectives](#)), [470](#)
[RootMeanSquaredError](#) (class in [evalml.objectives.regression_objective](#)), [390](#)
[RootMeanSquaredLogError](#) (class in [evalml.objectives](#)), [471](#)
[RootMeanSquaredLogError](#) (class in [evalml.objectives.regression_objective](#)), [392](#)

S

[safe_repr\(\)](#) (in module [evalml.utils](#)), [1349](#)
[safe_repr\(\)](#) (in module [evalml.utils.gen_utils](#)), [1343](#)
[save\(\)](#) ([evalml.automl.automl_search.AutoMLSearch](#) method), [202](#)
[save\(\)](#) ([evalml.AutoMLSearch](#) method), [213](#)
[save\(\)](#) ([evalml.AutoMLSearch](#) method), [1354](#)
[save\(\)](#) ([evalml.pipelines.ARIMARegressor](#) method), [1170](#)
[save\(\)](#) ([evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline](#) method), [1103](#)
[save\(\)](#) ([evalml.pipelines.BinaryClassificationPipeline](#) method), [1175](#)
[save\(\)](#) ([evalml.pipelines.CatBoostClassifier](#) method), [1179](#)

[save \(\) \(evalml.pipelines.CatBoostRegressor method\), 1181](#), [save \(\) \(evalml.pipelines.components.Estimator method\), 998](#)
[save \(\) \(evalml.pipelines.classification_pipeline.ClassificationPipeline method\), 1110](#), [save \(\) \(evalml.pipelines.components.estimators.ARIMARegressor method\), 643](#)
[save \(\) \(evalml.pipelines.ClassificationPipeline method\), 1186](#), [save \(\) \(evalml.pipelines.components.estimators.BaselineClassifier method\), 646](#)
[save \(\) \(evalml.pipelines.components.ARIMARegressor method\), 955](#), [save \(\) \(evalml.pipelines.components.estimators.BaselineRegressor method\), 648](#)
[save \(\) \(evalml.pipelines.components.BaselineClassifier method\), 958](#), [save \(\) \(evalml.pipelines.components.estimators.CatBoostClassifier method\), 651](#)
[save \(\) \(evalml.pipelines.components.BaselineRegressor method\), 960](#), [save \(\) \(evalml.pipelines.components.estimators.CatBoostRegressor method\), 654](#)
[save \(\) \(evalml.pipelines.components.CatBoostClassifier method\), 963](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.baseline_classifier method\), 495](#)
[save \(\) \(evalml.pipelines.components.CatBoostRegressor method\), 966](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.BaselineClassifier method\), 530](#)
[save \(\) \(evalml.pipelines.components.component_base.ComponentBase method\), 945](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.catboost_classifier method\), 498](#)
[save \(\) \(evalml.pipelines.components.ComponentBase method\), 967](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.CatBoostClassifier method\), 533](#)
[save \(\) \(evalml.pipelines.components.DateTimeFeaturizer method\), 970](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.decision_tree_classifier method\), 502](#)
[save \(\) \(evalml.pipelines.components.DecisionTreeClassifier method\), 974](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.DecisionTreeRegressor method\), 536](#)
[save \(\) \(evalml.pipelines.components.DecisionTreeRegressor method\), 977](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.elasticnet_classifier method\), 505](#)
[save \(\) \(evalml.pipelines.components.DelayedFeatureTransformer method\), 979](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.ElasticNetClassifier method\), 539](#)
[save \(\) \(evalml.pipelines.components.DFSTransformer method\), 981](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.et_classifier method\), 509](#)
[save \(\) \(evalml.pipelines.components.DropColumns method\), 983](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.ExtraTreesClassifier method\), 542](#)
[save \(\) \(evalml.pipelines.components.DropNullColumns method\), 986](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.kneighbors_classifier method\), 512](#)
[save \(\) \(evalml.pipelines.components.DropRowsTransformer method\), 988](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.KNeighborsClassifier method\), 545](#)
[save \(\) \(evalml.pipelines.components.ElasticNetClassifier method\), 991](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.lightgbm_classifier method\), 515](#)
[save \(\) \(evalml.pipelines.components.ElasticNetRegressor method\), 993](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.LightGBMClassifier method\), 548](#)
[save \(\) \(evalml.pipelines.components.EmailFeaturizer method\), 995](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.logistic_regression_classifier method\), 519](#)
[save \(\) \(evalml.pipelines.components.ensemble.stacked_ensemble_classifier method\), 478](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.LogisticRegressionClassifier method\), 551](#)
[save \(\) \(evalml.pipelines.components.ensemble.stacked_ensemble_classifier method\), 481](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.RandomForestClassifier method\), 554](#)
[save \(\) \(evalml.pipelines.components.ensemble.stacked_ensemble_classifier method\), 484](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.rf_classifier method\), 522](#)
[save \(\) \(evalml.pipelines.components.ensemble.StackedEnsembleClassifier method\), 487](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.svm_classifier method\), 524](#)
[save \(\) \(evalml.pipelines.components.ensemble.StackedEnsembleClassifier method\), 489](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.SVMClassifier method\), 556](#)
[save \(\) \(evalml.pipelines.components.ensemble.StackedEnsembleRegressor method\), 492](#), [save \(\) \(evalml.pipelines.components.estimators.classifiers.xgboost_classifier method\), 527](#)

[save \(\) \(evalml.pipelines.components.estimators.classifiers.XGBoostClassifier method\), 559](#)
[save \(\) \(evalml.pipelines.components.estimators.DecisionTreeClassifier method\), 657](#)
[save \(\) \(evalml.pipelines.components.estimators.DecisionTreeRegressor method\), 660](#)
[save \(\) \(evalml.pipelines.components.estimators.ElasticNetClassifier method\), 663](#)
[save \(\) \(evalml.pipelines.components.estimators.ElasticNetRegressor method\), 665](#)
[save \(\) \(evalml.pipelines.components.estimators.Estimator save \(\) \(evalml.pipelines.components.estimators.regressors.LinearRegressor method\), 668](#)
[save \(\) \(evalml.pipelines.components.estimators.estimators.Estimator method\), 639](#)
[save \(\) \(evalml.pipelines.components.estimators.ExtraTreesClassifier method\), 671](#)
[save \(\) \(evalml.pipelines.components.estimators.ExtraTreesRegressor method\), 674](#)
[save \(\) \(evalml.pipelines.components.estimators.KNeighborsClassifier method\), 677](#)
[save \(\) \(evalml.pipelines.components.estimators.LightGBMClassifier method\), 680](#)
[save \(\) \(evalml.pipelines.components.estimators.LightGBMRegressor method\), 683](#)
[save \(\) \(evalml.pipelines.components.estimators.LinearRegressor method\), 685](#)
[save \(\) \(evalml.pipelines.components.estimators.LogisticRegressionClassifier method\), 688](#)
[save \(\) \(evalml.pipelines.components.estimators.ProphetRegressor method\), 691](#)
[save \(\) \(evalml.pipelines.components.estimators.RandomForestClassifier method\), 694](#)
[save \(\) \(evalml.pipelines.components.estimators.RandomForestRegressor method\), 696](#)
[save \(\) \(evalml.pipelines.components.estimators.regressors.sarima \(evalml.pipelines.components.estimators.SVMRegressor method\), 562](#)
[save \(\) \(evalml.pipelines.components.estimators.regressors.ARIMARegressor method\), 604](#)
[save \(\) \(evalml.pipelines.components.estimators.regressors.baseline \(evalml.pipelines.components.estimators.XGBoostClassifier method\), 565](#)
[save \(\) \(evalml.pipelines.components.estimators.regressors.BaselineRegressor method\), 606](#)
[save \(\) \(evalml.pipelines.components.estimators.regressors.xgboost \(evalml.pipelines.components.estimators.XGBoostRegressor method\), 569](#)
[save \(\) \(evalml.pipelines.components.estimators.regressors.CatBoostRegressor method\), 609](#)
[save \(\) \(evalml.pipelines.components.estimators.regressors.decision_tree \(evalml.pipelines.components.Imputer method\), 572](#)
[save \(\) \(evalml.pipelines.components.estimators.regressors.DecisionTreeRegressor method\), 612](#)
[save \(\) \(evalml.pipelines.components.estimators.regressors.elasticnet \(evalml.pipelines.components.LabelEncoder method\), 575](#)
[save \(\) \(evalml.pipelines.components.estimators.regressors.ElasticNetRegressor method\), 615](#)

<code>save()</code> (<code>evalml.pipelines.components.LightGBMClassifier</code> method), 1017	<code>save()</code> (<code>evalml.pipelines.components.TextFeaturizer</code> method), 1083
<code>save()</code> (<code>evalml.pipelines.components.LightGBMRegressor</code> method), 1020	<code>save()</code> (<code>evalml.pipelines.components.TimeSeriesBaselineEstimator</code> method), 1085
<code>save()</code> (<code>evalml.pipelines.components.LinearDiscriminantAnalysis</code> method), 1022	<code>save()</code> (<code>evalml.pipelines.components.Transformer</code> method), 1088
<code>save()</code> (<code>evalml.pipelines.components.LinearRegressor</code> method), 1025	<code>save()</code> (<code>evalml.pipelines.components.transformers.column_selectors.ColumnSelector</code> method), 860
<code>save()</code> (<code>evalml.pipelines.components.LogisticRegressionClassifier</code> method), 1027	<code>save()</code> (<code>evalml.pipelines.components.transformers.column_selectors.DropColumns</code> method), 862
<code>save()</code> (<code>evalml.pipelines.components.LogTransformer</code> method), 1029	<code>save()</code> (<code>evalml.pipelines.components.transformers.column_selectors.SelectColumns</code> method), 864
<code>save()</code> (<code>evalml.pipelines.components.LSA</code> method), 1032	<code>save()</code> (<code>evalml.pipelines.components.transformers.column_selectors.SelectColumns</code> method), 866
<code>save()</code> (<code>evalml.pipelines.components.OneHotEncoder</code> method), 1035	<code>save()</code> (<code>evalml.pipelines.components.transformers.DateTimeFeaturizer</code> method), 873
<code>save()</code> (<code>evalml.pipelines.components.Oversampler</code> method), 1037	<code>save()</code> (<code>evalml.pipelines.components.transformers.DelayedFeatureTransformer</code> method), 876
<code>save()</code> (<code>evalml.pipelines.components.PCA</code> method), 1039	<code>save()</code> (<code>evalml.pipelines.components.transformers.DFSTransformer</code> method), 878
<code>save()</code> (<code>evalml.pipelines.components.PerColumnImputer</code> method), 1042	<code>save()</code> (<code>evalml.pipelines.components.transformers.dimensionality_reduction.ReducedDimensionalityTransformer</code> method), 711
<code>save()</code> (<code>evalml.pipelines.components.PolynomialDetrender</code> method), 1044	<code>save()</code> (<code>evalml.pipelines.components.transformers.dimensionality_reduction.ReducedDimensionalityTransformer</code> method), 716
<code>save()</code> (<code>evalml.pipelines.components.ProphetRegressor</code> method), 1047	<code>save()</code> (<code>evalml.pipelines.components.transformers.dimensionality_reduction.ReducedDimensionalityTransformer</code> method), 719
<code>save()</code> (<code>evalml.pipelines.components.RandomForestClassifier</code> method), 1050	<code>save()</code> (<code>evalml.pipelines.components.transformers.dimensionality_reduction.ReducedDimensionalityTransformer</code> method), 714
<code>save()</code> (<code>evalml.pipelines.components.RandomForestRegressor</code> method), 1052	<code>save()</code> (<code>evalml.pipelines.components.transformers.DropColumns</code> method), 880
<code>save()</code> (<code>evalml.pipelines.components.RFClassifierSelectFromModel</code> method), 1055	<code>save()</code> (<code>evalml.pipelines.components.transformers.DropNullColumns</code> method), 882
<code>save()</code> (<code>evalml.pipelines.components.RFRegressorSelectFromModel</code> method), 1057	<code>save()</code> (<code>evalml.pipelines.components.transformers.DropRowsTransformer</code> method), 885
<code>save()</code> (<code>evalml.pipelines.components.SelectByType</code> method), 1059	<code>save()</code> (<code>evalml.pipelines.components.transformers.EmailFeaturizer</code> method), 887
<code>save()</code> (<code>evalml.pipelines.components.SelectColumns</code> method), 1061	<code>save()</code> (<code>evalml.pipelines.components.transformers.encoders.label_encoder.LabelEncoder</code> method), 721
<code>save()</code> (<code>evalml.pipelines.components.SimpleImputer</code> method), 1064	<code>save()</code> (<code>evalml.pipelines.components.transformers.encoders.LabelEncoder</code> method), 731
<code>save()</code> (<code>evalml.pipelines.components.StackedEnsembleClassifier</code> method), 1066	<code>save()</code> (<code>evalml.pipelines.components.transformers.encoders.onehot_encoder.OneHotEncoder</code> method), 725
<code>save()</code> (<code>evalml.pipelines.components.StackedEnsembleRegressor</code> method), 1069	<code>save()</code> (<code>evalml.pipelines.components.transformers.encoders.OneHotEncoder</code> method), 735
<code>save()</code> (<code>evalml.pipelines.components.StandardScaler</code> method), 1071	<code>save()</code> (<code>evalml.pipelines.components.transformers.encoders.target_encoder.TargetEncoder</code> method), 729
<code>save()</code> (<code>evalml.pipelines.components.SVMClassifier</code> method), 1073	<code>save()</code> (<code>evalml.pipelines.components.transformers.encoders.TargetEncoder</code> method), 737
<code>save()</code> (<code>evalml.pipelines.components.SVMRegressor</code> method), 1076	<code>save()</code> (<code>evalml.pipelines.components.transformers.feature_selection.FeatureSelector</code> method), 740
<code>save()</code> (<code>evalml.pipelines.components.TargetEncoder</code> method), 1078	<code>save()</code> (<code>evalml.pipelines.components.transformers.feature_selection.FeatureSelector</code> method), 749
<code>save()</code> (<code>evalml.pipelines.components.TargetImputer</code> method), 1081	<code>save()</code> (<code>evalml.pipelines.components.transformers.feature_selection.rf_classifier.RandomForestClassifier</code> method), 743

[save \(\) \(evalml.pipelines.components.transformers.features_selection.RFClassifierSelectFromModel method\), 746](#)
[save \(\) \(evalml.pipelines.components.transformers.features_selection.RFRegressorSelectFromModel method\), 746](#)
[save \(\) \(evalml.pipelines.components.transformers.features_selection.RFClassifierSelectFromModel method\), 752](#)
[save \(\) \(evalml.pipelines.components.transformers.features_selection.RFRegressorSelectFromModel method\), 752](#)
[save \(\) \(evalml.pipelines.components.transformers.FeaturesSelector \(evalml.pipelines.components.transformers.preprocessing.DropNull method\), 755](#)
[save \(\) \(evalml.pipelines.components.transformers.FeaturesSelector \(evalml.pipelines.components.transformers.preprocessing.DropNull method\), 755](#)
[save \(\) \(evalml.pipelines.components.transformers.Imputer \(evalml.pipelines.components.transformers.preprocessing.EmailFeatureImputer method\), 892](#)
[save \(\) \(evalml.pipelines.components.transformers.imputer \(evalml.pipelines.components.transformers.preprocessing.feature_selection.Imputer method\), 770](#)
[save \(\) \(evalml.pipelines.components.transformers.imputer \(evalml.pipelines.components.transformers.preprocessing.log_transform.Imputer method\), 758](#)
[save \(\) \(evalml.pipelines.components.transformers.imputer \(evalml.pipelines.components.transformers.preprocessing.log_transform.Imputer method\), 758](#)
[save \(\) \(evalml.pipelines.components.transformers.imputer \(evalml.pipelines.components.transformers.preprocessing.LogTransformer method\), 761](#)
[save \(\) \(evalml.pipelines.components.transformers.imputer \(evalml.pipelines.components.transformers.preprocessing.LSA method\), 773](#)
[save \(\) \(evalml.pipelines.components.transformers.imputer \(evalml.pipelines.components.transformers.preprocessing.Lsa.LSA method\), 764](#)
[save \(\) \(evalml.pipelines.components.transformers.imputer \(evalml.pipelines.components.transformers.preprocessing.polynomial.Imputer method\), 775](#)
[save \(\) \(evalml.pipelines.components.transformers.imputer \(evalml.pipelines.components.transformers.preprocessing.Polynomial method\), 767](#)
[save \(\) \(evalml.pipelines.components.transformers.imputer \(evalml.pipelines.components.transformers.preprocessing.text_feature.Imputer method\), 777](#)
[save \(\) \(evalml.pipelines.components.transformers.LabelEncoder \(evalml.pipelines.components.transformers.preprocessing.text_transform.LabelEncoder method\), 894](#)
[save \(\) \(evalml.pipelines.components.transformers.LinearDiscriminantAnalysis \(evalml.pipelines.components.transformers.preprocessing.TextTransformer method\), 896](#)
[save \(\) \(evalml.pipelines.components.transformers.LogTransformer \(evalml.pipelines.components.transformers.preprocessing.TextTransformer method\), 898](#)
[save \(\) \(evalml.pipelines.components.transformers.LSA save \(\) \(evalml.pipelines.components.transformers.preprocessing.transformer.LSA method\), 900](#)
[save \(\) \(evalml.pipelines.components.transformers.OneHotEncoder \(evalml.pipelines.components.transformers.preprocessing.transformer.OneHotEncoder method\), 904](#)
[save \(\) \(evalml.pipelines.components.transformers.Oversampler \(evalml.pipelines.components.transformers.preprocessing.URLFeatureTransformer method\), 906](#)
[save \(\) \(evalml.pipelines.components.transformers.PCA save \(\) \(evalml.pipelines.components.transformers.RFClassifierSelectFromModel method\), 908](#)
[save \(\) \(evalml.pipelines.components.transformers.PerColumnImputer \(evalml.pipelines.components.transformers.RFRegressorSelectFromModel method\), 911](#)
[save \(\) \(evalml.pipelines.components.transformers.PolynomialDegreeReducer \(evalml.pipelines.components.transformers.samplers.base_sampler.PolynomialDegreeReducer method\), 913](#)
[save \(\) \(evalml.pipelines.components.transformers.preprocessing.datetime.DateTimeFeatureTransformer \(evalml.pipelines.components.transformers.samplers.Oversampler method\), 780](#)
[save \(\) \(evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer \(evalml.pipelines.components.transformers.samplers.oversampler.DelayedFeatureTransformer method\), 812](#)
[save \(\) \(evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer \(evalml.pipelines.components.transformers.samplers.undersampler.DelayedFeatureTransformer method\), 783](#)
[save \(\) \(evalml.pipelines.components.transformers.preprocessing.DelayedFeatureTransformer \(evalml.pipelines.components.transformers.samplers.undersampler.DelayedFeatureTransformer method\), 815](#)
[save \(\) \(evalml.pipelines.components.transformers.preprocessing.DEScalingTransformer \(evalml.pipelines.components.transformers.scalers.standard_scaler.DEScalingTransformer method\), 817](#)

[save \(\) \(evalml.pipelines.components.transformers.scalers.StandardScaler method\), 857](#)
[save \(\) \(evalml.pipelines.components.transformers.SelectByType method\), 921](#)
[save \(\) \(evalml.pipelines.components.transformers.SelectColumns method\), 923](#)
[save \(\) \(evalml.pipelines.components.transformers.SimpleImputer method\), 925](#)
[save \(\) \(evalml.pipelines.components.transformers.StandardScaler method\), 927](#)
[save \(\) \(evalml.pipelines.components.transformers.TargetEncoder method\), 930](#)
[save \(\) \(evalml.pipelines.components.transformers.TargetImputer method\), 932](#)
[save \(\) \(evalml.pipelines.components.transformers.TextFeaturizer method\), 934](#)
[save \(\) \(evalml.pipelines.components.transformers.Transformer method\), 937](#)
[save \(\) \(evalml.pipelines.components.transformers.transformer.Transformer method\), 869](#)
[save \(\) \(evalml.pipelines.components.transformers.Undersampler method\), 940](#)
[save \(\) \(evalml.pipelines.components.transformers.URLFeaturizer method\), 942](#)
[save \(\) \(evalml.pipelines.components.Undersampler method\), 1091](#)
[save \(\) \(evalml.pipelines.components.URLFeaturizer method\), 1093](#)
[save \(\) \(evalml.pipelines.components.XGBoostClassifier method\), 1095](#)
[save \(\) \(evalml.pipelines.components.XGBoostRegressor method\), 1098](#)
[save \(\) \(evalml.pipelines.DecisionTreeClassifier method\), 1193](#)
[save \(\) \(evalml.pipelines.DecisionTreeRegressor method\), 1196](#)
[save \(\) \(evalml.pipelines.DelayedFeatureTransformer method\), 1198](#)
[save \(\) \(evalml.pipelines.DFSTransformer method\), 1201](#)
[save \(\) \(evalml.pipelines.ElasticNetClassifier method\), 1203](#)
[save \(\) \(evalml.pipelines.ElasticNetRegressor method\), 1206](#)
[save \(\) \(evalml.pipelines.Estimator method\), 1209](#)
[save \(\) \(evalml.pipelines.ExtraTreesClassifier method\), 1212](#)
[save \(\) \(evalml.pipelines.ExtraTreesRegressor method\), 1215](#)
[save \(\) \(evalml.pipelines.FeatureSelector method\), 1217](#)
[save \(\) \(evalml.pipelines.KNeighborsClassifier method\), 1220](#)
[save \(\) \(evalml.pipelines.LightGBMClassifier method\),](#)
[save \(\) \(evalml.pipelines.LightGBMRegressor method\), 1225](#)
[save \(\) \(evalml.pipelines.LinearRegressor method\), 1228](#)
[save \(\) \(evalml.pipelines.LogisticRegressionClassifier method\), 1231](#)
[save \(\) \(evalml.pipelines.multiclass_classification_pipeline.MulticlassClassifier method\), 1120](#)
[save \(\) \(evalml.pipelines.MulticlassClassificationPipeline method\), 1235](#)
[save \(\) \(evalml.pipelines.OneHotEncoder method\), 1239](#)
[save \(\) \(evalml.pipelines.PerColumnImputer method\), 1241](#)
[save \(\) \(evalml.pipelines.pipeline_base.PipelineBase method\), 1126](#)
[save \(\) \(evalml.pipelines.PipelineBase method\), 1245](#)
[save \(\) \(evalml.pipelines.ProphetRegressor method\), 1249](#)
[save \(\) \(evalml.pipelines.RandomForestClassifier method\), 1251](#)
[save \(\) \(evalml.pipelines.RandomForestRegressor method\), 1254](#)
[save \(\) \(evalml.pipelines.regression_pipeline.RegressionPipeline method\), 1132](#)
[save \(\) \(evalml.pipelines.RegressionPipeline method\), 1258](#)
[save \(\) \(evalml.pipelines.RFClassifierSelectFromModel method\), 1261](#)
[save \(\) \(evalml.pipelines.RFRegressorSelectFromModel method\), 1264](#)
[save \(\) \(evalml.pipelines.SimpleImputer method\), 1266](#)
[save \(\) \(evalml.pipelines.StackedEnsembleClassifier method\), 1269](#)
[save \(\) \(evalml.pipelines.StackedEnsembleRegressor method\), 1271](#)
[save \(\) \(evalml.pipelines.StandardScaler method\), 1273](#)
[save \(\) \(evalml.pipelines.SVMClassifier method\), 1275](#)
[save \(\) \(evalml.pipelines.SVMRegressor method\), 1278](#)
[save \(\) \(evalml.pipelines.TargetEncoder method\), 1280](#)
[save \(\) \(evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassifier method\), 1139](#)
[save \(\) \(evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassifier method\), 1145](#)
[save \(\) \(evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassifier method\), 1152](#)
[save \(\) \(evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase method\), 1158](#)
[save \(\) \(evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressor method\), 1163](#)
[save \(\) \(evalml.pipelines.TimeSeriesBinaryClassificationPipeline method\), 1286](#)

[save\(\) \(evalml.pipelines.TimeSeriesClassificationPipeline method\), 1292](#)
[save\(\) \(evalml.pipelines.TimeSeriesMulticlassClassificationPipeline method\), 1299](#)
[save\(\) \(evalml.pipelines.TimeSeriesRegressionPipeline method\), 1304](#)
[save\(\) \(evalml.pipelines.Transformer method\), 1307](#)
[save\(\) \(evalml.pipelines.XGBoostClassifier method\), 1310](#)
[save\(\) \(evalml.pipelines.XGBoostRegressor method\), 1312](#)
[save_plot\(\) \(in module evalml.utils\), 1349](#)
[save_plot\(\) \(in module evalml.utils.gen_utils\), 1343](#)
[scikit_learn_wrapped_estimator\(\) \(in module evalml.pipelines.components.utils\), 948](#)
[score\(\) \(evalml.objectives.AccuracyBinary method\), 401](#)
[score\(\) \(evalml.objectives.AccuracyMulticlass method\), 402](#)
[score\(\) \(evalml.objectives.AUC method\), 404](#)
[score\(\) \(evalml.objectives.AUCMacro method\), 405](#)
[score\(\) \(evalml.objectives.AUCMicro method\), 407](#)
[score\(\) \(evalml.objectives.AUCWeighted method\), 408](#)
[score\(\) \(evalml.objectives.BalancedAccuracyBinary method\), 411](#)
[score\(\) \(evalml.objectives.BalancedAccuracyMulticlass method\), 412](#)
[score\(\) \(evalml.objectives.binary_classification_objective.BinaryClassificationObjective method\), 317](#)
[score\(\) \(evalml.objectives.BinaryClassificationObjective method\), 415](#)
[score\(\) \(evalml.objectives.cost_benefit_matrix.CostBenefitMatrix method\), 319](#)
[score\(\) \(evalml.objectives.CostBenefitMatrix method\), 417](#)
[score\(\) \(evalml.objectives.ExpVariance method\), 419](#)
[score\(\) \(evalml.objectives.F1 method\), 421](#)
[score\(\) \(evalml.objectives.F1Macro method\), 422](#)
[score\(\) \(evalml.objectives.F1Micro method\), 424](#)
[score\(\) \(evalml.objectives.F1Weighted method\), 425](#)
[score\(\) \(evalml.objectives.fraud_cost.FraudCost method\), 322](#)
[score\(\) \(evalml.objectives.FraudCost method\), 428](#)
[score\(\) \(evalml.objectives.Gini method\), 431](#)
[score\(\) \(evalml.objectives.lead_scoring.LeadScoring method\), 325](#)
[score\(\) \(evalml.objectives.LeadScoring method\), 433](#)
[score\(\) \(evalml.objectives.LogLossBinary method\), 435](#)
[score\(\) \(evalml.objectives.LogLossMulticlass method\), 436](#)
[score\(\) \(evalml.objectives.MAE method\), 438](#)
[score\(\) \(evalml.objectives.MAPE method\), 439](#)
[score\(\) \(evalml.objectives.MaxError method\), 441](#)
[score\(\) \(evalml.objectives.MCCBinary method\), 443](#)
[score\(\) \(evalml.objectives.MCCMulticlass method\), 444](#)
[score\(\) \(evalml.objectives.MeanSquaredLogError method\), 446](#)
[score\(\) \(evalml.objectives.MedianAE method\), 447](#)
[score\(\) \(evalml.objectives.MSE method\), 449](#)
[score\(\) \(evalml.objectives.multiclass_classification_objective.MulticlassClassificationObjective method\), 327](#)
[score\(\) \(evalml.objectives.MulticlassClassificationObjective method\), 451](#)
[score\(\) \(evalml.objectives.objective_base.ObjectiveBase method\), 330](#)
[score\(\) \(evalml.objectives.ObjectiveBase method\), 453](#)
[score\(\) \(evalml.objectives.Precision method\), 455](#)
[score\(\) \(evalml.objectives.PrecisionMacro method\), 456](#)
[score\(\) \(evalml.objectives.PrecisionMicro method\), 458](#)
[score\(\) \(evalml.objectives.PrecisionWeighted method\), 459](#)
[score\(\) \(evalml.objectives.R2 method\), 461](#)
[score\(\) \(evalml.objectives.Recall method\), 463](#)
[score\(\) \(evalml.objectives.RecallMacro method\), 464](#)
[score\(\) \(evalml.objectives.RecallMicro method\), 466](#)
[score\(\) \(evalml.objectives.RecallWeighted method\), 467](#)
[score\(\) \(evalml.objectives.regression_objective.RegressionObjective method\), 332](#)
[score\(\) \(evalml.objectives.RegressionObjective method\), 469](#)
[score\(\) \(evalml.objectives.RootMeanSquaredError method\), 471](#)
[score\(\) \(evalml.objectives.RootMeanSquaredLogError method\), 472](#)
[score\(\) \(evalml.objectives.sensitivity_low_alert.SensitivityLowAlert method\), 335](#)
[score\(\) \(evalml.objectives.SensitivityLowAlert method\), 475](#)
[score\(\) \(evalml.objectives.standard_metrics.AccuracyBinary method\), 338](#)
[score\(\) \(evalml.objectives.standard_metrics.AccuracyMulticlass method\), 340](#)
[score\(\) \(evalml.objectives.standard_metrics.AUC method\), 342](#)
[score\(\) \(evalml.objectives.standard_metrics.AUCMacro method\), 343](#)
[score\(\) \(evalml.objectives.standard_metrics.AUCMicro method\), 345](#)
[score\(\) \(evalml.objectives.standard_metrics.AUCWeighted method\), 346](#)
[score\(\) \(evalml.objectives.standard_metrics.BalancedAccuracyBinary method\), 348](#)

[score\(\) \(evalml.objectives.standard_metrics.BalancedAccuracyMulticlass method\), 350](#)
[score\(\) \(evalml.objectives.standard_metrics.ExpVariance score method\), 351](#)
[score\(\) \(evalml.objectives.standard_metrics.F1 method\), 353](#)
[score\(\) \(evalml.objectives.standard_metrics.F1Macro method\), 355](#)
[score\(\) \(evalml.objectives.standard_metrics.F1Micro method\), 356](#)
[score\(\) \(evalml.objectives.standard_metrics.F1Weighted method\), 357](#)
[score\(\) \(evalml.objectives.standard_metrics.Gini method\), 360](#)
[score\(\) \(evalml.objectives.standard_metrics.LogLossBinary method\), 362](#)
[score\(\) \(evalml.objectives.standard_metrics.LogLossMulticlass method\), 363](#)
[score\(\) \(evalml.objectives.standard_metrics.MAE method\), 365](#)
[score\(\) \(evalml.objectives.standard_metrics.MAPE method\), 366](#)
[score\(\) \(evalml.objectives.standard_metrics.MaxError method\), 367](#)
[score\(\) \(evalml.objectives.standard_metrics.MCCBinary method\), 370](#)
[score\(\) \(evalml.objectives.standard_metrics.MCCMulticlass method\), 371](#)
[score\(\) \(evalml.objectives.standard_metrics.MeanSquaredLogError method\), 372](#)
[score\(\) \(evalml.objectives.standard_metrics.MedianAE method\), 374](#)
[score\(\) \(evalml.objectives.standard_metrics.MSE method\), 375](#)
[score\(\) \(evalml.objectives.standard_metrics.Precision method\), 378](#)
[score\(\) \(evalml.objectives.standard_metrics.PrecisionMacro method\), 379](#)
[score\(\) \(evalml.objectives.standard_metrics.PrecisionMicro method\), 380](#)
[score\(\) \(evalml.objectives.standard_metrics.PrecisionWeighted method\), 382](#)
[score\(\) \(evalml.objectives.standard_metrics.R2 method\), 383](#)
[score\(\) \(evalml.objectives.standard_metrics.Recall method\), 386](#)
[score\(\) \(evalml.objectives.standard_metrics.RecallMacro method\), 387](#)
[score\(\) \(evalml.objectives.standard_metrics.RecallMicro method\), 388](#)
[score\(\) \(evalml.objectives.standard_metrics.RecallWeighted method\), 390](#)
[score\(\) \(evalml.objectives.standard_metrics.RootMeanSquaredError method\), 391](#)
[score\(\) \(evalml.objectives.standard_metrics.RootMeanSquaredLogError method\), 393](#)
[score\(\) \(evalml.objectives.time_series_regression_objective.TimeSeriesRegression method\), 395](#)
[score\(\) \(evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline method\), 1103](#)
[score\(\) \(evalml.pipelines.BinaryClassificationPipeline method\), 1176](#)
[score\(\) \(evalml.pipelines.classification_pipeline.ClassificationPipeline method\), 1110](#)
[score\(\) \(evalml.pipelines.ClassificationPipeline method\), 1186](#)
[score\(\) \(evalml.pipelines.components.utils.WrappedSKClassifier method\), 949](#)
[score\(\) \(evalml.pipelines.components.utils.WrappedSKRegressor method\), 950](#)
[score\(\) \(evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline method\), 1120](#)
[score\(\) \(evalml.pipelines.MulticlassClassificationPipeline method\), 1235](#)
[score\(\) \(evalml.pipelines.pipeline_base.PipelineBase method\), 1126](#)
[score\(\) \(evalml.pipelines.PipelineBase method\), 1246](#)
[score\(\) \(evalml.pipelines.regression_pipeline.RegressionPipeline method\), 1132](#)
[score\(\) \(evalml.pipelines.RegressionPipeline method\), 1258](#)
[score\(\) \(evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline method\), 1139](#)
[score\(\) \(evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline method\), 1146](#)
[score\(\) \(evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassificationPipeline method\), 1152](#)
[score\(\) \(evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase method\), 1158](#)
[score\(\) \(evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline method\), 1163](#)
[score\(\) \(evalml.pipelines.TimeSeriesBinaryClassificationPipeline method\), 1286](#)
[score\(\) \(evalml.pipelines.TimeSeriesClassificationPipeline method\), 1292](#)
[score\(\) \(evalml.pipelines.TimeSeriesMulticlassClassificationPipeline method\), 1299](#)
[score\(\) \(evalml.pipelines.TimeSeriesRegressionPipeline method\), 1304](#)
[score_needs_proba\(\) \(evalml.objectives.binary_classification_objective.BinaryClassificationObjective property\), 317](#)
[score_needs_proba\(\) \(evalml.objectives.BinaryClassificationObjective property\), 415](#)
[score_needs_proba\(\) \(evalml.objectives.multiclass_classification_objective.MulticlassClassificationObjective property\), 328](#)

[score_needs_proba\(\)](#) [\(evalml.objectives.MulticlassClassificationObjective property\)](#), 451
[score_needs_proba\(\)](#) [\(evalml.objectives.objective_base.ObjectiveBase property\)](#), 330
[score_needs_proba\(\)](#) [\(evalml.objectives.ObjectiveBase property\)](#), 453
[score_needs_proba\(\)](#) [\(evalml.objectives.regression_objective.RegressionObjective property\)](#), 332
[score_needs_proba\(\)](#) [\(evalml.objectives.RegressionObjective property\)](#), 470
[score_needs_proba\(\)](#) [\(evalml.objectives.time_series_regression_objective.TimeSeriesRegressionObjective property\)](#), 395
[score_pipeline\(\)](#) [\(in module evalml.automl.engine.engine_base\)](#), 187
[score_pipelines\(\)](#) [\(evalml.automl.automl_search.AutoMLSearch method\)](#), 202
[score_pipelines\(\)](#) [\(evalml.automl.AutoMLSearch method\)](#), 214
[score_pipelines\(\)](#) [\(evalml.AutoMLSearch method\)](#), 1355
[search\(\)](#) [\(evalml.automl.automl_search.AutoMLSearch method\)](#), 202
[search\(\)](#) [\(evalml.automl.AutoMLSearch method\)](#), 214
[search\(\)](#) [\(evalml.AutoMLSearch method\)](#), 1355
[search\(\)](#) [\(in module evalml\)](#), 1355
[search\(\)](#) [\(in module evalml.automl\)](#), 215
[search\(\)](#) [\(in module evalml.automl.automl_search\)](#), 202
[search_iteration_plot\(\)](#) [\(evalml.automl.pipeline_search_plots.PipelineSearchPlots class method\)](#), 206
[search_iterative\(\)](#) [\(in module evalml\)](#), 1356
[search_iterative\(\)](#) [\(in module evalml.automl\)](#), 216
[search_iterative\(\)](#) [\(in module evalml.automl.automl_search\)](#), 203
[SearchIterationPlot](#) [\(class in evalml.automl.pipeline_search_plots\)](#), 206
[SEED_BOUNDS](#) [\(in module evalml.utils\)](#), 1350
[SEED_BOUNDS](#) [\(in module evalml.utils.gen_utils\)](#), 1343
[SelectByType](#) [\(class in evalml.pipelines.components\)](#), 1058
[SelectByType](#) [\(class in evalml.pipelines.components.transformers\)](#), 919
[SelectByType](#) [\(class in evalml.pipelines.components.transformers.column_selectors\)](#), 862
[SelectColumns](#) [\(class in evalml.pipelines.components\)](#), 1060
[SelectColumns](#) [\(class in evalml.pipelines.components.transformers\)](#), 921
[SelectColumns](#) [\(class in evalml.pipelines.components.transformers.column_selectors\)](#), 864
[send_data_to_cluster\(\)](#) [\(evalml.automl.engine.dask_engine.DaskEngine method\)](#), 183
[send_data_to_cluster\(\)](#) [\(evalml.automl.engine.DaskEngine method\)](#), 192
[SensitivityLowAlert](#) [\(class in evalml.objectives\)](#), 473
[SensitivityLowAlert](#) [\(class in evalml.objectives.sensitivity_low_alert\)](#), 333
[SequentialComputation](#) [\(class in evalml.automl.engine.sequential_engine\)](#), 188
[SequentialEngine](#) [\(class in evalml.automl\)](#), 217
[SequentialEngine](#) [\(class in evalml.automl.engine\)](#), 195
[SequentialEngine](#) [\(class in evalml.automl.engine.sequential_engine\)](#), 189
[set_fit\(\)](#) [\(evalml.pipelines.components.component_base_meta.ComponentBaseMeta class method\)](#), 946
[set_fit\(\)](#) [\(evalml.pipelines.components.ComponentBaseMeta class method\)](#), 968
[set_fit\(\)](#) [\(evalml.pipelines.components.transformers.encoders.onehot_encoder.OneHotEncoder class method\)](#), 726
[set_fit\(\)](#) [\(evalml.pipelines.components.transformers.imputers.target_encoder.TargetEncoder class method\)](#), 767
[set_fit\(\)](#) [\(evalml.pipelines.pipeline_meta.PipelineBaseMeta class method\)](#), 1128
[set_fit\(\)](#) [\(evalml.utils.base_meta.BaseMeta class method\)](#), 1339
[set_params\(\)](#) [\(evalml.pipelines.components.utils.WrappedSKClassifierWrapper class method\)](#), 949
[set_params\(\)](#) [\(evalml.pipelines.components.utils.WrappedSKRegressorWrapper class method\)](#), 950
[setup_job_log\(\)](#) [\(evalml.automl.engine.cf_engine.CFEngine static method\)](#), 181
[setup_job_log\(\)](#) [\(evalml.automl.engine.CFEngine static method\)](#), 191
[setup_job_log\(\)](#) [\(evalml.automl.engine.dask_engine.DaskEngine static method\)](#), 183
[setup_job_log\(\)](#) [\(evalml.automl.engine.DaskEngine static method\)](#), 193
[setup_job_log\(\)](#) [\(evalml.automl.engine.engine_base.EngineBase static method\)](#), 183

static method), 185

setup_job_log() (evalml.automl.engine.EngineBase static method), 194

setup_job_log() (evalml.automl.engine.sequential_engine.SequentialEngine static method), 189

setup_job_log() (evalml.automl.engine.SequentialEngine static method), 195

setup_job_log() (evalml.automl.EngineBase static method), 214

setup_job_log() (evalml.automl.SequentialEngine static method), 217

silent_error_callback() (in module evalml.automl.callbacks), 205

SimpleImputer (class in evalml.pipelines), 1264

SimpleImputer (class in evalml.pipelines.components), 1062

SimpleImputer (class in evalml.pipelines.components.transformers), 923

SimpleImputer (class in evalml.pipelines.components.transformers.imputers), 773

SimpleImputer (class in evalml.pipelines.components.transformers.imputers.simple_imputer), 762

SKOptTuner (class in evalml.tuners), 1336

SKOptTuner (class in evalml.tuners.skopt_tuner), 1331

sparsity_score() (evalml.data_checks.sparsity_data_check.SparsityDataCheck static method), 242

sparsity_score() (evalml.data_checks.SparsityDataCheck static method), 264

SparsityDataCheck (class in evalml.data_checks), 263

SparsityDataCheck (class in evalml.data_checks.sparsity_data_check), 241

split() (evalml.preprocessing.data_splitters.time_series_split.TimeSeriesSplit method), 1314

split() (evalml.preprocessing.data_splitters.TimeSeriesSplit method), 1316

split() (evalml.preprocessing.data_splitters.training_validation_split.TrainingValidationSplit method), 1315

split() (evalml.preprocessing.data_splitters.TrainingValidationSplit method), 1317

split() (evalml.preprocessing.TimeSeriesSplit method), 1321

split() (evalml.preprocessing.TrainingValidationSplit method), 1321

split_data() (in module evalml.preprocessing), 1319

split_data() (in module evalml.preprocessing.utils), 1318

StackedEnsembleBase (class in evalml.pipelines.components.ensemble), 485

StackedEnsembleBase (class in evalml.pipelines.components.ensemble.stacked_ensemble_base), 476

StackedEnsembleClassifier (class in evalml.pipelines), 1266

StackedEnsembleClassifier (class in evalml.pipelines.components), 1064

StackedEnsembleClassifier (class in evalml.pipelines.components.ensemble), 487

StackedEnsembleClassifier (class in evalml.pipelines.components.ensemble.stacked_ensemble_classifier), 479

StackedEnsembleRegressor (class in evalml.pipelines), 1269

StackedEnsembleRegressor (class in evalml.pipelines.components), 1067

StackedEnsembleRegressor (class in evalml.pipelines.components.ensemble), 490

StackedEnsembleRegressor (class in evalml.pipelines.components.ensemble.stacked_ensemble_regressor), 482

StandardScaler (class in evalml.pipelines), 1271

StandardScaler (class in evalml.pipelines.components), 1069

SparsityDataCheck (class in evalml.pipelines.components.transformers), 926

StandardScaler (class in evalml.pipelines.components.transformers.scalers), 856

StandardScaler (class in evalml.pipelines.components.transformers.scalers.standard_scaler), 853

split() (evalml.preprocessing.data_splitters.time_series_split.TimeSeriesSplit method), 180

submit_evaluation_job() (evalml.automl.engine.cf_engine.CFClient method), 180

submit_evaluation_job() (evalml.automl.engine.cf_engine.CFEngine method), 191

submit_evaluation_job() (evalml.automl.engine.dask_engine.DaskEngine method), 183

submit_evaluation_job() (evalml.automl.engine.DaskEngine method), 193

submit_evaluation_job() (evalml.automl.engine.engine_base.EngineBase method), 185

submit_evaluation_job()

(*evalml.automl.engine.EngineBase method*), [submit_training_job\(\)](#)
[194](#) (*evalml.automl.engine.engine_base.EngineBase method*), [185](#)
[submit_evaluation_job\(\)](#) (*evalml.automl.engine.sequential_engine.SequentialEngine method*), [189](#)
[submit_evaluation_job\(\)](#) (*evalml.automl.engine.EngineBase method*), [194](#)
 (*evalml.automl.engine.SequentialEngine method*), [195](#) [submit_training_job\(\)](#)
[submit_evaluation_job\(\)](#) (*evalml.automl.EngineBase method*), [215](#) (*evalml.automl.engine.sequential_engine.SequentialEngine method*), [190](#)
[submit_evaluation_job\(\)](#) (*evalml.automl.SequentialEngine method*), [196](#) [submit_training_job\(\)](#)
[submit_scoring_job\(\)](#) (*evalml.automl.cf_engine.CFEngine method*), [181](#) (*evalml.automl.EngineBase method*), [215](#)
[submit_scoring_job\(\)](#) (*evalml.automl.SequentialEngine method*), [217](#) [submit_training_job\(\)](#)
 (*evalml.automl.cf_engine.CFEngine method*), [181](#) [submit_training_job\(\)](#)
[submit_scoring_job\(\)](#) (*evalml.automl.CFEngine method*), [191](#) (*evalml.automl.SequentialEngine method*), [218](#)
[submit_scoring_job\(\)](#) (*evalml.automl.dask_engine.DaskEngine method*), [184](#) [summary\(\)](#) (*evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline property*), [1104](#)
[submit_scoring_job\(\)](#) (*evalml.automl.DaskEngine method*), [193](#) [summary\(\)](#) (*evalml.pipelines.BinaryClassificationPipeline property*), [1176](#)
[submit_scoring_job\(\)](#) (*evalml.automl.engine.engine_base.EngineBase method*), [185](#) [summary\(\)](#) (*evalml.pipelines.classification_pipeline.ClassificationPipeline property*), [1111](#)
[submit_scoring_job\(\)](#) (*evalml.automl.EngineBase method*), [194](#) [summary\(\)](#) (*evalml.pipelines.ClassificationPipeline property*), [1186](#)
[submit_scoring_job\(\)](#) (*evalml.automl.engine.sequential_engine.SequentialEngine method*), [189](#) [summary\(\)](#) (*evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline property*), [1121](#)
[submit_scoring_job\(\)](#) (*evalml.automl.SequentialEngine method*), [195](#) [summary\(\)](#) (*evalml.pipelines.MulticlassClassificationPipeline property*), [1236](#)
[submit_scoring_job\(\)](#) (*evalml.automl.EngineBase method*), [194](#) [summary\(\)](#) (*evalml.pipelines.pipeline_base.PipelineBase property*), [1126](#)
[submit_training_job\(\)](#) (*evalml.automl.cf_engine.CFEngine method*), [181](#) [summary\(\)](#) (*evalml.pipelines.PipelineBase property*), [1246](#)
[submit_training_job\(\)](#) (*evalml.automl.CFEngine method*), [192](#) [summary\(\)](#) (*evalml.pipelines.regression_pipeline.RegressionPipeline property*), [1133](#)
[submit_training_job\(\)](#) (*evalml.automl.dask_engine.DaskEngine method*), [184](#) [summary\(\)](#) (*evalml.pipelines.RegressionPipeline property*), [1258](#)
[submit_training_job\(\)](#) (*evalml.automl.DaskEngine method*), [193](#) [summary\(\)](#) (*evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline property*), [1140](#)
[submit_training_job\(\)](#) (*evalml.automl.engine.engine_base.EngineBase method*), [185](#) [summary\(\)](#) (*evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline property*), [1146](#)
[submit_training_job\(\)](#) (*evalml.automl.SequentialEngine method*), [217](#) [summary\(\)](#) (*evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline property*), [1152](#)
[submit_training_job\(\)](#) (*evalml.automl.cf_engine.CFEngine method*), [181](#) [summary\(\)](#) (*evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase property*), [1158](#)
[submit_training_job\(\)](#) (*evalml.automl.CFEngine method*), [192](#) [summary\(\)](#) (*evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline property*), [1164](#)
[submit_training_job\(\)](#) (*evalml.automl.dask_engine.DaskEngine method*), [184](#) [summary\(\)](#) (*evalml.pipelines.TimeSeriesBinaryClassificationPipeline property*), [1286](#)
[submit_training_job\(\)](#) (*evalml.automl.DaskEngine method*), [193](#) [summary\(\)](#) (*evalml.pipelines.TimeSeriesClassificationPipeline property*), [1293](#)
[submit_training_job\(\)](#) (*evalml.automl.engine.engine_base.EngineBase method*), [185](#) [summary\(\)](#) (*evalml.pipelines.TimeSeriesMulticlassClassificationPipeline property*), [1299](#)
[submit_training_job\(\)](#) (*evalml.automl.SequentialEngine method*), [195](#) [summary\(\)](#) (*evalml.pipelines.TimeSeriesRegressionPipeline property*), [1299](#)

property), 1304
 supported_problem_types() (evalml.pipelines.components.ensemble.stacked_ensemble_base.StackedEnsembleBase), 1278
 property), 478
 supported_problem_types() (evalml.pipelines.components.ensemble.StackedEnsembleBase), 1076
 property), 487
 supported_problem_types() (evalml.pipelines.components.Estimator), 928
 property), 998
 supported_problem_types() (evalml.pipelines.components.estimators.Estimator), 735
 property), 668
 supported_problem_types() (evalml.pipelines.components.estimators.estimator.Estimator), 1079
 property), 639
 supported_problem_types() (evalml.pipelines.Estimator property), 1209
 SVMClassifier (class in evalml.pipelines), 1273
 SVMClassifier (class in evalml.pipelines.components), 1071
 SVMClassifier (class in evalml.pipelines.components.estimators), 696
 SVMClassifier (class in evalml.pipelines.components.estimators.classifiers), 554
 SVMClassifier (class in evalml.pipelines.components.estimators.classifiers.target_classifier), 522
 SVMRegressor (class in evalml.pipelines), 1276
 SVMRegressor (class in evalml.pipelines.components), 1074
 SVMRegressor (class in evalml.pipelines.components.estimators), 699
 SVMRegressor (class in evalml.pipelines.components.estimators.regressors), 629
 SVMRegressor (class in evalml.pipelines.components.estimators.regressors.svm_regressor), 592
 T
 t_sne() (in module evalml.model_understanding), 314
 t_sne() (in module evalml.model_understanding.graphs), 299
 target_distribution() (in module evalml.preprocessing), 1320
 target_distribution() (in module evalml.preprocessing.utils), 1318
 TargetDistributionDataCheck (class in evalml.data_checks), 264
 TargetDistributionDataCheck (class in evalml.data_checks.target_distribution_data_check), 243
 TargetEncoder (class in evalml.pipelines.components), 1076
 TargetEncoder (class in evalml.pipelines.components.transformers), 928
 TargetEncoder (class in evalml.pipelines.components.transformers.encoders), 735
 TargetEncoder (class in evalml.pipelines.components.transformers.encoders.target_encoder), 727
 TargetImputer (class in evalml.pipelines.components), 1079
 TargetImputer (class in evalml.pipelines.components.transformers), 930
 TargetImputer (class in evalml.pipelines.components.transformers.imputers), 775
 TargetImputer (class in evalml.pipelines.components.transformers.imputers.target_imputer), 765
 TargetImputerMeta (class in evalml.pipelines.components.transformers.imputers.target_imputer_meta), 767
 TargetLeakageDataCheck (class in evalml.data_checks), 265
 TargetLeakageDataCheck (class in evalml.data_checks.target_leakage_data_check), 244
 TextFeaturizer (class in evalml.pipelines.components), 1081
 TextFeaturizer (class in evalml.pipelines.components.transformers), 933
 TextFeaturizer (class in evalml.pipelines.components.transformers.preprocessing), 831
 TextFeaturizer (class in evalml.pipelines.components.transformers.preprocessing.text_featurizer), 800
 TextTransformer (class in evalml.pipelines.components.transformers.preprocessing), 834
 TextTransformer (class in evalml.pipelines.components.transformers.preprocessing.text_transformer), 803
 threshold() (evalml.pipelines.binary_classification_pipeline.BinaryClassifier property), 1104
 threshold() (evalml.pipelines.binary_classification_pipeline_mixin.BinaryClassifier property), 1105

[threshold\(\) \(evalml.pipelines.BinaryClassificationPipeline method\), 223](#)
[threshold\(\) \(evalml.pipelines.BinaryClassificationPipeline property\), 1176](#)
[threshold\(\) \(evalml.pipelines.time_series_classification_pipeline.time_series_classification_pipeline\), 1140](#)
[threshold\(\) \(evalml.pipelines.TimeSeriesBinaryClassificationPipeline method\), 224](#)
[threshold\(\) \(evalml.pipelines.TimeSeriesBinaryClassificationPipeline property\), 1287](#)
[time_elapsed\(\) \(in module evalml.utils.logger\), 1344](#)
[TimeSeriesBaselineEstimator \(class in evalml.pipelines.components\), 1083](#)
[TimeSeriesBaselineEstimator \(class in evalml.pipelines.components.estimators\), 701](#)
[TimeSeriesBaselineEstimator \(class in evalml.pipelines.components.estimators.regressors\), 631](#)
[TimeSeriesBaselineEstimator \(class in evalml.pipelines.components.estimators.regressors.time_series_baseline_estimator\), 595](#)
[TimeSeriesBinaryClassificationPipeline \(class in evalml.pipelines\), 1281](#)
[TimeSeriesBinaryClassificationPipeline \(class in evalml.pipelines.time_series_classification_pipeline\), 1134](#)
[TimeSeriesClassificationPipeline \(class in evalml.pipelines\), 1287](#)
[TimeSeriesClassificationPipeline \(class in evalml.pipelines.time_series_classification_pipeline\), 1140](#)
[TimeSeriesMulticlassClassificationPipeline \(class in evalml.pipelines\), 1293](#)
[TimeSeriesMulticlassClassificationPipeline \(class in evalml.pipelines.time_series_classification_pipeline\), 1146](#)
[TimeSeriesPipelineBase \(class in evalml.pipelines.time_series_pipeline_base\), 1153](#)
[TimeSeriesRegressionObjective \(class in evalml.objectives.time_series_regression_objective\), 394](#)
[TimeSeriesRegressionPipeline \(class in evalml.pipelines\), 1300](#)
[TimeSeriesRegressionPipeline \(class in evalml.pipelines.time_series_regression_pipeline\), 1159](#)
[TimeSeriesSplit \(class in evalml.preprocessing\), 1320](#)
[TimeSeriesSplit \(class in evalml.preprocessing.data_splitters\), 1315](#)
[TimeSeriesSplit \(class in evalml.preprocessing.data_splitters.time_series_split\), 1313](#)
[to_dict\(\) \(evalml.data_checks.data_check_action.DataCheckAction method\), 222](#)
[to_dict\(\) \(evalml.data_checks.data_check_message.DataCheckMessage method\), 222](#)
[to_dict\(\) \(evalml.data_checks.data_check_message.DataCheckWarning method\), 223](#)
[to_dict\(\) \(evalml.data_checks.DataCheckAction method\), 251](#)
[to_dict\(\) \(evalml.data_checks.DataCheckError method\), 251](#)
[to_dict\(\) \(evalml.data_checks.DataCheckMessage method\), 252](#)
[to_dict\(\) \(evalml.data_checks.DataCheckWarning method\), 254](#)
[train_and_score_pipeline\(\) \(in module evalml.automl.engine\), 196](#)
[train_and_score_pipeline\(\) \(in module evalml.pipelines.components.estimators.regressors.time_series_baseline_estimator\), 595](#)
[train_and_score_pipeline\(\) \(in module evalml.pipelines.components.estimators.regressors.time_series_baseline_estimator\), 595](#)
[train_pipeline\(\) \(in module evalml.automl.engine\), 196](#)
[train_pipeline\(\) \(in module evalml.automl.engine.engine_base\), 187](#)
[train_pipeline\(\) \(in module evalml.pipelines\), 202](#)
[train_pipeline\(\) \(in module evalml.pipelines\), 214](#)
[train_pipelines\(\) \(evalml.automl.AutoMLSearch method\), 1355](#)
[training_only\(\) \(evalml.pipelines.components.component_base.ComponentBase property\), 945](#)
[training_only\(\) \(evalml.pipelines.components.ComponentBase property\), 968](#)
[TrainingValidationSplit \(class in evalml.preprocessing\), 1321](#)
[TrainingValidationSplit \(class in evalml.preprocessing.data_splitters\), 1316](#)
[TrainingValidationSplit \(class in evalml.preprocessing.data_splitters.training_validation_split\), 1314](#)
[transform\(\) \(evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline method\), 1104](#)
[transform\(\) \(evalml.pipelines.BinaryClassificationPipeline method\), 1176](#)
[transform\(\) \(evalml.pipelines.classification_pipeline.ClassificationPipeline method\), 1111](#)
[transform\(\) \(evalml.pipelines.ClassificationPipeline method\), 1187](#)
[transform\(\) \(evalml.pipelines.component_graph.ComponentGraph method\), 1115](#)
[transform\(\) \(evalml.pipelines.ComponentGraph method\), 1190](#)
[transform\(\) \(evalml.pipelines.components.DateTimeFeaturizer method\), 971](#)
[transform\(\) \(evalml.pipelines.components.DelayedFeatureTransformer method\), 971](#)

`method`), 979
`transform()` (`evalml.pipelines.components.DFSTransformer`
`method`), 981
`transform()` (`evalml.pipelines.components.DropColumnsTransformer`
`method`), 983
`transform()` (`evalml.pipelines.components.DropNullColumnsTransformer`
`method`), 986
`transform()` (`evalml.pipelines.components.DropRowsTransformer`
`method`), 988
`transform()` (`evalml.pipelines.components.EmailFeaturizer`
`method`), 995
`transform()` (`evalml.pipelines.components.FeatureSelector`
`method`), 1006
`transform()` (`evalml.pipelines.components.Imputer`
`method`), 1009
`transform()` (`evalml.pipelines.components.LabelEncoder`
`method`), 1014
`transform()` (`evalml.pipelines.components.LinearDiscriminantAnalysis`
`method`), 1022
`transform()` (`evalml.pipelines.components.LogTransformer`
`method`), 1030
`transform()` (`evalml.pipelines.components.LSA`
`method`), 1032
`transform()` (`evalml.pipelines.components.OneHotEncoder`
`method`), 1035
`transform()` (`evalml.pipelines.components.Oversampler`
`method`), 1037
`transform()` (`evalml.pipelines.components.PCA`
`method`), 1039
`transform()` (`evalml.pipelines.components.PerColumnImputer`
`method`), 1042
`transform()` (`evalml.pipelines.components.PolynomialDegreeReducer`
`method`), 1044
`transform()` (`evalml.pipelines.components.RFClassifierSelectFromModel`
`method`), 1055
`transform()` (`evalml.pipelines.components.RFRegressorSelectFromModel`
`method`), 1057
`transform()` (`evalml.pipelines.components.SelectByType`
`method`), 1059
`transform()` (`evalml.pipelines.components.SelectColumnsTransformer`
`method`), 1061
`transform()` (`evalml.pipelines.components.SimpleImputer`
`method`), 1064
`transform()` (`evalml.pipelines.components.StandardScaler`
`method`), 1071
`transform()` (`evalml.pipelines.components.TargetEncoder`
`method`), 1078
`transform()` (`evalml.pipelines.components.TargetImputer`
`method`), 1081
`transform()` (`evalml.pipelines.components.TextFeaturizer`
`method`), 1083
`transform()` (`evalml.pipelines.components.TransformerColumnSelector`
`method`), 1088
`transform()` (`evalml.pipelines.components.transformers.column_selector`
`method`), 860
`transform()` (`evalml.pipelines.components.transformers.column_selector`
`method`), 862
`transform()` (`evalml.pipelines.components.transformers.column_selector`
`method`), 864
`transform()` (`evalml.pipelines.components.transformers.column_selector`
`method`), 866
`transform()` (`evalml.pipelines.components.transformers.DateTimeFeaturizer`
`method`), 873
`transform()` (`evalml.pipelines.components.transformers.DelayedFeaturizer`
`method`), 876
`transform()` (`evalml.pipelines.components.transformers.DFSTransformer`
`method`), 878
`transform()` (`evalml.pipelines.components.transformers.dimensionality_reduction`
`method`), 711
`transform()` (`evalml.pipelines.components.transformers.dimensionality_reduction`
`method`), 717
`transform()` (`evalml.pipelines.components.transformers.dimensionality_reduction`
`method`), 719
`transform()` (`evalml.pipelines.components.transformers.dimensionality_reduction`
`method`), 714
`transform()` (`evalml.pipelines.components.transformers.DropColumnsTransformer`
`method`), 880
`transform()` (`evalml.pipelines.components.transformers.DropNullColumnsTransformer`
`method`), 883
`transform()` (`evalml.pipelines.components.transformers.DropRowsTransformer`
`method`), 885
`transform()` (`evalml.pipelines.components.transformers.EmailFeaturizer`
`method`), 887
`transform()` (`evalml.pipelines.components.transformers.encoders.label_encoder`
`method`), 722
`transform()` (`evalml.pipelines.components.transformers.encoders.LabelEncoder`
`method`), 732
`transform()` (`evalml.pipelines.components.transformers.encoders.onehot_encoder`
`method`), 725
`transform()` (`evalml.pipelines.components.transformers.encoders.OneHotEncoder`
`method`), 735
`transform()` (`evalml.pipelines.components.transformers.encoders.target_encoder`
`method`), 729
`transform()` (`evalml.pipelines.components.transformers.encoders.TargetEncoder`
`method`), 737
`transform()` (`evalml.pipelines.components.transformers.feature_selector`
`method`), 740
`transform()` (`evalml.pipelines.components.transformers.feature_selector`
`method`), 749
`transform()` (`evalml.pipelines.components.transformers.feature_selector`
`method`), 743
`transform()` (`evalml.pipelines.components.transformers.feature_selector`
`method`), 747
`transform()` (`evalml.pipelines.components.transformers.feature_selector`
`method`), 752
`transform()` (`evalml.pipelines.components.transformers.feature_selector`
`method`), 755
`transform()` (`evalml.pipelines.components.transformers.FeatureSelector`
`method`), 755

[illegible]

<code>transform()</code> (evalml.pipelines.components.transformers.StandardScaler method), 925	<code>transform()</code> (evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassifier method), 1140
<code>transform()</code> (evalml.pipelines.components.transformers.TargetEncoder method), 928	<code>transform()</code> (evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassifier method), 1146
<code>transform()</code> (evalml.pipelines.components.transformers.TargetEncoder method), 930	<code>transform()</code> (evalml.pipelines.time_series_classification_pipelines.TimeSeriesClassifier method), 1152
<code>transform()</code> (evalml.pipelines.components.transformers.TargetEncoder method), 932	<code>transform()</code> (evalml.pipelines.time_series_pipeline_base.TimeSeriesPipeline method), 1158
<code>transform()</code> (evalml.pipelines.components.transformers.TargetEncoder method), 935	<code>transform()</code> (evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline method), 1164
<code>transform()</code> (evalml.pipelines.components.transformers.TargetEncoder method), 937	<code>transform()</code> (evalml.pipelines.TimeSeriesBinaryClassificationPipeline method), 1287
<code>transform()</code> (evalml.pipelines.components.transformers.TargetEncoder method), 869	<code>transform()</code> (evalml.pipelines.TimeSeriesClassificationPipeline method), 1293
<code>transform()</code> (evalml.pipelines.components.transformers.TargetEncoder method), 940	<code>transform()</code> (evalml.pipelines.TimeSeriesMulticlassClassificationPipeline method), 1299
<code>transform()</code> (evalml.pipelines.components.transformers.TargetEncoder method), 942	<code>transform()</code> (evalml.pipelines.TimeSeriesRegressionPipeline method), 1304
<code>transform()</code> (evalml.pipelines.components.Undersampler method), 1091	<code>transform()</code> (evalml.pipelines.Transformer method), 1307
<code>transform()</code> (evalml.pipelines.components.URLFeaturizer method), 1093	<code>transform_all_but_final()</code> (evalml.pipelines.binary_classification_pipeline.BinaryClassificationPipeline method), 1104
<code>transform()</code> (evalml.pipelines.DelayedFeatureTransformer method), 1198	<code>transform_all_but_final()</code> (evalml.pipelines.BinaryClassificationPipeline method), 1176
<code>transform()</code> (evalml.pipelines.DFSTransformer method), 1201	<code>transform_all_but_final()</code> (evalml.pipelines.classification_pipeline.ClassificationPipeline method), 1181
<code>transform()</code> (evalml.pipelines.FeatureSelector method), 1217	<code>transform_all_but_final()</code> (evalml.pipelines.ClassificationPipeline method), 1187
<code>transform()</code> (evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline method), 1121	<code>transform_all_but_final()</code> (evalml.pipelines.component_graph.ComponentGraph method), 1115
<code>transform()</code> (evalml.pipelines.MulticlassClassificationPipeline method), 1236	<code>transform_all_but_final()</code> (evalml.pipelines.ComponentGraph method), 1190
<code>transform()</code> (evalml.pipelines.OneHotEncoder method), 1239	<code>transform_all_but_final()</code> (evalml.pipelines.multiclass_classification_pipeline.MulticlassClassificationPipeline method), 1121
<code>transform()</code> (evalml.pipelines.PerColumnImputer method), 1241	<code>transform_all_but_final()</code> (evalml.pipelines.MulticlassClassificationPipeline method), 1236
<code>transform()</code> (evalml.pipelines.pipeline_base.PipelineBase method), 1126	<code>transform_all_but_final()</code> (evalml.pipelines.pipeline_base.PipelineBase method), 1127
<code>transform()</code> (evalml.pipelines.PipelineBase method), 1246	<code>transform_all_but_final()</code> (evalml.pipelines.PipelineBase method), 1246
<code>transform()</code> (evalml.pipelines.regression_pipeline.RegressionPipeline method), 1133	<code>transform_all_but_final()</code> (evalml.pipelines.regression_pipeline.RegressionPipeline method), 1133
<code>transform()</code> (evalml.pipelines.RegressionPipeline method), 1258	<code>transform_all_but_final()</code> (evalml.pipelines.time_series_classification_pipelines.TimeSeriesBinaryClassificationPipeline method), 1140
<code>transform()</code> (evalml.pipelines.RFClassifierSelectFromModel method), 1261	<code>transform_all_but_final()</code> (evalml.pipelines.time_series_classification_pipelines.TimeSeriesBinaryClassificationPipeline method), 1146
<code>transform()</code> (evalml.pipelines.RFRegressorSelectFromModel method), 1264	<code>transform_all_but_final()</code> (evalml.pipelines.time_series_classification_pipelines.TimeSeriesBinaryClassificationPipeline method), 1152
<code>transform()</code> (evalml.pipelines.SimpleImputer method), 1266	<code>transform_all_but_final()</code> (evalml.pipelines.time_series_classification_pipelines.TimeSeriesBinaryClassificationPipeline method), 1158
<code>transform()</code> (evalml.pipelines.StandardScaler method), 1273	<code>transform_all_but_final()</code> (evalml.pipelines.time_series_classification_pipelines.TimeSeriesBinaryClassificationPipeline method), 1164
<code>transform()</code> (evalml.pipelines.TargetEncoder method), 1280	<code>transform_all_but_final()</code> (evalml.pipelines.time_series_classification_pipelines.TimeSeriesBinaryClassificationPipeline method), 1176
<code>transform()</code> (evalml.pipelines.time_series_classification_pipelines.TimeSeriesBinaryClassificationPipeline method), 1140	

[1258](#)
[transform_all_but_final\(\)](#)
[\(evalml.pipelines.time_series_classification_pipeline.TimeSeriesBinaryClassificationPipeline method\), 1140](#)
[transform_all_but_final\(\)](#)
[\(evalml.pipelines.time_series_classification_pipeline.TimeSeriesClassificationPipeline method\), 1146](#)
[transform_all_but_final\(\)](#)
[\(evalml.pipelines.time_series_classification_pipeline.TimeSeriesMulticlassClassificationPipeline method\), 1152](#)
[transform_all_but_final\(\)](#)
[\(evalml.pipelines.time_series_pipeline_base.TimeSeriesPipelineBase method\), 1158](#)
[transform_all_but_final\(\)](#)
[\(evalml.pipelines.time_series_regression_pipeline.TimeSeriesRegressionPipeline method\), 1164](#)
[transform_all_but_final\(\)](#)
[\(evalml.pipelines.TimeSeriesBinaryClassificationPipeline method\), 1287](#)
[transform_all_but_final\(\)](#)
[\(evalml.pipelines.TimeSeriesClassificationPipeline method\), 1293](#)
[transform_all_but_final\(\)](#)
[\(evalml.pipelines.TimeSeriesMulticlassClassificationPipeline method\), 1299](#)
[transform_all_but_final\(\)](#)
[\(evalml.pipelines.TimeSeriesRegressionPipeline method\), 1305](#)
[Transformer \(class in evalml.pipelines\), 1305](#)
[Transformer \(class in evalml.pipelines.components\), 1086](#)
[Transformer \(class in evalml.pipelines.components.transformers\), 935](#)
[Transformer \(class in evalml.pipelines.components.transformers.transformer\), 867](#)
[tune_binary_threshold\(\) \(in module evalml.automl\), 218](#)
[tune_binary_threshold\(\) \(in module evalml.automl.utils\), 208](#)
[Tuner \(class in evalml.tuners\), 1337](#)
[Tuner \(class in evalml.tuners.tuner\), 1332](#)

U

[Undersampler \(class in evalml.pipelines.components\), 1088](#)
[Undersampler \(class in evalml.pipelines.components.transformers\), 937](#)
[Undersampler \(class in evalml.pipelines.components.transformers.samplers\), 850](#)
[Undersampler \(class in evalml.pipelines.components.transformers.samplers.undersampler\), 844](#)
[uniqueness_data_check \(class in evalml.data_checks.uniqueness_data_check.UniquenessDataCheck static method\), 246](#)
[uniqueness_data_check \(class in evalml.data_checks\), 266](#)
[update\(\) \(evalml.automl.pipeline_search_plots.SearchIterationPlot method\), 200](#)
[URLFeaturizer \(class in evalml.pipelines.components\), 1091](#)
[URLFeaturizer \(class in evalml.pipelines.components.transformers\), 940](#)
[URLFeaturizer \(class in evalml.pipelines.components.transformers.preprocessing\), 836](#)
[URLFeaturizer \(class in evalml.pipelines.components.transformers.preprocessing.transformers\), 807](#)

V

[validate\(\) \(evalml.data_checks.class_imbalance_data_check.ClassImbalanceDataCheck method\), 219](#)
[validate\(\) \(evalml.data_checks.ClassImbalanceDataCheck method\), 249](#)
[validate\(\) \(evalml.data_checks.data_check.DataCheck method\), 221](#)
[validate\(\) \(evalml.data_checks.data_checks.DataChecks method\), 227](#)
[validate\(\) \(evalml.data_checks.DataCheck method\), 250](#)
[validate\(\) \(evalml.data_checks.DataChecks method\), 254](#)
[validate\(\) \(evalml.data_checks.datetime_format_data_check.DateTimeFormatDataCheck method\), 228](#)
[validate\(\) \(evalml.data_checks.datetime_nan_data_check.DateTimeNaNDataCheck method\), 229](#)
[validate\(\) \(evalml.data_checks.DateTimeFormatDataCheck method\), 255](#)
[validate\(\) \(evalml.data_checks.DateTimeNaNDataCheck method\), 255](#)
[validate\(\) \(evalml.data_checks.default_data_checks.DefaultDataChecks method\), 231](#)
[validate\(\) \(evalml.data_checks.DefaultDataChecks method\), 257](#)
[validate\(\) \(evalml.data_checks.highly_null_data_check.HighlyNullDataCheck method\), 232](#)

```

validate() (evalml.data_checks.HighlyNullDataCheck validate_inputs()
method), 257 (evalml.objectives.AUCWeighted method),
validate() (evalml.data_checks.id_columns_data_check.IDColumnsDataCheck
method), 234 validate_inputs()
validate() (evalml.data_checks.IDColumnsDataCheck (evalml.objectives.BalancedAccuracyBinary
method), 258 method), 411
validate() (evalml.data_checks.invalid_targets_data_check.InvalidTargetDataCheck
method), 235 (evalml.objectives.BalancedAccuracyMulticlass
method), 412
validate() (evalml.data_checks.InvalidTargetDataCheck validate_inputs()
method), 260
validate() (evalml.data_checks.multicollinearity_data_check.MulticollinearityDataCheck_classification_objective.BinaryClassification
method), 236 method), 317
validate() (evalml.data_checks.MulticollinearityDataCheck validate_inputs()
method), 260 (evalml.objectives.BinaryClassificationObjective
method), 415
validate() (evalml.data_checks.natural_language_nan_data_check.NaturalLanguageNaNDataCheck
method), 238 validate_inputs()
validate() (evalml.data_checks.NaturalLanguageNaNDataCheck(evalml.objectives.cost_benefit_matrix.CostBenefitMatrix
method), 261 method), 320
validate() (evalml.data_checks.no_variance_data_check.NoVarianceDataCheck
method), 239 (evalml.objectives.CostBenefitMatrix method),
validate() (evalml.data_checks.NoVarianceDataCheck 418
method), 262 validate_inputs() (evalml.objectives.ExpVariance
method), 419
validate() (evalml.data_checks.outliers_data_check.OutliersDataCheck), 419
method), 240 validate_inputs() (evalml.objectives.F1 method),
validate() (evalml.data_checks.OutliersDataCheck 421
method), 262 validate_inputs() (evalml.objectives.F1Macro
method), 422
validate() (evalml.data_checks.sparsity_data_check.SparsityDataCheck), 422
method), 242 validate_inputs() (evalml.objectives.F1Micro
method), 424
validate() (evalml.data_checks.SparsityDataCheck validate_inputs() (evalml.objectives.F1Weighted
method), 264 method), 425
validate() (evalml.data_checks.target_distribution_data_check.TargetDistributionDataCheck
method), 243 validate_inputs()
validate() (evalml.data_checks.target_leakage_data_check.TargetLeakageDataCheck_fraud_cost.FraudCost
method), 245 method), 323
validate() (evalml.data_checks.TargetDistributionDataCheck validate_inputs() (evalml.objectives.FraudCost
method), 265 method), 428
validate() (evalml.data_checks.TargetLeakageDataCheck validate_inputs() (evalml.objectives.Gini
method), 266 method), 431
validate() (evalml.data_checks.uniqueness_data_check.UniquenessDataCheck)
method), 247 (evalml.objectives.lead_scoring.LeadScoring
method), 325
validate() (evalml.data_checks.UniquenessDataCheck validate_inputs() (evalml.objectives.LeadScoring
method), 267 method), 433
validate_inputs()
(evalml.objectives.AccuracyBinary method), validate_inputs()
401 (evalml.objectives.LogLossBinary method),
validate_inputs() 435
(evalml.objectives.AccuracyMulticlass validate_inputs()
method), 402 (evalml.objectives.LogLossMulticlass method),
validate_inputs() (evalml.objectives.AUC 437
method), 404 validate_inputs() (evalml.objectives.MAE
method), 438
validate_inputs() (evalml.objectives.AUCMacro validate_inputs() (evalml.objectives.MAPE
method), 406 method), 440
validate_inputs() (evalml.objectives.AUCMicro validate_inputs() (evalml.objectives.MaxError
method), 407

```

method), 441
 validate_inputs() (*evalml.objectives.MCCBinary method*), 443
 validate_inputs() (*evalml.objectives.MCCMulticlass method*), 445
 validate_inputs() (*evalml.objectives.MeanSquaredLogError method*), 446
 validate_inputs() (*evalml.objectives.MedianAE method*), 448
 validate_inputs() (*evalml.objectives.MSE method*), 449
 validate_inputs() (*evalml.objectives.multiclass_classification_objective.MulticlassClassificationObjective method*), 328
 validate_inputs() (*evalml.objectives.MulticlassClassificationObjective method*), 451
 validate_inputs() (*evalml.objectives.objective_base.ObjectiveBase method*), 330
 validate_inputs() (*evalml.objectives.ObjectiveBase method*), 453
 validate_inputs() (*evalml.objectives.Precision method*), 455
 validate_inputs() (*evalml.objectives.PrecisionMacro method*), 457
 validate_inputs() (*evalml.objectives.PrecisionMicro method*), 458
 validate_inputs() (*evalml.objectives.PrecisionWeighted method*), 460
 validate_inputs() (*evalml.objectives.R2 method*), 461
 validate_inputs() (*evalml.objectives.Recall method*), 463
 validate_inputs() (*evalml.objectives.RecallMacro method*), 465
 validate_inputs() (*evalml.objectives.RecallMicro method*), 466
 validate_inputs() (*evalml.objectives.RecallWeighted method*), 468
 validate_inputs() (*evalml.objectives.regression_objective.RegressionObjective method*), 332
 validate_inputs() (*evalml.objectives.RegressionObjective method*), 470
 validate_inputs() (*evalml.objectives.RootMeanSquaredError method*), 471
 validate_inputs() (*evalml.objectives.RootMeanSquaredLogError method*), 473
 validate_inputs() (*evalml.objectives.sensitivity_low_alert.SensitivityLowAlert method*), 335
 validate_inputs() (*evalml.objectives.SensitivityLowAlert method*), 475
 validate_inputs() (*evalml.objectives.standard_metrics.AccuracyBinary method*), 339
 validate_inputs() (*evalml.objectives.standard_metrics.AccuracyMulticlass method*), 340
 validate_inputs() (*evalml.objectives.standard_metrics.AUC method*), 342
 validate_inputs() (*evalml.objectives.standard_metrics.AUCMacro method*), 343
 validate_inputs() (*evalml.objectives.standard_metrics.AUCMicro method*), 345
 validate_inputs() (*evalml.objectives.standard_metrics.AUCWeighted method*), 346
 validate_inputs() (*evalml.objectives.standard_metrics.BalancedAccuracyBinary method*), 348
 validate_inputs() (*evalml.objectives.standard_metrics.BalancedAccuracyMulticlass method*), 350
 validate_inputs() (*evalml.objectives.standard_metrics.ExpVariance method*), 351
 validate_inputs() (*evalml.objectives.standard_metrics.F1 method*), 353
 validate_inputs() (*evalml.objectives.standard_metrics.F1Macro method*), 355
 validate_inputs() (*evalml.objectives.standard_metrics.F1Micro method*), 356
 validate_inputs() (*evalml.objectives.standard_metrics.F1Weighted method*), 358
 validate_inputs() (*evalml.objectives.standard_metrics.Gini method*), 360

<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.LogLossBinary</code> <code>method</code>), 362	<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.RecallWeighted</code> <code>method</code>), 390
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.LogLossMulticlass</code> <code>method</code>), 363	<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.RootMeanSquaredError</code> <code>method</code>), 392
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.MAE</code> <code>method</code>), 365	<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.RootMeanSquaredLogError</code> <code>method</code>), 393
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.MAPE</code> <code>method</code>), 366	<code>validate_inputs()</code> (<code>evalml.objectives.time_series_regression_objective.TimeSeriesRe</code> <code>method</code>), 396
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.MaxError</code> <code>method</code>), 368	<code>value()</code> (<code>evalml.data_checks.data_check_action_code.DataCheckAction</code> <code>method</code>), 222
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.MCCBinary</code> <code>method</code>), 370	<code>value()</code> (<code>evalml.data_checks.data_check_message_code.DataCheckMess</code> <code>method</code>), 226
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.MCCMulticlass</code> <code>method</code>), 371	<code>value()</code> (<code>evalml.data_checks.data_check_message_type.DataCheckMess</code> <code>method</code>), 227
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.MeanSquaredLogError</code> <code>method</code>), 373	<code>value()</code> (<code>evalml.data_checks.DataCheckActionCode</code> <code>method</code>), 251
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.MedianAE</code> <code>method</code>), 374	<code>value()</code> (<code>evalml.data_checks.DataCheckMessageCode</code> <code>method</code>), 253
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.MSE</code> <code>method</code>), 376	<code>value()</code> (<code>evalml.data_checks.DataCheckMessageType</code> <code>method</code>), 254
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.Precision</code> <code>method</code>), 378	<code>value()</code> (<code>evalml.exceptions.exceptions.PartialDependenceErrorCode</code> <code>method</code>), 274
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.PrecisionMacro</code> <code>method</code>), 379	<code>value()</code> (<code>evalml.exceptions.PartialDependenceErrorCode</code> <code>method</code>), 275
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.PrecisionMicro</code> <code>method</code>), 381	<code>value()</code> (<code>evalml.model_family.model_family.ModelFamily</code> <code>method</code>), 277
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.PrecisionWeighted</code> <code>method</code>), 382	<code>value()</code> (<code>evalml.model_family.ModelFamily</code> <code>method</code>), 279
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.R2</code> <code>method</code>), 384	<code>value()</code> (<code>evalml.model_understanding.prediction_explanations.explainer</code> <code>method</code>), 284
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.Recall</code> <code>method</code>), 386	<code>value()</code> (<code>evalml.problem_types.problem_types.ProblemTypes</code> <code>method</code>), 1323
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.RecallMacro</code> <code>method</code>), 387	<code>value()</code> (<code>evalml.problem_types.ProblemTypes</code> <code>method</code>), 1327
<code>validate_inputs()</code> (<code>evalml.objectives.standard_metrics.RecallMicro</code> <code>method</code>), 389	<code>visualize_decision_tree()</code> (in module <code>evalml.model_understanding.graphs</code>), 299

W

`warning()` (`evalml.automl.engine.engine_base.JobLogger`
`method`), 187

`warning_not_unique_enough` (in module
`evalml.data_checks.uniqueness_data_check`),
247

`warning_too_unique` (in module
`evalml.data_checks.sparsity_data_check`),
242

`warning_too_unique` (in module
`evalml.data_checks.uniqueness_data_check`),
247

[WrappedSKClassifier](#) (class in [evalml.pipelines.components.utils](#)), 948
[WrappedSKRegressor](#) (class in [evalml.pipelines.components.utils](#)), 949
[write_to_logger\(\)](#) ([evalml.automl.engine.engine_base.JobLogger](#) method), 187

X

[XGBoostClassifier](#) (class in [evalml.pipelines](#)), 1307
[XGBoostClassifier](#) (class in [evalml.pipelines.components](#)), 1093
[XGBoostClassifier](#) (class in [evalml.pipelines.components.estimators](#)), 704
[XGBoostClassifier](#) (class in [evalml.pipelines.components.estimators.classifiers](#)), 556
[XGBoostClassifier](#) (class in [evalml.pipelines.components.estimators.classifiers.xgboost_classifier](#)), 525
[XGBoostRegressor](#) (class in [evalml.pipelines](#)), 1310
[XGBoostRegressor](#) (class in [evalml.pipelines.components](#)), 1095
[XGBoostRegressor](#) (class in [evalml.pipelines.components.estimators](#)), 706
[XGBoostRegressor](#) (class in [evalml.pipelines.components.estimators.regressors](#)), 634
[XGBoostRegressor](#) (class in [evalml.pipelines.components.estimators.regressors.xgboost_regressor](#)), 598